MECHANICS · AUTOS · HOME IMPROVEMENTS

POPULAR SCIENCE

April 35c

MONTHLY

48-PAGE **HOME SHOW**

10 Ways to Improve the Home You Have

A House Designed for Do-It-Yourselfers

What You Should Know About Appliances



New Outdoor Room You Can Build . . . Page 148



Speed, Spray and Dependability!



America's
Most Beautiful Outboard Motors

JAVELIN*	30 hp.	$582.00
SEA-HORSE 30*	30 hp.	552.00
SEA-HORSE 30	30 hp.	462.00
SEA-HORSE 15*	15 hp.	452.00
SEA-HORSE 15	15 hp.	362.00
SEA-HORSE 10	10 hp.	321.00
SEA-HORSE 7½	7½ hp.	241.00
SEA-HORSE 5½	5½ hp.	216.00
SEA-HORSE 3	3 hp.	146.00

*Electric Starting...Prices f.o.b. factory, subject to change...All models except the "3" have separate Mile-Master Fuel System...OBC certified brake hp at 4000 rpm (30's at 4500).

Sea-Horses are terrific for water skiing — so responsive, so maneuverable, so DEPENDable! And Johnson gives you a choice of three 30's—electric starting, manual starting and the magnificent, high-fashion Javelin with concealed controls and wrap-around chrome cowling. All fitted for remote control. All equipped with separate Mile-Master Fuel System. All *quiet!* See your Johnson Dealer. Look for his name under "Outboard Motors" in your classified telephone directory.

FREE! Write for your illustrated copy of the new Sea-Horse Catalog. Complete, factual, helpful.

JOHNSON MOTORS, 500 Pershing Rd., Waukegan, Ill.
A DIVISION OF OUTBOARD, MARINE & MANUFACTURING COMPANY
In Canada: Manufactured by Johnson Motors, Peterborough

Johnson SEA-HORSES
FOR DEPENDABILITY

ASK COMMERCIAL USERS...SEA-HORSES WORK FOR THEM!

Copyrighted material

Oil and filter both need changing too!



IT'S CLEAN OIL MONTH
Change Oil and Filter NOW!

Regular oil changes and new FRAM Oil Filter Cartridges will help save your engine's pep, power and life for years. FRAM keeps your engine clean . . . traps deadly abrasives as small as one micron (.000039") in size, yet will not remove detergents.

There's a FRAM Cartridge individually engineered for your engine — get it at your FRAM dealer today.

FRAM®
OIL • AIR • FUEL • WATER
FILTERS

FRAM CORPORATION, Providence 16, R. I.
Fram Canada Ltd., Stratford, Ont.

Copyrighted material

Founded in 1872,
Vol. 168: No. 4

POPULAR SCIENCE
REG. U. S. PAT. OFF. Monthly

Mechanics and Handicraft
REG. U.S. PAT. OFF.

America's Leading New-Idea Magazine for 84 Years

APRIL, 1956

You'd Hardly Know They're Trucks..... 93
Robots That Take the Rap for You..... 98
Atomic Rays Keep Food Fresh.....102
Biggest Shovel Digs 125 Tons a Minute.....106
What's Coming in 1957 Cars.....115
Fast New Workhorse Joins the Air Force....118
How They Exposed the Piltdown Hoax.....120
Auto News from Europe.....124
Chevrolets Take '56 Speed Honors.....128
Why Typewriter Keyboard May Be Shifted..132

1956 Home Show

House Planned for Workshopper 138
New Aids for Your Kitchen.....142
Plastic House of the Future.....144
Screened Terrace You Can Build 148
Window Walls Modernize a Home 152
How to Install New Appliances.....159
Air-Conditioning Kits Are Here....164
Making a Modern Clock Is Easy....168
A Gate to Match Your House.....170
How Pros Put Up Wallpaper.....172
A Quick Way to Build a Patio.....176
Making a Husky Concrete Drive..178
New Paint Cannot Drip.....183

New for Boatmen.....188
Gus Meets a Flood of Trouble.....190
How to Make Archery Safe.....193
Remote Controls for Your Outboard Motor..198
How to Use Abrasive Wheels Safely.....205
Could You Bore a Square Hole?.....214
How to Use a Spray Gun.....217
I Built Our Kitchen Blender.....222
Overhauling Your Lawn-Mower Engine.....228
Gluing Up a Table Top.....236

(More features and departments are listed on page 4)

Editor
VOLTA TORREY
Managing Editor
HOWARD ALLAWAY
Art Editor
HOWARD C. JENSEN
Associate Editors
Alden P. Armagnac, Devon Francis, Martin Mann, Herbert O. Johansen, Sheldon M. Gallager, Henry B. Comstock, Herbert R. Pfister, Stanley Beitler, Frank Dorr, Erik H. Arctander, Ruth Westphal
Art
Harry Samuels (Director), Herbert Anthony, Gene Butera, Eric A. Karminski Jr., Henry W. Kazmirowski, Dana B. Rasmussen, Laylen H. Sweet
Copy
Kendall W. Goodwyn (Director), Everett H. Ortner, Maryann Smith, Georgette Sparks
Photography
W. W. Morris (Director), Hubert Luckett, Orlando Guerra
Assistant Managing Editors
Frank Rowsome Jr.
Robert P. Stevenson
Mechanics and Handicraft
Harry Walton
Pacific Coast Editor
Wesley S. Griswold (Los Angeles)
Midwestern Editor
Joseph Dorlaque (Chicago)
Editorial Assistants
Rosa Lee Beeland (Chief), Louise Levis, Bebe Lipson, Roberta Marks
Publisher
GODFREY HAMMOND
President
RALPH H. FLYNN
Advertising Manager
LEE P. ADAMS
Circulation Director
EUGENE WATSON

ADVERTISING OFFICES:
NEW YORK—353 Fourth Ave.
CHICAGO—360 North Michigan Ave.
DETROIT—820 Book Bldg.
SAN FRANCISCO—114 Sansome St.
CLEVELAND—328 Citizens Bldg.
LOS ANGELES—1127 Wilshire Blvd.
PORTLAND, ORE.—520 S.W. Sixth Ave.

EDITORIAL OFFICES: 353 Fourth Avenue, New York 10, N. Y.

Published monthly at 353 Fourth Avenue, New York 10, N. Y., by Popular Science Publishing Co., Inc., Godfrey Hammond, Chairman of the Board; Ralph H. Flynn, President and Treasurer; Franklin E. Parker Jr., Secretary; Eugene Watson, Vice-President. Second-class mail privileges authorized at New York, N. Y., and Dayton, Ohio. Entered as second-class matter at the Post Office Department, Canada. Printed in U.S.A. Copyright, 1956, by Popular Science Publishing Co., Inc. All rights reserved in the United States, Great Britain, and in all the countries participating in the International Copyright Convention and Pan-American Copyright Convention. Single copy 35c. Subscriptions to United States, its possessions, and Canada, 1 year $3.40 (2 years $6.00, 3 years $8.00). Elsewhere, 1 year $6.00 (2 years $11.00, 3 years $16.00). Four weeks' notice is needed to change a subscriber's address. Please give both old and new addresses, including postal zone numbers.



What's your boss saying about you?

The door is usually open. Today it's closed.

They're talking about you . . . about your future. You don't have to hear to know what they're saying. Because there's nobody who knows more about you and your present job than *you*.

O.K. . . . So you have "experience." Five years on the same job.

Have you *mastered* the job . . . learned everything there is to know about it?

If your answer is "yes," success is right around the corner. But if the answer is "no," then your experience doesn't amount to much. And chances are these things are true about you: you just "coast" along with things . . . you do nothing and go home all tired out. BEWARE! Those are danger signals. Unless you take a fresh look at things, you'll be doing the same job at the same salary for the next five years. And the *next* five.

What you can do about your future

If you want to succeed . . . make more money, earn the respect of your family and community . . . you have to take the bull by the horns. Success doesn't just come along. You have to meet it halfway. So act NOW and make your experience mean something. Add I. C. S. *training* to your record and start going places. Do it at home, in your spare time, for a few cents a day.

Does it work? These *facts* answer that. A recent survey shows that in a single 120-day period, 1973 I. C. S. students were promoted to better jobs. If *you* had acted a year ago, one of them could have been *you*. So mail the coupon below *today*.

Pick your favorite subject

277 I. C. S. courses to choose from. 203 expert I. C. S. instructors to give you personal help. No time or expense going to and from classes. No interference with business and social life.

Your first step

Sit down *right now* and fill out the coupon below. Check your favorite subject. I. C. S. will send you FREE and without obligation of any sort, three books. One, "How to Succeed," tells you how to start climbing to the top. Second book outlines the opportunities in the field of your choice. Also a free sample lesson in basic mathematics.



For Real Job Security—Get an I. C. S. Diploma! **I. C. S., Scranton 9, Penna.** Member, National Home Study Council

INTERNATIONAL CORRESPONDENCE SCHOOLS ICS

BOX 45641D, SCRANTON 9, PENNA. (Partial list of 277 courses)

Without cost or obligation, send me "HOW to SUCCEED" and the opportunity booklet about the field BEFORE which I have marked X (plus sample lesson):

ARCHITECTURE and BUILDING CONSTRUCTION
- ☐ Air Conditioning—Refrig.
- ☐ Architecture
- ☐ Architectural Interiors
- ☐ Building Contractor
- ☐ Building Estimator
- ☐ Building Maintenance
- ☐ Carpentry and Mill Work
- ☐ Heating
- ☐ Painting Contractor
- ☐ Plumbing
- ☐ Reading Arch. Blueprints

ART
- ☐ Cartooning
- ☐ Commercial Art
- ☐ Fashion Illustrating
- ☐ Magazine Illustrating
- ☐ Show Card and Sign Lettering
- ☐ Sketching and Painting

AUTOMOTIVE
- ☐ Auto Body Rebuilding
- ☐ Auto Elec. Technician
- ☐ Auto-Engine Tune Up
- ☐ Automobile Mechanic

AVIATION
- ☐ Aeronautical Engineering Jr.
- ☐ Aircraft & Engine Mechanic

BUSINESS
- ☐ Advertising
- ☐ Bookkeeping and Accounting
- ☐ Business Administration
- ☐ Business Correspondence
- ☐ Public Accounting
- ☐ Creative Salesmanship
- ☐ Federal Tax
- ☐ Letter-writing Improvement
- ☐ Office Management
- ☐ Professional Secretary
- ☐ Retail Business Management
- ☐ Sales Management
- ☐ Stenographic-Secretarial
- ☐ Traffic Management

CHEMISTRY
- ☐ Analytical Chemistry
- ☐ Chemical Engineering
- ☐ Chem. Lab. Technician
- ☐ General Chemistry
- ☐ Natural Gas Prod. & Trans.
- ☐ Petroleum Engineering
- ☐ Plastics
- ☐ Pulp and Paper Making

CIVIL, STRUCTURAL ENGINEERING
- ☐ Civil Engineering
- ☐ Construction Engineering
- ☐ Highway Engineering
- ☐ Reading Struct. Blueprints
- ☐ Sanitary Engineering
- ☐ Structural Engineering
- ☐ Surveying and Mapping

DRAFTING
- ☐ Aircraft Drafting
- ☐ Architectural Drafting
- ☐ Electrical Drafting
- ☐ Mechanical Drafting
- ☐ Mine Surveying and Mapping
- ☐ Plumbing Drawing and Estimating
- ☐ Structural Drafting

ELECTRICAL
- ☐ Electrical Engineering
- ☐ Electrical Maintenance
- ☐ Electrician ☐ Contracting
- ☐ Lineman

HIGH SCHOOL
- ☐ Commercial ☐ Good English
- ☐ High School Subjects
- ☐ Mathematics

LEADERSHIP
- ☐ Foremanship
- ☐ Industrial Supervision
- ☐ Leadership and Organization
- ☐ Personnel-Labor Relations

MECHANICAL AND SHOP
- ☐ Gas—Electric Welding
- ☐ Heat Treatment ☐ Metallurgy
- ☐ Industrial Engineering
- ☐ Industrial Instrumentation
- ☐ Industrial Supervision
- ☐ Internal Combustion Engines
- ☐ Machine Design-Drafting
- ☐ Machine Shop Inspection
- ☐ Machine Shop Practice
- ☐ Mechanical Engineering
- ☐ Quality Control
- ☐ Reading Shop Blueprints
- ☐ Refrigeration
- ☐ Sheet Metal Worker
- ☐ Tool Design ☐ Toolmaking

RADIO, TELEVISION
- ☐ Industrial Electronics
- ☐ Practical Radio TV Eng'r'ng
- ☐ Radio and TV Servicing
- ☐ Radio Operating
- ☐ Television Technician

RAILROAD
- ☐ Air Brake Equipment
- ☐ Car Inspector
- ☐ Diesel Engineer & Fireman
- ☐ Section Foreman

STEAM AND DIESEL POWER
- ☐ Combustion Engineering
- ☐ Diesel—Elec. ☐ Diesel Eng's
- ☐ Electric Light and Power
- ☐ Stationary Fireman
- ☐ Stationary Steam Engineering

TEXTILE
- ☐ Carding and Spinning
- ☐ Cotton, Rayon, Woolen Mfg.
- ☐ Finishing and Dyeing
- ☐ Loom Fixi'g ☐ Textile Des'ing
- ☐ Textile Eng'r'g ☐ Throwing
- ☐ Warping and Weaving

MISCELLANEOUS
- ☐ Domestic Refrigeration
- ☐ Marine Engineering
- ☐ Ocean Navigation
- ☐ Professional Engineering
- ☐ Short Story Writing
- ☐ Telephony

Name_____ Age_____ Home Address_____

City_____ Zone_____ State_____ Working Hours_____ A.M. to P.M._____

Occupation_____

Canadian residents send coupon to International Correspondence Schools, Canadian, Ltd., Montreal, Canada. . . . Special tuition rates to members of the U. S. Armed Forces.

Copyrighted material



37 NEW SCREWDRIVERS...
AT YOUR DEALER'S NOW!

Ruby Red, Fire-Resistant Plastic Handles
Powerful, Comfortable Grips
High Grade, Heat-Treated Steel Bits... Hard and Tough
Fully Plated for Rust Protection
Sparkling Appearance
Keystone, Cabinet and Phillips Types
22 Meet Mil. Spec. GGG-S-121-C

"Ruby Line" screwdrivers were designed by PROTO to meet demands for high quality at low cost. Manufacturing economies give long service at modest prices. Complete line of 37 models. Bit widths from 1/8" to 5/16", blades from 1 1/2" to 9 3/4". In Keystone, Cabinet and #1 and #2 Phillips types.

See your nearby PROTO dealer today. Send 10¢ for catalog of entire PROTO line of tools to **PROTO TOOLS**
2203 Santa Fe Ave., Los Angeles 54, Calif.

5681

Eastern Factory, Jamestown, N. Y.
Canadian Factory, London, Ont.

PROTO TOOLS
PROTO means PROfessional TOols

News and Pictures

Plane Rockets Fired, Filmed in Tests.... 97
Retriever Picks Up Landing Craft.....100
Rail "Convertible" Has Many Bodies.....100
Billionth-of-a-Second Timer Is Fastest....101
Engine Gets Pull-Out Cylinders.....101
1,800-Hp. Diesel Pulls Heavier Trains..105
Convertible Top Locks Electrically.....110
TV Puts Its Eye on Fish at Home.....110
Rubber Head Protects Atomic Workers..111
Foot Power Opens Mailbox.....111
Big Burning Glass Aids Air Force.....112
Plastic Car Makes Big Splash.....113
Rare New Yarn Spun from Arctic Dogs..114
Fuel Tank Rolls Like a Tire.....114
Portable Pillbox to Shield Cops.....119
Motorized Mole Downs Trees.....119
French Sports Car Is Fast, Smooth.....126
Czech Car Has Wrap-Around Windows 126
Fallout-Proof Lab Keeps Atomic Time..127
Truck Lifts and Carries Long Loads.....136
New in Electronics.....204
Mite Puts Out 10,000 R.P.M.....246
Peanut Bulbs Pack More Light.....252

Mechanics and Homebuilding

Five Photo Tips.....200
Oven Rack Dries Prints Fast.....201
8 Uses for Adhesive-Tape Spools.....202
Colored Tape Decorates Models.....203
Oil Can Puts Heat on Small Jobs.....203
Tripod Grill Folds for Storage.....210
Desk Conceals Secret Information.....210
Oil Can Releases Single Drops.....216
7 Projects for the Gardener.....233
Hose Makes a Fountain.....234
Blocks Hold Builder's Sand Pile.....234
Mobile Rack Carries Sorted Pipe.....235
Grease "Cups" Speed Sawing.....235
Downspouts Form a Supply Rack.....238
Wood Block Gauges Depth.....238
Roll-Away Square Benches Make Space 250

Departments

Letters 16
Craftsmen at Work..... 86
PSM Late News..... 88
I'd Like to See Them Make..... 90
New in Aviation.....130
New for the Handyman.....169
Keeping the Home Shipshape.....181
New Ideas from the Inventors.....185
New Tools.....211
Wordless Workshop 212
Hints from the Model Garage.....225
New for Your Car.....227
Do It the Easy Way.....234
New Shop Ideas.....239

Copyrighted material



How these 18 Experts can help you

Get into a High Pay ACCOUNTING CAREER

LaSalle's famous staff of Accounting authorities are helping thousands prepare for fast promotions and bigger pay. They can do the same for you!

If your heart is set on a larger income and all that it means . . . better home—fine car—larger bank account—more of the good things of life. . . .

If that's your ambition and you are really serious about it, then you owe it to yourself to get the REAL FACTS about LaSalle Accounting, and the many good-pay opportunities that can be YOURS through LaSalle's famous Problem Method plan.

It matters not whether you've had a single day of experience in this field—or whether you have already started but want to climb higher. LaSalle's expert training is designed to take you *from where you are . . . to where you want to be . . .* in higher positions and a lifetime career of security and good income.

WHY YOU CAN'T FAIL TO GAIN

You see on this page a panel of experts who know Accounting from A to Z . . . all the way from Basic Accounting, on up through Accounting Systems, Cost Accounting, Auditing, Income Tax, and training for the C.P.A. certificate. These are only part of our instruction staff. But what is most important to you . . .

. . . These C.P.A.'s and Expert Accountants know how to impart their knowledge to others . . . how to help you prepare quickly yet thoroly for success in this lucrative field.

The proof? What stronger proof could there be than that more than 4,200 Certified Public Accountants (one out of every 13 of the U.S. total) has trained with LaSalle? Or the hundreds of thousands of men and women whom LaSalle has helped qualify rapidly for more money, a brighter future, in a high-pay-lifetime career? These thousands came to us with different backgrounds of experience and varying degrees of ambition. Many have reported raises and promotions after only a few weeks of training. Thousands of them have written to say they are now earning 50% more—even *double* their former incomes—*often in less than a year*. These letters are published in book form for your inspection. They were written by real people, with real income, problems and ambitions—people who might be your next-door neighbor.

Yes, if you are really sincere in wanting to better your position—start your income climbing—enjoy a lifetime career of high standing and high reward—this friendly staff of experts can help you.


SAMPLE LESSON SENT FREE
MAIL COUPON BELOW

You don't have to wonder what LaSalle's Accounting plan is like. You will be sent a free sample lesson, which does not obligate you in any way. Study it—keep it—see for yourself how simple, clear, and easy it is to master. This is an actual lesson right out of the regular training—to show you exactly how LaSalle's Problem Method has trained more than 1,350,000 men and women from all walks of life.

Also . . . the latest book, "Accountancy, the Profession That Pays," gives all the latest facts about the new and growing opportunities in several different fields of profitable employment.

This can be an important day in your life. A coupon like the one below has started hundreds of thousands of men and women toward a bigger job, a larger income. It can do the same for you.

Member, National Home Study Council

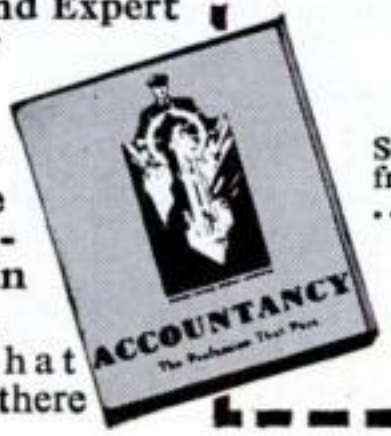

Mail the Coupon Today!

FREE BOOK

LA SALLE
EXTENSION UNIVERSITY
A Correspondence Institution
417 S. Dearborn St., Dept. 483H, Chicago 5, Ill.

Send free Sample Lesson in Accounting—also, latest free book, "Accountancy, the Profession That Pays" . . . all without cost or obligation.

Name.....*Age*.....

Address.....

City & Zone.....*State*.....

FREE SAMPLE LESSON



Copyrighted material


An intrstng exprmnt in spch

Some day your voice may travel by a sort of electronic "shorthand" when you telephone. Bell Laboratories scientists are experimenting with a technique in which a sample is snipped off a speech sound—just enough to identify it—and sent by wire to a receiver which rebuilds the original sound. Thus voices can be sent by mea ıs of fewer signals. More voices may economically share the wires.


This is but one of many transmission techniques that Laboratories scientists are exploring in their search for ways to make Bell System wire and radio channels serve you more efficiently. It is another example of the Bell Telephone Laboratories research that keeps your telephone the most advanced on earth. *The oscilloscope traces at right show how the shorthand technique works.*

BELL TELEPHONE LABORATORIES


World center of communications research. Largest industrial laboratory in the United States.

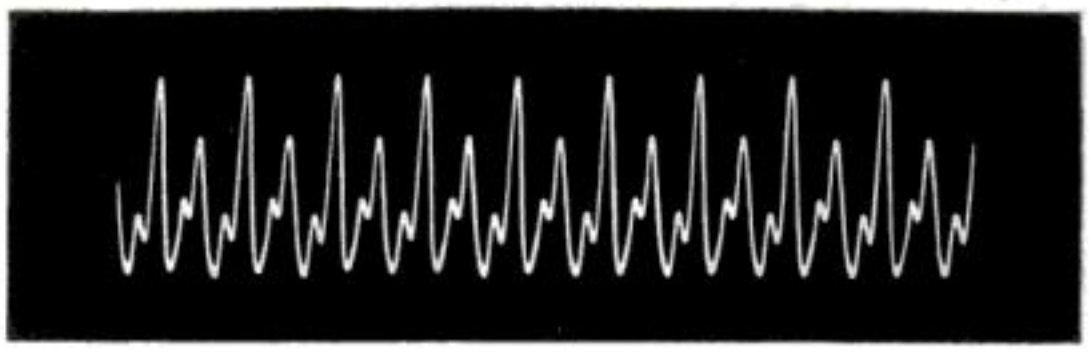


Vibrations of the sound "or" in the word "four." Pattern represents nine of the "pitch periods" which originate in puffs of air from the larynx when a word is spoken.

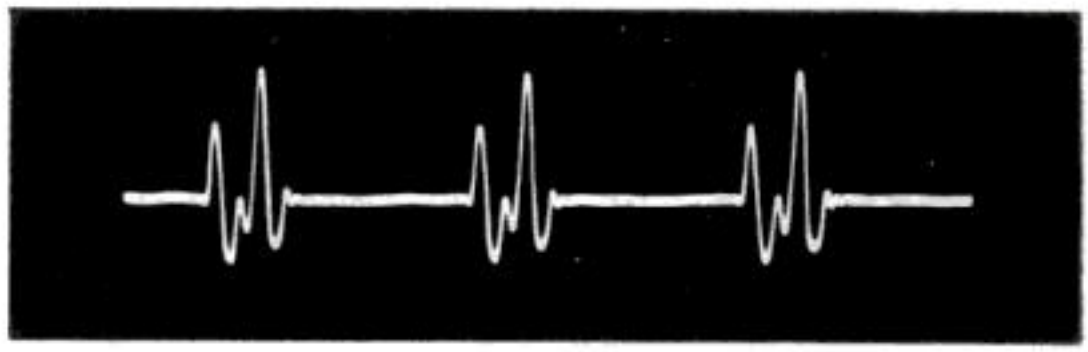


An electronic sampling of the "or" sound. One "pitch period" in three has been selected for transmission. This permits great naturalness when voice is rebuilt. Intelligible speech could be sent through a 1 in 6 sampling.

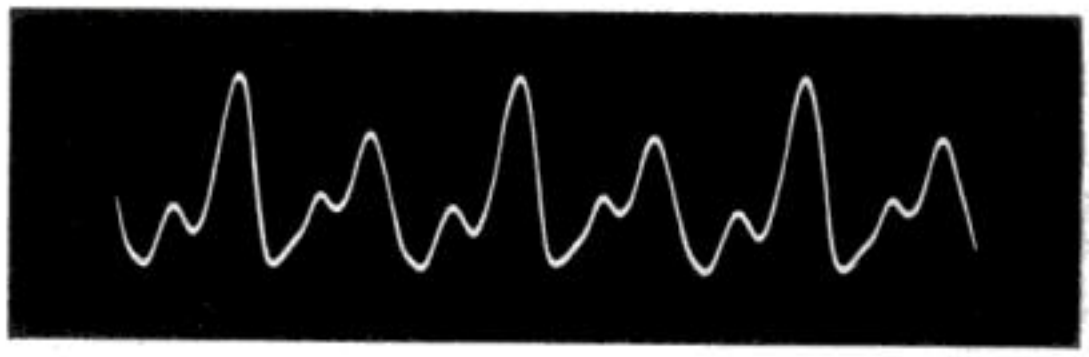

The selected samples are "stretched" for transmission. They travel in a narrower frequency band than complete sound.

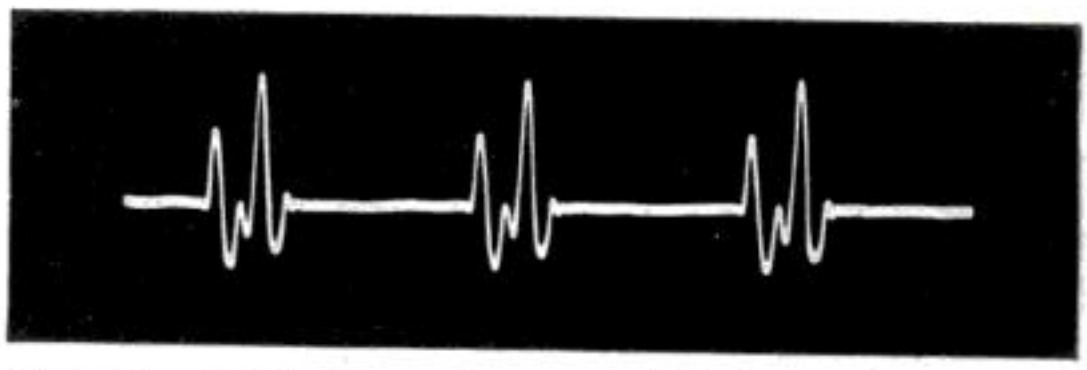

Using the stretched sample as a model, the receiver restores original frequency. In all speech, sounds are intoned much longer than is needed for recognition — even by the human ear. Electronic machines perform recognition far faster than the ear.

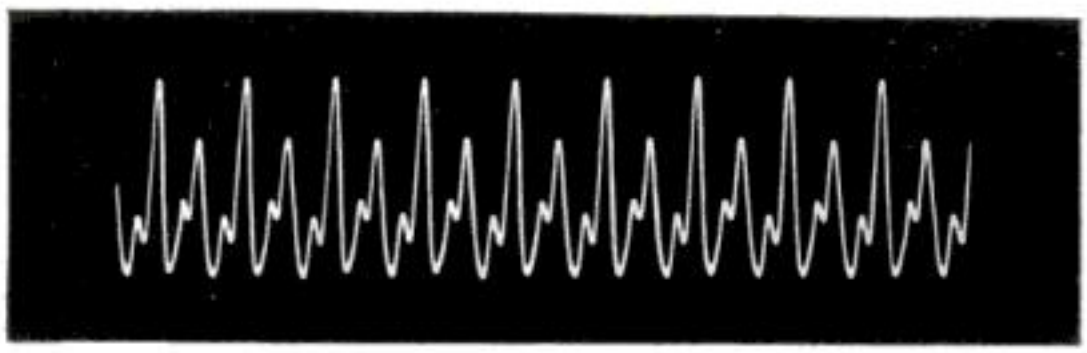


The receiver fills in gaps between samples, recreating total original sound. Under new system, three or four voices could travel at once over a pair of wires which now carries only one — and come out clearly at the end!

Copyrighted material

HIGH SCHOOL GRADUATES!

"I'm making time in the Army!"

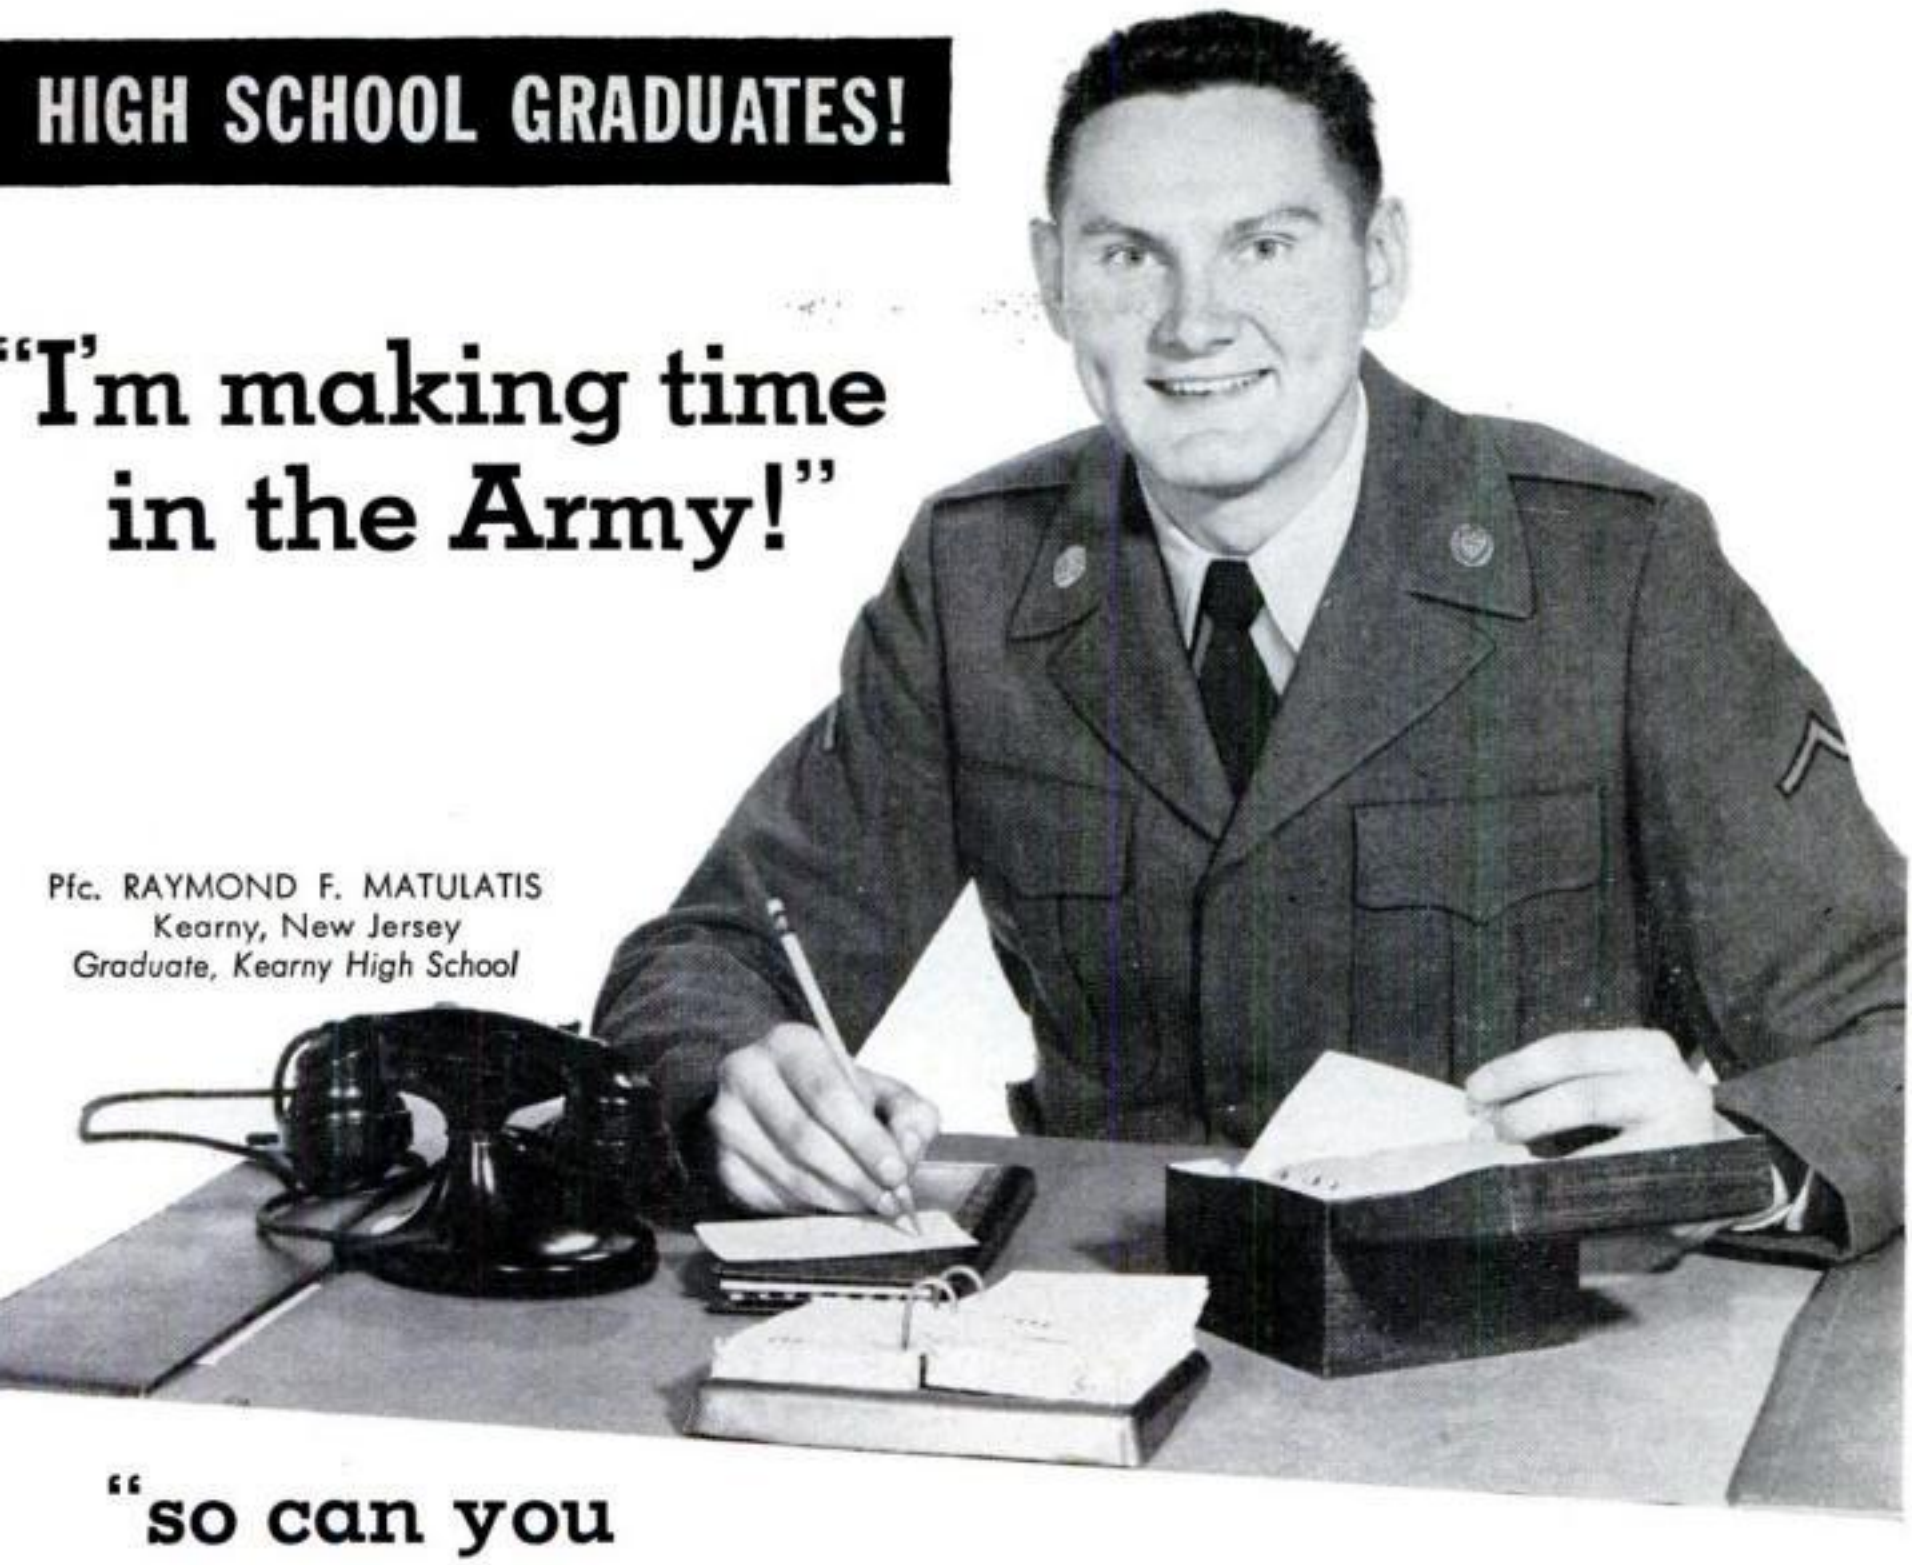

Pfc. RAYMOND F. MATULATIS
Kearny, New Jersey
Graduate, Kearny High School

"so can you BY CHOOSING YOUR TRAINING *BEFORE* ENLISTMENT!"

"That's right—I chose my Army training. It's made me a personnel management specialist—a job that fits right in with my career plans. This way I'm making time, not marking time, in the Army. I've advised a lot of my high school friends to look into this terrific program. I think you'll find it's a fine opportunity for you, too. You see, the Army offers such a wide range of technical courses that you're sure to find one that will help you get ahead in your field. And the schools are excellent—offering really top level courses, taught in a campus atmosphere. I haven't wasted a moment in the Army, and neither will you—if you enlist now for the technical training you want."

Raymond F. Matulatis

Over 100 courses ready and waiting

Yes, make time in the Army by selecting the training that interests *you* . . . and reserving it *before* enlistment! You're bound to find just what you want with over 100 courses to choose from. Electronics, radar, mechanics, medicine, chemistry—you name it, and it's *yours!* You'll attend one of the fine Army schools where you'll be taught by expert instructors—learn by using the most modern equipment in the world! And when your course ends, you'll be a skilled specialist in your field!

How you can qualify

If you have a high school diploma or its equivalent, or if you are a high school senior, you can reserve your Army schooling right away! Get the facts, now!

Get CHOICE, not chance, in the Army!

FILL OUT COUPON AND MAIL IT TODAY!

THE ADJUTANT GENERAL PS 56-4
Department of the Army,
Washington 25, D.C.
Attn: AGSN

Please send me the Army booklet describing special opportunities for high school graduates.

Mr. .....

Address .....

City ..... **State** ..... **Date of Grad.** .....

Copyrighted material

Now...anything you can see brought up 15 times closer!

from 1 to 50 miles

new, amazing

POWERHOUSE

EXTRA LONG RANGE

TELESCOPE

$12.95 VALUE

NOW 4.99

- Metal Draw Tubes!
- Extra Sharp!
- Deluxe Model!
- Converts into Microscope!



FREE
PORTABLE TRIPOD

ENJOY THRILLING VIEWS OF PLANETS!

Spend endless hours of sheer enjoyment by observing the moon and other planets at far closer range! Educational too for children as well as adults! Yes! the POWERHOUSE TELESCOPE lets you and your family travel into outer space without leaving the earth!

225 TIMES AREA MAGNIFICATION

From this → ◯ → *to this* →



These two dramatic photos of the Washington Monument prove beyond words the terrific power of this amazing telescope. The tiny photo is as the naked eye sees it miles from the nation's capital. The big picture is what the **POWERHOUSE** gives you—**225 times** the area!

MADE IN GERMANY
by 101-YEAR-OLD PLANT

This extra long range **POWERHOUSE TELESCOPE** was developed by a reputable German factory. Known for quality products for over 100 years. Not a toy with cardboard tubes! A real optical instrument with heavy-duty METAL draw tubes and **PRECISION MADE** lenses of amazing power. Every detail reflects German know-how and legendary workmanship.

7 SUPER FEATURES

1. Polished **METAL** tubes. 2. Smooth focusing. 3. Contoured eyepiece. 4. Interior coated objective lens as in expensive binoculars. 5. Permits viewing even in moonlight. 6. Deluxe quality finish thruout. 7. Converts quickly into a compound microscope! **NOW** the super power lenses give you greater range and magnification than famous American binoculars selling for up to $250.00.

POWERFUL LENSES REACH OUT INTO OUTER SPACE

Miles melt away. 15 miles become only one. Anything your eye can see—even celestial bodies—are brought closer. They look bigger, clearer, sharper. Observe the moon and its changing phases. Search the skies for the new man-made satellites being launched by the U.S. Navy. Try it on distant buildings, people, ships at sea, sports, airplanes, birds and wild animals—**WITHOUT BEING SEEN.**

BUY DIRECT & SAVE

Buy direct from importer! Reg. 12.95 value—yours for 4.99, with Table Tripod & dust protector. Send only **4.99** cash, m.o. or check for prompt delivery. (COD's plus postage extra). Satisfaction **GUARANTEED** or your 4.99 back. Have fun! Have thrills! Order **TODAY!**

THORESEN'S, Dept. 7-D-43

352 Fourth Ave., New York 10, N.Y.

CANADIANS: Mail order direct Thoresen's, Dept. US-43, 45 St. James St., West, Montreal 1, P.Q. Same price—no extra charges.

MAIL TODAY

THORESEN'S, Dept. 7-D-43
352 Fourth Avenue, New York 10, N.Y.

RUSH ..... **POWERHOUSE TELESCOPES** and **Free Tripod** at cut price of **4.99** each, on 7 day trial, money back guarantee.

☐ **Check, cash, or m.o. herewith. RUSH prepaid.**
☐ **Send C.O.D. plus postage fees.**

Name .....

Address .....

Town ..... State .....

Copyrighted material

Engineer's Report:

1956 CHEVROLET

The safety story behind horsepower that ranges up to 225!

by **ED COLE,** *Chevrolet Chief Engineer*

Lately, it seems, all my friends are asking me about higher horsepower ratings. "Two hundred and twenty-five horsepower means just that much more speed, doesn't it?" many of them ask. I tell them that top speed isn't the point at all—that higher horsepower in the '56 Chevrolet means better acceleration, response and maneuverability. It means the car is *safer to drive!*

For instance, Chevrolet's new horsepower, ranging up to 225, gives you a split-second punch of acceleration that can whisk you out of a potential accident situation in a jiffy. That same burst of acceleration from a stop can put you in motion in the blink of an eye when you want to get away fast. Chevy's higher horsepower means safer passing, too. You can get around a car more quickly and back into your own lane. It means more power for safer hill climbing and more power in reserve at all times.

That big-bore V8 of ours *does* have more power. Up to 45 more horsepower than last year! The compression ratio's been boosted as high as 9.25 to 1 for an even greater high-compression power punch. But that power is put there for your pleasure and safety and I'd like to suggest this: See your Chevrolet dealer and road test one of our new Chevrolets. See if you don't agree that it gives you a new margin of safety on the road! . . . Chevrolet Division of General Motors, Detroit 2, Michigan.

CHEVROLET




Copyrighted material

TO INTRODUCE YOU TO THE JAZZ PROGRAM OF THE COLUMBIA (Lp) RECORD CLUB...

FREE ALL 3 OF THESE 12" COLUMBIA (Lp) JAZZ RECORDS

IF YOU JOIN THE CLUB NOW AND AGREE TO ACCEPT AS FEW AS 4 SELECTIONS DURING THE COMING 12 MONTHS



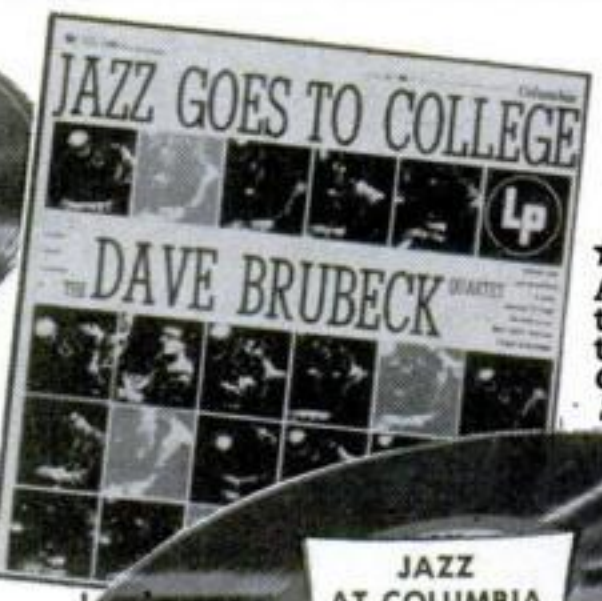



★ **JAZZ GOES TO COLLEGE**
A historic recording by the greatest name in contemporary jazz. Includes *Out of Nowhere, The Song Is You, Le Souk.*





★ CONDON
★ Armstrong
★ BEIDERBECKE
BESSIE SMITH ★ Teddy Wilson
Bunk Johnson ★ Jimmy Lunceford
—and many more



12 immortal performances by the beloved masters who made jazz history! Included are: *St. James Infirmary; Well, All Right Then; Sugar Foot Strut; Margie.*



★ GOODMAN ★ Krupa ★ JAMES
★ Ellington ★ BASIE ★ Hampton
and other great stars

A *must* for any music library . . . the foremost gentlemen of swing in the real swing gems of all time, including *Henderson Stomp, Stealin' Apples, Dark Eyes, Cherokee, Avenue C.*

BUILD A RECORD LIBRARY OF THE GREATEST JAZZ PERFORMANCES OF ALL TIME!

Yes! Yours FREE—ALL THREE of the great Columbia (Lp) Jazz recordings shown above! We make this unique offer to introduce you to the money-saving Jazz Program of the Columbia (Lp) Record Club . . . an exciting new program that brings you each month the finest recorded performances of the greatest jazz immortals of *every period and style*—from the world's largest jazz library—all at tremendous savings!

HOW THE CLUB OPERATES. Each month you will receive free, the Club Magazine which describes a carefully selected 12" high fidelity Columbia (Lp) Jazz recording—plus an alternate. You may accept either record, or tell the Club to send you NO record for any given month. The records you accept are mailed to you and billed at $3.98 each, plus a small mailing charge. Your only obligation is to accept as few as 4 records within the next 12 months. You may cancel membership any time thereafter.

OTHER DIVISIONS TO CHOOSE FROM. Members may also select records from the Club's other divisions: *Classical; Listening and Dancing; Broadway, Movies, Television and Musical Comedies.* Records accepted from any division count toward *free* Bonus records.

FREE BONUS RECORDS GIVEN REGULARLY. The 3 records sent to you now represent an "advance" of the Club's bonus system—given to you at once. After fulfilling your obligation by purchasing 4 records, you get an additional *free* Bonus record of your choice for every two additional selections you accept. Bonus records are pressed exclusively for Club members, not available elsewhere.

MAIL COUPON NOW to get these 3 jazz records *free,* at once. You must be delighted in every way, or you may cancel your membership without obligation by returning the free records within 10 days.

COLUMBIA (Lp) RECORD CLUB 165 West 46th St., New York 36, N. Y.

MAIL COUPON NOW

COLUMBIA (Lp) RECORD CLUB, Dept. 349
165 West 46th Street, New York 36, N. Y.

ALL 3—YOURS FREE

★ JAZZ GOES TO COLLEGE—Dave Brubeck Quartet
★ JAZZ AT COLUMBIA—Collector's Items
★ JAZZ AT COLUMBIA—Swing

Please enroll me in the JAZZ DIVISION of the Columbia (Lp) Record Club and send me at once the three records listed above, ALL 3 FREE.

Each month you will send me the Columbia (Lp) Record Club Magazine which describes the Club's selections in all four divisions. I may select records from any division and my only obligation is to accept a minimum of four records in the next twelve months at the regular list price, plus a small mailing charge. After accepting four records, I will receive a free Bonus record for every two additional selections I purchase. If not delighted with my membership, I may cancel within 10 days by returning all records.

Name.....
(Please Print)
Address.....

City.....Zone.....State.....

Canada: Prices slightly higher. Address 11-13 Soho St., Toronto, 2B

If you wish to have this membership credited to an established Columbia Records dealer, authorized to accept subscriptions, please fill in the following information:

Dealer's name.....

Dealer's address.....

® "Columbia", (Lp) Marcas Reg. T.M.

Copyrighted material

I WILL TRAIN YOU AT HOME FOR GOOD PAY JOBS IN RADIO-TELEVISION



J. E. SMITH has trained more men for Radio-Television than any other man. OUR 40th YEAR.

America's Fast Growing Industry Offers You Good Pay—Bright Future—Security

I TRAINED THESE MEN



"Started to repair sets six months after enrolling. Earned $12 to $15 a week in spare time."—Adam Kramlik, Jr., Sunneytown, Pennsylvania.



"Up to our necks in Radio-Television work. Four other NRI men work here. Am happy with my work."—Glen Peterson, Bradford, Ont., Canada.



"Am doing Radio and Television Servicing full time. Now have my own shop. I owe my success to N.R.I."—Curtis Stath, Ft. Madison, Iowa.



"Am with WCOC. NRI course can't be beat. No trouble passing 1st class Radio-phone license exam."—Jesse W. Parker, Meridian, Mississippi.



"By the time I graduated I had paid for my course, a car and testing equipment. Can service toughest jobs."—E. J. Streitenberger, New Boston, Ohio.

AVAILABLE TO VETERANS UNDER G.I. BILLS


Start Soon to Make $10, $15 a Week Extra Fixing Sets

Keep your job while training. I start sending you special booklets the day you enroll, that show you how to fix sets. Multitester built with parts I send helps you make $10, $15 a week extra fixing sets while training. Many start their own Radio-Television business with spare time earnings.

My Training Is Up-To-Date

You benefit by my 40 years' experience training men at home. Well illustrated lessons give you basic principles you need. Skillfully developed kits of parts I send (see below) "bring to life" things you learn from lessons.

You Learn by Practicing with Parts I Send

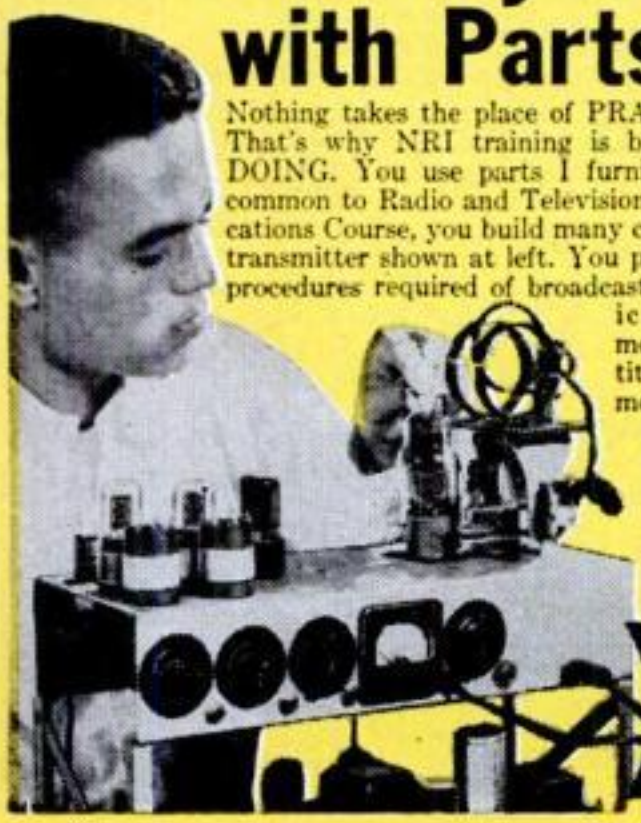

Nothing takes the place of PRACTICAL EXPERIENCE. That's why NRI training is based on LEARNING BY DOING. You use parts I furnish to build many circuits common to Radio and Television. As part of my Communications Course, you build many circuits, including low power transmitter shown at left. You put it "on the air," perform procedures required of broadcast operators. With my Servicing Course you build modern Radio, etc.; use Multitester you build to make money fixing sets in spare time while training. You can stay at home, keep your job, learn Radio-TV in spare time at low cost. Mail coupon for book showing other equipment you build and keep.

The Tested Way To Better Pay!

2 FREE BOOKS SHOW HOW MAIL COUPON



Television Making Good Jobs, Prosperity—Even without Television, Radio is bigger than ever. 115 million home and auto Radios are big market for servicing. 3000 broadcasting stations use operators, technicians. Government, Aviation, Police, Ship, Micro-wave Relay, Two-way Radio Communications for buses, taxis, trucks, R. R. are growing fields. Television is moving ahead fast.



About 200 Television stations are now on the air. Hundreds of others being built. Good TV jobs opening up for Technicians, Operators, etc.



25 million homes now have Television sets. Thousands more are being sold every week. Get a job or have your own business selling, installing, servicing.

Radio-TV Needs Men of Action—Mail Coupon

Without obligating you in any way, I'll send an actual lesson to prove that my training is practical, thorough; 64-page book to show good job opportunities for you in Radio-TV. Terms for NRI training are as low as $5 a month. Many graduates make more in two weeks than total cost of training. Mail coupon now. J. E. SMITH, President, National Radio Institute, Dept. 6DB, Washington 9, D. C. OUR 40TH YEAR.

Good for Both—FREE

MR. J. E. SMITH, President, Dept. 6DB
National Radio Institute, Washington 9, D. C.
Mail me Sample Lesson and 64-page Book, FREE.
(No salesman will call. Please write plainly.)


Name.....Age.....

Address.....

City.....Zone....State.....

VETS write in date of discharge .....

Approved Member National Home Study Council

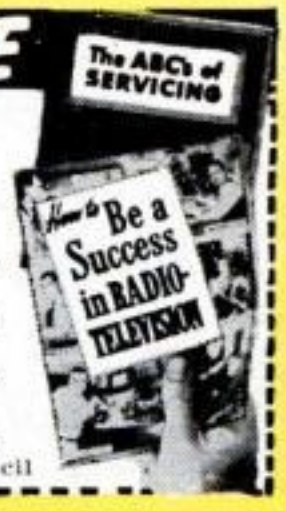


Copyrighted material

FIRST

any way you look at it !



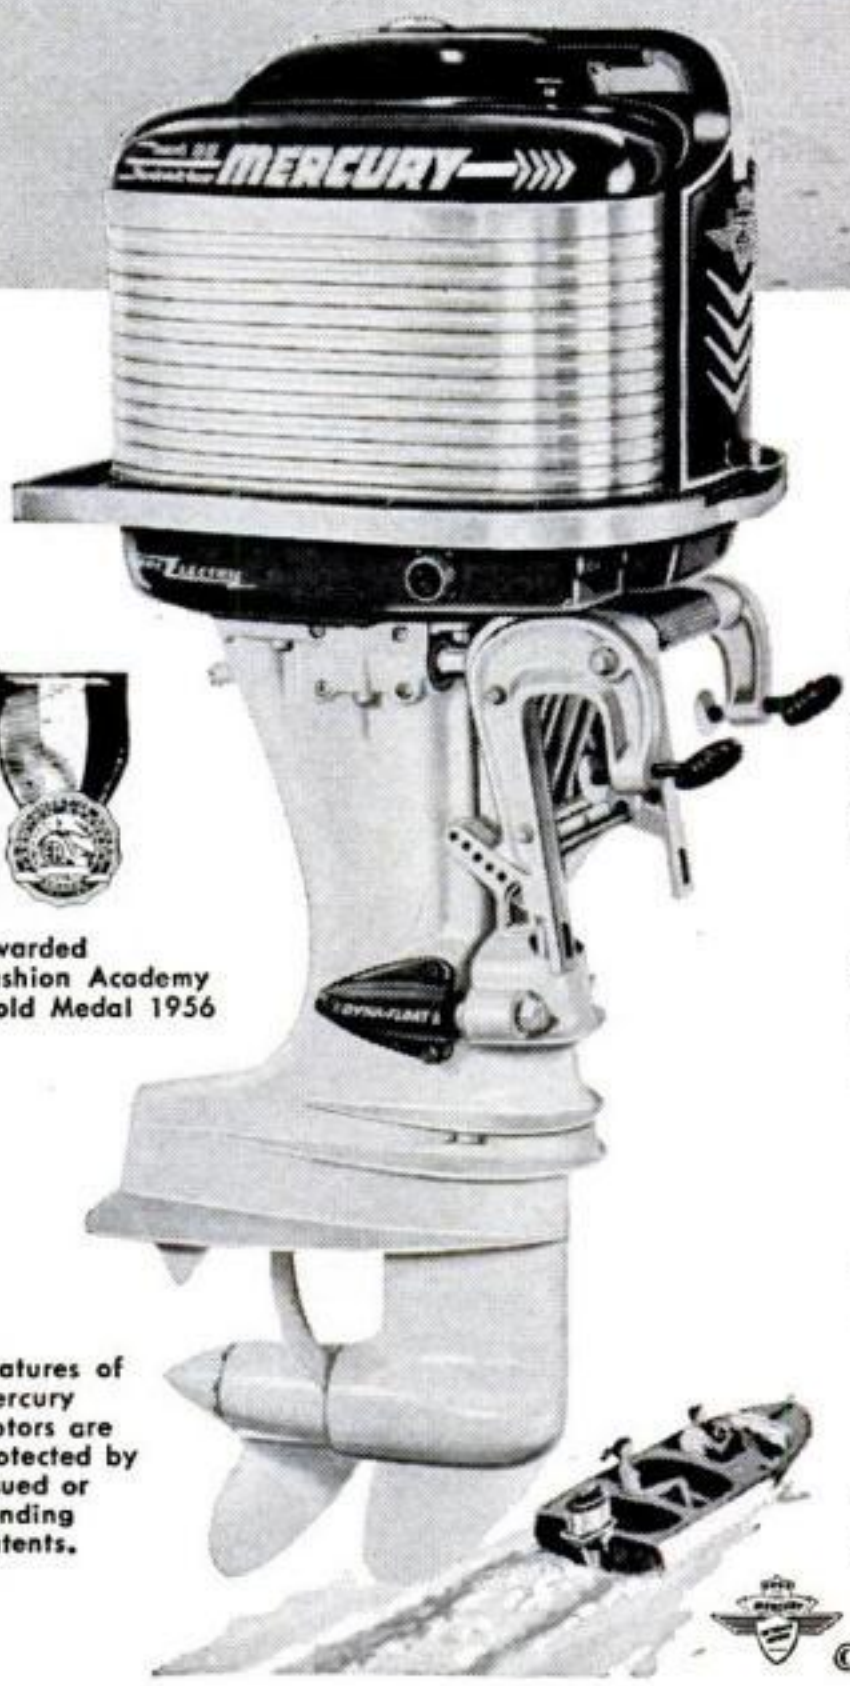

Awarded Fashion Academy Gold Medal 1956

Features of Mercury motors are protected by issued or pending patents.

KIEKHAEFER MERCURY

mark 55E

40 h.p. 4 Cylinder in Line, Alternate Firing Thunderbolt Engine; Reverse Gear and Neutral; Dyna-Float Suspension; Scientific Engine Silencing; Merchromatic 2-Tone Colors

FIRST with color styling. **FIRST** in power. **FIRST** in durability and reliability. **FIRST** in actual operating economy. **FIRST** with 12-volt electrical system. **FIRST** with permanent magnet generator. **FIRST** with super light weight starter. **FIRST** with aircraft alternate four integral magneto. **FIRST** with drop forged aluminum clamp and swivel brackets (unbreakable). **FIRST** with drop forged aluminum pistons. **FIRST** with rubber rotor water pump. **FIRST** with Ride-Guide steering. **FIRST** alternate firing four. And many others.

Write for FREE Illustrated Catalog


©1956 KIEKHAEFER CORPORATION, Fond du Lac, Wisconsin

Copyrighted material

2 TOP OPPORTUNITY FIELDS

Either, or a Combination of Both Fields Offer a World of Opportunity to Trained Men!

ELECTRICITY
Electronics

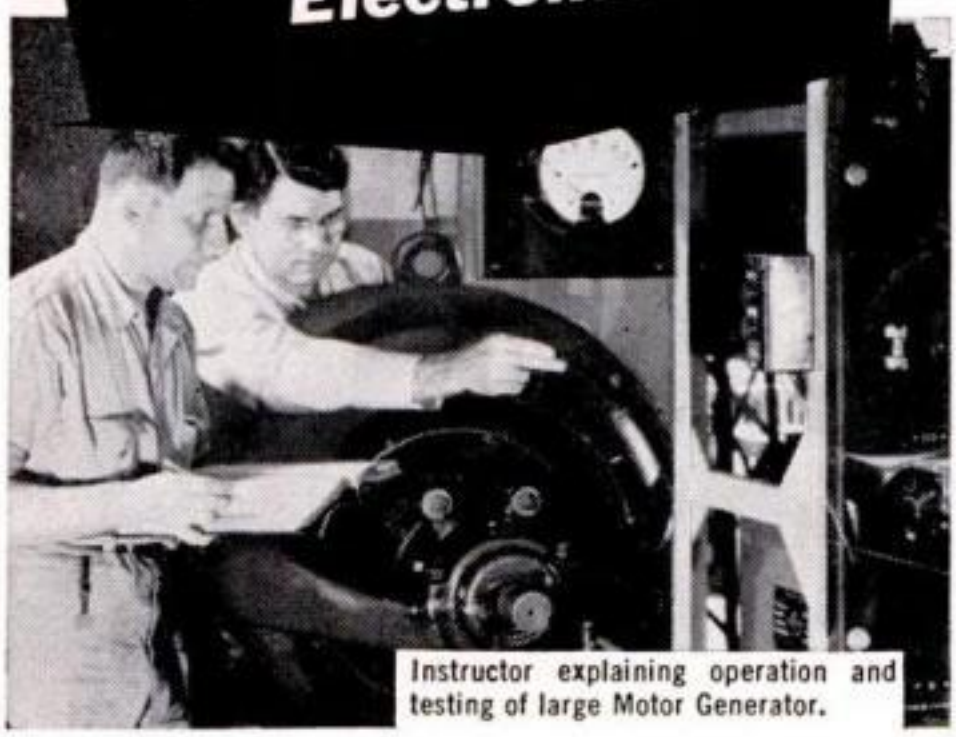

Instructor explaining operation and testing of large Motor Generator.

In industry—in the home—electricity and electronics are playing a vastly larger, more vital role than ever before. New devices and inventions in our lives are putting a premium on trained Electrical men. The fabulous growth in this field is creating countless job opportunities. Prepare now for a future in Electricity.

TELEVISION
Radio–Color TV



Instructor helping student check wiring and trace circuits of TV set.

The fastest growing industry in America! New stations by the hundreds . . . new sets by the millions . . . and now COLOR TV. The opportunities ahead in sales, installation and servicing of TV-Radio sets are unlimited. Get ready now, quickly, for A GOOD JOB OR INDEPENDENCE IN A BUSINESS OF YOUR OWN.

Train in the great shops of COYNE

Oldest, and Best Equipped School of Its Kind in the U. S.

VETERAN or NON-VETERAN—Whether 17 or up to 45 years of age, prepare for your future now. Don't be satisfied with a "no future" job. Train the Coyne way for a better job and a real future in ELECTRICITY-ELECTRONICS, TELEVISION-RADIO — or a combination of both fields—fields that offer a world of opportunities. Lifetime employment service to Coyne graduates.

WE TRAIN YOU IN CHICAGO—Learn the easier, practical way at *Coyne*, on real, full size equipment. No advanced education or previous experience needed. You learn *better* the *Coyne* way.



A TECHNICAL TRADE INSTITUTE OPERATED NOT FOR PROFIT

COYNE ELECTRICAL SCHOOL

TRAINING IN REFRIGERATION and ELECTRIC APPLIANCES can be INCLUDED

500 S. Paulina St., Dept. 46-73H, CHICAGO 12, ILL.

FINANCE PLAN—Enroll now, pay most of tuition later. Part-time employment help for students.

Mail Coupon for Big Free Book

CLIP COUPON NOW for big new illustrated Coyne book "Guide to Careers in ELECTRICITY-ELECTRONICS and TELEVISION-RADIO." No obligation; *no salesman will call.*



B. W. COOKE, President
COYNE ELECTRICAL SCHOOL
500 S. Paulina St., Chicago 12, Ill. Dept. 46-73H

Send BIG FREE book and details of all the training you offer in both fields. However, I am especially interested in:

☐ ELECTRICITY-ELECTRONICS ☐ TELEVISION-RADIO

*Name*_____

*Address*_____

*City*_____ *State*_____

Copyrighted material



. . . but the Egyptians knew it ages ago!

POWERS to overcome sickness! Means to escape poverty! Knowledge to bring happiness and peace of mind! Skill and genius to create a civilization which we still copy today! These are only some of the accomplishments of the ancient Egyptians.

Above and beyond these physical achievements was the secret wisdom possessed by the Egyptian mystery schools. In these centers of learning men and women were taught the laws of life and how to master them. With this mastery they were able to shape their destinies as they wished them to be. It takes no greater mental effort to *achieve results* when you know how. Successful living is the oldest art in the world. It consists of developing *initiative, foresight* and the ability to combine experiences into new and workable ideas.

These laws operate as unfailingly as the laws which govern the sun, moon and planets. They were discovered centuries ago by certain wise men of Egypt, and preserved down through the ages by the Rosicrucians.

Time has since crumbled Egypt's walls, but it couldn't destroy this formula for the control of life. In your hands, this knowledge could alter the entire course of your affairs.

The Rosicrucians offer to you—if you have the courage to break away from limited forms of thinking—these same simply expressed truths of life which have led thousands to a joyous method of better living.

Let This FREE Book Help You

Learn how you may share the private instructions of The Rosicrucians, a non-profit fraternity of men and women whose influence extends into every land. Let this be the turning point in *your* life! For your copy of *"The Mastery of Life"* use the coupon below or write to Scribe S.Y.J.

The Rosicrucians
[AMORC]
SAN JOSE, CALIFORNIA, U. S. A.

Scribe S.Y.J.
The Rosicrucians (AMORC)
San Jose, California, U.S.A.

Please send me, without obligation, my copy of *"The Mastery of Life"* which explains how I may receive and use your intelligent and age-old method for attaining mastership of life.

Name.....

Address.....

Copyrighted material

INVENTORS

Learn how to protect your invention. The U. S. Patent Laws provide that any new and useful art, machine, article of manufacture, or composition of matter, or any new and useful improvement thereof, may be patented if the act of invention is involved. Therefore, every inventor with a valuable invention should take advantage of the Patent Laws and proceed for patent protection in order to safeguard his rights.

A patent gives the inventor the exclusive right to prevent others from making, using, or selling the invention claimed in the patent for a period of seventeen years.

The Patent Laws were enacted for the benefit of the inventor to give him protection for the features of his invention which are patentable. These features must be properly and concisely set forth and claimed in a formal application for patent, in order to comply with the requirements of the Patent Laws. For that reason, unless the inventor is familiar with patent matters, he should engage a competent registered patent attorney or agent to represent him. We are registered to practice before the U. S. Patent Office and are prepared to serve you in the handling of your patent matters.

A specially prepared booklet entitled "Patent Guide for the Inventor", containing detailed information with respect to patent protection and procedure, together with a "Record of Invention" form will be promptly forwarded to you without obligation upon request.

CLARENCE A. O'BRIEN & HARVEY JACOBSON

Registered Patent Attorneys

62-D DISTRICT NATIONAL BUILDING

WASHINGTON 5, D. C.

Copyrighted material

Learn at Home
in your spare time
to Fix Electric Appliances



Better Pay–More Opportunities

Get into a field where there is important work and opportunity for the trained man. Millions of electric appliances are sold every year. Every wired home now has an average of 8. Many of them need service and repair. Owners pay well to have them fixed quickly, properly. This is your opportunity for a better job, your own part time or full time business. NRI can give you the training you need, at home, in your spare time.

A Way to Extra Money

Soon after starting you will be able to earn extra cash fixing toasters, clocks, fans, vacuum cleaners, etc., for neighbors and friends. Keep your job while learning and earning. Put spare time to work for you. Work in your basement, garage, spare room. You'll be amazed how easily, quickly you, too, can start earning many extra dollars. NRI shows you how. Even before you finish training your spare time earnings may pay for the course and equipment.

NRI Sends Tester to Learn and Earn

You need proper equipment to service today's automatic appliances. With **this** course you get parts to build professional type, multi-use Appliance Tester. You learn to use it. Takes guess work out of servicing. Mail coupon for FREE book and Sample Lesson. See how easy it is to learn. Find out about NRI—a school that for more than 40 years has been training men, through home study, for success, good pay jobs. Our reputation, record, experience back up this course. Write now to: Electric Appliance Training, NRI, Dept. BD6, Washington 9, D. C.



FREE *Lesson and Book Mail this NOW!*

NATIONAL RADIO INSTITUTE
Dept. BD6, Washington 9, D. C.
Send me Lesson and Book Free. No Salesman will call.

Name ..... Age .....

Address .....

City ..... Zone ..... State .....

APPROVED MEMBER NATIONAL HOME STUDY COUNCIL

Letters



Prices of 1956 Cars

You packed a lot of interesting information into that handy little "Score Card" booklet [Feb., pp. 145-160]. But I noticed that the prices you gave don't all agree with those which I have seen in other published lists. How come?

HENRY R. SCHMIDT, Ocala, Fla.

Manufacturers give car prices in various ways. Some include taxes, preparation and handling charges; others do not. As a result, we regret, several of the prices given in the February issue of POPULAR SCIENCE MONTHLY *were wrong. So were some of the prices given in other magazines. As this issue goes to press, manufacturers' practices and prices are being revised again. To compound the confusion, dealers are not bound by factory suggested prices.*

Who Has the Most Motors?

I see in the January issue that Mr. Alan Kogan of Detroit has 22 motors in his house [Letters, p. 20]. Not bad, but he has to take a back seat. I looked around our house and, counting our three electric shavers, found 34 motors all told.

ALEX BROWN, Tucson, Ariz.

. . . We have a grand total of 68 motors (including those in 10 clocks, two dishwashers and a jukebox) under one roof.

J. RAYMOND FRITZ, Newport, R. I.

Report from a Satisfied Customer

I read a lot about the new inventions made for cars today. So I decided I would try them. First I installed a carburetor that guaranteed to save 25 percent on fuel. Then I put in a set of special spark plugs that saved 20 percent. To these I added an intake superduper heater—another saving of 30 percent. Next I added a special automatic transmission guaranteed to save 35

Copyrighted material

INVENTORS

If you believe that you have an invention, you should find out how to protect it. The first step is to have a search made of the prior pertinent U. S. patents. If a report on this search indicates that the invention appears patentable you can apply for a patent, and the specifications and claims should be prepared.

The firm of McMorrow, Berman & Davidson, with offices in Washington, D. C., is qualified to take the necessary steps for you. We can make a preliminary search on your invention, advise you whether we think it can be patented, and prepare your application for patent.

Unless you are fully familiar with the U. S. Patent Laws, we recommend that you engage the services of a Registered Patent Attorney to protect your interests. The patent laws are *your* laws. A patent gives you the right to prevent others from making, using or selling the invention claimed in your patent for a period of 17 years.

Use these patent laws for your protection. Investigate whether your invention can be patented. If you have what you believe to be an invention, we suggest that you have this firm make a search for you.

Send for a copy of our Patent Booklet entitled "How To Protect Your Invention," containing information about patent protection and patent procedure. Along with this we will also send you an "Invention Record" form, for your use in writing down and sketching details of your invention. We will mail them promptly. No obligation. They are yours for the asking.


McMORROW, BERMAN & DAVIDSON

Registered Patent Attorneys

PATENTS · COPYRIGHTS · PATENTS

142-T VICTOR BUILDING, WASHINGTON 1, D. C.

Copyrighted material

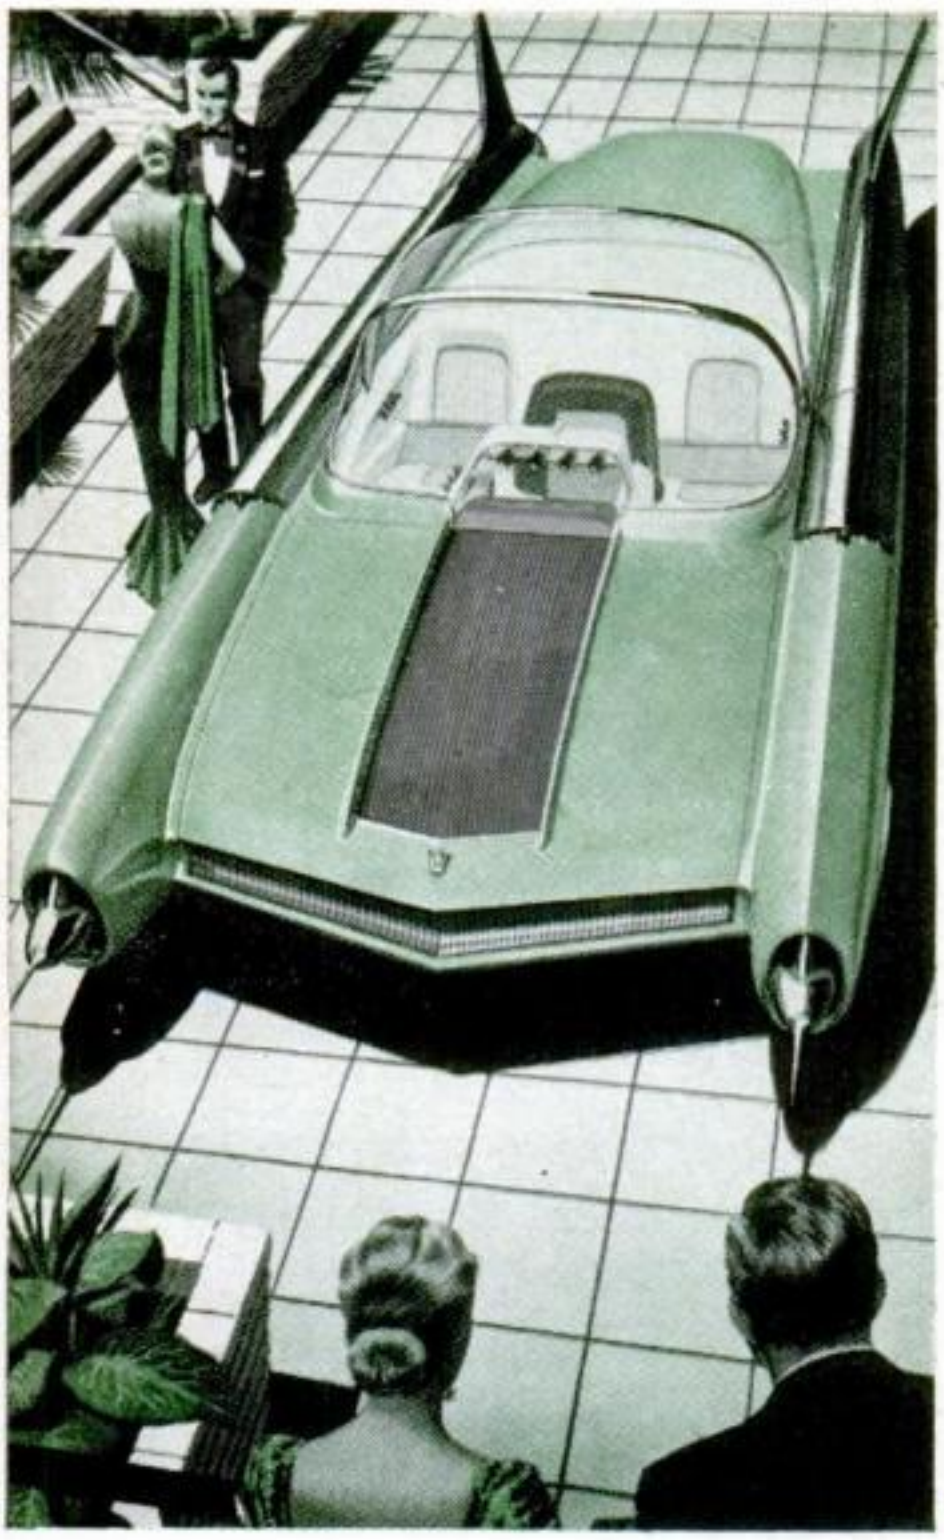

"New or old—the car you drive today runs best on years-ahead Quaker State!"



Super-refined from Pure Pennsylvania Grade Crude Oil, world's finest. Famous for performance, protection, economy! Try it!

QUAKER STATE OIL REFINING CORP., OIL CITY, PA.
Member Pennsylvania Grade Crude Oil Association

percent. Then I put on a set of cold-rubber, puncture-proof tires that promised another 15 percent saving.

Now, with a fuel economy of 125 percent, I have to stop every 50 miles to bail



fuel out of the gas tank to keep it from running over.

JOHN BARTOVICH, Brownfield, Pa.

Mines Official Praises Rescue Story

I have just finished reading your accurate article concerning the 1955 National First-Aid and Mine-Rescue Contest at Knoxville [Jan., p. 97]. The photographs were excellent, too, probably the best set ever produced along this line. Please accept our thanks for a nice job.

E. R. NICOLAI, Assistant Chief
Office of Mineral Reports
Bureau of Mines, Washington, D. C.

Big, Bigger, Biggest

You're wrong about that dragline used on the St. Lawrence Seaway [Jan. p. 108] being the world's largest. We have a bigger one—1,250 tons—here in Hibbing. And there is reportedly a still larger one in England.

PAUL PEROCESCHI, Hibbing, Minn.

For a report on a new power shovel that dwarfs all these, see page 106.

Fuel Injection Here Already

Your article on fuel injection in the February issue [p. 140] was most interesting. I am sure you will be interested to know that the Meteor Fuel Injector is currently available for immediate installation as a replacement for a carburetor. It is made by the Saaty Fuel Injector Corp., 1050 Broad St., Providence 5, R.I.

LESLIE D'AVIGDOR, New York City

Look Who's Flatheaded Now

I did a double-take when I read in Ken Purdy's article on the new Corvette, in your February issue ["New Corvette Challenges Thunderbird and Hawk," p. 136],

Copyrighted material

Now IN YOUR OWN HOME *Learn*



NO PREVIOUS TECHNICAL EXPERIENCE NEEDED

NOW . . . get EVERYTHING YOU NEED for real Laboratory-type training AT HOME

AUTOMATION ELECTRONICS
TELEVISION
RADIO-ELECTRONICS
the Amazingly Effective
D.T.I. WAY
—with the aid of BOTH HOME EQUIPMENT and HOME MOVIES



Above: Work over **300** fascinating experiments with this equipment

1. Build over 300 fascinating experiments from 16 BIG SHIPMENTS of Electronic-Radio parts which you KEEP.


2. Build valuable commercial-type test equipment—as shown to the left—which you KEEP. This includes a quality 5 INCH oscilloscope and vacuum tube voltmeter—both highly useful for Television work.

3. Build and keep a big 21 INCH TV Set. (D.T.I. offers another home training in Television-Radio-Electronics, but without the TV set.)

4. Use a 16 mm. movie projector and new series of highly instructive movies—a wonderful aid to help you grasp important fundamentals faster . . . easier . . . better.

5. Enjoy well-illustrated, easy-to-read lessons with handy FOLD-OUT diagrams.

6. Get an honest-to-goodness EMPLOYMENT SERVICE to help you get a good job after graduating —or assistance in starting your OWN SALES AND SERVICE BUSINESS. Mail coupon today for the complete details.

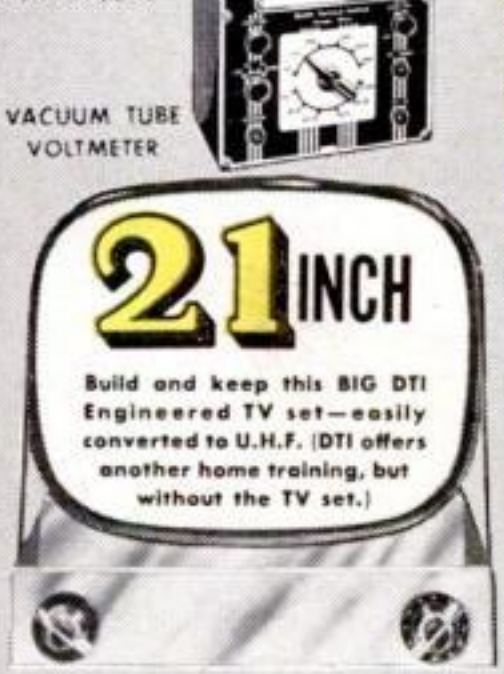



"One of America's Foremost Electronics Training Centers"



What will mailing the coupon below *do for YOU?* Just this! You'll find out about one of today's most remarkable . . . practical ways to prepare to get into America's amazing billion dollar opportunity field of TELEVISION-RADIO-ELECTRONICS. You'll see how to get into fascinating work that pays well . . . that offers one of America's most promising futures . . . that enables you to start your own business almost "on a shoe string," if you prefer this to a job opportunity.

And above all, you'll get some GOOD NEWS especially welcomed by men anxious to earn REAL MONEY in this thrilling field. For you'll see that NOW you can get the kind of practical, laboratory-type training so desirable for making real progress in Television-Radio-Electronics *AND WITHOUT* LEAVING HOME.

You'll see that DeVry Technical Institute sends everything needed to set up your own HOME LABORATORY. You get and keep the same type of basic electronic equipment used in our modern Chicago Training Laboratories. You get home training that includes the knowledge and experience gained from training thousands of students first hand in Chicago. And to top it all, you use DTI's amazingly effective and exclusive home training aid—INSTRUCTIVE MOVIES. But why not get the complete story? Mail coupon today for information-packed literature.

MODERN LABORATORIES

If you prefer, get all your preparation in our new Chicago Training Laboratories—one of the finest of its kind. Ample instructors, modern equipment. Write for details!

MILITARY SERVICE!

If you're subject to military service, the information we have for you should prove very helpful. Mail coupon today.

Get this information-packed publication

FREE!

Mail Coupon Today

DeVRY TECHNICAL INSTITUTE
CHICAGO 41, ILLINOIS
FORMERLY
DeFOREST'S TRAINING, INC.

25 YEARS DeVry Technical Institute

DeVRY TECHNICAL INSTITUTE
4141 BELMONT AVE., CHICAGO 41, ILL.

MEMBER OF NATIONAL HOME STUDY COUNCIL

I would like your Opportunity News Bulletin showing "89 Ways to Earn Money In Television-Radio-Electronics"; also, complete facts about the training opportunity made possible by your organization.

Name _____ Age _____
(PLEASE PRINT)
Address _____ Apt. _____
City _____ Zone _____ State _____
D.T.I.'s Training is available in Canada Dept. PS-4-M 1014

Copyrighted material

that some of the earlier models were powered by a "flathead six-cylinder engine." Chevrolet has always, I believe, made nothing but overhead-valve fours, sixes and V-8s.

JOHN DANIELS, Wellfleet, Mass.

You and the many other Chevvy fans who caught that one are right. Chevrolet hasn't had a flathead engine since 1912.

Just the Facts, Man

When you speak of a Nash being "urged" by a 220-hp. "mill" [Dec., p. 142], you lose my confidence. This is the jargon, not of the serious engineering-minded devotee of improved performance, but of the back-alley hot-rodder whose idea of mechanical perfection is something with several carburetors and the largest megaphone exhausts on the market.

Here's to more conventional—and more correct—terms.

C. A. RAMBOW, Lt. (j.g.) USNR
Bremerton, Wash.

There are new models in language as well as automobiles, and we are intrigued by new ideas—both tangible and intangible.

A Hat Doffed to Martin Bunn and Gus

Carrying out an intention of long standing, I give utterance to the enjoyment derived from the Gus Wilson stories.




How Mr. Bunn can think up an endless series of situations is more than I can understand. Not only "situations," but another endless parade of human nature, which to me, a man of 71, has a strong appeal. All in all, I doff my head covering to Mr. Bunn and hope he will be around for many years to come.

A. J. WALLACE SR., Collingswood, N. J.


Headless Screws Hold Sanding Table

I found a simpler way to fasten that sanding table ["Drill Accessories You Can Make," Dec., p. 158] to my bench. Instead of angle irons, I put wood screws into the bottom, cut off the heads, and drilled matching holes in the bench top. The table



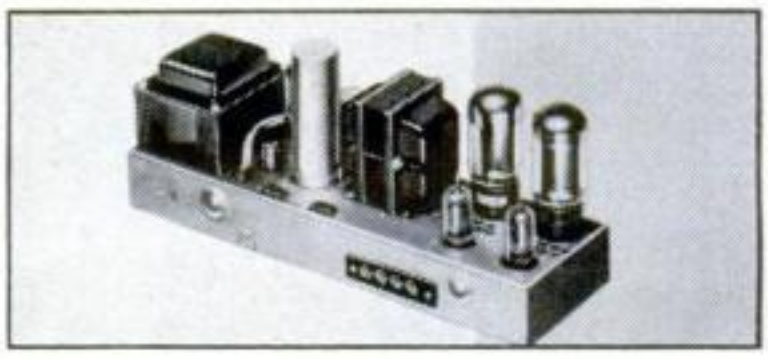

20-watt Hi-Fi Amplifier and

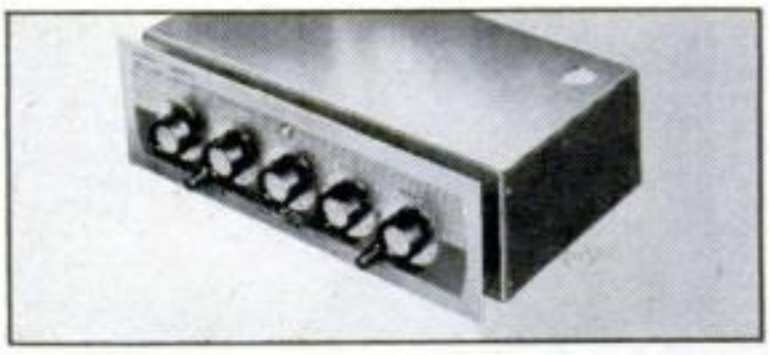

a Pre-Amp with controls

NEW G-E "CONVERTIBLE" in one flexible unit, only $99.95

The G-E Convertible is a dual chassis design, mounting a 20-watt Hi-Fi amplifier, plus a pre-amp with 7 controls. There are 5 inputs and 4 outputs for every home audio need.

New Installation Flexibility, too! The amplifier and pre-amp may be custom-mounted independently. Or, the Convertible may be placed on a shelf or table as one complete unit.

Write for new hi-fi ideas and your dealer's name. *General Electric Co., Special Products, TV Receiver Dept., Sect. R6146, Syracuse, N.Y.*

GENERAL ELECTRIC

Copyrighted material

How to CRACK the education barrier



Is there an "education barrier" between you and promotion? Are young college graduates being brought in to fill positions above you?

You can break down that barrier . . . gain real security, responsibility, prestige . . . *surprise fellow employees and win their respect.* You can match yourself against the smartest of the college boys and come out a WINNER. Here's how!

AN HOUR A DAY THE I.C.S. WAY!

If you can spare an hour a day, if you have the determination to make good, if you're willing to invest pennies now for dollars later on—then I.C.S. can help you. You can be a man or woman, young or old, skilled or unskilled. So long as you can understand simple language and illustrated training manuals, you need have no doubts. The I.C.S. hour-a-day plan is SUCCESS-PROVED. You learn while you earn—anywhere, any time.

Just pick the subject you want!

Only I.C.S. offers you such a wide range of subjects to choose from. Drafting. Engineering. Television. Aeronautics. Business. High School. 277 courses in all. *I.C.S. is the oldest, largest home-study school. It is also the best known in business and industry.*

Free catalog plus free books!

When you mail the coupon below, you get a complete catalog on the subject you check with information about employment opportunities, training requirements, etc. And you get "How to Succeed"—36 pages of valuable tips on winning recognition, pay raises, success. Also, a free sample lesson in basic mathematics.

For Real Job Security—Get an I. C. S. Diploma! **I. C. S., Scranton 9, Penna.** Member, National Home Study Council

INTERNATIONAL CORRESPONDENCE SCHOOLS ICS

BOX 62641D, SCRANTON 9, PENNA. (Partial list of 277 courses)

Without cost or obligation, send me "HOW to SUCCEED" and the opportunity booklet about the field BEFORE which I have marked X (plus sample lesson):

ARCHITECTURE and BUILDING CONSTRUCTION
- ☐ Air Conditioning—Refrig.
- ☐ Architecture
- ☐ Architectural Interiors
- ☐ Building Contractor
- ☐ Building Estimator
- ☐ Building Maintenance
- ☐ Carpentry and Mill Work
- ☐ Heating
- ☐ Painting Contractor
- ☐ Plumbing
- ☐ Reading Arch. Blueprints

ART
- ☐ Cartooning
- ☐ Commercial Art
- ☐ Fashion Illustrating
- ☐ Magazine Illustrating
- ☐ Show Card and Sign Lettering
- ☐ Sketching and Painting

AUTOMOTIVE
- ☐ Auto Body Rebuilding
- ☐ Auto Elec. Technician
- ☐ Auto-Engine Tune Up
- ☐ Automobile Mechanic

AVIATION
- ☐ Aeronautical Engineering Jr.
- ☐ Aircraft & Engine Mechanic

BUSINESS
- ☐ Advertising
- ☐ Bookkeeping and Accounting
- ☐ Business Administration
- ☐ Business Correspondence
- ☐ Public Accounting
- ☐ Creative Salesmanship
- ☐ Federal Tax
- ☐ Letter-writing Improvement
- ☐ Office Management
- ☐ Professional Secretary
- ☐ Retail Business Management
- ☐ Sales Management
- ☐ Stenographic-Secretarial
- ☐ Traffic Management

CHEMISTRY
- ☐ Analytical Chemistry
- ☐ Chemical Engineering
- ☐ Chem. Lab. Technician
- ☐ General Chemistry
- ☐ Natural Gas Prod. & Trans.
- ☐ Petroleum Engineering
- ☐ Plastics
- ☐ Pulp and Paper Making

CIVIL, STRUCTURAL ENGINEERING
- ☐ Civil Engineering
- ☐ Construction Engineering
- ☐ Highway Engineering
- ☐ Reading Struct. Blueprints
- ☐ Sanitary Engineering
- ☐ Structural Engineering
- ☐ Surveying and Mapping

DRAFTING
- ☐ Aircraft Drafting
- ☐ Architectural Drafting
- ☐ Electrical Drafting
- ☐ Mechanical Drafting
- ☐ Mine Surveying and Mapping
- ☐ Plumbing Drawing and Estimating
- ☐ Structural Drafting

ELECTRICAL
- ☐ Electrical Engineering
- ☐ Electrical Maintenance
- ☐ Electrician ☐ Contracting
- ☐ Lineman

HIGH SCHOOL
- ☐ Commercial ☐ Good English
- ☐ High School Subjects
- ☐ Mathematics

LEADERSHIP
- ☐ Foremanship
- ☐ Industrial Supervision
- ☐ Leadership and Organization
- ☐ Personnel-Labor Relations

MECHANICAL AND SHOP
- ☐ Gas—Electric Welding
- ☐ Heat Treatment ☐ Metallurgy
- ☐ Industrial Engineering
- ☐ Industrial Instrumentation
- ☐ Industrial Supervision
- ☐ Internal Combustion Engines
- ☐ Machine Design-Drafting
- ☐ Machine Shop Inspection
- ☐ Machine Shop Practice
- ☐ Mechanical Engineering
- ☐ Quality Control
- ☐ Reading Shop Blueprints
- ☐ Refrigeration
- ☐ Sheet Metal Worker
- ☐ Tool Design ☐ Toolmaking

RADIO, TELEVISION
- ☐ Industrial Electronics
- ☐ Practical Radio TV Eng'r'ng
- ☐ Radio and TV Servicing
- ☐ Radio Operating
- ☐ Television Technician

RAILROAD
- ☐ Air Brake Equipment
- ☐ Car Inspector
- ☐ Diesel Engineer & Fireman
- ☐ Section Foreman

STEAM AND DIESEL POWER
- ☐ Combustion Engineering
- ☐ Diesel—Elec. ☐ Diesel Eng's
- ☐ Electric Light and Power
- ☐ Stationary Fireman
- ☐ Stationary Steam Engineering

TEXTILE
- ☐ Carding and Spinning
- ☐ Cotton, Rayon, Woolen Mfg.
- ☐ Finishing and Dyeing
- ☐ Loom Fixi'g ☐ Textile Des'ing
- ☐ Textile Eng'r'g ☐ Throwing
- ☐ Warping and Weaving

MISCELLANEOUS
- ☐ Domestic Refrigeration
- ☐ Marine Engineering
- ☐ Ocean Navigation
- ☐ Professional Engineering
- ☐ Short Story Writing
- ☐ Telephony


Name_____ Age_____ Home Address_____

City_____ Zone_____ State_____ Working Hours_____ A.M. to P.M._____

Occupation_____

Canadian residents send coupon to International Correspondence Schools, Canadian, Ltd., Montreal, Canada. . . . Special tuition rates to members of the U. S. Armed Forces.


Copyrighted material

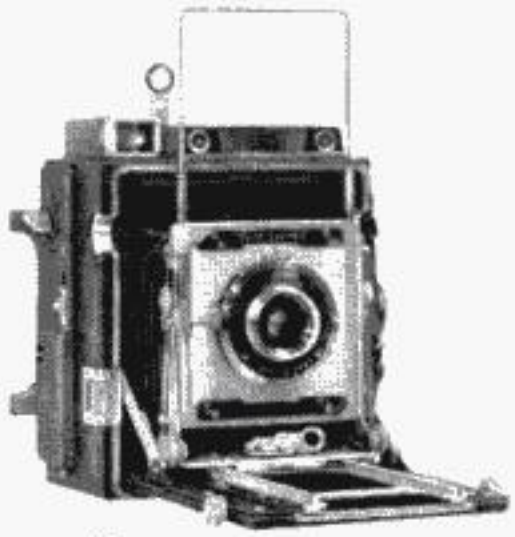

Pacemaker GRAPHIC®

USES ALL TYPES OF FILM!

One of the greatest advantages of the Pacemaker Graphic is the wide selection of films that are available to fit it . . . allowing the photographer complete freedom from technical limitations. There are more than 40 different types and makes of sheet film alone, including many special-purpose films such as infrared, portrait, high contrast and fast press films. A variety of accessory film receptacles is made by Graflex so that you may also use roll film, film packs or Polaroid film. Glass plates frequently used for experimental work also can be used in the Graphic camera.



RITEWAY® SHEET FILM HOLDERS—Riteway holders are the only ones unconditionally guaranteed for 2 full years! Exceed ASA tolerances, assure perfect film plane registration. Fit all standard 4x5 camera backs. Hold 2 sheets film $4.95 each.




GRAFMATIC® SHEET FILM MAGAZINES—Each of these semi-automatic film magazines holds six sheets of film. Simple pull-push motion changes film in a split second. Has safety catch, exposure counter, ready signal. Saves time. Slips under spring back like ordinary film holder. For "23" and "45" Graphics, from $24.95.



ROLL FILM HOLDERS—Use inexpensive 120 size roll film. Have automatic film stop and exposure counter. Dark slide permits partially exposed roll to be taken from camera. Two types for 8 or 12 exposures. For "23," "34" and "45" Graphics, from $21.50.

FILM PACK ADAPTERS—For Graphic 23, 34 and 45 cameras. Hold easy-to-use daylight-loading 12 exposure film packs that save space and weight when traveling and save time when taking sequence photos. Have dark slide so that partially exposed pack may be taken off camera. From $9.75.



POLAROID BACK—Special accessory fits Graflok backs of 4x5 Graphics. Affords full use of all built-in Graphic features plus the advantages of picture-in-a-minute Polaroid films used frequently for checking lighting and composition or for covering spot news for television. $83.50.

GRAFLEX® Price-Winning Cameras

For free booklet, write:
DEPT. PS-46, GRAFLEX, INC., ROCHESTER 8, N. Y.


Prices include federal tax where applicable and are subject to change without notice. Prices are slightly higher in Canada.

is steady to use when set in the holes, but can quickly be lifted out and put away.

R. E. CZERNY, Hapeville, Ga.

Easier Way to Splice a Wire

The method you show for making an electrical branch splice [Dec., p. 230] is correct, but rather difficult to tape properly, especially for a beginner. The tape has to be weaved in, out and around, making a bulky, unsatisfactory job. Most electricians

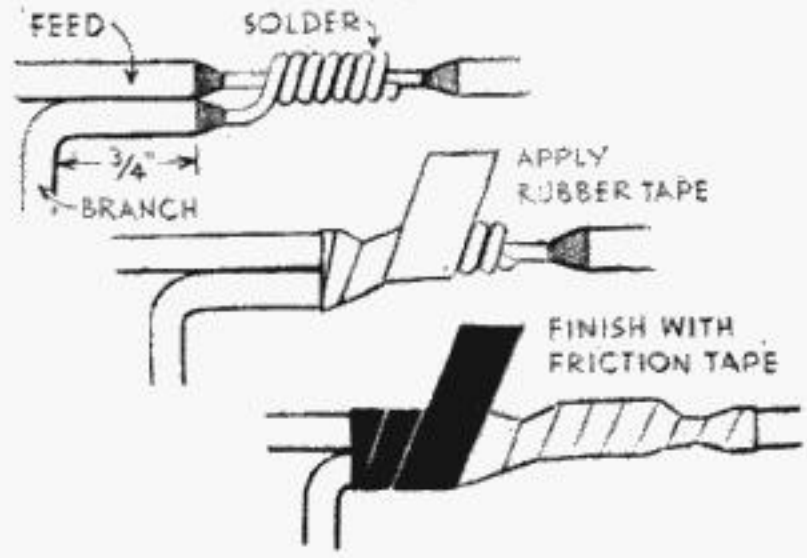

bend the branch alongside the main (sketch) so that all the tape can be wound in one direction.

A. SPAGNOLA, E.E., Bronxville, N. Y.

It's a Thunderflash

The picture accompanying "Toy Room Speeds Airplane Production" [Jan., p. 280] shows a model of a Thunderflash rather than a Thunderstreak.

RICHARD MCDONALD, St. Louis

You're right. The solid nose, which contains camera equipment, identifies it as a Thunderflash reconnaissance model of the F-84. Air-intake ducts are at the wing roots. In the Thunderstreak fighter-bomber, the air intake is in the nose.

Calling the South Pole



Your article "Secrets of the South Pole" [Jan., p. 102] gave the call letters of the amateur radio station at the South Pole as K4USN. The correct call is KC4USN. The other stations, KC4-USA, KC4USB and KC4USV will be located at Little America Base, Marie Byrd Land and McMurdo Sound, respectively.

ED SCHWARTZ, K6JHR, Burbank, Calif.

'BARGAINS'

Gives YOU the BUYING POWER OF BIG WHOLESALERS . . .

Buy at unheard-of low prices . . . sell dirt cheap!

Save 40¢-80¢ on Every Dollar you Spend on:

Toys, Books, Jewelry, Greeting Cards, Household Merchandise, Appliances, Industrial Materials, Machinery, Tools, Etc.



BARGAINS is the only big tabloid publication in existence that tells you WHERE and HOW every month—lists hundreds of money-making opportunities . . . many times so extraordinary it's hard to believe they're genuine. But it's true . . . you save and profit by buying as low as 10c-25c on the Retail Dollar! . . . One issue of this Sensational NEW Publication can save you more than the cost of the entire subscription!

BARGAINS Brings You The Pick Of Bankrupt, Closeout, Surplus Bargains!

Here are just a few samples of Profit-Makers usually found in "BARGAINS":

$200. Surplus typewriters, $23 each!
New Phono Records, 78 and 45 rpm, 7c each!
$1 Mufflers, Scarfs, 12½c each!
69c Insect Repellant, 5c each!
$10 Men's Toiletry Sets, 69c each!
New Hairnets, ½c each!
$1 Kiddies handbags, 3c each!
New 20" T.V. Pic. tubes, $21.95 each!
LADIES APRONS, 6¼c each!
$1.95 Men's Silk Ties, 12½c each!
50c Everyday greeting cards, 7c per box!
$1 val. personal cloth name tapes, 40c for 72!

Plus hundreds of other sensational buys!

The list to the left merely illustrates types of bargains usually found in this paper. Lists naturally change from month to month. Pro rata prices based on quantity buys.

BARGAINS Helps Small-Lot Buyers thru Unique "Shoppers Buying Service"—And Teaches you HOW TO SELL

Do you have limited cash? Buy big-name merchandise at TREMENDOUS SAVINGS, thanks to BARGAINS unduplicated service for subscribers ONLY. Each month this publication negotiates bargain offers in famous merchandise at LOW WHOLESALE PRICES and then offers them to subscribers AT NO PROFIT! Enables you to buy in small lots—singly or in quantity at the same prices, sometimes even lower, than dealers are paying! This SINGLE FEATURE OF BARGAINS IS WORTH THE LOW SUBSCRIPTION PRICE A DOZEN TIMES OVER. Yet it's only one feature among many!

Special articles in BARGAINS give you valuable tips on HOW to sell these bargains for BIG PROFITS. And you know, EVERYBODY is looking for bargains these days . . . In fact, this is the only kind of merchandise that is being sold in tremendous volume. Ask any big businessman!

Nothing succeeds like success! Thousands of Salesmen, Dealers, Agents are subscribers to BARGAINS! And many "spare-time" enthusiasts are pocketing welcome profits working out of their homes!

Don't take our word for it—here's what our subscribers say:

"...it has resulted in extra profits of $40.00 & upwards per month." J. H. Alabama

"...My appreciation to you for having made the magazine available to me." W. S. Washington

"...am so glad to be one of your subscribers." E. L. California

"...Saw your wonderful paper and enjoyed every bit of it's reading and advertising." M. S. Vermont

BARGAINS is not for sale on the newsstands—order direct! **$2 per year—12 Big Issues (Regular price, $3 per year)**

Special Limited Time Offer to Get 10,000 New Subscribers!

Your Money Back IN FULL

if the First Issue Doesn't Please You!

LET'S FACE IT . . . Claims, promises are easily made on paper. You may or may not believe all we say here. BUT you can't go wrong in subscribing to "Bargains" on this iron-clad MONEY BACK GUARANTEE . . . Your money back IN FULL if the first issue that you receive doesn't please you! Can any offer be more positive, more FAIR than this POWERFUL guarantee?

Tower Press, Inc.

P. O. Box 591-ZC **Lynn, Massachusetts**

"Tear out Coupon. Mail NOW—at once!"

Tower Press, Inc., P. O. Box 591-ZC, Lynn, Mass.

O.K. Here's my $2.00 for 1 year subscription. Rush me 1st copy!

Name.....

Address.....

City.....State.....

Remember! Your MONEY BACK IN FULL if the 1st issue you receive doesn't please you! **A.**

Copyrighted material

HOW TO REPAIR Electric Appliances

ASK TO SEE IT!



This HANDY, Practical "How to Do It" book for Electric & Gas Home Appliance Servicemen, Mechanics & Users covers Principles, Servicing & Repairs. Tells How to Locate Troubles, How to take Appliances Apart, How to Make Repairs, How to Assemble and Connect. Gives up to date testing methods, wiring diagrams and complete data on each appliance.

SAVE TIME, TROUBLE, MONEY WITH AUDELS BIG 800 PAGE HOME APPLIANCE SERVICE GUIDE

Toasters Pressing Irons Waffle Bakers Casseroles Roasters Broilers—Coffee Makers Space Heaters Water Heaters Ranges—Home Wiring Shop Work—Appliance Testing Fundamental Electricity—Fractional H.P. Motors—Food Mixers Fans & Blowers—Vacuum Cleaners—Washing Machines Clothes Dryers Ironers—Dishwashers—Garbage Disposers—Refrigeration Window Air Conditioners—Oil Burners—Drainage Pumps Gas Ranges, Furnaces & Water Heaters—Bottled Gas Appliances.

A SHOP COMPANION THAT ANSWERS YOUR QUESTIONS. Easy to read and understand over 800 pages fully illustrated—with 500 photos and diagrams—1001 Facts. A ready reference.



$4 COMPLETE • PAY $1 A MONTH

TO GET THIS SERVICE INFORMATION FOR YOURSELF—FILL IN AND MAIL 7 DAY TRIAL COUPON TODAY.

Step up your own skill with the facts and figures of your trade. Audels Mechanics Guides contain Practical Inside Trade Information in a handy form. Fully illustrated and Easy to Understand. Highly Endorsed. Check the book you want for 7 DAYS FREE EXAMINATION. Send No Money, Nothing to pay Postman.

MAIL ORDER

AUDEL, Publishers, 49 W. 23 St., NEW YORK 10, N. Y.

Please send me postpaid for FREE EXAMINATION books marked (x) below. If I decide to keep them I agree to mail $1 in 7 Days on each book or set ordered and further mail $1 monthly on each book or set until I have paid price, otherwise I will return them.

☐ HOME APPLIANCE SERVICE GUIDE, 800 Pages	$4
☐ AUTOMOBILE MECHANICS GUIDE, 1664 Pages	4
☐ TRUCK & TRACTOR GUIDE, 1299 Pages	4
☐ DIESEL ENGINE MANUAL, 575 Pages	2
☐ MACHINISTS HANDY BOOK, 1650 Pages	4
☐ WELDERS GUIDE, 400 Pages	1
☐ BLUE PRINT READING, 416 Pages	2
☐ MATHEMATICS & CALCULATIONS, 700 Pages	2
☐ SHEET METAL PATTERN LAYOUTS, 1100 Pages	4
☐ SHEET METAL WORKERS HANDY BOOK, 388 Pgs.	1
☐ MECHANICAL DRAWING GUIDE, 160 Pages	1
☐ MECHANICAL DRAWING & DESIGN, 480 Pages	2
☐ AIRCRAFT WORKER, 240 Pages	1
☐ TELEVISION SERVICE MANUAL, 434 Pages	2
☐ RADIOMANS GUIDE, 1040 Pages	4
☐ ELECTRONIC DEVICES, 216 Pages	2
☐ ELECTRIC MOTOR GUIDE, 1000 Pages	4
☐ WIRING DIAGRAMS (Light & Power), 272 Pgs.	1
☐ ELECTRICIANS EXAMINATIONS, 250 Pages	1
☐ ELECTRIC POWER CALCULATIONS, 425 Pages	2
☐ HANDY BOOK OF ELECTRICITY, 1440 Pages	4
☐ ELECTRIC DICTIONARY, 9000 Terms	2
☐ ELECTRIC LIBRARY, 7000 Pages (12 Book Set)	18
☐ SHIPFITTERS HANDY BOOK, 250 Pages	1
☐ REFRIGERATION & Air Conditioning, 1280 Pgs.	4
☐ MILLWRIGHTS & MECHANICS GUIDE, 1200 Pgs.	4
☐ POWER PLANT ENGINEERS GUIDE, 1500 Pages	4
☐ ENGINEERS & FIREMANS EXAMS, 525 Pages	1
☐ PUMPS, Hydraulics & Air Compressors, 1658 Pgs.	4
☐ OPERATING ENGINEERS LIBRARY (3 Books)	9
☐ MECHANICAL DICTIONARY, 950 Pages	4
☐ GARDENERS & GROWERS GUIDES (4 Book Set)	6
☐ CARPENTERS & BUILDERS GUIDES (4 Book Set)	6
☐ PLUMBERS & Steamfitters Guides (4 Book Set)	6
☐ MASONS AND BUILDERS GUIDES (4 Book Set)	6
☐ PAINTERS & DECORATORS MANUAL, 450 Pgs.	2
☐ HOUSE HEATING GUIDE, 1000 Pages	4
☐ OIL BURNER GUIDE, 384 Pages	1

Check NOW!

You Can Look Over Any Guide In Your Own Home — Start the Easy Payments If Satisfied

MAIL THIS TODAY


Name.....

Address.....

Occupation.....

Employed by..... 54

MORE $ $ $ PER HOUR WITH MODERN IMPROVED LAWNMOWER SHARPENER

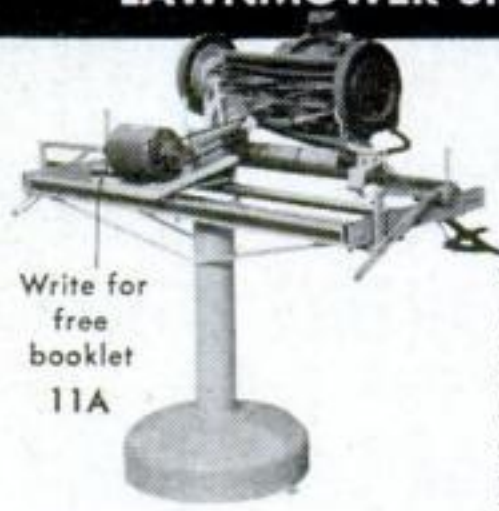

Write for free booklet 11A

Grinds All Reel Type Mowers Hollow Grinds or Flat Grinds Bed Knives

Engine, oil, or gasoline are not removed from power mowers. Wheels, handle and roller remain in place. Moderns precision grinding assures repeat business. 100% Steel Construction

Faster—Easier to operate

Compare Before You Buy

NO CHANGE IN PRICE FOR OVER 10 YRS.

$263.00 Complete with ½ H.P. Motor f.o.b. Pasadena, Calif.

MODERN MFG. CO.

160 N. FAIR OAKS, PASADENA, CALIF.

MONEY for MEN ALL DATA FREE

THE PLASTEX Industry needs manufacturers on small scale and for big production of Lamp and Clock Stands, Art Goods and Novelties in Plastex and Marble imitation. Experience unnecessary. ½c material makes regular 10c store sellers. Rubber moulds furnished for speed production. Small investment brings good returns. We are now placing big chain store orders with manufacturers. Ambitious men have chance for real prosperity. Our Free booklet will interest and benefit you.

PLASTEX INDUSTRIES, Dept. 2, 3400 Third Ave., New York 56, N. Y.

Free! Fabulous Collection from SOUTH of the BORDER



Start TODAY to enjoy an exciting new hobby! Rush Coupon for big, valuable collection of genuine, all-different postage stamps from the exciting land of the mysterious Amazon . . . scarce airmails, gorgeous commemoratives, giant-sized stamps picturing wild horses, covered wagons, action-packed fights, native war heroes; **PLUS** sensational train stamp, beautiful "Christ of the Andes"; many others. **EXTRA!** Bargain Catalog, "Collector's Manual" plus other exciting offers for your inspection. Enclose 10¢ for mailing expenses. . . ACT NOW!

JAMESTOWN STAMP CO. DEPT. N4PS JAMESTOWN, N. Y.



RUSH my Free "South of the Border" Collection and other offers. I enclose 10c for mailing costs.

Name.....

Street.....


City..... State.....

Copyrighted material

LAW TRAINING *for* BUSINESS

[in spare time at home]

Earn LL.B. Degree

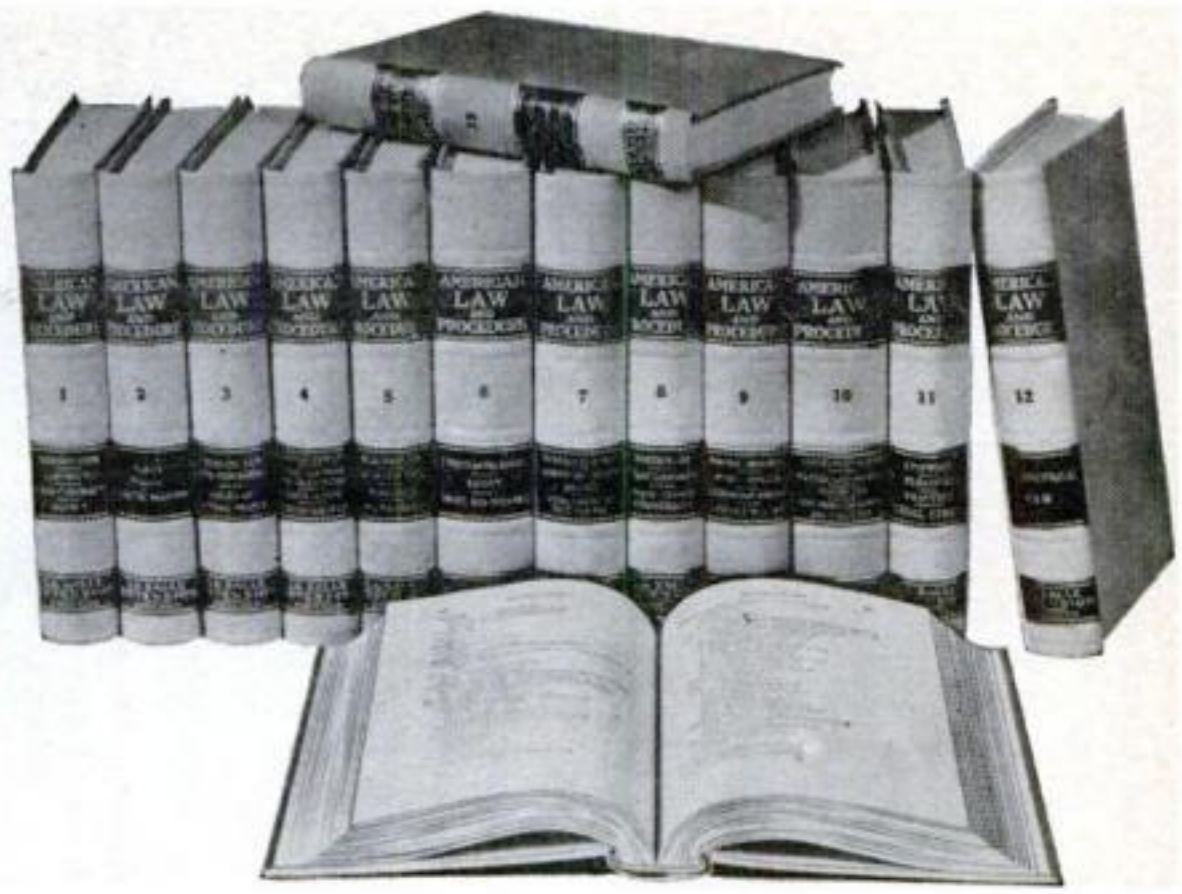

Thousands of men and women who never intend to practice are studying Law in spare time at home—not for a legal career but as an aid to business advancement.

Law today is involved in almost every major business decision. In many lines of work it is almost indispensable—credits and collections, accounting, traffic and transportation, employee relations, real estate, insurance, finance, taxation, etc. For all types of work, Law training develops keen, clear, quick, correct, and decisive thinking.

You can study LaSalle's American Law and Procedure right in the privacy of your own home—progressing as rapidly as your time and ability permit. LaSalle has, for nearly 50 years, helped more than 1,350,000 ambitious people get ahead in the business world. Thousands of letters in our files from grateful students and businessmen who have achieved greater success speak of—better jobs, more money and the satisfaction it brings, prestige and leadership.

A MOST UNUSUAL LAW LIBRARY

This training includes the fourteen-volume LaSalle Law library—AMERICAN LAW AND PROCEDURE, which is the basis of all the instruction service. This library has been compiled by leaders in the field of Law. It covers the whole basic field of Law in an orderly and simple manner that is easy to learn and understand. Collateral reading and printed lectures on legal problems which are furnished at regular intervals throughout the training, supplement the text. Law instructors personally supervise your program from the first assignment to the LL.B. degree or diploma. Under the LaSalle method you deal with legal problems—you learn by doing—actually solving legal problems—not just memorizing rules.

WRITE TODAY FOR TWO FREE BOOKS

You are determined to get ahead—to prepare for greater future possibilities—and to earn more money. Send the coupon below and find out how to qualify yourself for the many openings available to the Law-trained man. In our FREE books, "Law Training for Leadership" and "Evidence," you will find answers to all your questions about the study of Law and the LaSalle method.


No investment is likely to pay higher returns than an investment in yourself, by enrolling in the American Law and Procedure training. Send coupon today for full information—no obligation, of course.

LaSalle Extension University

A Correspondence Institution

Dept. 483L 417 S. Dearborn St., Chicago 5, Ill.

Gentlemen: Please send me your two free booklets, "Law Training for Leadership" and "Evidence," which tell how I may study Law at home and qualify for the LL. B. degree.

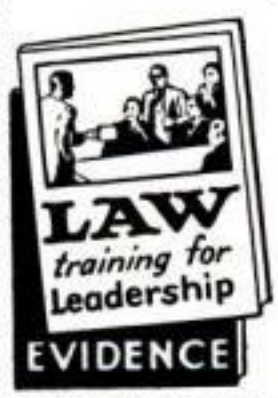

Name.....*Age*.....

Street.....

City.....*Zone*....*State*.....

Copyrighted material

Inventors

Take these necessary preliminary steps promptly to protect your invention by applying for a United States patent—

Sketch and describe your invention. Sign, date and have this disclosure witnessed by two people who understand your invention. Have us make a preliminary search among U. S. patents already granted for similar types of invention. We then report to you on the probable patentability of your invention and recommend your further course of action.

Write for our instructive booklet, "Patent Protection for Inventors" and our convenient "Evidence of Invention" disclosure form. No obligation.

VICTOR J. EVANS & Co. *Merlin M. Evans*
REGISTERED PATENT ATTORNEY
240-D MERLIN BUILDING, WASHINGTON 6, D. C.

Loosens Rusted Bolts
nuts, screws, "frozen" parts without breakage!

LIQUID® WRENCH
The Super Solvent that "MELTS THE RUST AWAY"

A powerful blend of fast-acting solvents. Absolutely harmless to all metals and alloys. *Works in seconds!*





Cleans guns, rods, reels . . .

. . . leaves a protective coating that helps prevent formation of new rust and corrosion.



Makes repairs easier, faster on autos, bikes, outboards, lawnmowers, plumbing . . . . anything metal. Saves hours of hard work, many broken parts.

2122

AT HARDWARE STORES, GARAGES, FILLING STATIONS EVERYWHERE
Manufactured by
RADIATOR SPECIALTY CO.
Charlotte, North Carolina

SOLDER SEAL PRODUCTS

INVENTORS

PROTECT YOUR INVENTION BY A U. S. PATENT. SEND FOR FREE "INVENTION RECORD" FORM AND "PATENT INFORMATION EVERY INVENTOR SHOULD HAVE".

CARL MILLER
REGISTERED PATENT ATTORNEY
WOOLWORTH BLDG., 35th FLOOR, 46C
NEW YORK CITY

PATENTS
C. A. SNOW & CO.
REGISTERED PATENT ATTORNEYS
WRITE FOR INFORMATION TO
426 SNOW BUILDING, WASHINGTON 1, D. C.

INVENTORS

Whether an invention is patentable can be substantially determined by a search of the U. S. Patent records. Without obligation, write for information explaining the steps you should take to secure a patent.

JOHN N. RANDOLPH
Registered Patent Attorney
205 Columbian Building Washington 1, D. C.

INVENTORS

Send for PATENT INFORMATION Book and INVENTOR'S RECORD without obligation

GUSTAVE MILLER
46-PS WARNER BUILDING
WASHINGTON 4, D.C.

REGISTERED PATENT ATTORNEY
ASSOCIATE EXAMINER
U.S. PAT. OFF. 1922-1929
Patent Attorney & Advisor
U. S. NAVY DEPT. 1930-1947
PATENT LAWYER

INVENTIONS
For Sale

Our clients have excellent inventions in many fields to be manufactured and marketed on a cash, royalty or license basis. Full description of clients' inventions will be sent if you state your field of interest. INVENTORS: WE ALSO WANT INVENTIONS OF EVERY TYPE. Write for details.

GLOBAL MARKETING SERVICE
2420 77th Ave. Dept. PS Oakland 5, Calif.


When Writing to Advertisers Please Mention Popular Science

INVENTORS


I shall be pleased to furnish you, upon request, with information relative to patent procedure—without any obligation on your part.

PATRICK D. BEAVERS
Registered Patent Attorney
937 Columbian Building, Washington 1, D. C.


Copyrighted material

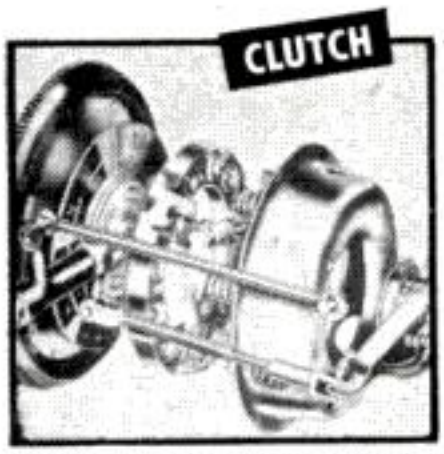


2900 photos and diagrams, plus crystal-clear directions, make every operation easy as A-B-C.

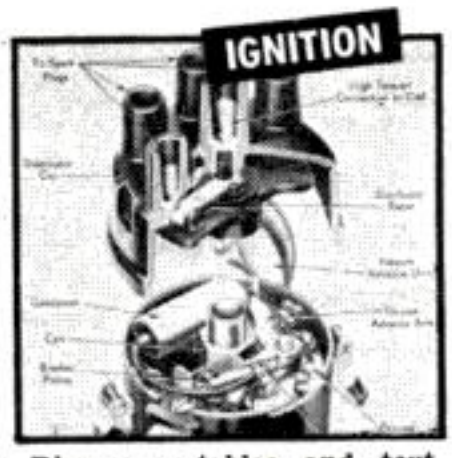

Diagrams, tables and text take the "mystery" out of all ignition systems.

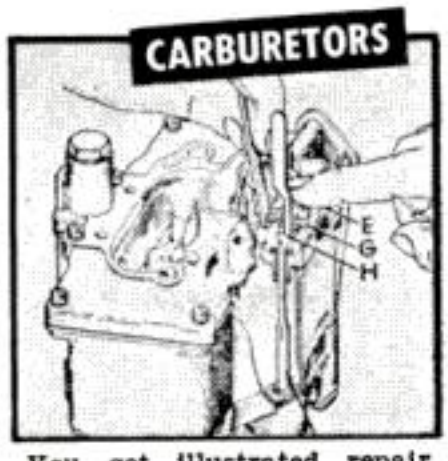


You get illustrated repair procedures for all types of carburetors.

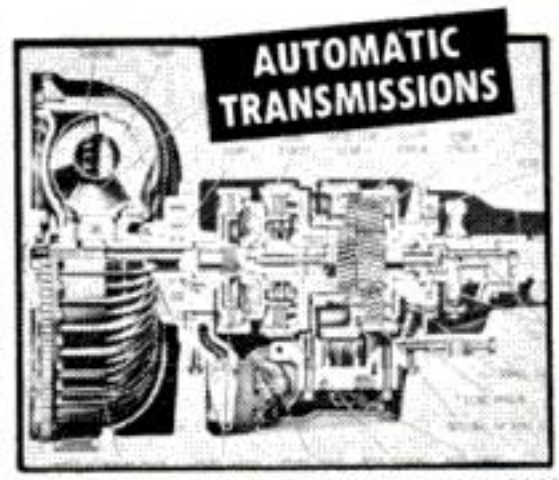


ALL AUTOMATIC TRANSMISSIONS are fully covered in special big section. (NOTE: All pictures shown here are greatly reduced in size. Actually, this giant book is almost a *foot high!*)

Here's the EASY Step-by-Step Way to

FIX ANY PART OF ANY CAR

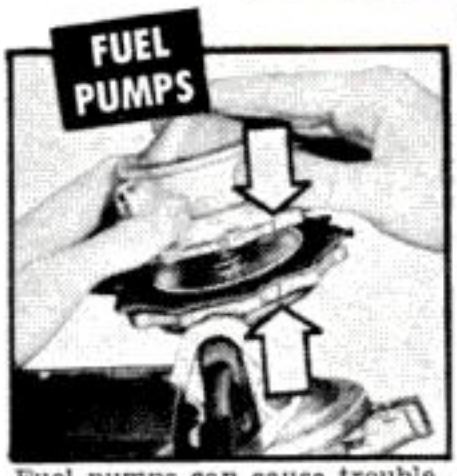

Fuel pumps can cause trouble. Pictures show exactly how to take them apart, fix them.

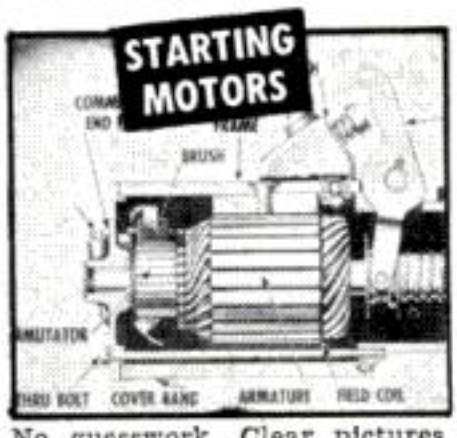

No guesswork. Clear pictures show how to fix starting motor, generator, brakes, etc.

Now—Whether You're a Beginner or Expert Mechanic—You Can "Lick" Any Auto Repair Job On Any Car Built from 1946 Through 1956!

in a jiffy!

NOW you can tackle any repair job, and do it quickly, easily, right—the *first* time! MOTOR'S *BRAND-NEW* AUTO REPAIR MANUAL shows you *how*—with crystal-clear pictures and step-by-step directions you can easily follow.

No guesswork. This giant guide tells you where to start; what tools to use. Leads you easily and quickly through the entire operation. Covers everything from a simple carburetor adjustment to a complete overhaul.

Everything You Need to Know

BIG, NEW REVISED Edition has MORE REPAIR INFORMATION THAN EVER! OVER 1,000 giant pages, 2,900 "This-Is-How" pictures—clear drawings, diagrams, cutaway photos—make every step EASY. 291 "Quick Check" charts—23,436 essential repair specifications. 225,000 service and repair facts. Instructions and pictures *so complete, so clear*—you CAN'T go wrong!

Even a green beginner can do a good job. And top mechanics will be amazed at the time-saving procedures.

The "Meat" of Over 160 Official Shop Manuals

The editors have put together the "Know-How" from over 160 Official Shop Manuals; "boiled it down" into one handy indexed book.

Includes ALL Automatic Transmissions. Covers new Carburetors, Engines, Chokes, Fuel Pumps, Oil Filters, Starting Motors, Generators, Distributors, Clutches, Universals, Axles, Brakes, Power Steering, Shock Absorbers, etc. PLUS new Trouble-Shooter section that enables you to spot any car trouble in a jiffy.

Factory Specifications and Adjustment Tables. Tune-up Charts, Table of Measurements and Clearances. Overhauling, Replacement Facts—AND MUCH MORE.

Used by Armed Forces, hundreds of thousands of auto service men! Now try it on this GUARANTEE:

Try Book for a Week FREE
SEND NO MONEY

Pay nothing to postman. Test book in your own garage or shop. It's GUARANTEED to pay for itself in 7 days. If it doesn't just return the book, and owe nothing. Rush coupon for your free-trial copy of this great money-saving Manual. MOTOR Book Dept., Desk 2D, 250 West 55th St., New York 19, N. Y.



SEND NO MONEY! TRY BOOK FOR A WEEK FREE!



Just 2 of the Many Letters of Praise

Does Every Job. "My MOTOR Manual is a wonderful help. It has put me in a position to do every job."—*S. L. Sharpless, Los Angeles, Calif.*

Amazed Self and Friends. "I amazed myself and my friends, too. Now do jobs that stumped me before."—*Michael Balicsky, Newark, N. J.*



USED BY U.S. ARMY NAVY MARINES

Same FREE 7-Day Offer on MOTOR'S Brand-New TRUCK REPAIR MANUAL

Covers EVERY job on EVERY gasoline-powered truck made from 1946 thru 1955 — including GM and Cummins Diesels. Over 2,000 illustrations, over 300,000 facts. Check proper box in coupon for free trial.



COVERS 650 MODELS—ALL THESE MAKES

Buick	Ford	Nash
Cadillac	Frazer	Oldsmobile
Chevrolet	Henry J	Packard
Chrysler	Hudson	Plymouth
Clipper	Imperial	Pontiac
Continental	Kaiser	Rambler
Crosley	Lincoln	Studebaker
De Soto	Mercury	Thunderbird
Dodge		Willys

2,000,000 COPIES SOLD!

MAIL COUPON NOW FOR 7-DAY FREE TRIAL

MOTOR Book Dept., Desk 2D,
250 West 55th Street, New York 19, N. Y.

Rush to me at once: (Check box opposite book you want).

☐ **MOTOR'S New AUTO REPAIR MANUAL.** If okay, I'll remit just $2.00 in seven days, then $2.00 monthly for two months and a final payment of 95c (plus 35c delivery charges) one month after that. Otherwise, I'll return the book postpaid in seven days. **(Foreign price: Remit $9.00 cash with order.)**

☐ **MOTOR'S New TRUCK REPAIR MANUAL.** (Described at left.) If okay I will remit $2.00 in seven days, and $2.00 monthly for three months, plus 35c delivery charge with final payment. Otherwise I will return book promptly. **(Foreign price: Remit $10.00 cash with order.)**

Print Name.....Age.....

Print Address.....

City & Zone No.....State.....

☐ **SAVE 35c** delivery charge by enclosing WITH COUPON check or money order for full payment of $6.95 for Auto Repair Manual (or $8.00 for Truck Manual). Same 7-day return-for-refund privilege applies.



TAKE IT EASY

REMOVABLE R·O·W WOOD WINDOWS WITH LIF-T-LOX® WINDOW BALANCE

It's easy to clean windows *inside*, if they are R·O·W removable windows. Raising and lowering windows equipped with the new LIF-T-LOX balance is easy, too. No wonder they are the most popular windows with builders and buyers.

See your lumber dealer or write:

R. O. W. SALES COMPANY • 1336 ACADEMY
FERNDALE 20, MICHIGAN

R·O·W and LIF-T-LOX are the registered trade-marks of R.O.W. Sales Company.

TURBINES—NOW AVAILABLE FOR CIVILIAN USE



KITS FROM—$59.50

FEATURES:

- ONE PRIMARY MOVING PART
- NO AUXILIARY COOLING
- USES LOW COST FUEL
- LIGHT WEIGHT SMALL VOLUME
- SELF CONTAINED GEARBOX
- .685 SQ. FT. FRONTAL AREA
- CORROSION RESISTANT CONST.



60 LBS.

Having applied mass production techniques with sound engineering we have developed a series of low cost gas turbines. This type unit is applicable to automotive, aircraft, marine, and industrial usage. It is the engine of the future as well as the present. Its ultra-modern design will remain current for years to come.

Send $1.00 for catalog containing prices, photographs, technical data, etc., or, send $3.00 for catalog plus a bound set of assembly and detailed blueprints. Catalog or blueprint fee refunded on first order.

TRECO PRODUCTS, DEPT. 30, 1364 WOODLAND HILLS DR., ATLANTA 5, GEORGIA

Cleveland Engineering Institute
DEPT. PS4F
6300 Euclid Ave., Cleveland 3, Ohio
☐ Mechanical ☐ Aeronautical

NAME.....AGE.....
ADDRESS.....
CITY..... STATE.....

No Obligation — No Salesmen
RESIDENT and HOME STUDY COURSES

DRAFTING DOUBLES YOUR INCOME

IT'S EASY — AT HOME — IN YOUR SPARE TIME — PAY AS YOU LEARN

MECHANICAL

In a few months . . . earn big pay . . . assure your future! There's a record demand for draftsmen! Keep your job, yet prepare for a better one.

OR AERONAUTICAL

No experience needed — C. E. I.'s Professional Engineers train you at home. Do as hundreds of our other graduates have done — let a C. E. I. diploma pave the way!

FREE SUCCESS BOOK SAMPLE LESSON



Completed your course and was made Shop Foreman with a 50% increase in salary. W. R.



After completing your course my salary increased from $350 to $820 per month. G. T. W.



Was promoted ahead of four other men with a pay increase after completing your course. W. K. A.

APPROVED FOR VETERANS

50 HOURS EXTRA TRAINING AT OUR RESIDENT SCHOOL NO EXTRA CHARGE

CLEVELAND ENGINEERING INSTITUTE 6300 EUCLID AVE CLEVELAND 3, O

Copyrighted material

NATIONAL SCHOOLS

proudly presents

FOR MEN WHO WANT TO EARN MORE MONEY

TELERAMA* • ALL 8 BRANCHES OF TELEVISION • ELECTRONICS • RADIO IN ONE DYNAMIC, MODERN SHOP METHOD, HOME TRAINING COURSE

*Registration applied for

Another great advance in **HOME STUDY TRAINING.** Let National Schools, of Los Angeles, a practical Technical Resident Trade School for over 50 years, train you at home by Shop-Method, for today's unlimited opportunities in **ALL 8 BRANCHES** of the Television, Electronics, Radio Industry.

Check all you receive in *One Master Course* at One Low Tuition

1. **Television — Including Color TV**
2. **Radio — FM and AM**
3. **Industrial Electronics**
4. **Sound Recording and Hi-Fidelity**
5. **Preparation for FCC License**
6. **Automation**
7. **Radar and Sonar**
8. **Communications**

ALL OF THIS MODERN, NEWEST, PRACTICAL EQUIPMENT IS YOURS TO KEEP!

- Parts to Build a modern TV set, including large screen Picture Tube.
- Parts to build a powerful Superhet Receiver, standard broadcast and short wave.
- Parts to conduct many experiments and build Continuity Checker, RF Oscillator, TV Circuits, Audio Oscillator, TRF Receiver, Signal Generator.
- Professional Multitester
- These are a MUST for all technicians.

YOU DO MANY PRACTICAL JOBS. You do servicing circuit analysis and many other down-to-earth experiments. You build a modern TV set from the ground up . . . with equipment kits we give you, including a new large screen picture tube and professional Multitester, at no additional charge.

EARN AS YOU LEARN! Many of our students earn their entire tuition and more in Spare Time jobs we show them how to do while learning. YOU GET GRADUATE ADVISORY SERVICE, TOO.



L. J. ROSENKRANZ
President of NATIONAL SCHOOLS



This Master-Shop-Method course is completely up-to-date. Here in Los Angeles, the TV and Electronics center of the world, we are able to keep in constant touch with the industries' latest developments. As a student, you will quickly master all phases at home . . . in your spare time. Your earning power will grow with every lesson. Just as thousands of National Schools graduates do every day, you can handle servicing, manufacturing, repairing, hundreds of other jobs, or make good money in your own business. SECURE YOUR FUTURE—NOW SEND COUPON BELOW.



IN THESE MODERN TV STUDIOS, SHOPS AND LABORATORIES, your Shop Method Home Study Course was developed by experienced instructors and engineers. What an advantage that is to you at home — each lesson is tested, proved, easy to understand. You can master the most up-to-date projects, such as color TV set repair, printed circuits — even prepare for F.C.C. License and industrial electronics without taking a special course. TAKE YOUR FIRST STEP NOW TO A TOP-PAY JOB IN TV, ELECTRONICS, RADIO. SEND COUPON BELOW TODAY.



APPROVED FOR VETERANS AND NON-VETERANS

NATIONAL SCHOOLS

4000 S. FIGUEROA ST., LOS ANGELES 37, CALIF
187 N. LA SALLE ST., CHICAGO 1, ILL.
IN CANADA: 811 W. Hastings St., Vancouver, B. C

MEMBER



FREE!
Fully illustrated "CAREER" BOOK in TV, Radio, Electronics. AND actual Sample Lesson—yours at no cost, no obligation SEND COUPON NOW—TODAY!

NATIONAL SCHOOLS
TECHNICAL TRADE TRAINING SINCE 1905
Los Angeles, California

GET FAST SERVICE — MAIL NOW TO OFFICE NEAREST YOU!

NATIONAL SCHOOLS, DEPT. RC 46
4000 S. FIGUEROA ST. LOS ANGELES 37, CALIF. OR 187 N. LA SALLE ST CHICAGO 1, ILL.

Rush free TV-Radio "Opportunity" Book and sample lesson. No salesman will call


NAME _____ BIRTHDAY _____ 19__
ADDRESS _____
CITY _____ ZONE ____ STATE _____
VETERANS: Give Date of Discharge _____

Copyrighted material

Sound your Z...enjoy


GAS ECONOMY FOR KEEPS

because–

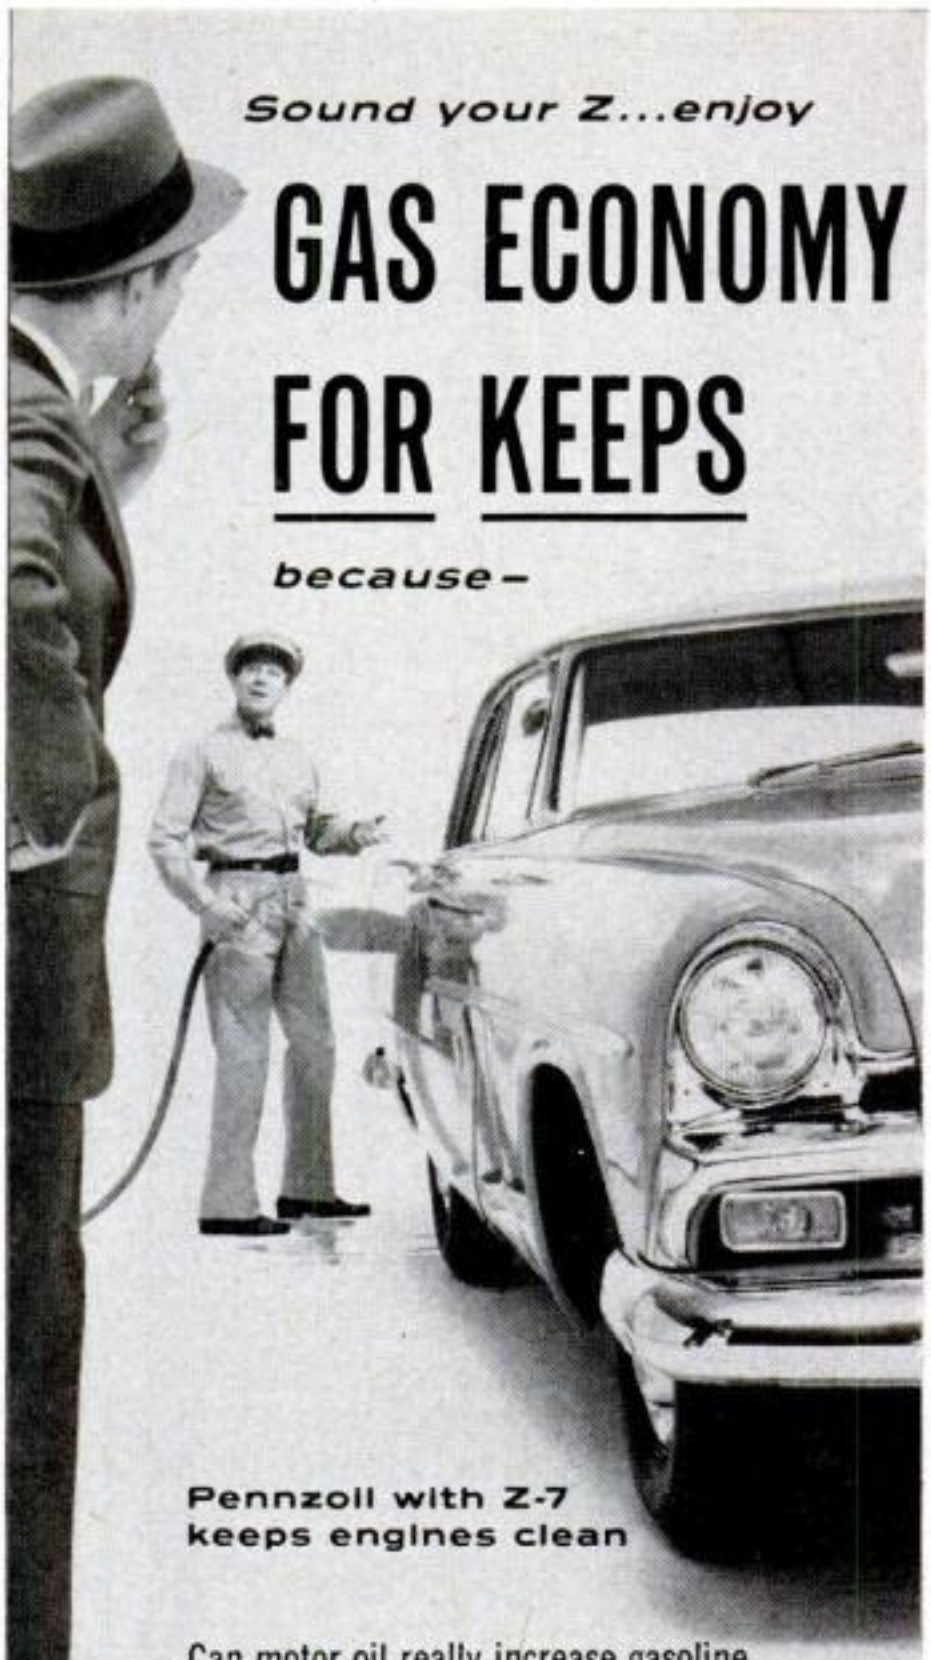

Pennzoil with Z-7 keeps engines clean

Can motor oil really increase gasoline mileage? Yes! Pennzoil with Z-7 prevents deposits from forming in combustion chambers. This eliminates power-stealing knock and ping. By keeping engines clean, this different Pennsylvania motor oil with an all-oil body makes every drop of fuel work harder, unlocks full horsepower—not for just a few miles after an oil change, but for keeps. To make the gasoline you use take you farther on every tankful, get Pennzoil with Z-7, The Tough Film® oil, in the exact seasonal grade for your car!

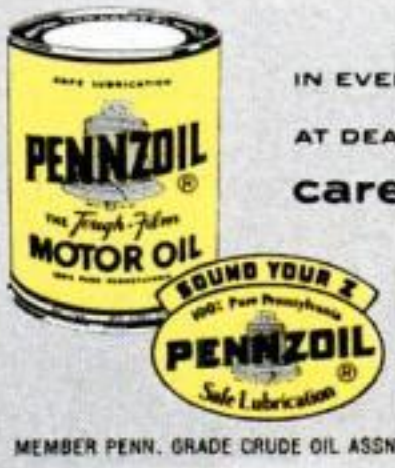

IN EVERY STATE,

AT DEALERS WHO

care FOR YOUR CAR

MEMBER PENN. GRADE CRUDE OIL ASSN., PERMIT NO. 2, OIL CITY, PA.



You can have a career instead of a job



Industrial growth . . . automation . . . technical advances create career opportunities for engineers, accountants, management experts. Share rewards awaiting college-trained men. Important firms visit campus regularly to employ Tri-State College graduates. Start any quarter in this world-famed college. *Approved for veterans.*

Bach. of Science degree in 27 months

in Mechanical, Civil, Electrical Chemical, Aeronautical, Radio (TV-Electronics) Engineering. *In 36 Months a B.S. in Business Administration* (General Business, Accounting, Motor Transport Management majors). Capable students may accelerate. 36-weeks course in Drafting. *Intensive programs: technical fundamentals stressed;* comprehensive courses with more professional class hours. *Small classes:* personalized instruction. For earnest, mature students whose time and budget requires accelerated courses and modest costs. Preparatory courses. *Beautiful campus* in friendly college town. Well-equipped, new and modernized buildings and laboratories. Enter June, Sept., Jan., March. *Write Jean McCarthy, Director of Admissions, for "Your Career in Engineering and Commerce."*



TRI-STATE COLLEGE

546 College Avenue Angola, Indiana

SHORTHAND in 6 WEEKS

Famous SPEEDWRITING shorthand. 120 words per minute. No symbols; no machines; uses ABC's. Easiest to learn, write and transcribe. Lowest cost. 300,000 taught by mail. For business and Civil Service. Typing available. 33rd year. Write for FREE booklet to:

Speedwriting

Dept. 2604-6, 55 W. 42 St., New York 36 ®



YOUR OWN BUSINESS with BIG EARNINGS in..

ELECTRIC APPLIANCE REPAIRING

SEND FOR FREE BOOK!

50,000,000 Families Are Your Prospects! Repair electrical appliances for friends and neighbors. Service electrical equipment in stores, etc. Earn up to $5.00-$6.00 an hour or more! New shop method home study training. Electronic Kit makes it now possible. Rush name for FREE Book, and Special PAY LATER form. **CHRISTY TRADES SCHOOL, 4804 N. Kedzie Ave., Dept. D-6201, Chicago 25.**



SEND FOR THIS FREE!

Make money. Know how to break and train horses. *Write today for this book FREE,* together with special offer of a course in Animal Breeding. If you are interested in Gaiting and Riding the saddle horse, check here ( ) *Do it today—now.*

BEERY SCHOOL OF HORSEMANSHIP

Dept. 584 Pleasant Hill, Ohio



Convert Lawn Mowers into Power Units with this

Briggs & Stratton 2-H.P., 4-Cycle GAS ENGINE

AIR COOLED FULLY GUARANTEED

SAVE! Reg. Price $68.00 SPECIAL OFFER while they last . . . $37.50 fob

Powers Farm, Home & Industrial Tools

• Garden Equipment • Pumps • Compressors

GOV'T SURPLUS

Briggs & Stratton leads the world in dependable, trouble-free performance. A precision-built 2-horsepower, 4-cycle engine with advance styling and economical operation. Easy rope start—sure fire ignition in all weather. Positive, automatic splash-lubrication system. 2 Qt. gas tank. Float feed carburetor with adjustable idle speed and automatic governor. Oil bath air cleaner. Complete with muffler. 3 Piston rings for added compression. 2000-3600 RPM adjustable speed range.

SUPPLY LIMITED! IMMEDIATE DELIVERY! ORDER FROM AD

FREE CATALOG of Compressors, Generating Plants, Motors

ROBERTS ELECTRIC CO., Dept. PS-415, 849 W. Grand, Chicago 22, Ill

Copyrighted material




You save $2.71 on new special Bernz-O-Matic 2-in-1 Propane Torch Kit

Regular Price $10.59

WARD'S SPECIAL... $7.88

includes:

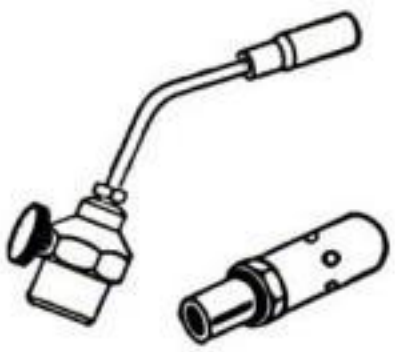

TORCH AND PENCIL-BURNER UNIT
for fine soldering, electrical work, sweating copper fittings, removing putty, etc. ..... Regular **$6.95**

UTILITY BURNER HEAD
for heavy-duty work like burning paint, thawing frozen pipes, tiling floors ..... Regular **$1.95**



AN EXTRA DISPOSABLE PROPANE-FILLED CYLINDER
provides twice as much life for your torch. Comes in especially handy if your original cylinder should expire in the middle of a job. Attaches in seconds. Regular **$1.69**

Regular **10.59**

WARD'S SPECIAL **7.88**

YOU SAVE **2.71**

IDEAL TORCH SET FOR HOBBYIST, HANDYMAN, MECHANIC

Versatile—paint removing, soldering, repairing toys, fixing gutters, loosening frozen nuts and bolts, singeing fowl, lighting fires, fixing radios—are just a few of its uses.

Safer—no liquid fuel to pour, spill or store. Safety relief valve on top. Cylinder made of top-quality 16-gauge steel. UL approved.

Easy to operate—turn a valve, light a match and it's lit! No pumping, priming, preheating. Thousands of *women* use it every day.

Fast working—provides 2300°F. of clean, blue flame, adjustable to needle-point precision.

Really compact—weighs less than 3 lbs. with cylinder fully loaded. Fits neatly in pocket or tool kit.

AVAILABLE at all Montgomery Ward Retail or Catalogue Stores or mail your coupon to your nearest Montgomery Ward Mail Order House:

Chicago, Ill.	St. Paul, Minn.	Ft. Worth, Texas
Baltimore, Md.	Kansas City, Mo.	Portland, Ore.
Albany, N. Y.	Denver, Colo.	Oakland, Calif.

MONTGOMERY WARD

Enclosed find $7.88. Please send me postpaid new Bernz-O-Matic 2-in-1 Propane Torch Kit, No. 84 KDP 6038.

Name.....
(Please PRINT plainly)

Address.....

City..... State.....

Copyrighted material

World-famous Victoreen "Vic-Tic"

GEIGER COUNTERS

Up to now nationally advertised at $125



Entire unit bears factory warranty for 90 days.

HALF PRICE

62.50 *post paid in U.S.A. Ohioans add 3% sales tax*

THE GOVERNMENT PAYS $30,000 REWARD FOR ANY WORKABLE URANIUM STRIKE!

Find uranium in your own backyard! Get in on this once-in-a-blue-moon opportunity! The internationally known Victoreen "Vic-Tic" Geiger counter (now in current production) . . . HALF PRICE! Now any family can prospect for fabulous uranium in spare time! Hunters, fishermen, campers can prospect on "location". Farmers, vacationers, hikers, picnickers, scouts . . . YOU . . . might hit the $30,000.00 jackpot leading to security for life! WHAT ARE THESE GEIGER COUNTERS? They're the original "Vic-Tic" model in use all over the world! Made by the Victoreen Instrument Co., pioneers in radiation-detection instruments since 1928; suppliers of 75% of ALL Geiger tubes used in ANY Geiger counter; developers of special detection instruments for the AEC; now selling and servicing thousands of instruments for the U. S. government. They're brand new current production! Individually factory-checked and factory-packed with fresh batteries. Transistor-amplified loud speaker. Four sensitivity ranges (0-200; 0-1000; 0-10,000; 0-100,000). Speaker pitch control. Clear, easily read meter. Weighs only 3 lbs. Batteries good for 100 hours, 4 hours per day. Complete with radio-active sample, detailed instruction manual and convenient shoulder strap. Rush order NOW. No C.O.D.'s, please.

Joseph Sales Co., 1740 E. 12th St.
Suite 506, Cleveland 14, Ohio.

Please rush me.....

.....

Check or money order enclosed, No C.O.D.'s, please.

Name.....

Address.....

City.....

DO-IT-YOURSELFERS . . . SCHOOLS . . . ELECTRONICS TINKERERS

Vic-Tic Geiger counter assembly kit—Save more! Same instrument as above, but in semi-assembled form. Major components and sub-assemblies completed, tubes mounted on circuit board, power supply assembled. Simple instructions included. All you need is a screw driver and soldering iron. ONLY 12 SOLDERING OPERATIONS NEEDED! Knowledge of electronics not necessary. Complete outfit, less batteries only **34.50**

Your counter will be **12 to 20 times more sensitive** with the addition of the Bismuth Six-Pack. Unit will attach to *any* Vic-Tic counter. Reg. 115.00 **57.50**

Canvas carrying case for Vic-Tic or Vic-Tic with Bis-Pak, Reg. 4.50 **2.25**

Hand probe for exploring crevices, etc., regularly 19.50.....**9.75**

JOSEPH SALES CO., 1740 East 12th St., Suite 506, Cleveland 14, Ohio

FREE IMPORT by Return Mail



To demonstrate your big money-making opportunities in my proved, successful mail-order import plan, I'll send you FREE an imported, hand-tied Coachman casting fly, made in the Orient to sell there for less than 2¢. A retail price of 30¢ in the U. S. gives 1500% mark-up. There are 19 Million U. S. fishermen who are prospects for casting flies, a heavy spending market. Other, even larger markets await hundreds of foreign products we find for you and show you how to import—*cameras, watches, toys, perfumes, fashions, art objects, etc.*

GET CASH-IN-ADVANCE MAIL ORDERS

Pocket big profits in advance. Pay traders abroad with the balance, to ship direct to your customers by parcel post. No stocks to carry. No face-to-face selling. Or if you like personal contacts then import for stores or wholesalers. Your own full or part time business from home or a small office. Export and travel abroad opportunities too, for men and women under my simple direct methods.

ALL THREE FREE! HURRY!

Write today for your copy of my booklet, "Success Stories in World Trade," showing how others have done, full details and imported Coachman Fishing Fly—ALL FREE. No obligation. (Only one fly to a person. This ad must be sent with your request.) Airmail reaches me overnight.

B. L. Mellinger, The Mellinger Co., Dept. F 244
1717 Westwood Blvd., Los Angeles 24, Calif.

Don't Buy Single-Purpose Power Garden Equipment



Your Dollars Buy MORE in a ROTO-HOE

There's no need to buy two, three, or more separate power garden tools. The "ROTO-HOE IDEA" makes available to you one basic power unit and a wide variety of "customer-proven" attachments. All are integrally-designed to fit and work perfectly with the same 2 h.p. ROTO-HOE power unit; all are interchangeable in a few seconds; all are thoroughly "use-tested," available NOW! Complete ROTO-HOE only $134.

NEW 22" Self-Propelled Twin ROTO-CUTTER helps keep lawn velvet-smooth, has easy-to-sharpen twin spindle blades. Attaches in seconds, costs only $49.50 to add to ROTO-HOE power unit; or as a complete unit, ready to go to work for only $131.50.

START YOUR OWN BUSINESS

If you're handy with tools, you may be able to start a profitable part or full-time business selling and servicing ROTO-HOE's. Write today for details.

FREE COLOR BROCHURE Illustrates all attachments in color, gives full information. Write today for a copy and for name of nearby ROTO-HOE dealer.

ROTO-HOE & Sprayer Co., Box 18, Newbury, Ohio

"America's Leader in Lawn & Garden Equipment"

Copyrighted material



L. C. Lane, B.S., M.A. President, Radio-Television Training Association. Executive Director, Pierce School of Radio & Television.

VETERANS - - NON-VETERANS

LET ME HELP YOU EARN TOP MONEY in TELEVISION

— as I've helped these men —

LEARN TELEVISION AT HOME *IN YOUR* SPARE TIME

Now, while demand for trained men is rising, you can prepare for a top-pay, life-time career as an electronic technician, television repairman, or studio technician . . . or set up your own profitable business. You don't need any experience whatsoever to add your name to my list of hundreds of successful graduates.



LEARN BY DOING

As part of your training I give you the equipment you need to set up your own home laboratory and prepare for a BETTER-PAY TV JOB. You build and keep an Electromagnetic TV RECEIVER designed and engineered to take any size picture tube up to 21-inch. (10-inch tube furnished. Slight extra cost for larger sizes.) . . . also a Super-Het Radio Receiver, AF-RF Signal Generator, Combination Voltmeter-Ammeter-Ohmmeter, C-W Telephone Transmitter, Public Address System, AC-DC Power Supply. Everything supplied, including all tubes.

STUDY NEWEST DEVELOPMENTS

My training covers all the latest developments in the fast-growing Television-Radio-Electronics industry. You learn about FM — RADAR — COLOR TV — TRANSISTORS — PRINTED CIRCUITS, etc.

CHOOSE FROM THREE COMPLETE COURSES

covering all phases of Radio, FM and TV

1. Radio, FM and Television Technician Course — no previous experience needed.
2. FM-TV Technician Course — previous training or experience in radio required.
3. TV Cameraman and Studio Technician Course — advanced training for men with Radio or TV training or experience.

EXTRA TRAINING IN NEW YORK CITY AT NO EXTRA COST!

After you finish your home study training in Course 1 or 2 you can have two weeks, 50 hours, of intensive Lab work on modern electronic equipment at our associate resident school, Pierce School of Radio and Television. THIS EXTRA TRAINING IS YOURS AT NO EXTRA COST WHATSOEVER!

FCC COACHING COURSE

Important for BETTER-PAY JOBS requiring FCC License! You get this training AT NO EXTRA COST! Top TV jobs go to FCC-licensed technicians.

EARN WHILE YOU LEARN

Almost from the very start of your course you can earn extra money by repairing sets for friends and neighbors. Many of my students earn up to $25 a week . . . pay for their entire training with spare time earnings . . . start their own profitable service business.

FREE! I'll send you my new 40-page book, "How to Make Money in Television - Radio - Electronics," a Free sample lesson, and other literature showing how and where you can get a top-pay job in Television.



Radio Television Training Association

52 EAST 19th STREET • NEW YORK 3, N. Y.

Licensed by the State of New York • Approved for Veteran Training

AIRCRAFT INSPECTOR



"With RTTA training and through repairing radios and televisions for the right people at the right price, I was able to make the right contacts. I am now an Inspector for Douglas Aircraft at about $125 a week."

Hugh Maddox, Los Angeles, Calif. 4/20/54

$60 A WEEK IN SPARE TIME



"I have the skill and know-how to do the work I love best and to enjoy better things in life, thanks to RTTA. I am now working at TV servicing and making $60 a week spare time."

Harold Gimlen, Flint, Mich. 4/21/54

ASSISTANT MANAGER



"I am Assistant Manager of Day and Nite TV Service."

Ronald W. Curry, Tulsa, Okla. 1/3/55

EARNS EXTRA MONEY



"RTTA training gave me a chance for my own business, extra money earned, and more things that the price of the course could never equal."

Bryce Ruttle, Peterborough, Ontario, Can. 4/2/55

VETERANS

My School fully approved to train Veterans under new Korean G. I. Bill. Don't lose your school benefits by waiting too long. Write discharge date on coupon.

FEELS FULLY QUALIFIED



"With your training I feel fully qualified to get out and compete with all radio mechanics in this area. I have over $1,500 invested in test equipment, $1,000 in tube stock and $200 in miscellaneous equipment. Since I haven't had one complaint in 9 months I have been servicing sets, your school must have done a good job."

Jim Martin, Collinsville, Ill. 3/27/55

MAIL THIS COUPON TODAY!

Mr. Leonard C. Lane, President
RADIO-TELEVISION TRAINING ASSOCIATION
Dept. P-4C, 52 East 19th Street, New York 3, N. Y.

Dear Mr. Lane: Send me your NEW FREE BOOK, FREE SAMPLE LESSON, and FREE aids that will show me how I can make TOP MONEY IN TELEVISION. I understand I am under no obligation.

(PLEASE PRINT PLAINLY)

Name_____ Age_____

Address_____

City_____ Zone____ State_____

I AM INTERESTED IN:

- ☐ Radio-FM-TV Technician Course
- ☐ FM-TV Technician Course
- ☐ TV Cameraman & Studio Technician Course

VETERANS! Write discharge date

NO OBLIGATION!

Copyrighted material

DRAFTSMEN



CASH BIG PAY CHECKS!

Train Now for more success, greater security

LEARN AT HOME IN SPARE TIME
(or at college in Chicago)

Check the want ads in any newspaper—SEE the big-pay opportunities open to you as a draftsman. What's more, you can learn this well-paid, prestige profession at home—quickly, easily! No special talent needed. Get complete, step-by-step Chicago Tech lessons in the mail, spend a few pleasant hours studying each week. In a short time you'll be a well-trained draftsman, ready to take your pick of many good jobs. Act now!



FREE INFORMATION—MAIL COUPON TODAY!
Get FREE TRIAL LESSON plus information about C.T.C. practical training. Learn what successful Chicago Tech graduates say about high pay and opportunities in drafting. No charge, or obligation.

CHICAGO TECHNICAL COLLEGE

D-224 Tech Bldg., 2000 So. Michigan Ave.
Chicago 16, Illinois
Mail me FREE Lesson with information about big opportunities in DRAFTING.

Name.....Age.....

Address.....

City.....Zone....State.....

LUBRIPLATE

IN HANDY TUBES KEEPS RUST OFF GUNS, MAKES REELS RUN SMOOTH





TRY LUBRIPLATE! Not an old-fashioned oil that runs off or gets gummy. LUBRIPLATE is a new, white and clean, semi-fluid lubricant that stays put.

- In handy 25¢, 50¢ and $1.00 tubes at Sporting Goods, Hardware, Marine and Auto Supply Stores.
- Dealers write to LUBRIPLATE DIVISION, Fiske Bros. Refining Co., Newark 5, N.J.

LUBRIPLATE
THE MODERN LUBRICANT

Broad Markets Await Brikcrete Manufacturers

B-12



Because Brikcrete gives so much for so little it is the preferred masonry for homes, schools, motels—practically every kind of residential, commercial, and industrial construction. A lower-than-lumber selling price still permits 100% or more mark-up on basic production costs. And Brikcrete has quality appeal because it is outstanding in design, proportion and color. All the values that building owners and contractors are looking for. That's why market potentials are so broad.

More Local Plants Needed

As a local manufacturing opportunity, Brikcrete has much to offer. Local markets are supplied by local plants using local materials and labor. Savings in freight and distribution enable low selling prices, high income potentials. Plants operate in franchise-protected territories with exclusive privileges. And for men of modest capital, machinery is available on easy-to-pay lease arrangements. Write or wire for Brikcrete Book No. 2.

Brikcrete Associates, Inc., 422 W. 25th, Holland, Mich.

CANADA: Dunn Masonry Machinery Ltd.
802 Dundas Highway, Cooksville, Ontario

"WE'RE LOOKING FOR PEOPLE WHO LIKE TO DRAW" ... says Norman Rockwell, one of America's 12 Most Famous Artists. If *you* like to draw, you may have talent to become a successful artist, spare or full time. Find out for sure with our scientific, 8-page **Free Art Talent Test.** Thousands paid $1 to take it. Get it FREE. No obligation. Send your name, address, age to: Famous Artists Schools, Dept. 11-D, Westport, Conn.



Build your own GAS TURBINE ENGINE!



Order these plans today

GAS TURBINE ENGINES. Two engines in one plan. Quick easy to make. No special tools, material. Instructions and seventeen sheets drawings, complete $9.95 C.O.D. We pay C.O.D. postage. Or send money and we will also include drawings of patent automobile turbine engine. Money back ten day guarantee Get other information too. Write. "Ship C.O.D." Print name. Rush order.

J. HOUSTON MAUPIN, Dept. 68, Tipp City, Ohio

WORK FOR THE GOVERNMENT



START AS HIGH AS $3,880.00 YEAR
Prepare NOW for next exams. Other positions start high as $4,525.00. Men—Women, 18-55. Mail coupon today.

Coupon

FRANKLIN INSTITUTE, Dept. P-90, Rochester 4, N.Y.
(Not Government Controlled) Sirs: Rush FREE: (1) 36-page book with partial list of U.S. Gov't Jobs. (2) Tell me how to prepare for these tests.

Name_____ Age____

Address_____


Cannot channel



Easy to clean


Filters out all dirt


Traps moisture


Never needs replacing


Reduces friction


Rigid double-cone construction

End Filter Replacement!

with Revolutionary New Type

Micro BRONZE

OIL FILTER



Increases engine life


Waterproof


Saves detergents




Saves engine repairs

NOW ONLY

$3.95

for all Micro Bronze Single-cone Filters

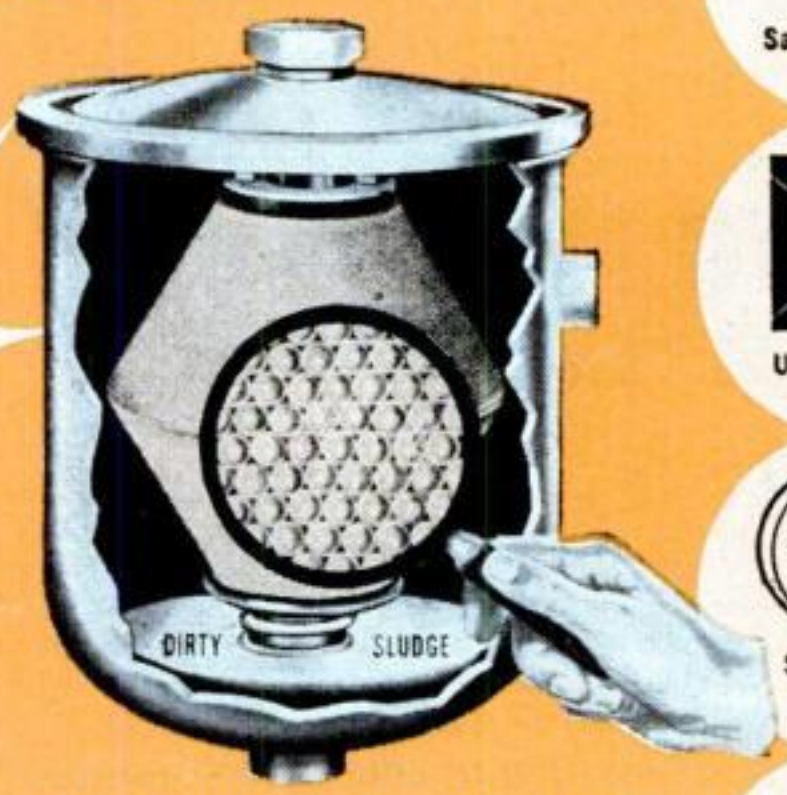


Unaffected by pressure


Unconditionally guaranteed


Screens out abrasives

U. S. Pat. No. 2716492

WHY GIVE YOUR ENGINE HALF-WAY PROTECTION? The Micro Bronze permanent all-metal filter with the built-in acid neutralizer is the world's first filter that guards against *all five* engine enemies: Acids, abrasives, friction, moisture and sludge.

Made of solid but porous everlasting sintered bronze, the Micro Bronze Filter screens out *all* particles of dirt and abrasives larger than .00023 inch in size (so small you could put a thousand of them on the head of a pin!). The Micro Bronze positively cannot channel . . . operates efficiently at all temperatures . . . never wears out, never needs replacing, merely occasional cleaning.

SAVES OIL CHANGES . . . SAVES DETERGENTS. Your oil is good for at least 10,000 miles with a Micro Bronze Filter. All the valuable additives are saved. You never need buy another replacement pack! Used with modern detergent oils, Micro Bronze will add thousands of miles to engine life, help prevent loss of engine power, save costly oil changes, pack replacements and engine overhauls!

DOES YOUR PRESENT FILTER PASS THE "ACID" TEST? If you have a Micro Bronze Filter with the built-in Acid Neutralizer your engine is getting the full protection it needs! In a simple test you can easily make yourself, the Micro Bronze special element completely neutralizes acids in 60 seconds!

BUILT-IN ACID NEUTRALIZER!


Efficient at all temperatures

THE SINTERED METALS SECRET . . . Before World War II, the Germans discovered how to fuse microscopic balls of metal into solid but porous form. Following the war, this secret was made available to American industry and we've developed it for Micro Bronze Filters. This is a magnification of the filter wall.

A PERMANENT *Micro* BRONZE FILTER FOR THE PRICE OF A THROW-AWAY UNIT

Now you can buy a Micro Bronze Single-Cone Filter for only $3.95 (fits all cars and trucks with a by-pass filter system). Heavy duty, de luxe double-cone model only $6.95 (fits all cars and trucks with either by-pass or full-flow system). Complete filter system including outside housing, Micro Bronze Filter element and mounting bracket for cars without filter housing, only $9.95.



Fits all cars

Saves oil


All-metal construction

Eliminates acid

Built-in acid neutralizer



Easy to install

FILTERS THE DIRT BUT NOT THE DETERGENTS

DISTRIBUTORS WANTED

We are receiving orders from all over the world for the amazing Micro Bronze Filter, and are setting up exclusive distributorships to handle our rapidly growing dealer organization. Write, wire or phone.

Micro Bronze Filter Corporation, Dept. PS-46
140 Kansas St., El Segundo, California · Cable Address: MICRONZE

Please ship the following, postpaid, at once:

☐ Micro Bronze Single-Cone Filter Element, $3.95.
☐ Micro Bronze Heavy Duty, de luxe Double-Cone Filter Element, $6.95.
☐ Micro Bronze complete filter system including outside housing, filter element and mounting bracket, $9.95.

Inclosed is $_____ payment in full including all shipping charges to my door. Ship immediately!

Make of Car_____ Model_____ Year_____

No. of Cyls._____ No. of present filter if any_____

Name_____

Address_____


City_____ Zone____ State_____

Copyrighted material



IF YOU "EAT, SLEEP AND LIVE" CARS...

TURN YOUR HOBBY INTO A CAREER!

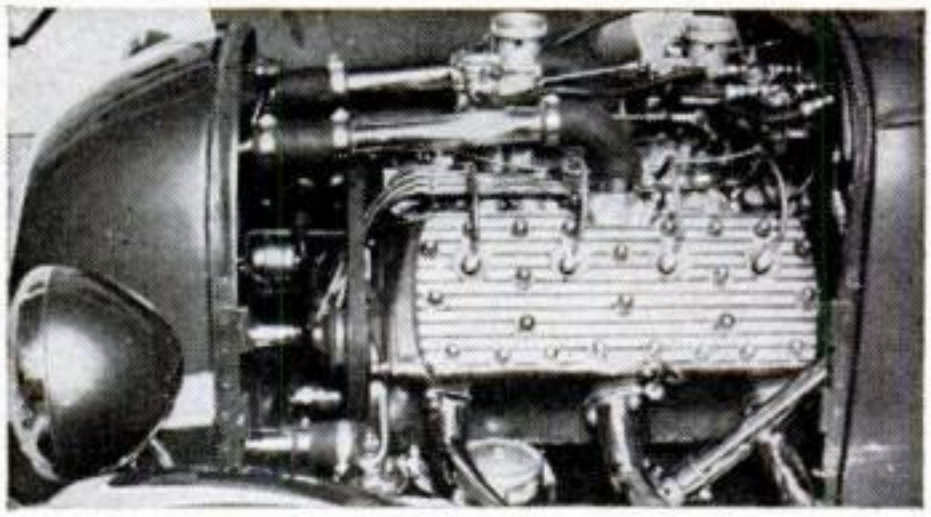

Get America's Big-time, Big-future

AUTO MECHANICS & DIESEL COURSE *at home in your spare time!*

Los Angeles' *National Schools*, America's automotive Technical Trade School since 1905, now brings its famous resident Shops and Faculty direct to you at home—to prepare you to earn more money, with job security, in today's fast-moving, opportunity-filled Auto Mechanics Industry!

Get *your* home training from the "Car Capital of The World"—America's most auto-minded city, center of Hot Rod and Sports Car activity! Mail coupon right now!

"SHOP-METHOD" HOME TRAINING!

YOU MASTER ALL PHASES, INCLUDING DIESEL! All lessons fully illustrated. Latest equipment covered.



THIS SET OF LIFETIME TOOLS IS YOURS! Also all-metal tool box. Part of your course, yours to keep.

EARN WHILE YOU LEARN! We show you how to start Spare Time Earnings soon after enrollment.

ATTENTION MEN OF DRAFT AGE. Learn how you can achieve higher rating and pay. Mail coupon *at once!*

APPROVED FOR G. I. TRAINING. Both Home Study & Resident Courses
Free help with technical and personal problems—Job Placement Service



Send for FREE FACT-BOOK AND SAMPLE LESSON!
NOW! 2 offices to serve you faster! Mail coupon today to one nearest you!

NATIONAL SCHOOLS

Technical Trade Training Since 1905

LOS ANGELES 37, CALIFORNIA
IN CANADA: 811 West Hastings Street, Vancouver, B. C.

MAIL NOW TO OFFICE NEAREST YOU!

(mail in envelope or paste on postal card)

NATIONAL SCHOOLS, Dept DC-46

4000 S. FIGUEROA STREET, LOS ANGELES 37, CALIF. OR 187 N. LA SALLE ST., CHICAGO 1, ILLINOIS

Send *FREE* Auto-Mechanics Book and Sample Lesson. No obligation, no salesman will call.

NAME_____ BIRTHDAY _____ 19___

ADDRESS_____

CITY_____ ZONE___ STATE_____

☐ Check if interested ONLY in Resident School Training at Los Angeles.

VETERANS: Give Date of Discharge_____



Full Color—Wall Size International

WORLD MAP

It's wall size! 33 inches x 50 inches. Heavy duty durable stock in 8 full colors with clear type to instantly identify any corner of the globe. All in precision detail. Smart as a mural. Educational for children's rooms, den, office, civic, schools, etc. Order Direct today. Send $1.00 each prepaid or 3 for $2.75. Same large map of U.S.A. Same price. Guaranteed.

$1

TERRY ELLIOTT CO., Dept. MP-4
135 East 44th St. New York 17, N. Y.

HIGH BLOOD PRESSURE?



New simplified gauge tests blood pressure at home! This instrument detects internal changes which lead to unexpected strokes, heart and kidney damage, insomnia, headaches, etc. No experience or assistance needed to test pressure accurately. Operating instructions also include information on what to do to prevent or reduce the damaging effects of high blood pressure. These useful instruments are fully guaranteed and actually pay for themselves within a week. Order now for immediate shipment.

THE STANDARD UNIT.....$6.50 postpaid
Or C.O.D. plus postage. Contains everything that is needed, including functional stethoscope.

THE DELUXE UNIT.....$9.75 postpaid
Or C.O.D. plus postage. Same outfit as standard unit, but includes genuine professional stethoscope.

JOY SPECIALTY COMPANY,
Scientific Instrument Dept. G
2320-G W. Hubbard Street Chicago 12, Ill.

BECOME AN EXPERT IN TRAFFIC *and* TRANSPORTATION

Traffic men earn $4,000 to $10,000 and up. Thousands of firms need experts on rates, tariffs, regulations. We train you thoroly in spare time at home for executive traffic jobs. Personal training under traffic authorities. Write for free book "Traffic and Transportation."

LASALLE Extension University, 417 So. Dearborn St.
A Correspondence Institution Dept. 483T Chicago 5, Ill.

A "GOOD HAND" HELPS YOU SUCCEED!

LEARN TO WRITE WELL

Use Your Name beautifully written, plus special pen-point for shaded writing. *Only 10¢*

Handwriting quickly improves with our easy-to-understand picture lessons! Put your spare time to good use; send today for ☐ FREE BOOKLET of Penmanship Courses and Supplies or check volumes wanted below at $1 each: ☐ Business Writing ☐ Artistic Writing ☐ Card Writing ☐ Bird & Design Flourishing ☐ Engrossing Alphabets. COMPLETE SET $4.50. Act now!

SINCE 1895

TAMBLYN SCHOOL of PENMANSHIP
S. A. Ziller, Pres. 438 Ridge Bldg., Kansas City, Mo., USA

TILT ARBOR SAW $16.95 SOLD DIRECT FACTORY TO YOU




Save big money on this complete 8 in. Tilt Arbor Saw. Sold direct factory to you. All cast iron and steel construction. Big — Sturdy — weighs 25 lbs. Crosscuts, rips, bevels, mitres, cuts compound angles. Uses any ¼ to ⅓ H.P. motor. Reg. $4.95 — 8 in. Simonds Blade included. Try 10 days. If you are not satisfied FOR ANY REASON, return saw for absolute money back refund. Ship express collect. Send check, M.O. or sent C.O.D.

Write For **FREE CATALOG** *Big Bargain On Power Tools*

AMERICAN MACHINE & TOOL CO.
ROYERSFORD 29, PA.

Copyrighted material

RCA offers you the finest training at home in Radio-TV electronics, TV servicing, Color TV

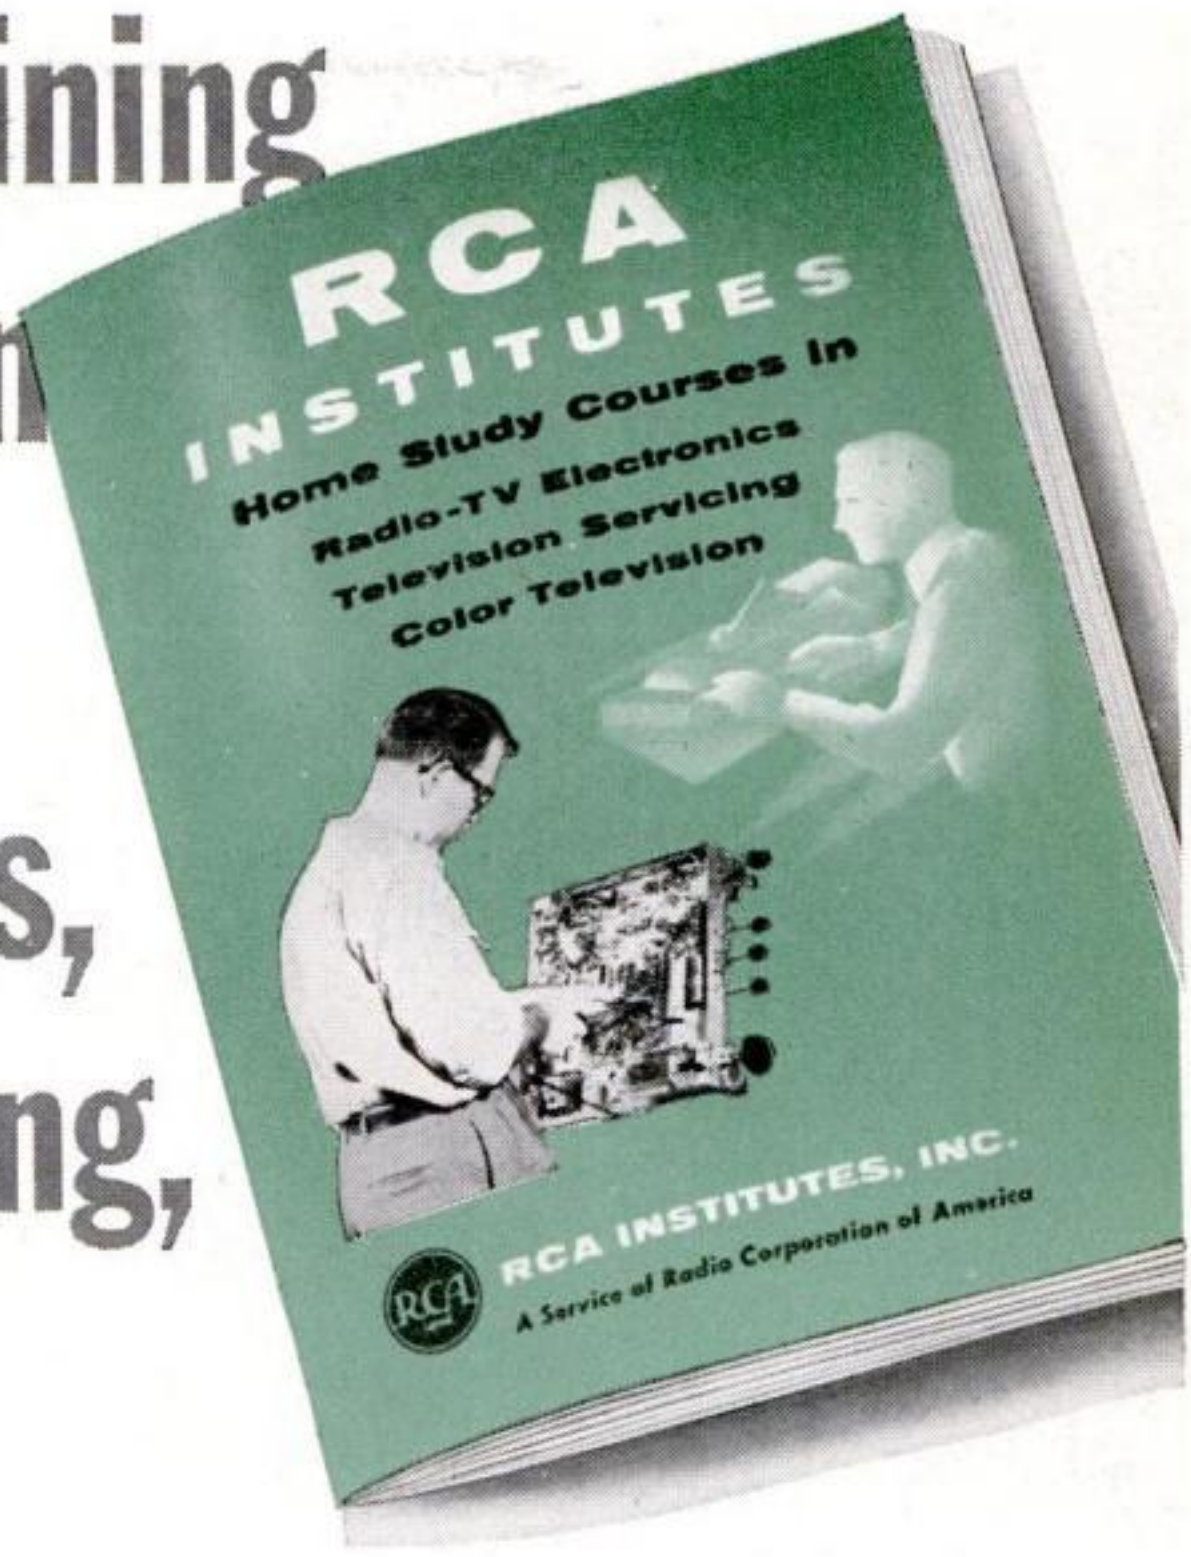

SEND FOR THIS FREE BOOK NOW!

The instruction you receive and equipment you get (and keep) will start you on your way. Pay-as-you-learn. You pay for only one study group at a time. This 52 page book contains complete information on Home Study Courses for the beginner and the advanced student.

RCA Institutes, Inc., Home Study SP-64
350 West Fourth Street New York 14, N. Y.
Without obligation, send me FREE CATALOG on Home Study Courses in Radio, Television and Color TV. No salesman will call.

Name.....
Please Print

Address.....

City.....Zone.....State.....

IMPORTANT
Be sure to write for RCA Institutes catalog before signing up for any Radio-TV course

RCA INSTITUTES, INC.
A SERVICE OF RADIO CORPORATION of AMERICA
350 WEST FOURTH STREET, NEW YORK 14, N.Y.


Copyrighted material

SENSATIONAL NEW "CONTEST" REEL

with best features of both...

SPINNING H-I BAIT CASTING REELS

PREFERRED AT FAMOUS FISHING SPOTS

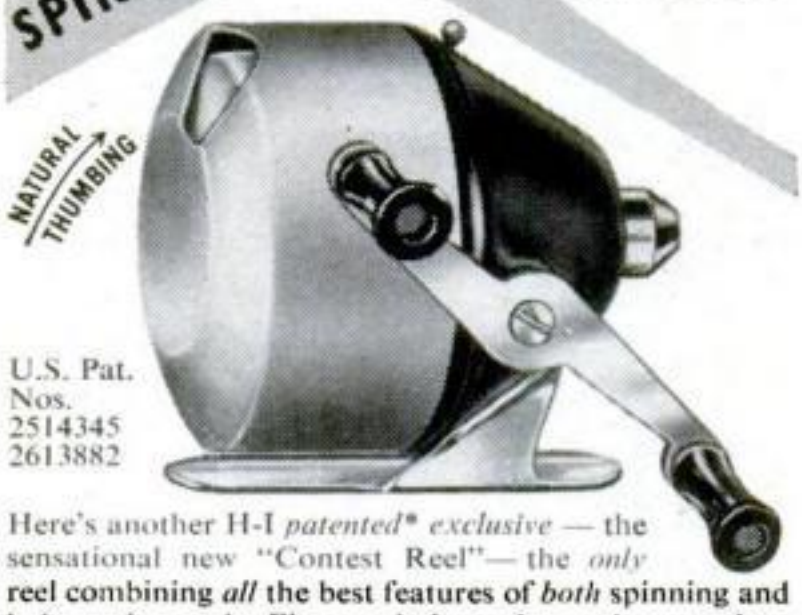

U.S. Pat. Nos. 2514345 2613882

Here's another H-I *patented* exclusive* — the sensational new "Contest Reel"— the *only* reel combining *all* the best features of *both* spinning and bait casting reels. Fits any bait casting rod . . . stationary spool — no back lash . . . natural-thumbing for perfect line control . . . (casts lighter lines further, more accurately, with much less effort). It's lightweight, yet sturdy with streamlined design and perfect balance.

Look for H-I on the tackle you buy

Rods, Reels, Lines, Lures, for every fisherman and every kind of fishing

$500 in Cash Prizes for the best Name for this New Reel. Free entry blank at your dealers.

Valuable Fishing Guide. Send 25¢ to

HORROCKS-IBBOTSON CO. Dept. PS-416, UTICA, N. Y.

Manufacturer of the largest line of fishing tackle in the world

TERRIFIC!

SALE 7 x 35



Regularly $27.95

NOW $21.95

Brand new glasses. This **UNITED** binocular in the short time it has been on the market has met tremendous acceptance. It's an all-weather performer with newest streamlined designing. Perfectly balanced for ease of operation. **Weighs only 20 ounces!** Only 5½" high! Provides brilliant, sharp images for day or night viewing.

20 POWER

Never in the 100 years since Carl Zeiss invented binoculars has it been possible to get a *20 POWER PRISMATIC BINOCULAR* that weighs only *18 OUNCES!* Precision made. Individual focus. They have removable, screw-in protective lens caps. Lens are color corrected. Tremendous *20 POWER* gives you crisp, clear viewing! *Regularly $39.95.....NOW* $29.95

30 DAY NO RISK TRIAL

If not absolutely satisfied return for full refund. Made in Japan. Leather cases and straps included! Add 10% Fed. tax. Cash orders prepaid, C.O.D.'s require $2.00 deposit. **UNITED BINOCULAR CO., Dept. ARF-2816, 9043 S. Western Ave., Chicago 20.**

DEALERS WANTED. Write for latest Wholesale Catalog.

FREE 25-DAY SUPPLY HIGH-POTENCY VITAMINS

Now you may have, absolutely free, a full 25-day supply of amazing **VIMATRIN,** the new 25 **VITAMIN—MINERAL FORMULA,** comparable to branded products that retail up to $7.95 per 100. We pay the expense of this sensational offer . . . not just a token sample, but a full 25 day supply . . . because we're sure this trial will prove to you that you too, like many thousands of others, may experience a new feeling of health, youth and well-being, a new zest for life. Each easy-to-take **CAPSULE** supplies your body with 13 vitamins and 12 minerals in new higher potencies equal to, or exceeding, the minimum daily requirements, and including 3 mcg. of the "Red" Vitamin B12 along with Folic acid, important factors in **BLOOD-BUILDING.** Also **FREE,** the famous Vitamin-Quota Guide Book. Answers perplexing vitamin questions and shows how to **SAVE UP TO 50%** on the same vitamins your doctor advises. All absolutely **FREE,** no obligation to buy anything, no monthly purchase plan. Supply limited. Only one to a family, please. Enclose 25c to cover cost of packing and mailing. Send for your supply today. **VITAMIN-QUOTA,** Dept. T-437, 880 Broadway, New York 3, N. Y. or T-437, 1125 Crenshaw Blvd., Los Angeles 19, Calif.

LEARN ACCOUNTING Business Administration



Bookkeeping, secretarial and allied subjects at home in your spare time or attend nationally approved resident school. Write today for FREE Success Book giving complete details on courses, plans, rates and employment opportunities. G.I. approved.

Member National Home Study Council

Hills BUSINESS UNIVERSITY AND EXTENSION SCHOOL, Dept. B.

629 W. Main St., Oklahoma City 2, Okla.


Secrets of VENTRILOQUISM Now Revealed!



Easy to learn in 60 to 90 days with our Home Study Course. **RESULTS GUARANTEED.** Make Money! Be Popular! Have Fun! Big Opportunity! Radio, Television, Stage Appearances! For Free information regarding price and terms, WRITE. You must state your age. Dummy Catalog 25c.

FRED MAHER SCHOOL OF VENTRILOQUISM
Box 36, Studio PS-4, Kensington Station
Detroit 24, Michigan

Locksmithing AND KEY MAKING

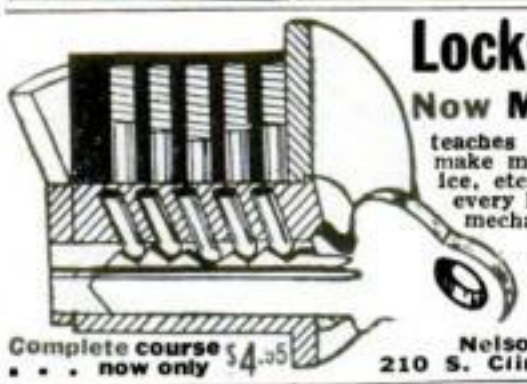

Now Made Easy! Practical up-to-date course teaches you how to pick locks, de-code, make master keys, repair, install, service, etc. New self-instruction lesson for every handyman, homeowner, carpenter, mechanic, service station operator, fix-it shop, hardware dealer, gunsmith, 53 easy illustrated lessons. Full price only $4.95, postpaid; or C.O.D. plus postage. Satisfaction or refund guaranteed.

Complete course . . . now only $4.95

Nelson-Hall Co., Dept. DU-1
210 S. Clinton St., Chicago 6, Ill.

IT'S EASY... MAKE MONEY IN PHOTOGRAPHY

If you are over 17—good pay and fascinating work await you in photography! Start making money quickly in sparetime—step into your own studio or exciting career job. LEARN BY-DOING method trains you at home! Write TODAY for FREE catalog. Also Resident Training. 46th Year. Approved for Vets.

NEW YORK INSTITUTE OF PHOTOGRAPHY
10 West 33 Street New York 1, New York
Dept. 5 **46th YEAR**

AUTOMATIC RETOOTHER for HAND SAWS

MAKES NEW PROFITS



Cuts new teeth in 50 seconds — any size 4 to 16 points. Old teeth fall off as chips. Easy to operate. A perfect job

FREE! Write Now for Descriptive Literature

BURR MFG. CO.
8943-X VENICE BLVD. LOS ANGELES 34, CALIFORNIA

Copyrighted material

Free! FROM THE WORLD'S HOT SPOT



Sensational Get-Acquainted Offer! Yours FREE . . . big valuable collection of all-different, all-genuine postage stamps from the fabulous Middle East — the world's powder keg. Exciting history-making stamps from war-threatened Israel, Arab Jordan, Palestine, Iraq, Pakistan, Bahrain, Syria, Aden, Lebanon, Afghanistan, many others. Spectacular issues picturing men of war, flashing bayonets, ancient fortresses, strategic maps, admirals, generals, kings, sultans **PLUS** scarce Korea set. Guaranteed worth over $2.00 at Standard Catalog prices! **EXTRA:** other exciting offers, 64-page Collectors Guide; complete U.S. catalog. Supply limited . . . send 10c for mailing costs. **ACT NOW!**
HARRIS, 2702 TRANSIT BLDG., BOSTON 17, MASS.

WHAM-O SPORTSMAN *

$1.50 35-LB. PULL!

HITS LIKE A RIFLE—
KILLS RABBITS, SQUIRRELS.
Powerful, silent, accurate.
For hunting, target, routing pests.
Sportsman's choice sold world over!



HUNTING SLINGSHOT
Heavy duty 7" ash stock.
40 steel balls, extra rubber, target.
GUARANTEED. *Professional model of Nat'l Slingshot Assn. At dealers or write
WAMO MFG. CO. Box D-82, San Gabriel, Calif.

LEARN PLASTICS



COMPLETE LOW COST SHOP METHOD HOME TRAINING NOW AVAILABLE

Get in on Big Money opportunities in Plastic molding, casting, forming, carving, etc. Earn as you learn with Interstate's professionally prepared course. All plastic materials furnished.

WRITE FOR FREE BOOKLET

INTERSTATE TRAINING SERVICE
DEPT. C-2, PORTLAND 13, OREGON

FULL SIZE MODEL KITS!



$5.95

THE ORIGINAL — Improved!

Complete, improved detail, easy to finish. The original kit. Wood with process for gun metal finish. ORDER THESE MODELS DIRECT. Ideal for den or game room.

NEW illustrated catalog of 9 models. For Catalog, Send 10¢ to:

O'BRIEN GUNCRAFT (C) P.O. BOX 657 MADISON, WIS.



NOW—Own and Play an Italian ACCORDION

Save UP TO 50%

Choose from famous quality makes at LOWEST WHOLESALE PRICES

Get the facts about owning and playing the accordion...It's easy and loads of fun! You order on **no risk plan** . . . 5 DAYS FREE TRIAL! Save up to 50% off regular price. Easy, convenient terms. You choose from the finest and most famous Italian accordion makes for which we are authorized direct factory distributors. FREE home study course included. Find out about the fun and profit in store for the accordion player. Rush coupon for big Color Catalog and low Wholesale Prices—yours *free*. No obligation.

5-DAY FREE TRIAL
Easy Terms


Accordion Manufacturers & Wholesalers Outlet
2003 W. Chicago, Dept. P-46, Chicago 22, Ill.

—MAIL COUPON—

Accordion Manufacturers & Wholesalers Outlet
2003 W. Chicago Ave., Dept. P-46, Chicago 22, Ill.
Send big FREE Color Catalog, best terms and lowest wholesale prices.

NAME .....
ADDRESS .....
CITY ..... ZONE .... STATE .....

Become an Electrical Engineer

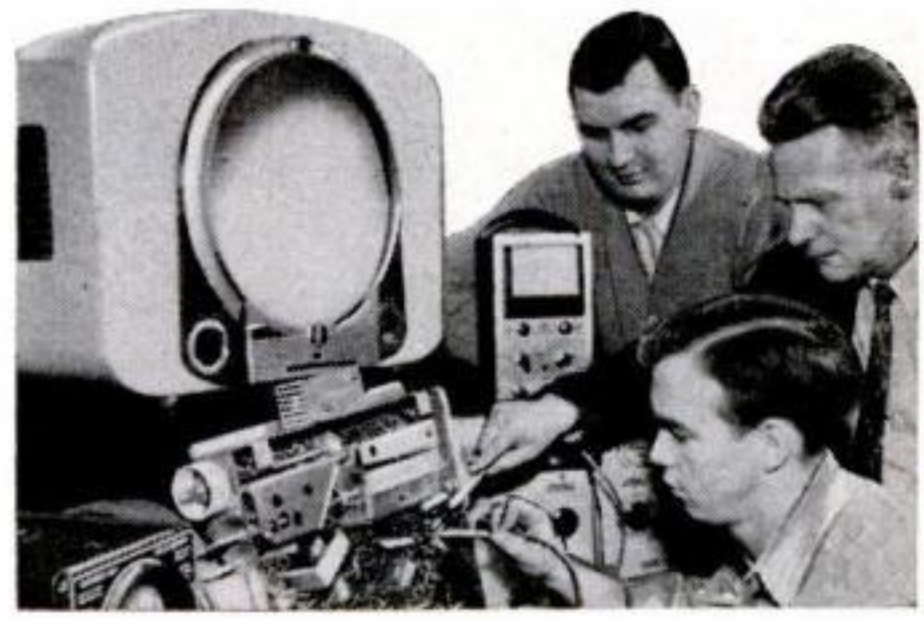



- **Major in Electronics or Power**
- **Earn B. S. Degree in 36 months**

Over 50% of the nation's industrial leaders began their careers with engineering training. Prepare now for a rewarding future as an Electrical Engineer or Engineering Technician. Enroll at the Milwaukee School of Engineering.

Plan Your Career—Eight Courses Give You Wide Range of Study

ENGINEERING COURSES
Electrical Engineering-Bachelor of Science Degree
Save a valuable year through optional year 'round study.
Electronics major ..... 36 months
Power major ..... 36 months
TECHNICIAN COURSES
Electro Technician ..... 12 months
Electronic Technician ..... 12 months
Radio Technician ..... 12 months
Radio and Television Technician ..... 18 months
SERVICE COURSES
Electrical Service ..... 6 months
Radio and Television Service ..... 12 months

MECHANICAL TECHNOLOGY COURSES — Also available, Service and Technician courses 6 to 18 months — Heating, Refrigeration, Welding, Air Conditioning and Mechanical —B.S. Degree in Mechanical Engineering with a major in Design, Metal Fabrication, or Plant Engineering.
Also, general 3-month preparatory course.

Terms open July, September, January, April

Prior Military, Practical or Academic training evaluated for advanced credit. Faculty of specialists. 50,000 former students. Annual enrollment from 48 states and 23 overseas countries. 52nd year. Non-profit. Residence courses only. Send handy coupon today.

MS-11A




MILWAUKEE SCHOOL OF ENGINEERING


MILWAUKEE SCHOOL OF ENGINEERING
Dept. PS-456, 1025 N. Milwaukee St., Milwaukee, Wis.
Send free illustrated career booklets ☐ Electrical Technology ☐ Mechanical Technology ☐ Radio-Television.
I am interested in _____
(name of course)
Name _____ Age _____
Address _____
City _____ Zone _____ State _____
If veteran, indicate date of discharge _____

Copyrighted material

Here's the Kind of MEN I Build!

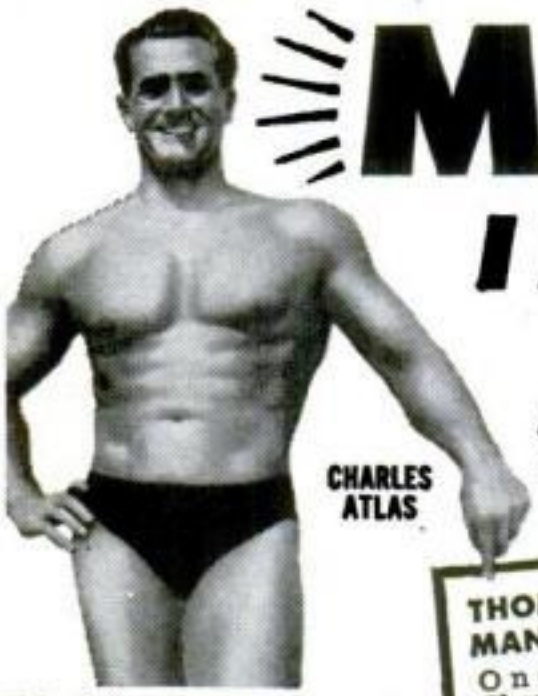

Will You Let Me PROVE I Can Make YOU a New Man?

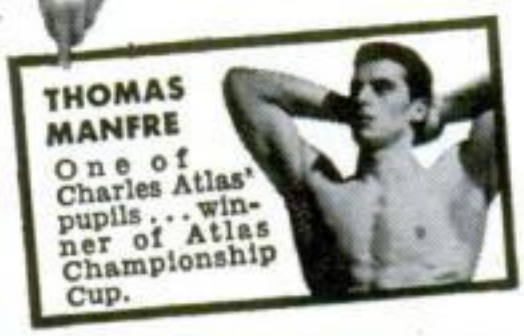

I don't care how old or young you are, or how ashamed of your present physical condition you may be. Just give me 15 minutes a day, and I'll start giving you RESULTS that you can SEE, FEEL, and MEASURE with a tape! I can broaden your shoulders, strengthen your back, develop your whole muscular system INSIDE and OUTSIDE! I can add inches to your chest, . . . give you a vise-like grip, . . . make your legs powerful . . . help cram your body so full of strength, red-blooded vitality your friends will be amazed! **WRITE FOR FREE BOOK.** 32 pages about how **"Dynamic Tension"** changed me from 97-lb. weakling into "World's Most Perfectly Developed Man"—and what I'll **prove** it can do for YOU. **CHARLES ATLAS, Dept. 14, 115 E. 23rd Street, New York 10, N. Y.**



FREE BOOK

CHARLES ATLAS, Dept. 14,
115 East 23rd St., New York 10, N. Y.

Send me—absolutely FREE—a copy of your famous book, "Everlasting Health and Strength"—32 pages, crammed with photos and valuable advice. No obligation. (Please print)

Name_____ Age_____

Address _____

City_____ State_____

U-MAK-IT BOAT KITS

TWICE THE FUN- HALF THE COST!

MOST COMPLETE LINE OF BOAT KITS 8 TO 23'— PRAMS, ROWBOATS, OUTBOARDS, CABIN CRUISERS

Finest hobby with unequaled rewards for you, your family and friends.

Start building! Stop wishing! Be shipshape for the first break of the season.

Ask for your copy of our completely **ILLUSTRATED CATALOG** showing all models, accessories, all you need to build your own.

Send 25¢ (coin) for postage and handling





U-MAK-IT *products*

703 R WHITTIER ST., BRONX, 59 NEW YORK

INSURED TIRE SERVICE POPULAR BRANDS



FREE INSURANCE POLICY given with each used tire sold. We guarantee the amount of service you pay for.

NOWHERE CAN SUCH QUALITY BE FOUND AT SUCH LOW PRICE!

SPECIAL! Deduct 10% on orders for Two or More used tires

YOU CAN'T LOSE!!

Super Quality — Rugged Performance — 12 Months Insured Service							
600x16	$3.65	670x15	$3.95	700x16	$4.45	760x16	$4.75
650x15	3.85	670x16	4.05	710x15	4.35	820x15	4.95
650x16	4.25	700x15	3.95	760x15	4.45	550x17	4.65


Supreme Quality—Nothing Finer—12 Months Insured Service							
600x16	$5.25	475x19	$5.45	700x15(6)	$10.95	700x20	$12.50
600x16(6)	6.75	640x15	4.95	750x16(8)	15.95	750x20(8)	15.50
650x16	5.75	670x15	5.35	700x17	11.95	750x20(10)	17.50
650x16(6)	7.25	710x15	5.45	750x17	16.45	825x20	21.50
700x16	6.35	760x15	5.95	750x15	10.95	900x20	19.95
750x16(6)	8.45	800x15	6.35	30x5	11.25	1000x20	20.45
550x18	4.95	820x15	6.35	600x20	10.95	1100x20	21.25
550x17	4.75	550x15	5.35	650x20	11.75	1000x22	21.95
650x15	5.25	670x16	5.15	32x6(8)	11.95	1100x22	22.75
700x15	5.35	700x16(6)	10.25	32x6(10)	12.75	1100x24	25.95

Whitewalls $1.00 extra.

MIDLAND TIRE SALES

Speedy shipments on Mail Orders. F.O.B. Chicago. Insurance policy sent with each order. Deduct 10% on orders for 2 or more used tires. Send CHECK or MONEY ORDER.—No COD's.
3701 S. Normal, Dept. SS-42, Chicago 9, Ill.

LOOK!

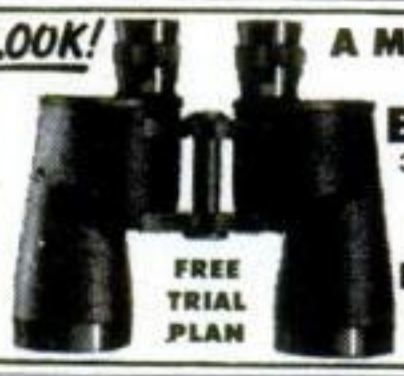

A MILLION THRILLS!
High Power
BINOCULARS
33 Models: $9.95 to $135
Free! Catalog & Book "How to Select Binoculars"
FREE TRIAL PLAN
BUSHNELL *Binoculars*
Dept. P24 43 E. Green Pasadena, Calif.

Here's Best Hobby for Fun & Profit

Learn To MOUNT BIRDS



TAN SKINS, MAKE UP FURS

Be a Taxidermist. We teach you **at Home.** Mount **Birds, Animals, Pets,** common specimens. Save your hunting trophies, decorate home and den. Make genuine **KROME LEATHER,** tan and make up furs for sparetime profit. **INVESTIGATE TODAY**

FREE BOOK 48 pages-tells all about it. Hunters, get your copy. It's **Now Free.** Send post card. State your **AGE**

N. W. SCHOOL OF TAXIDERMY, DEPT. 2604, Omaha, Nebr.

CASTING SECRETS REVEALED!



Now you can learn how to make big money by casting thousands of perfect plaques, book ends, figurines, etc., with X.L. rubber molds.

NO EXPERIENCE, VERY LITTLE CAPITAL NEEDED

X.L., Rubber, Pts. $2.50; Qts. $4.00 (postage extra). **Molds and enough rubber for three molds, $1.50 prepaid. U.S. only.** Send 25c (refunded with order) for informative catalog (40 pages) describing this wonderful, exciting *Profit-making* business.

HUGE PROFITS! MORE MONEY!

PLASTIC ARTS STUDIO 3403 S. MADISON, DEPT. 3 MUNCIE, INDIANA

FREE—Amazing Book on

RHEUMATISM, ARTHRITIS

If you suffer the aches, pains and discomforts of Rheumatism, as manifested in ARTHRITIS, NEURITIS, SCIATICA or LUMBAGO, send today for the FREE Book. It reveals important facts about why drugs and medicine give only temporary relief without removing causes. Explains fully a proven, specialized system of treatment that may save you years of distress. No obligation. Write for this FREE Book today!

BALL CLINIC, Dept. 36, Excelsior Springs, Mo.

PUMP WATER *FAST!*



Drains Wash Tubs, Cellars, Cisterns. Famous #7 **pumps 4000 gph** 700 gph **at 95' high, or** 2400 gph. from 25' well. **Sturdy rustproof alloy metal. Six blade impeller. ¾" inlet, 1½" outlet. Standard pipe** threaded. **Uses any ⅛ to ½ H. P. Motor Will not leak or clog. Ironclad guarantee. Send check, M.O., or sent C.O.D.** **$6.95 M.L.L.**

Irrigate, Fill Tanks, Draw Well Water. Heavy duty #8 pumps 9500 gph 1200 gph. 95' high 5000 gph from 25' well. **Rustproof alloy metal. 8 blade impeller. 1" inlet, 1" outlet. Standard pipe threaded Will not leak or clog. Iron clad guarantee. Send check, M.O., or sent C.O.D.** **$11.95 M.L.L.**

Free Catalogue—Gear Pumps, Large Centrifugal Pumps, Deep and Shallow Well Pumps, Sump Pumps.

MOORE MANUFACTURING CO.
SWEDESBORO 2, NEW JERSEY

Copyrighted material

"Building Beautifiers" Can Earn High Incomes

Colorcrete, a cementitious plastic, gives lifetime beauty and protection to drab, dirty masonry — concrete, stucco, etc. — on all kinds of buildings. Tough, tenacious, enduring. Easily cleaned. Helps to daylight dark interiors. Choice of gleaming white or 30 colors. Applied under pneumatic pressure to form an inseparable bond.





More Colorcretors are needed to supply the ever-increasing demand. Low investment appeals to men of limited capital. Work is easy, fascinating, highly profitable. Broad opportunity to develop a lifetime business. No special ability or experience needed because we supply full instructions and sales cooperation. Colorcrete machine is simple to operate, easy to move around. Write today for Opportunity Book.

Colorcrete Industries, Inc. COLORCRETE CS
572 Ottawa Av., Holland, Mich.
IN CANADA: DUNN MASONRY MACHINERY LIMITED
1022 Dundas Highway Cooksville, Ont.

TELEPHONES



Desk Stand Style
Slightly used but in excellent condition
Many Valuable Uses
Inter-House Phones — House to Barn, etc.
Loud Speakers — Microphones
Educational Purposes, Toys, etc.

Comes complete, ready to use with wiring diagrams included. Two complete for only $5.00 **$2.75** Postpaid in U.S.A.

TELEPHONE LAMP KIT—with illustrated instructions for making Desk Telephone Lamp including all parts (harp, nipples, push switch, cord, plug, etc.) . . . . $6.50 Ppd. (Shade is not included).

MICROPHONE, Dept. X-3304, 1760 W. Lunt Ave., Chicago 26, Ill.

A NEW REAL METAL COAT on any object **ELECTROPLATE**
ANY OBJECT IN HOME, SHOP, GARAGE-



NOW with our **NEW ELECTROCHEMICAL** Outfit. You can easily **do your own plating.** Not a paint. But a hard durable metal plate, equal to commercial plating. Get your own plating kit with instructions on plating metal and non-metal objects as Tools, Auto Parts, Silverware, Jewelry, Baby Shoes and 1001 other articles with **Chrome, Nickel, Copper, Gold, etc. SEND NO MONEY.** Everything sent C.O.D. for the low price of ONLY $5.95 or send $5.95 now and receive it postpaid. Money back in 7 days if not satisfied. **M.Z. SALES CO.,** Dept. H-5, 113 West 42nd St., New York 36, N.Y.

OPERATION '56—the year to FIX HOME IMPROVEMENT

See your lumber dealer TODAY!

94.6% OF BAILEY GRADUATES ARE EMPLOYED AT TOP PAY IN THE FIELDS WHICH THEY WERE TRAINED!



DIESEL-AUTO MECHANICS DESPERATELY NEEDED!

We have a far greater demand for our students than we can fill!
We can show you an actual waiting list of leading companies throughout the world who have tried Bailey graduates — found them outstanding, and are coming back for more!

Bailey Graduates are Successful . . . RECEIVE BIG PAY — HAVE SECURE FUTURE!

The Famous Bailey Course prepares you for BOTH Diesel and Gasoline Mechanics.

This is a **must**-due to the advent of using Diesel principles, such as 'Fuel Injection' on passenger cars . . . use of gasoline engines for starting Diesel engines, etc. You learn all this at Bailey in the amount of time ordinarily required to learn just one of these subjects, **ALL FOR THE PRICE OF ONE.**

Don't be satisfied with a 'futureless', one-type job — learn how you can make **big money** now! Write today for Free Booklet that takes you on a step-by-step camera tour through our spacious, modern shops — See Bailey students in action as they Learn-by-doing with the Famous Bailey Method of training!

We provide you with housing and part time jobs while in school, plus nation-wide placement service for graduates.

BAILEY Technical SCHOOLS

1650 S. GRAND — ST. LOUIS 4, MO.

MAIL TODAY!
Please mail immediately this free booklet without obligation.


FREE BOOKLET



Name.....
Address.....
City..... State.....
APPROVED FOR VETERAN . . . NON-VETERAN

Copyrighted material

TRAIN AT HOME FOR BIG PAY IN
AUTO MECHANICS

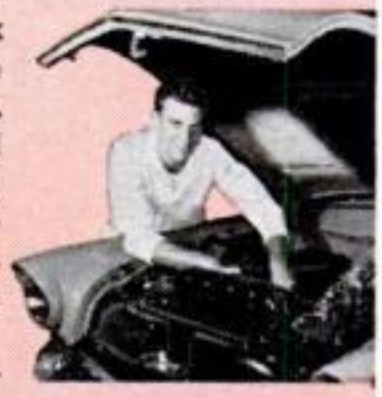

You can make up to $125 a week and more—or *open your own shop*—as an auto mechanic. 50,000 more trained men needed at once to service 50 million vehicles. *You learn at home in spare time* thru easy CTI Shop-Method plan. You get extra training in Diesel or Body-Fender Repair if desired. *Mail coupon for 2 FREE books on job facts!*



MAKE TO $5 AN HOUR AS YOU TRAIN Earn up to $5 an hour while learning. Many pay for course this way.

TUNE-UP KIT & TOOLS SENT

Only CTI sends you a valuable Tune-Up Kit. You also get professional tools. These help you start earning soon after you enroll. *Mail coupon today!*



MAIL TODAY • 2 FREE BOOKS

COMMERCIAL TRADES INSTITUTE Dept. A-294
1400 Greenleaf Ave., Chicago 26, Ill.
Send me your new, FREE BOOKS which show me how I can train at home to make big money in the auto field.

Name_____ Age____

Address_____

City_____ Zone____ State____

Member: National Home Study Council

TURN YOUR SPARE TIME INTO
$5 an HOUR EXTRA CASH



***Earn Big Money in Your Own Home with the* BELSAW SHARP SMITH**

Thousands of Belsaw users have proved that sharpening circular saws, grinding planer and jointer knives is profitable. Many have given up regular jobs to devote their entire time to their own money-making business.

The initial investment is only $15 down payment. The space required is small... 15 square feet in your home or garage.


No experience is necessary. A beginner can produce expert work the day his Belsaw arrives.

The demand is in your own neighborhood... constantly expanding. More and more circular saws are used by professionals, carpenters, contractors . . . plus the thousands with basement workshops. All these circular saws need dependable sharpening . . . the kind you can give them with a Belsaw.

You do the jobs in your own home in your own spare time. No punching the time clock. If you want to take the day off to go fishing, it's yours for the taking. Every man has dreamed of being his own boss. With your Belsaw you can make it possible.

Write today for actual experiences of Belsaw owners... and Free Book, "Lifetime Security with Your Own Business."

FREE Book →



BELSAW MACHINERY CO
1676 Field Bldg., 315 Westport Rd., Kansas City 11, Mo.

EAT ANYTHING WITH FALSE TEETH



If you have trouble with plates that slip, rock and cause sore gums—try Brimms Plasti-Liner. One application makes plates fit *snugly without powder or paste,* because Brimms Plasti-Liner hardens permanently to your plate. It relines and refits loose plates in a way no powder or paste can do. No need to pass up your favorite foods. With plates held firmly by Plasti-Liner, **YOU CAN EAT ANYTHING!** Simply lay soft strip of Plasti-Liner on troublesome upper or lower. Bite and it molds perfectly. *Easy to use,* tasteless, odorless, harmless to you and your plates. Removable as directed. Money back guarantee. At your drug counter. Only $1.50.

BRIMMS PLASTI-LINER
THE PERMANENT DENTURE RELINER

TREMENDOUS Profits with Hagen's Exclusive TEAR GAS PENCIL!



This Tear-Gas Pencil discharges smothering clouds of tear gas to instantly stop, stun and incapacitate the most vicious man or beast, an effective substitute for dangerous firearms; leaves no permanent injury. No selling experience needed. Handle as a profitable sideline . . . soon you'll sell it full time. Start now! Send $4.95 for complete demonstrating kit of Automatic Tear Gas Pencil, 10 demonstrators & 3 Powerful Tear Gas Cartridges. Not sold to minors.

SELLS EASY TO
SERVICE STATIONS
SMALL STORES
LOAN OFFICES
BANKS, HOMES

HAGEN SUPPLY CORP., Dept. P-46, St. Paul 4, Minn.

STAMP COLLECTORS!
319 DIFFERENT STAMPS 25¢



This big imported collection includes: **Giant glider aviation set** showing real and toy gliders, **Israel airpost** & ancient coin set. Fish & insect life from far-off Ifni, Sahara, Guinea, Red Cross Flag, Nurse & Blood Transfusion, Jap Antelope & Bird, curious child artwork plus **hundreds** of fascinating issues from all parts of the world. Altogether **319 all different** stamps cataloging $7.25—for **only 25c** to introduce our bargain approvals. **BONUS: Valuable IMPERF. ERROR** and **48-Page Stamp Dictionary** included free as long as they last.

STAMPEX CO., Dept. BP, P.O. Box 47, White Plains, New York

Find HIDDEN TREASURES



GOLD, SILVER, PRECIOUS METALS with the Famous Model 27 Metal Detector. Lightweight, ultra-sensitive, low cost. None finer. Also GEIGER COUNTERS for uranium and the VIOLITE for tungsten. INFORMATION FREE

THE *Detectron* CORP.
5528 Vineland Ave., No. Hollywood, Calif.

SEWS LEATHER
AND TOUGH TEXTILES LIKE A MACHINE



With SPEEDY STITCHER Automatic Sewing Awl, anyone can quickly and skillfully sew or repair anything made of LEATHER, CANVAS, NYLON, PLASTIC, or other heavy materials. Sews firm, even lockstitches like a machine. Gets into hard-to-reach places. Specially made for heavy duty sewing on LUGGAGE, FOOTWEAR, RUGS, AWNINGS, SAILS, SADDLERY, UPHOLSTERY, OVERALLS, AUTO-TOPS, SPORTS GEAR, and other tough sewing jobs. Here's the handiest tool you'll ever own. Will save you many times its small cost. Comes ready for instant use . . . complete with bobbin of waxed thread and 3 different types of diamond-pointed needles. Easy-to-follow directions will make you an expert in minutes. Extra needles and waxed-thread always available. Save money, send $1.98 for postpaid delivery. If C.O.D., $1.98 plus postage. MONEY BACK GUARANTEE.

SPORTSMAN'S POST
366 Madison Ave., Dept. A-229, New York 17

ONLY **1.98**

Copyrighted material

CHEMISTRY



BIG LABORATORY GIVEN FREE!

Be a **CHEMIST!** One of the really **GREAT** professions! We teach you at home. Simplified (but thorough) course: no previous training required. Earn while you learn. This is a **GOLDEN AGE** for those with special knowledge! Diploma awarded! Send 25c for first lesson and KIT or $1.00 for first 5 lessons and supplies including

FREE! **URANIUM TESTER, CHEMICAL PUZZLE** (worth $2.50) and **HOW TO MAKE 100 NEW CHEMICALS!**

NATIONAL SCHOOL OF CHEMISTRY
P. O. Box 606-B **Redwood City, Calif.**

Watch Repairing Pays Big Money Learn at home



Watch repairers in great demand. Train step-by-step in 10 easy lessons. We furnish all tools and 15 jewel watch and practice movement. Turn spare time into cash. A licensed school. Low cost. Send for FREE book today.

ILLINOIS SCHOOL OF WATCH REPAIRING
2870 Elston Ave., Dept. PS-46, Chicago 18, Ill.

Also Eshelman Adult 2 Pass. SPORT & GOLF CARS 1/5 the Price of most other Cars. 70 Miles Per Gal. Free Catalog.

ESHELMAN TRACTORS

LOW AS $99



For Better Lawns and Gardens investigate Eshelman Riding Rotary Mowers, Tillers, Tractors. Advertised in GOOD HOUSEKEEPING. Thousands of satisfied users. Free Literature Write:

ESHELMAN CO.
Dept. M-44, 109 Light St., Balto. 2, Md.

3 HP

Shipping Points: BALTIMORE • CHICAGO • RENO

---

only $95 freight incl. Write For FREE FOLDER

12 ft. SPORTBOAT KIT



Includes ready-cut parts and hardware. Models low as $39.00 freight incl.

TAFT MARINE WOODCRAFT
Dept. PS-4, 636 39th Ave. N.E., Minneapolis 21, Minn.

High School at Home

MANY FINISH IN 2 YEARS

No classes. No time wasted going to and from school. Progress as fast as your time and abilities permit. Standard H. S. texts supplied. Thousands enroll each year in this 59 year-old school. Send for FREE descriptive booklet.

AMERICAN SCHOOL, Dept. H446
Drexel at 58th St., Chicago 37, Ill.
Without obligation, please send FREE descriptive booklet.

Name.....

Address.....

Complete Canadian Courses available. Write American School, Dept. H446, 1610 Sherbrooke St. W., Montreal

---

REPLACE YOUR OLD WOOD CELLAR DOOR





WITH A MODERN ALL-STEEL BILCO DOOR

DO IT YOURSELF

IN JUST 3 TO 4 HOURS

Think of it! Only a few hours of pleasant work to replace your unsightly, troublesome wood hatchway with a lifetime, weathertight BILCO . . . the door installed on tens of thousands of new homes.

PAYS FOR ITSELF! Cost so little, yet never needs repair or replacement. Operates at a touch. Smooth, trim appearance adds amazing new beauty to your home.

Rush coupon TODAY for free folder and "Do It Yourself" pamphlet showing step by step replacement of wood hatchway.

Bilco®

AMERICA'S FINEST BASEMENT DOOR

THE BILCO CO.
DEPT. 317C
NEW HAVEN, CONN.

Gentlemen: Please send me "Do It Yourself Pamphlet" along with other literature showing sizes.

Name_____

Street_____

City_____ **State**_____

Copyrighted material

TENSE NERVOUS HEADACHES
call for
STRONGER Yet SAFER
ANACIN

Won't Upset The Stomach

Anacin® not only gives *stronger, faster* relief from pain of headache, but is also *safer.* Won't upset the stomach and has no bad effects. You see, Anacin is like a doctor's prescription. That is, Anacin contains not just one but a *combination* of medically proven, active ingredients. Scientific research has proved *no single drug* can give such strong yet such safe relief as Anacin. *Buy Anacin Tablets today!*

Shrinks Hemorrhoids New Way Without Surgery

Science Finds Healing Substance That Relieves Pain—Shrinks Hemorrhoids

For the first time science has found a new healing substance with the astonishing ability to shrink hemorrhoids and to relieve pain – without surgery.

In case after case, while gently relieving pain, actual reduction (shrinkage) took place.

Most amazing of all – results were so thorough that sufferers made astonishing statements like "Piles have ceased to be a problem!"

The secret is a new healing substance (Bio-Dyne*)—discovery of a world-famous research institute.

This substance is now available in *suppository* or *ointment form* under the name *Preparation H.** Ask for it at all drug counters—money back guarantee. *Reg. U. S. Pat. Off.

ENGINEERING DEGREE IN 27 MONTHS

BIG DEMAND FOR GRADUATES

AERONAUTICAL, CHEMICAL, CIVIL, ELECTRICAL, MECHANICAL and ELECTRONIC ENGINEERING (Inc. Radio and TV)

Hundreds of young men are earning **B.S. ENGINEERING DEGREES** annually in this recognized institution—year around operation. New terms start quarterly. Many students earn a major part of their college expenses in this large industrial center.

Low tuition. Competent instruction. Thorough, intense, practical program. Modern, well-equipped laboratories including new physics laboratory and modern wind tunnel. Individualized instruction emphasized.

Government approved for G.I.'s. Engineering preparatory courses. Students from 48 states and 21 foreign countries. Enter June, September, December, March. Send coupon for free catalog and full information. Enroll now.

INDIANA TECHNICAL COLLEGE

646 E. Washington Boulevard, Fort Wayne 2, Indiana

Please send me free information on B. S. Engineering degree in 27 months as checked.

☐ Aeronautical ☐ Chemical ☐ Civil
☐ Electrical ☐ Mechanical ☐ Electronics

Name.....

Address.....

FISTULA

FREE BOOK—Explains Dangers of Associated Ailments



Piles, Fissures and Rectal Abscess are common ailments that may also be associated with neglected Fistula. Our new 130-page illustrated book sent FREE. Write today—McCleary Clinic & Hospital, 471 Elms Blvd., Excelsior Springs, Mo.



DO YOU LIKE TO DRAW

CARTOONS?

Ask us to send you facts about FAMOUS CARTOONISTS!

Just send name, address, age, to
CARTOONS-OF-THE-MONTH
ROSLYN, NEW YORK





HE-MAN VOICE!

STRENGTHEN *your* voice this tested *scientific* way. Yes—you may now be able to improve the POWER of your speaking and singing voice... in the privacy of your own room! Self-training lessons, mostly silent. No music required.

FREE BOOK Write TODAY for Eugene Feuchtinger's great booklet "How to Develop a Successful Voice." It's absolutely FREE! You must state your age. Booklet mailed postpaid in plain wrapper. No salesman will call. Send your name and age RIGHT NOW! Prefect Voice Institute, 210 S. Clinton St., Studio DU-1, Chicago 6, Ill.



$7.95 **DRAINS** cellars, cisterns, wash tubs; **IRRIGATES - CIRCULATES - SPRAYS**

1,001 USES—HOUSE, GARDEN, FARM

Original All-Purpose Pump has 3,000 GPH capacity, 450 GPH 80' high; or 1800 GPH from 25' well. Use any 1/6 to ¾ HP motor. Stainless steel shaft. Oil-less bearing. 1" inlet; ¾" outlet. Motor coupling included.

DOES NOT CLOG OR RUST

Postpaid if cash with order. Send for yours today! MONEY BACK GUARANTEE. Larger Centrifugal Pumps and Gear Pumps in all sizes.

LABAWCO PUMPS, Belle Mead 3, N. J.


STUDY INDUSTRIAL DESIGN

You can train at Art Center School in California with practicing-professionals for upper-level jobs in INDUSTRIAL DESIGN. Recent graduates have been added to the staff at General Motors, Chrysler, Raymond Loewy, Henry Dreyfuss, etc. Majors in transportation, general product design, structure, community development, furniture design, packaging, display. 4-year degree courses. Learn to combine imaginative design with technical proficiency, coordinate utility and beauty. Stimulating environment. Field trips. Advantages of mild Southern California climate and nearby holiday spots. Coed. Placement service. Established 25 years. New terms Feb., June, Sept. Write for catalog.

ART CENTER SCHOOL, Edward J. Adams, Director

5353 WEST THIRD STREET, LOS ANGELES 5, CALIFORNIA

NEW FALSE PLATE FROM YOUR OLD ONE IN 18 HOURS

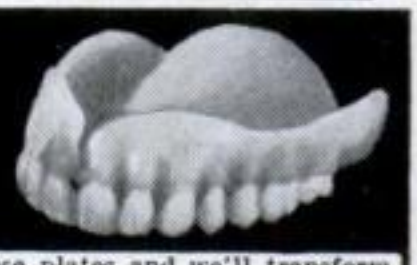

AS LOW AS $14.95

Send us your old broken, cracked or loose plates and we'll transform them into new lightweight wonder plastic plates. NO IMPRESSIONS needed with our revolutionary method. We use your own old plates. We remake them completely in only 18 hours. Missing teeth carefully matched and replaced. We GUARANTEE TO SATISFY YOU OR REFUND YOUR MONEY.

SEND NO MONEY—Send us your name today and we'll RUSH COMPLETE DETAILS. Begin to enjoy life right now. Clip this Ad; save it and send for free facts.

CHICAGO DENTAL PLATE LABORATORY • Dept. PS456
30 N. Dearborn St. • Suite 807 • Chicago 2, Ill.

Copyrighted material

Let Me Show You
How I Made
$20,000 a Year
Buying Junk Jewelry

Learn at home in one evening



No selling. Pay friends and neighbors good prices for old rings, watches, chains and bridges. U. S. Gov't pays you $35 an ounce for the gold this junk contains.

THERE'S gold to be picked up on any street in any town any day of the year if you know my secrets. I teach you how to find it, how to buy it, what to pay for it, how to test and how to ship to Uncle Sam for cash. I supply you with testing outfit and weighing scale. Takes only one evening to learn at home. Next day you are ready to fill your pockets with gold at junk prices. I'll teach you the secrets by which I made $20,000 a year. No charge for facts. Send name on postcard—no money. **Leslie Patton,** 335 W. Madison Street, Dept. 124. Chicago 6, Illinois.

Pellet Shooting Automatic



Shoots 10 pellets as fast as you pull trigger. For indoor target work & fun. **Automatic action.** Holds 10 pellets. **Full size model of Colt .45.** 6½-in. long. Plastic moulded. Moving parts of die cast metal. With supply of pellets. (Extra Pellets, 25c Pkg. Holster 50c) **EACH**.... **$1.65**

Johnson Smith & Company, Dept. 313, Detroit 7, Mich.

Catalog OF 3000 Novelties 10c



Send 10c for amazing catalog of novelties, live animals, scientific supplies, hobbies, funmakers, planes & boats, looms, magic tricks, joke articles, unusual seeds, gadget timesavers, cameras, optical goods, projectors, movies, lucky jewelry, religious novelties, disguises, musical instruments, stamps, coins, puzzles, fortune tellers, radios, auto & bike accessories, telescopes, magnifiers, compasses, banks, smokers' gadgets, artists' supplies, printing sets, engines, motors, shockers, knives, billfolds, fireworks, guns, rifles, sports, books, games, plants, etc. Send name, address & 10c to:

JOHNSON SMITH & CO., Dept. 313 Detroit 7, Michigan

Learn LEATHERCRAFT

- **Sell for big Profits. Markets Everywhere.**
- **Up to 500% Profit. Make Leather Goods, Billfolds, Bags, Belts, & 200 other items.**
- **EASY TO MAKE WITH THE NEW TANDY PROCESS.**
- **We supply complete instructions & materials.**

FREE Catalog U-DO-IT KITS

WRITE FOR FREE DETAILS, FREE CATALOG

81 TANDY STORES COAST-TO-COAST

TANDY LEATHER CO. *EST. 1919*

P.O. BOX 791-TK FORT WORTH, TEXAS

PAGE TILLERS

New *1956* "Page-Boy"

★ FULLY GUARANTEED
★ LOW PRICED
★ EASY TERMS

Makes tough jobs easy!

3 Models—1½-2 -3½ HP.

Tiller, mower, snow blow attachments easily shifted. Safe and easy to operate. Rugged steel frame, adjustable rubber tired wheels. So handy around the home or farm!

FREE CATALOG—Complete tractor line with all attachments




Tills. Cuts Grass. Blows Snow!

PAGE 1916 South 81st Street Milwaukee, Wisconsin

DIESEL

MECHANICS IN DEMAND

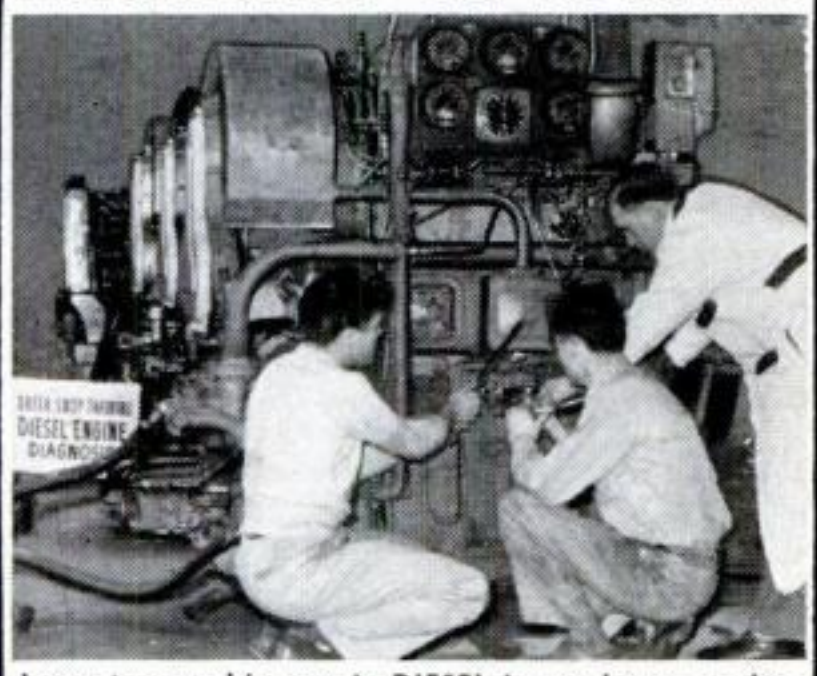

Learn to earn big pay in DIESEL in our large, modern equipped Chicago school and shop. No previous experience or training necessary. We help you find living quarters and part time job while in school.

Complete, practical courses taught in the following trades, under the supervision of experienced, expert technicians.

APPROVED FOR CIVILIANS ☐ OR GI'S ☐

—CHOOSE YOUR TRADE—

CHECK HERE		WEEKS
☐	DIESEL MECHANICS	20
☐	AUTO MECHANICS	20
☐	BODY & FENDER	16⅔
☐	GAS-ARC WELDING	4-12
☐	REFRIGERATION	13½
☐	AIR CONDITIONING	8⅓
☐	MACHINIST TRADE	30
☐	ADVANCED MACHINIST (includes tool & die)	32½
☐	PIANO TUNING & REPAIR	36

CHOOSE YOUR ENGINEERING COURSE

These courses are intended as terminal education for men who wish to enter the Diesel-Automotive and Refrigeration-Air Conditioning fields as technicians. These courses are designed to prepare men for supervisory positions. Students with a high school education, or equivalent, will be accepted.

☐ DIESEL AUTOMOTIVE ENGINEERING ..... 2 years
☐ REFRIGERATION & AIR COND. ENGINEERING .....18 months

FREE EMPLOYMENT HELP

Start your career with Greer by checking your interest above and mail coupon for complete information at no obligation.

NAME _____ AGE____

STREET _____

TOWN _____ ZONE____ STATE_____

Established 1902—Over 50,000 Graduates

54 years of continuous trade school experience to guide your training.

GREER SHOP TRAINING

Box D, 2238 S. Michigan Ave.
Chicago 16, Illinois

Copyrighted material



Something Wonderful Happens to people who learn MUSIC!

... here's how YOU can learn ANY instrument, even if you don't know a single note now!

A WHOLE NEW WORLD opens up when you learn to play. You are invited everywhere. Gain poise, self-confidence. Relax in leisure time. Enrich your life.

Even if you've never played a note, we can show you how to sit down at the piano—or any instrument—and start playing simple pieces right away. NO special "talent" needed. NO tedious exercises. NO teacher. Learn to play by playing real music BY NOTES—popular music, classical, hymns, musical comedy, etc. Pennies per lesson. *(58th year.)*

SEND FOR FREE BOOK


about our famous words-and-pictures lessons used by 900,000 people. No obligation. No salesmen. Just send name and address to:



U. S. SCHOOL OF MUSIC
Studio 154, Port Washington, N. Y.

Name.....

Address.....

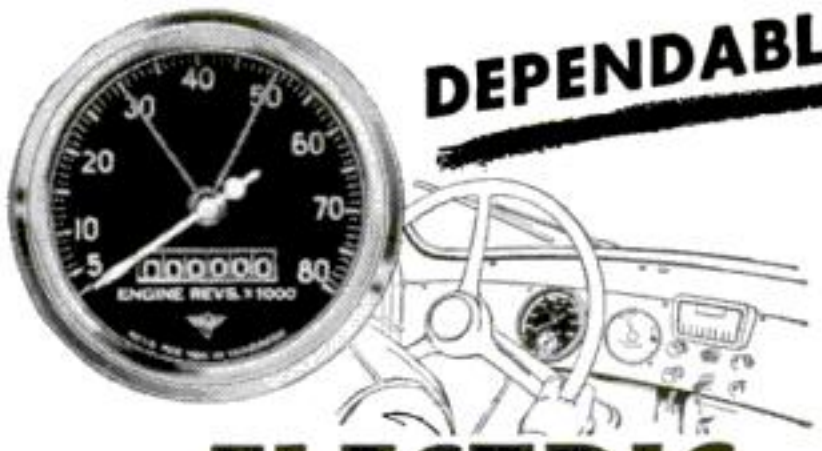

ELECTRIC TACHOMETERS

by Stewart-Warner

Full line! Fills every need. Models for cars, trucks, buses, boats, stationary engines.

Accurate! Positive electric drive assures accurate speed indications.

Reliable! Vibration-proof . . . no flexible shafts, no oscillators.

Easy to read! Large 3" diameter, illuminated dial face. Pointer has full 270° travel.

Exclusive! The only electric tachometer with an odometer. Records total engine revolutions.

See your dealer or write:

STEWART-WARNER
Instrument Division
Dept. P-46, 1840 Diversey Parkway, Chicago 14, Illinois

DON'T THROW IT AWAY

FLEX-O-FIX IT!





PATCH that torn rubber boot, wader, raincoat. **WATERPROOF** leather boots, shoes. **MEND** tents, sleeping bags, clothing. Plug holes in boats and canoes. Repair boat sails and tarpaulins.

Use Flex-O-Fix around home and car, too. **INSULATE** electrical connections, tool handles. Keep rugs, phones from skidding. **REPAIR** convertible car tops, weatherstripping, cuts in tires. **SEAL** leaks around windshields. Stops squeaks, rattles. Squeezes from tube. Dries into tough, elastic rubber. 75¢ a tube at dealers or send 1.00 direct. Prepaid to you.

PYROIL COMPANY, INC., Dept. PS-46
La Crosse, Wis., U.S.A.
Toronto, Canada

AROUND THE WORLD

IN LESS THAN A WEEK

Envelopes flown from San Francisco or New York in the first official U. S. Airmail Route Around the World in June 1947. Scarce, and wonderful additions to your stamp collection. *Either* cover $1.50 or $2.75 for the pair. 5 all diff. US AIRMAIL FIRST FLIGHT covers for $1. or 14 for $2.50 Official P. O. Cachet and backstamps on each. Full refund if not completely satisfied. Let us help you build your cover and stamp collection. Lists free.

K. M. WALSH Box 308 TUCKAHOE, N. Y.



Make Your Own TV REPAIRS!

This Book Can Save You $50 - $100 Per Year

Instructions Compiled Exclusively For Your TV! (Not just a diagram service)

Amazing New T.V. GUIDE with "Magic Memory" will positively repair your set 95% of the time. Patented method automatically tells you tube or part causing trouble. *Tells How to fix in a jiffy!* Works like magic. Revolutionary New "Attic-Master" Antenna included FREE. Outperforms all other antennas—gives you unbelievable MOVIE-SHARP reception. *Install in minutes!* Guaranteed money-back if not worth 10 times the price. Both only $1.95 postpaid. SUPPLY LIMITED. *Write!*

T.V. ENGINEERING CO., Dept PS4, 1036 S. La Brea, Los Angeles 19, Calif.



LEARN LOCKSMITHING

Learn this fascinating, profitable trade from experts in your spare time at home!

Age or physical handicap no disadvantage. **Year around, steady income. Full or part time.** Practical, illustrated lessons. You can make money even while learning! All materials and special tools supplied without extra charge.

Send for **FREE BOOKLET**

LOCKSMITHING INSTITUTE, Dept. PS-76
15 PARK AVENUE RUTHERFORD, N. J.
Lic. by N. J. State Board of Education
Approved for Veterans

RUPTURE



RELIEF...OR YOUR MONEY BACK

Write now for free booklet and pictures of rupture care. You can be helped...work steady, with low cost, easy to wear Web Truss, thousands satisfied.

WEB TRUSS CO. Dept. PS-4, Hagerstown, Maryland

See the Greatest Show on Earth with this

GIANT ASTRONOMICAL TELESCOPE

$15.00 FULL PRICE



Delivered ready for use. Has 45X, 75X and 100 power individually mounted eyepieces with brass focusing tube plus sun projector lens for observing sun spots and solar storms. Steel telescope tube 50 in. long. Rigid 6 ft. tripod adjustable to any height. Steel forked mounting with closely machined aluminum tripod head assembly assures extra fine adjustments. This professional type instrument provides full power with clear vision at all times. See the moons of Jupiter, our own moon, planets, milky way, double stars, star clusters, etc. All for only $15.00 FOB Mattituck. Sent express. COD orders require $5.00 deposit. Satisfaction guaranteed. 200X and 400X eyepieces available at $2.00 ea.

SUFFOLK SCIENCE SERVICE
Dept. TP-4 MATTITUCK, N. Y.

Copyrighted material

SPECIAL! WORLD'S GREATEST TIRE SALE!



Entire stock of our family-safe Top Grade, 40,000 mile Passenger Tires, (worn very slightly) released by Adjusters. Advertised for months at 7.86 ea., NOW at PRICES LISTED BELOW! IT'S CHEAPER THAN OFFERS OF $1. OFF of JUST ORDINARY TIRES! OR EVEN A "FREE" TIRE. "The Blatt Name famous in tires for 40 Years—I don't just repair it, I offer a FREE FAST REPLACEMENT guarantee on ANY defective tire within 12 months, Frt. Excl. CHOOSE YOUR FAVORITE BRAND. Not Recaps.

Foolish to Pay More—Dangerous to Pay Less!

GOODYEAR **Firestone**

U.S. Goodrich, General, Atlas, Lee & others.

FREE This pictured tire ash tray given with 2 or more tires!

12 MONTH TIRE GUAR. & FREE FACTORY-TESTED TUBE

Many of our customers say our tires give as much as 36 MONTHS SERVICE

				DEPENDABLE TRUCK TIRES			
600-16	$5.25	670-15	$5.15	700-20	$ 8.95	600-16(6)	$5.65
650-16	5.65	710-15	5.35	750-20	9.85	650-16(6)	6.45
700-16	5.75	760-15	5.35	825-20	16.55	700-16(6)	7.05
640-15	4.85	800-15	5.65	900-20	15.55	700-15(6)	7.85
700-15	4.95	820-15	5.65	1000-20	17.25	650-20	8.95
475-19	5.35	550-17	5.35	1100-20	17.25	750-16	7.55

WHITEWALLS 50c EXTRA

Lo-Price Used Tires. 12-Month "Free Repair" Insurance Guarantee $3.45 any car

Military Jeep. Full Retread MUD-GRIP Guar. 12-Mos. $8.65 any car

MARVIN BLATT 609 Spring Garden St. Phila., Pa.

MILITARY MUD-GRIP TIRES

AA Guar. 6 Mos.		AAA 12 Months	
900-16	$9.55	900-16	$13.95
750-20	12.95	750-20	17.95

Send Check or M.O. & this ad for FAST shipment, FOB Phila. I personally select your tires—as if my future depended on it. Read that top line again.

ADJUSTING

Men needed in exciting, *fast growing* field of Claims Adjusting. Many Earning Up to $125 Week in this fascinating work. Excellent positions with airlines, railroads, steamship lines, insurance companies and government offices. Also big opportunities for your *own spare time business*. Easy to learn. We train you at home. Send TODAY for FREE book.

UNIVERSAL SCHOOLS

University Park, PS-4, Box 8202, Dallas 5, Texas

TASOPE PHOTO-ENGRAVING PLANTS



MATERIAL COST OF THIS CUT ¾¢ SELLING PRICE $1.00 AND UP

Establish your own profitable PHOTO-ENGRAVING business. Make cuts for newspapers, printers, and advertisers. Make etched name plates, plaques etc. Instructions furnished, no experience necessary. Sold direct from factory since 1931. First five hundred cuts sold locally or by mail will pay for plant and pay you well for your time. Write for FREE catalog.

TASOPE, DEPT. PS-4, AURORA, MO.

GROW ORCHIDS AT HOME


BIG PROFITS SPARE OR FULL TIME

YEAR 'ROUND ANY CLIMATE NO EQUIPMENT

World's most thrilling hobby—profitable home business. Single Orchid plant may multiply into many—each as valuable as the first. Successful home grower shows you how! Raise gorgeous Cattleyas, Cymbidiums, Epidendrums, on living-room table. Big-profit orders come from friends, neighbors, florists, etc.—also Mail Orders. Illustrated secrets of the experts in simple "show-how" language AND blooming-size Orchid plants sent at NO RISK. Everything you need to start—for pleasure or profit. FREE—full details—SEND NO MONEY. Write today. TROPICAL FLOWERLAND, Dept. 24 4622 Wilshire, Los Angeles 5, Calif.

Need an extra $1,000, $2,000, or more? Make it with an

IDEAL LAWNMOWER SHARPENER

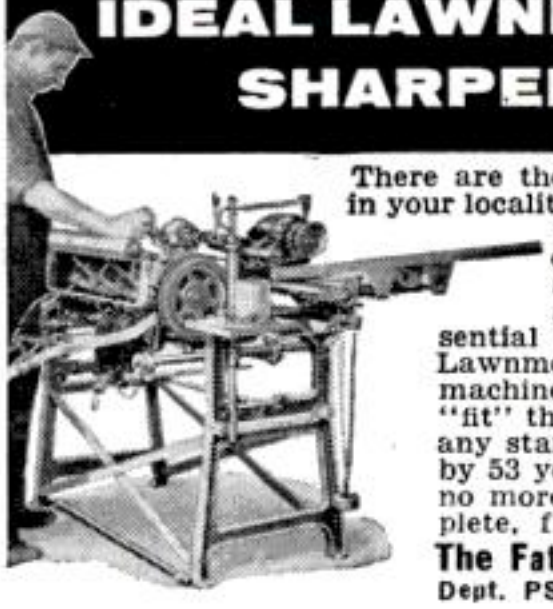

There are thousands of lawnmowers in your locality; Average $1,000 profit per 250 mowers with customer satisfaction and repeat business assured. Provide this essential service with an Ideal® Lawnmower Sharpener, the only machine that grinds the reel to "fit" the bed knife. Compare by any standard. The Ideal, backed by 53 years of experience, costs no more. Write today for complete, free catalog.

The Fate-Root-Heath Company,
Dept. PS-4 Plymouth, Ohio

"I'LL RIPPLE YOUR BODY WITH MUSCLES — LOAD T-N-T IN YOUR FISTS"

says Joe Louis



Add solid new muscle to your body. Guaranteed in 10 days.

Ten Champions are ready to help you build a body that men respect and women admire. They know you want action and they promise it fast...in their medically approved Conditioning Course.

Joe and other great Champions guarantee that in just ten days you'll feel better . . . be more aggressive. With their special Exercises you'll pack more power and gain new confidence — for only $1.00—or your money back.

Your mirror will show new muscles in only ten days. That's the promise of world Champions.



ONLY $1.00

LET GREAT STARS HELP YOU...



WHITEY LOCKMAN explains his sure-fire method to stimulate circulation and loosen you up for action . . . . . LOTS OF FUN



YOGI BERRA, the American League's most valuable player builds up your confidence . . . QUICK



KID GAVILAN sharpens your reflexes . . . develops stamina and toughens your body with his training camp workout . . . . WITH LITTLE EFFORT

EXTRA! You'll also receive exciting material from the Champions' Manly Art of Self Defense Home Course . . . . . IT'S TRULY AMAZING

FREE—Joe Louis' 24 page "Fight Secrets," free, if you act at once.



The National Sports Council, Dept. Q-46
33 West 46th St., New York 36, N. Y.

Enclosed $1 for the Planned Conditioning Course of the Champions. I must see results in 10 days or my money is refunded immediately. Fight Secrets is free.

NAME_____

ADDRESS_____


CITY_____ STATE_____

MAIL COUPON TODAY

Copyrighted material

Finest you can buy!

WISS

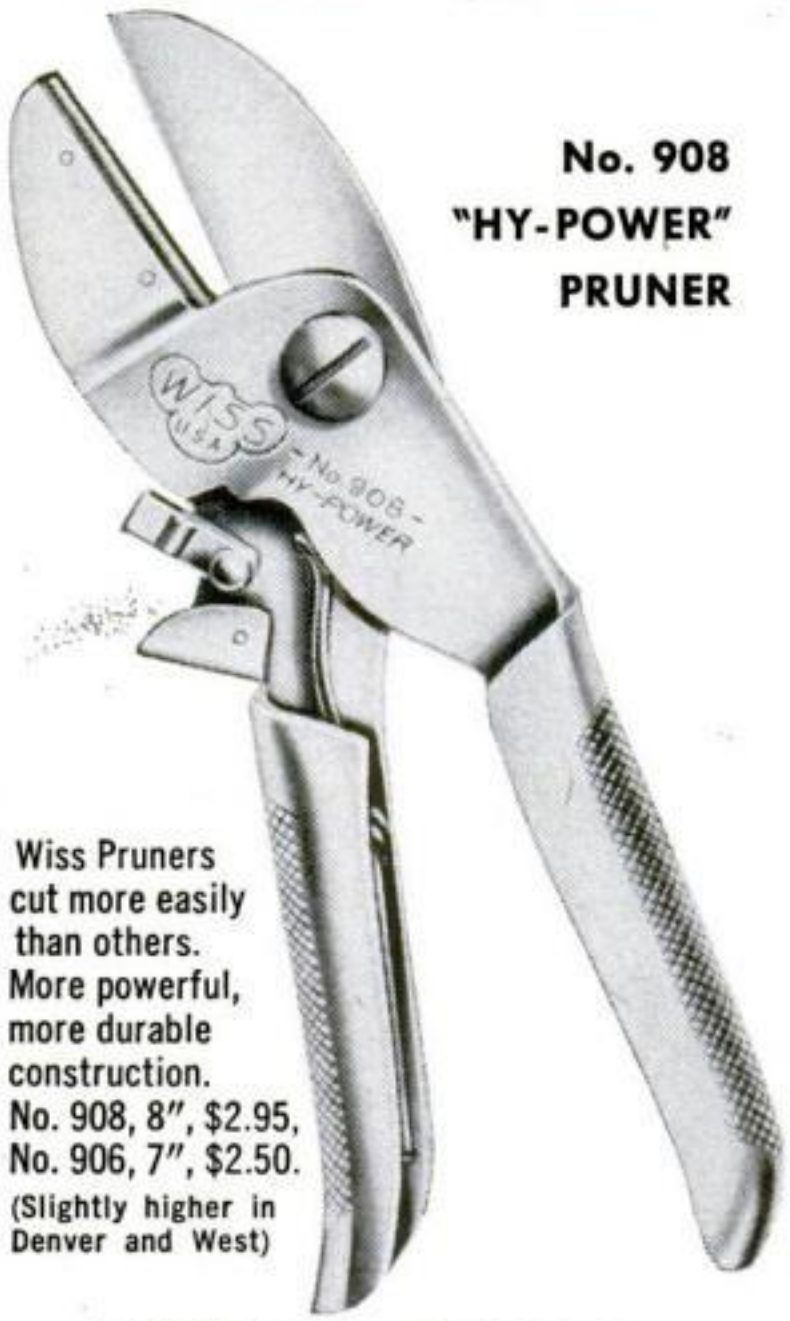

No. 908
"HY-POWER"
PRUNER

Wiss Pruners cut more easily than others. More powerful, more durable construction.
No. 908, 8", $2.95,
No. 906, 7", $2.50.
(Slightly higher in Denver and West)

J. WISS & SONS CO.,
Newark 7, N. J.

LAW

Men and Women STUDY AT HOME for Business Success and LARGER PERSONAL EARNINGS, 44 years expert instruction—over 114,000 students enrolled. LL.B. Degree awarded. All text material furnished. Easy payment plan. Send for FREE BOOK —"Law and Executive Guidance"—NOW!


AMERICAN EXTENSION SCHOOL OF LAW
Dept. D-12, 201 North Wells Street, Chicago 6, Ill.

NEW CONVENIENCE AND BEAUTY
NEW HULL AUTO COMPASS



Enjoy greater-than-ever-convenience with the NEW Hull Auto Compass . . . easier installation, easier compensation, easier reading. Its sparkling, new beauty of styling is easy to admire, too. At better dealers everywhere. Write for literature.

NEW COMBINATION MOUNT STANDS ON DASH, OR HANGS FROM WINDSHIELD MOULDING OR GLASS

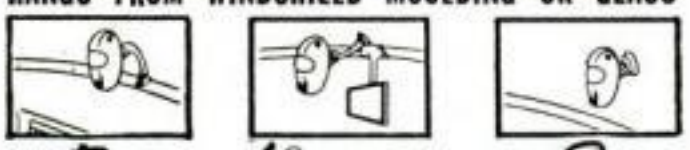




Beaconlite® illuminated $6.50

Streamline non-illuminated $4.95

HULL MFG. CO. P. O. Box 246 E-4 WARREN, OHIO

YOURS FREE!

VUER-PROJECTOR & Full Color Slide Kit—Authentic $4.95 Value!



If You're Interested In

BREEDING TROPICAL FISH
For Profit & Pleasure

This handsome, precision-viewing instrument and color slides are yours FREE—just for showing your *interest* in Tropical Fish Breeding! See gorgeous BETTAS, colorful TETRAS, exotic ANGEL FISH, etc., in the vibrant beauty of full color! Convince yourself Tropical Fish Breeding *is* the *profitable, easy-to-start* home business for you! Breed them in your living room, spare-room, *anywhere. Success is assured because we'll buy every fish you produce!* No expetience or costly equipment needed. Start spare-time, on a "shoestring"...build a $10,000 home business! Investigate!

Write today for FREE details on "Profit-Proven" Success Plan & Vuer! (If under 17, ask for plan A.)



TROPICAL FISH BREEDERS OF AMERICA
Dept. C-4
Los Angeles 61, Calif.



GIANT BALLOONS

They're really BIG—surplus U.S. Govt. (new overage) Neoprene weather, target balloons. GREAT FUN in the backyard; at parties, picnics, dances, fairs. TERRIFIC for high school and college PROMS. They attract BIG CROWDS to business openings, civic events, conventions, exhibitions, trade shows. ORDER TODAY! Approx. inflated sizes:

18" dia., 3 for 70c
3 ft. dia., 49c—5 ft. dia., 99c
10 ft. dia., $1.59—13 ft. dia., $1.95

Postage paid on prepaid orders. Calif. residents please add sales tax.

VOLUME SALES CO. WAR ASSETS DIV.
Dept. PS-456, 3930 Sunset Blvd., Los Angeles 29, Calif.

PEE WEE BATTERYLESS TUBELESS **"LIFETIME" RADIO**



REALLY WORKS—FOR LIFE! Works WITHOUT TUBES, BATTERIES OR ELECTRICAL PLUG-INS. Will never run down or burn out! World's smallest, SMALLER THAN A PACK OF CIGARETTES! GUARANTEED TO RECEIVE LOCAL RADIO STATIONS ANYTIME — ANYWHERE YOU GO! **Sensational new Ferrite Selective Tuner** — Perma-Crystal diode, Super SPEAKER-PHONE, durable black and gold plastic case. **SEND ONLY $2.00** (bill, ck, mo) and pay postman $4.99 COD postage on arrival or send $6.99 for postpaid delivery. SENT COMPLETE READY TO LISTEN WITH LIFETIME GUARANTEE. Nothing extra to buy—ever. Available only from:

MIDWAY COMPANY Dept. WPS-4 KEARNEY, NEBRASKA

When Writing to Advertisers
Please Mention Popular Science

New! FROM **MARQUETTE**



Model "31" AC
WELDER

Made to order for...

HOME SHOPS
REPAIR SHOPS
115V/230V

WRITE TODAY!

MARQUETTE MANUFACTURING COMPANY, INC.
307 EAST HENNEPIN AVE. • MINNEAPOLIS 14, MINN.

Copyrighted material



GRAVELY



5-HP GRAVELY Makes Tough Jobs EASY!

Gravely does jobs other tractors won't . . . because Gravely has *extra* power for tough mowing, gardening, field, farm jobs.

And you get *more* when you get Gravely: All-gear drive, power reverse, optional starter, power attachments *securely* mounted, quickly interchanged by only four bolts!

PLUS . . . 23 JOB-RIGHT TOOLS!

Your choice of 23 tools . . . used with one versatile tractor that saves you time, work and worry *all year long.* "Power vs. Drudgery" booklet shows how Gravely solves your upkeep and gardening problems.



GRAVELY TRACTORS, INC.
BOX 484 DUNBAR, W. VA.

EASY PAY PLAN

HYPNOTISM

Be Popular Amaze Entertain

Learn to apply Hypnotism and Autosuggestion in short time by training at home, with GUARANTEED RESULTS—DON'T DELAY. Write to America's oldest, most famous Hypnotic school for free information—now—today. Sent in plain wrapper.

SCHOOL OF APPLIED HYPNOLOGY
Dept. 24 120 Central Park South N. Y. 19, N. Y.

NEW BENJAMIN SUPER CO_2 GAS CARBINE — $16.50

HI-LO (2 Stage) Jet Power
Cal. .177 or .22
RIFLED
Shoots
Pellets
& Darts



IDEAL FOR TARGET & SMALL GAME
SAFE – ECONOMICAL – ACCURATE
CONVENIENT – PRACTICAL – NON TOXIC

New Benjamin .177 or .22 CO_2 ROCKET Gas Pistol with HI-LO JET POWER..... $15.00

EASY TO OPERATE—NO PUMPING—NO FLINCHING. Get 40 SHOTS from each 10¢ STANDARD SIZE CO_2 (Soda) CARTRIDGE. Up to ¾" penetration. Ask your DEALER for DEMONSTRATION.

FREE Folder

BENJAMIN AIR RIFLE CO.
852 MARION ST., ST. LOUIS 4, MO., U.S.A.

LEARN MEAT CUTTING AT NATIONAL

Pay After Graduation



The steady dependable trade of Meat Cutting taught easily in 8 short weeks. You LEARN BY DOING under actual meat market conditions in big modern school at Toledo.

For beginners or men with experience. Get a Profitable store of your own. Remember, PEOPLE MUST EAT! Big pay jobs. Free employment help. Thousands of successful graduates.

Buying, cutting, percentage, pricing, advertising, selling, etc. A complete retail meat education. National School established 33 years. Get National training NOW. Pay your tuition in easy weekly payments after you graduate. Get all the facts. Send coupon for FREE 52 page school catalog—TODAY. G.I. Approved.

National School of Meat Cutting, Inc.
Dept. 51-D, Toledo 4, Ohio

Send me your FREE school catalog on National Training at Toledo in Meat Cutting, Meat Merchandising and Self Service Meats. No obligation. No salesman will call.

Name..... Age.....

Address.....

City..... State.....

Approved for training Korean Veterans

Copyrighted material



A BETTER JOB or YOUR OWN SHOP

Make $3 to $5 an hour as you train for big money!

A PRACTICAL NEW WAY TO LEARN

AIR CONDITIONING & REFRIGERATION

Thousands of trained men are needed right now to service the 150 million air conditioning and refrigeration units in use—*and the millions more being sold.* You train at home *in spare time* for a good pay job or a business of your own. *Mail coupon today* for two FREE BOOKS which show how to break into this big, uncrowded field!

23 KITS—Build A Freezer Or Air Conditioner

You get practical training because CTI sends 23 kits. You get motor, compressor, testing gauges, controls, refrigeration hi-side, tools. *You build and keep a freezer, refrigerator, air conditioner or milk cooler as you learn. Get the facts about America's fast-growing industry. Mail coupon today.*

MAIL TODAY FOR 2 FREE BOOKS

COMMERCIAL TRADES INSTITUTE Dept. R-275
1400 Greenleaf Ave., Chicago 26, Ill.
Send me your big FREE books which tell me how I can train at home to make top money in Air Conditioning & Refrigeration.

Name_____ Age_____


Address_____

City_____ Zone____ State_____

Member: National Home Study Council

75c ea. for Finest Imported PRECISION PLIERS

- Flat Nose
- Combination
- Diagonal Cutter
- End Cutting Nippers
- Round Nose
- One Side Flat—One Side Round
- Snipe



FOR JEWELERS, OPTICAL WORKERS, HOBBYISTS, CRAFTSMEN OF ALL KINDS! These superb German instruments are of deep-forged, heat-treated high quality tool steel, fabricated to most exacting specifications. All-over ground and polished to smooth hard surfaces. Smooth working joints with just the right tension. Jaws meet perfectly to safely and securely hold even the most delicate objects in the hard-to-reach corners and angles. Each plier is 4" long and a veritable gem of precision and strength.


75c ea.... all 7 for $5.00 ppd.

AUTOMATIC PUSH DRILL



Does 1001 jobs in home and workshop. Heavy duty automatic push drill; nickel plated; strong, quick spring return. Complete with 8 standard drill points from 4/64" to 11/64" contained in handle. About 9" long. A $5.98 value NOW ..... $2.98 ppd.

CHROME VANADIUM 29 Pc. DRILL SET



Specially made for speed drilling. In sturdy plastic tool roll. Finest alloy steel drills hardened and precision ground to the sharpest, longest lasting cutting edge obtainable; will easily and cleanly bite through hardwoods, plastics, aluminum, iron and the toughest steels. Unconditionally guaranteed for thousands of drillings. Full jobber length.

Sizes by 64th from 1/16 to ½". NOW $6.49 ppd.

Also available with Turned Down Shanks to fit all ¼" drills. In individual pocket roll..... $8.95 ppd.

60 Pc. Set Wire Gauge CHROME VANADIUM DRILLS



Top quality high test Chrome Vanadium Drills designed for speed drilling through toughest steels, woods, plastic, iron and aluminum. Precision ground, long-lasting cutting edges. Guaranteed to give years of satisfaction. A full 60 pc. set nos. 1 through 60.

A $14.95 value—NOW ONLY..... $5.40 plus 35c pp. & hdlg.

Same set above available with Huot Index container—Only..... $6.65 plus 35c pp. & hdlg.

Send check or money order. If C.O.D. fee extra.
Money Back Guarantee.
SCOTT-MITCHELL HOUSE, INC.
Dept. M-176 611 Broadway N. Y. 12, N. Y.



22 YEARS AT THIS ADDRESS

AN ESTABLISHED POLICY OF CAREFUL SELECTION ASSURES YOU MANY HAPPY MILES. BE WISE—TRY ONE—YOU'LL BUY MORE! WE WELCOME COMPETITION. NO ONE CAN TOUCH OUR QUALITY & PRICE! White Walls $1.00 Ex. 50 Years of Combined family experience in High Quality tires. "FREE TUBE", PARTIALLY USED TIRES—12 MOS. WRITTEN GUARANTEE.

DEDUCT $1.00 from every Passenger Tire you buy—Does not include W.W., Truck or Snow Tires

SPECIALISTS IN TRUCK TIRES—Selected for Toughest Jobs—Tops in Value

I FEEL FINE! How Do Your Tires Feel?

600-16	$5.35	475-19	$4.75	700-15(6)	7.15	700-20	$8.95
600-16(6)	5.75	640-15	4.75	750-16(8)	11.95	750-20(10)	15.75
650-16	5.75	670-15	5.15	700-17	7.85	750-20(8)	9.85
650-16(6)	6.45	710-15	5.45	750-17	10.35	825x20	16.65
700-16	5.75	760-15	5.45	825-15	12.95	900-20	15.55
750-16(6)	8.85	800-15	5.75	600-20	8.05	1000-20	15.75
550-18	4.55	820-15	5.75	650-20	8.35	1100-20	17.45
550-17	4.55	670-16	5.35	32x6(8)	11.05	1100-22	18.95
650-15	5.35	760-16	7.05	32x6(10)	13.95	1000-22	16.75
700-15	4.95	700-16(6)	7.15	750-15	10.75	1100-24	22.95

ALL WHITE WALLS $1.00 EXTRA

"EXTRA SPECIAL" Fully Guaranteed all size 4-ply pass. FREE TIRE with 2 or more of these.—W. W. $1.00 Extra Factory Tested Tube given. GIANT TIRE SALE. **$7.35**

Thousands of tires shipped all over the U.S.A. All tires shipped F.O.B. Phila. Send Check or M.O. with this ad. Dept. 5. No C.O.D.

STANDARD 834 N. Broad St., Philadelphia 30, Pa.



KADET 4-WHEEL TRACTOR

LOW IN COST-HIGH IN QUALITY

Tillers, Mowers, Tractors low as **79.50**

This tractor is ideal for Farms, Estates, Schools, Nurseries, Parks, etc. 12 quick-hitch attachments available, including Snow Plow, Sickle Mower, Trailer, Turning Plow, etc.

FREE catalog write Dept. 20

NATIONAL FARM EQUIPMENT CO., INC.
142 GREENE STREET • NEW YORK 12, N. Y.

ROAD TO RICHES

You can be the next uranium millionaire! Government guarantees huge bonus! PRI instruments from $29.95. See your local dealer today! FREE CATALOG!

Write PRI, 4223 PS W. Jefferson
Los Angeles 16, California



REAL ESTATE

BE A BROKER

PAYS BIG! SEND FOR FREE, BIG, ILLUSTRATED CATALOG NOW! Graduates report making substantial incomes. Start and run your **own business quickly.** Men, women of all ages, learn easily. Course covers Sales, Property Management, Appraising, Loans, Mortgages, and related subjects. **STUDY AT HOME** or in classrooms in leading cities. Diploma awarded. Write TODAY for free book! No obligation.

FREE BOOK TELLS HOW

Approved for World War II and Korean Veterans

WEAVER SCHOOL OF REAL ESTATE (Est. 1936)
20205 Grand Ave. Kansas City, Mo.

CABINET MAKING



LOW COST HOME TRAINING COURSE FOR BEGINNERS & ADVANCED CRAFTSMEN

Make money. Learn skills and secrets of fine woodworking and tool use. Professionally prepared shop method training tells and shows how. Covers everything. Easy to master.

Write for Free Booklet

INTERSTATE TRAINING SERVICE
DEPT. F2, PORTLAND 13, OREGON

More Fun AND BOATS

Standout light-weight design
Choice of 6 trim models

Save nearly 20%

Buy Direct·Get More·Pay Less!

SAFE ★ RUGGED ★ STYLISH CAR-TOPPERS!

Modified Vee hull, full keel and runners, rub-rails, reinforced ribs and special transom for top outboard performance; rivet-locked aluminum, seams lapped and sealed; seats Styrofoam filled; greatest safety; lowest upkeep; no caulking.

WRITE FOR COMPLETE DETAILS TODAY!



AQUALINE BOAT Corporation
YORKLYN 4, DELAWARE • CEdar 9-7549

Copyrighted material

Non-marking **Oil Resistant** crepe soles and heels



Rest your feet as you work! Full cushion insole is soft, resilient, gives snug support, even as you work! Special features: built in steel shank—smooth, brown, genuine cowhide leather uppers. Built for men whose feet take a beating. See them soon.

Ask for

STAR BRAND

Cush-N-Bilt

Work Shoes

For nearest dealer write:

ROBERTS, JOHNSON & RAND

Div. of International Shoe Co., St. Louis 3, Mo.

OWN Your Own Business



$5 per hour

Clean and Mothproof rugs and upholstery "in the home," office, institution. If now employed you can operate in spare time and build a permanent full-time business. Alert dealers can gross $5 hourly profit on own service plus $3 on **EACH** serviceman. We locally train and assist you right in your town. Easy to learn—quickly established.

DURACLEAN cleans by absorption. No scrubbing, soaking or shrinkage. Dirt and grease vanish . . matted pile rises . . colors revive. Furnishings used again same day.

DURAPROOF makes fabrics resistant to moths and carpet beetles. Your service backed by an International Money Back 6 Year Warranty.

We furnish enough material to return your total investment. Easy terms. Send for **FREE** booklet TODAY.

DURACLEAN CO.

Duraclean Bldg., 6-184 Deerfield, Ill.

SEND FOR

Free Record



START SPEAKING

FRENCH OR SPANISH

ALMOST OVERNIGHT!

HERE'S the easiest way to learn FRENCH, SPANISH, Russian, German, Italian, Japanese or Brazilian. Listen to FREE 2-sided non-breakable record. Let your eyes follow words in FREE sample lesson. Almost at once you'll be chatting in a new language **with a perfect accent! That's all you hear!** No dull, tedious work. Just listen—imitate! It's that easy! Offer may end soon. Rush 25c to help cover cost of special packaging, shipping. State language you want. We'll also send free information on full Cortina course.

CORTINA ACADEMY, Dept. 124, 136 W. 52nd St., New York 19.



Is your car getting 'grey' prematurely?

KEEP IT SPARKLING LIKE NEW!

LET CHOLDUN "MAGIC" CHEMICALS DO THE WORK!!

Wash, wax and clean your car with same Choldun "MAGIC" Chemicals used daily in speedy, professional AUTO LAUNDRIES throughout the country. Take the hard work out of keeping your car sparkling like-new. Do it like the money-making, time-saving "professionals"!

"PURPLE MAGIC" — Washes as it Waxes, Shines as it Dries! Cuts car-washing time in half! Not a soap or detergent. Amazing Vegetable Formula contains Vegamin Wax. Two bottle caps sudsed up in bucket of water washes off most stubborn road grime, bugs, tar, tree sap. 8 oz. bottle $1.

"WHITE MAGIC" — Insures dazzling, brighter white-wall tires! Easy-to-use. Simply spray on (with handy sprayer attached). Cleans, bleaches, whitens. Non-caustic. Contains rubber-based "Aqua Silicate." 16 oz. bottle $1.

"LEATHER MAGIC" — Cleans brighter, softens faster, protects better — all with one easy application. Anti-static additive eliminates annoying shocks when sliding in and out of your car. 16 oz. bottle $1.

SPECIAL INTRODUCTORY OFFER: If your favorite Service Station, Car Dealer, Auto Accessory, Department Store or Super Market is out of stock—use coupon below. Order all three for $3.00 and receive FREE Chrome Rust Remover and Chrome Polish Kit worth $1.70 . . . A $4.70 value for $3.

CHOLDUN MFG. CORP., **331 East Street, New** Haven 11, Conn.

SEND ME ☐ "PURPLE MAGIC" at $1.00 ea.
☐ "WHITE MAGIC" at $1.00 ea.
☐ "LEATHER MAGIC" at $1.00 ea.
☐ ALL THREE for $3.00 . . . plus FREE $1.70 CHROME KIT

(Attach coupon to letter. PRINT NAME & ADDRESS. Enclose check or Money-Order. No C.O.D. We pay postage. Satisfaction Guaranteed or Money Back.)

Copyrighted material

The New Model 70 UTILITY TESTER

FOR REPAIRING ALL ELECTRICAL APPLIANCES MOTORS • AUTOMOBILES • TV TUBES

As an electrical trouble shooter the Model 70:



- Measures A.C. and D.C. Voltages, A.C. and D.C. Current, Resistances, Leakage, etc.
- Will measure current consumption *while the appliance under test is in operation.*
- Incorporates a sensitive direct-reading resistance range which will measure all resistances commonly used in electrical appliances, motors, etc.
- Leakage detecting circuit will indicate continuity from zero ohms to 5 megohms (5,000,000 ohms).
- Will test toasters, Irons, Broilers, Heating Pads, Clocks, Fans, Vacuum Cleaners, Refrigerators, Lamps, Fluorescents, Fans, Switches, Thermostats, etc.
- Will test *all* TV tubes for open filaments, inter-element shorts, burned out tubes, etc.

As an Automotive Tester the Model 70 will test:

• Both 6 Volt and 12 Volt Storage Batteries • Generators • Starters • Distributors • Ignition Coils • Regulators • Relays • Circuit Breakers • Cigarette Lighters • Stop Lights • Condensers • Directional Signal Systems • All Lamps and Bulbs • Fuses • Heating Systems • Horns • Also will locate poor grounds, breaks in wiring, poor connections, etc.

Handsome round-cornered molded bakelite case, 3⅛" x 5⅞" x 2¼". Complete with all test leads. Also included is a 44 page book giving detailed instructions. for testing all electrical appliances, automotive equipment, TV tubes, etc. Only **15.85**

SHIPPED ON APPROVAL

NO MONEY WITH ORDER—NO C.O.D.

Try it for 10 days before you buy. If completely satisfied then send $3.85 and pay balance at rate of $4.00 per month for 3 months — No Interest or Finance Charges Added! If not completely satisfied, return to us, no explanation necessary.

MOSS ELECTRONIC DIST. CO., INC.
Dept. D-225 3849 Tenth Ave., New York 34, N. Y.

Please rush 1 Model 70. I agree to pay $3.85 within 10 days after receipt and $4.00 per month thereafter.

Name_____

Address_____

City_____ Zone___ State_____

DO IT YOURSELF

DEGREASER!

engine shampoo

QT. SIZE CONCENTRATE MAKES 2 GALLONS





SPRAY OR BRUSH ON . . .

Takes cling out of oil and grease . . . emulsifies it . . . so that all dirt may be hosed off as easily as you rinse hands under water faucet. Launders engines faster, more completely, and safer than steam cleaning (warm the engine). Self scouring action brings out factory new appearance . . . provides accurate visual inspection . . . Gunked engines run cooler. Genuine Gunk is sold in BULK sizes at better automotive wholesalers everywhere. Retail sizes sold at *WESTERN AUTO STORES* and *ASSOCIATE STORES*. TRY IT TODAY! P.S. 456

The CURRAN CORPORATION, Lawrence, Mass.

Work, Sleep, Play In Comfort

Without Nagging Backache

Nagging backache, headache, or muscular aches and pains may come on with over-exertion, emotional upsets or day to day stress and strain. And folks who eat and drink unwisely sometimes suffer mild bladder irritation . . . with that restless, uncomfortable feeling.

If you are miserable and worn out because of these discomforts, Doan's Pills often help by their pain relieving action, by their soothing effect to ease bladder irritation, and by their mild diuretic action through the kidneys — tending to increase the output of the 15 miles of kidney tubes.

So if nagging backache makes you feel dragged-out, miserable . . . with restless, sleepless nights . . . don't wait . . . try Doan's Pills . . . get the same happy relief millions have enjoyed for over 60 years. Get Doan's Pills today!

POWERFUL! LOW COST!

Light • Rugged • Maneuverable

America's best tractor value. More useable power -- pulling, pushing, driving. 770 lbs. Pulls 12" plow. Gear Drive 8.4 Hp. B&S engine. Roller Bearings. B&W 4 speed Trans. Clutch, Diff. Full line implements. 100% satisfaction guaranteed.

Write for FREE CATALOG


COUNTRY SQUIRE TRACTOR CO.

P. O. Box 107-A-4
Muskego Wisconsin

COUNTRY SQUIRE TRACTOR



6.95



FREE WIN A TRACTOR WRITE FOR ENTRY BLANK NOTHING TO BUY **FREE**

HEAVY OILIPH-BALL BEARINGS PUMPS MILLIONS OF GALS.

IRRIGATE, SPRAY, DRAIN OR FILL ANYTHING—ANYWHERE! Will not Rust—Clog—or Leak. Patented Seal. Pumps 2800 gph, 420 gph at 75' high or 1600 gph from 25' well. Six blade impeller. Threaded for pipe. ¾ inlet, ½ outlet. Use ⅛ to ¾ hp motor . . 7500 gph 9.95
Heavier 2800 gph 8.95 Heavier 11.95

Check, MO or COD—Money Back Guarantee

FREE Literature—Comparison Charts

U.A.T. MFG. & ENG. CO. HICKSVILLE 273, NEW YORK

MEN WANTED

Earn $100 Per Week and up

AUTO DIESEL MECHANICS

Master a trade with a future—learn Auto-Diesel mechanics in our shops. You learn with tools on real equipment. Earn while you learn. Many of our graduates earn $100 per week and up. No previous experience necessary. Day and night courses. Approved for veterans. Write for free bulletin.

NASHVILLE AUTO-DIESEL COLLEGE

226 7th Ave., N., Dept. 41 Nashville 3, Tenn.

SHOOT "BAZOOK" HI-POWER SLING GUN!!

TOPS FOR HUNTING AND TARGET FUN

SHOOTS EVERYTHING — Arrows, nails, steel balls, pebbles, mud, etc.



PATENTED

$1.95 ppd. No C.O.D.

(350 - ¼" stl. balls $1)

PISTOL ACCURATE, RIFLE FAST. SAFE INDOOR with soft clay balls. POWERFUL gum rubber sling. GUARANTEED. Quick delivery. Extra rubber and ammo. included.

ORDER NOW • UMACO MFG. CO., P.O. Box 4133-W, LONG BEACH, CALIF.

PUMP FASTER with a "HY-JET"!

Made of aircraft grade aluminum alloy, this rugged #10 centrifugal pumps up to 4500 G.P.H. Ideal for irrigating—draining—filling—spraying. Uses 1/6 to ¾ H.P. motor. Rust-proof ½" shaft, oil-less bearing, ¾" suction, ½" discharge, std. pipe threads, adaptable to garden hose **$8.95**

Heavy-Duty HY-JET #20 fills and empties pools, ponds, etc. Extra powerful—up to 8000 G.P.H. Use ¼ to 3 H.P. motor. Rugged, rust-proof ½" shaft, oilless bearing, 1¼" suction, 1" discharge, std. threads **$11.95**

Prepaid if cash with order. Send Check or M.O. $2 deposit if COD. Money-back guarantee.



MACK EQUIPMENT & MACHINE CO.

327 No. Indiana Ave. Atlantic City, N. J.

Copyrighted material

MAGIC MAIL PLAN

that comes with this Little Machine
CAN MAKE YOU $5.00 AN HOUR



Write today for free facts about the newest and most fascinating of all new home operated businesses. For the first time, a simplified machine brings the fabulous profits of Plastic Sealing and Plastic Laminating within reach of the small operator. Anyone can learn to operate it with a few minutes practice. Then—with our MAGIC MAIL PLAN—can get mail orders pouring in daily with cash in every envelope.

No Canvassing or Selling

Fill orders at home in spare time to start. Then expand to full time business. We even supply circulars to bring back cash and orders. Rush name for all the facts you need to start. A postcard will do. No charge.

WARNER ELECTRIC CO., Dept. L-94
1512 Jarvis, Chicago 26, Illinois



I Made $14,839 in 1 Year SERVICING RADIATORS!

Rex Ryan (Iowa) and hundreds of others earn $8,000-$20,000 a year servicing auto-truck-tractor radiators the Inland way. Inland, largest radiator servicing equipment mfgr., offers the complete package — equipment, merchandising, "Pays-for-itself" financing, and Free training school for customers.

WRITE for FREE Radiator Servicing Folder.

INLAND MFG. COMPANY Dept. PS-4 1108 Jackson St., Omaha 2, Nebr.



HYPNOTISM
This New Easy Way

Be trained in your own home by a MASTER HYPNOTIST! Step by step exercises, clearly explained and illustrated, on a set of unbreakable long playing 33⅓ RPM records—all for only **$9.95.** GUARANTEED to have all the tools necessary to become an ACCOMPLISHED HYPNOTIST. Nothing to read, nothing else to buy! Check or money order to!

(Copyright) **UNIVERSITY WORKSHOP**
1625 Broadway, New York 19, N. Y.

---

150 MILES PER GALLON!

In starting your car, you can use up as much gas as it would take you to drive to work. **TO STOP THIS NEEDLESS WASTE, INSTALL THE AMAZING NEW SPARK INTENSIFIER TODAY!** TRY IT! You'll get quick starts, better mileage. Easily fitted into the center hole of any distributor cap, it controls pre-ignition detonation and ping, by metering out built-up voltage charge at proper instant for top efficiency. Give it the **acid** test. If you can't feel the increase in power and starting pep, send it back for full refund. Send **$2.00** today. FERRARI, 11365 Matteson Ave., Dept. PS-4, Los Angeles 66, Calif.



AMAZING ART OFFER!
LEARN TO DRAW

Your big chance to make extra money — art as a high pay career, or part-time to increase your present income.

SIMPLE: Hollywood Artists Course is a simplified series of professional art lessons —most effective, fastest, easiest for you!

Five famous condensed study books: Figure Drawing, Cartoons, Perspective, Water Colors, Oil Painting. All illustrated. Over 100 illustrations only $1.00 postpaid. Never again at this low price for ALL 5 Art Booklets. Money back guarantee.

Send $1.00 cash, check, or money order (no C.O.D.). You will receive your 5 art study courses postpaid. ACT NOW . . . a fascinating hobby, and a profitable career can be yours. HOLLYWOOD ARTISTS, P.O. Box 226, Lincoln Heights Station, Los Angeles 31.

NAME_____

ADDRESS_____

FREE PLAN

Tells How to Start Your Own Business

FILING SAWS



Saws come from 20 and 30 miles

"I rented a two-car garage and have all the work I can do. Some days I start 6:30 in the morning. I get work 20 and 30 miles from my place of business." —Charles H. Smith

Files Thousands of Saws in Spare Time

"I have done 4 or 5 thousand saws in my spare time in the 4½ years since I got the outfit, and they are all coming back with repeat orders."—Len Crego.

FOLEY FILED SAWS BRING NEW CUSTOMERS

Here is a steady repeat CASH business you can start in your own basement or garage and make up to $3 or $5 an hour in your spare time. Every saw you sharpen with the machine accuracy of the Foley Saw Filer is an ad that brings more customers. S. M. Hollingshead wrote to us: "I am doing very well with my Foley Filer, and I am glad I invested in your machinery. It is very satisfactory and works very well in the small community in which I live."

You can file all hand saws, also band and crosscut circular saws on the Foley Saw Filer. The adjustments are simple—there is no eyestrain—and you can start right away to turn out perfect cutting saws. "The first saw I sharpened with my Foley Saw Filer came out 100%. I think it is a marvel of perfection."—writes Clarence E. Parsons.

"MONEY MAKING FACTS" explains how you can get business from hardware stores, home owners, farmers, carpenters, schools, mills, factories, etc. Just think—with a modest investment, no overhead, no stock of goods to carry, you can start right in on a cash business that will help pay the rent, buy groceries, or a new car. Get the facts—send coupon today for this practical, money-making plan. No salesman will call.



Send for FREE BOOK

FOLEY MFG. CO., 419-6 Foley Bldg., Minneapolis 18, Minn.

Send me free book **"MONEY MAKING FACTS"**

Name.....

Address.....

Copyrighted material

PREPARE FOR BETTER JOB, BIGGER PAY IN SPARE TIME AT HOME

Today, choose the job you want—and prepare for it in time you might otherwise waste. Or if you are already in the work you like best, start training now for quicker promotion and increased pay. During more than 50 years AMERICAN SCHOOL has helped ambitious people to reach higher goals. Check subject that interests you and mail coupon for full information.

AMERICAN SCHOOL, Dept. G446, Drexel at 58th, Chicago 37, Ill.

Without obligation, please send FREE and postpaid, full particulars about the subject checked below.

- ☐ Accounting
- ☐ Apprenticeship Courses
- ☐ Architecture & Building
- ☐ Automotive Technician
- ☐ Better Foremanship
- ☐ Bookkeeping
- ☐ Business Management
- ☐ Civil Engineering
- ☐ Contracting
- ☐ Diesel Technician
- ☐ Drafting—Building Trades
- ☐ Drafting—Machine Trades
- ☐ Electrical Engineering
- ☐ Electricity—Practical
- ☐ Electronics—Industrial
- ☐ HIGH SCHOOL COURSES
- ☐ Mechanical Engineering
- ☐ Mechanical Technology
- ☐ Metalworking Courses
- ☐ Plumbing—Practical
- ☐ Private Secretary
- ☐ Retail Merchandising
- ☐ Salesmanship—Outside
- ☐ Sheet Metal Work
- ☐ Tool Making

NAME.....OCCUPATION.....

HOME ADDRESS.....AGE.....

CITY.....STATE.....

Canadians: Write American School, Dept. G446, 1610 Sherbrooke St. W, Montreal

MAIL COUPON NOW

105 POWER SUPER TELESCOPE



Everything for the Astronomer, Hobbyist, Student, & Scout in this complete astronomical super value telescope combination. Comes ready for immediate use, consists of brilliant 33X—65X—105X telescope, 3 foot hardwood Tripod, carrying case for scope. Star Explorer map, 108 page book "Discover the Stars." 3 foot telescope (closes to 16 inches) is brass bound, has 4 precision lenses that will bring distant objects, people, moon, stars, ships, etc., 105 times closer, 11,025 area magnification. All images erect. Sturdily built tripod is equipped with universal mount that has 360 degree horizontal range & 180 degree vertical range. Locks in any position with one simple adjustment. The Star Explorer map enables you to find any star automatically. This marvelous all purpose instrument is proclaimed by Scientists as a most unusual development. Everyone that has used it is amazed at its performance and value. It will fascinate the entire family. Shipped to you complete, nothing else to buy, at the amazing low price of.....

$11.95 POST PAID

Satisfaction guaranteed or money refunded. We pay all delivery charges. Send check or money order to DEPT. PS510

CRITERION CO. 331 CHURCH ST., HARTFORD 1, CONN.

Would You Like to Make $1,000 A MONTH?

That's what Stanley Hyman made selling the amazing new PRESTO Fire Extinguisher!



Stanley Hyman




Science's New Midget Miracle—"PRESTO"

AMAZING new kind of fire extinguisher does job of bulky extinguishers that cost 4 times as much. Ends fires fast as 2 seconds. Fits in palm of hand. Never corrodes. *Guaranteed for 20 years!* Sells for only $3.98! Show it to owners of homes, cars, boats, farms, etc., and to stores for resale—make good income. Write for FREE Sales Kit. No obligation.

MERLITE INDUSTRIES, Dept. P-16E, 114 East 32nd St., New York 16, N. Y. *In Canada: Mopa Co., Ltd., 371 Dowd St., Montreal 1, P. Q. (If you want a regular Presto to use as a demonstrator, send $2.50. Money back if you wish.)*

FIND HIDDEN RICHES!



NOW—find buried treasure, gold, silver, and metal objects, with sensational 3½-lb. locator—GOLDAK'S "FIND-IT" . . . only $49.50 complete with earphones, batteries, instructions.

Manufacturers of metal detection devices since 1933

Write for FREE literature full line metal, mineral locators; geiger and scintillation counters.

GOLDAK CO. 1544 W. Glenoaks Blvd., Glendale, Calif.

WHOLESALE!

NATIONALLY FAMOUS Power tools, appliances, typewriters, watches, diamond rings, jewelry, tape recorders, musical instruments, phonographs, guns, cameras, shavers, sewing machines, etc. Big illustrated color catalog! Earn big profits! Details about unique self-operating sales plan included.

30 to 80 % DISCOUNTS!

CONSOLIDATED DISTRIBUTORS
21-06 LAFAYETTE, PATERSON 23, NEW JERSEY

Stammering?



BREAK THAT HABIT NOW!
SUCCESSFUL EMERY CORRESPONDENCE COURSE FEATURED IN NEWSWEEK & MEDICAL RECORD. WRITE TODAY FOR FREE INFORMATION.

EMERY INSTITUTE
P.O. Box 867-PS-4, Winter Park, Florida

MODERN TRANSPARENT ROOF



Plates Repaired $5.00

Genuine Dupont Plastic NEW FALSE PLATE

From Your Old, Loose Plate
NO IMPRESSIONS NEEDED

New, revolutionary Duplication System actually transforms your old, loose, cracked, chipped plate into a new, natural-pink Dupont Plastic Plate with same teeth or new, natural matched teeth. ONE DAY SERVICE!

Only $18.95

30-DAY MONEY-BACK TRIAL

SEND NO MONEY—just your name and address for *FREE* details. *Save at our low price!* **Highest prices paid for** Dental Gold. **ALL-STATE DENTAL LABORATORIES, 22 W. Madison, Dept. 856, Chicago 2.**

Better Than Your Own SHOE STORE AT HOME




No investment, no experience needed. Just show magic cushion comfort to friends, neighbors, co-workers. Advance commissions to $4.00 a pair, plus Cash Bonus, Paid Vacation, $25.00 Reward Offer. Outstanding values for men, women, children. Money back guarantee. Shoe samples supplied without cost. Write TODAY for FREE new 84 page catalog and full details.

Two-Eyelet Hit With Cushioned Comfort

TANNERS SHOE CO., 792 BROCKTON, MASS.

Copyrighted material

HERE'S YOUR BIG OPPORTUNITY TO INCREASE BUILDING SKILL!

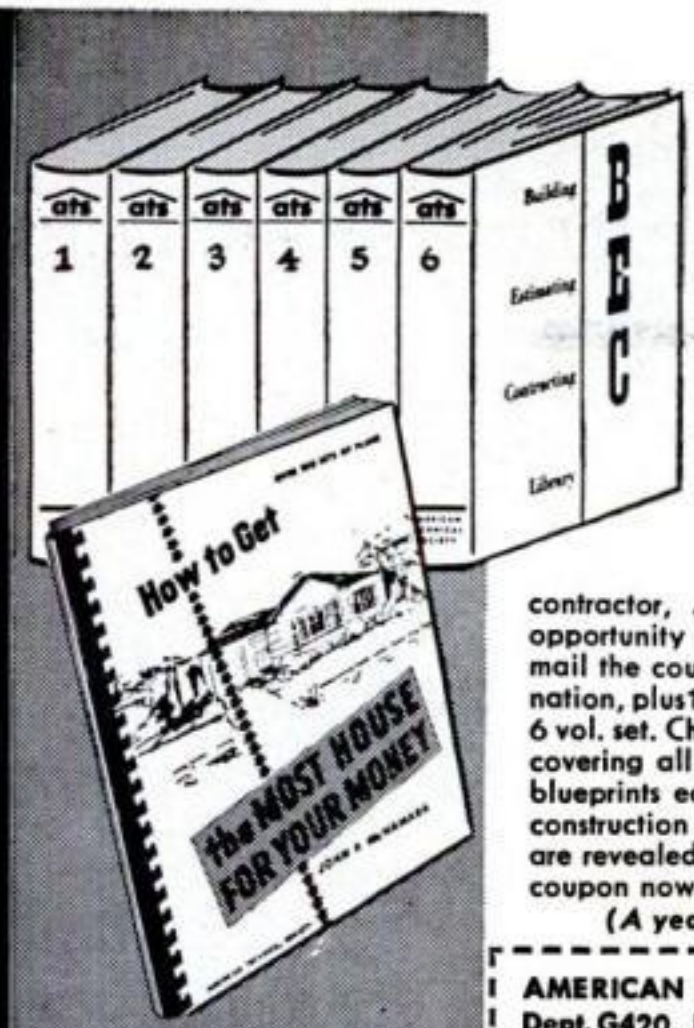

This 182-page idea and fact book, containing 200 pictures and plans, is your FREE bonus book. See offer at right and in coupon.

You will be surprised how much these skill books can add to your earnings

Examine the 6 Volumes at Our Risk! See How Quickly They Help to Solve Many Problems

ACT NOW AND GET FREE BONUS BOOK

• Whether you are carpenter's helper, high-pay craftsman or aspiring contractor, AMERICAN TECHNICAL SOCIETY offers you this no-obligation opportunity which can lead to better jobs and bigger income. Send no money—just mail the coupon and receive 6 authoritative Building Skill Books for 10 days examination, plus182-page Free Bonus Book which is yours whether you keep or return the 6 vol. set. Check through the more than 2400 pages of easy-to-understand information covering all subjects thoroughly, from foundations to final finishing. Learn to read blueprints easily and accurately. Speed up knowledge of how to estimate for new construction or remodeling. How problems can be solved quickly and completely are revealed. Time-saving methods proved by specialists are detailed for you. Mail coupon now.

(A year's consulting privileges given with these books at no extra cost.)

AMERICAN TECHNICAL SOCIETY—Publishers Since 1898
Dept. G420, Drexel Ave. at 58th St., Chicago 37, Illinois

I would like to examine your 6-Volume Set of Building Skill Books. I will pay delivery charges only, but if I choose I may return them express collect. If after 10 days I prefer to keep them I will send you $4 plus postage and pay the balance at the rate of only $5 a month until $39.65 has been paid. The FREE Bonus Book is to be my property whether I keep or return the 6-Volume Set.

Name_____

Address_____

City & Zone_____

Please attach letter giving employer's name and address. If self employed, give business man's name as reference. Men in service please give home address.

REPAIR ANY WATCH



. . . Swiss or American

No previous experience needed to learn *modern watch repair*. An enjoyable hobby or profitable career. Unique Sweazey System starts you making repairs right away. Develops your skill step by step. Teaches you modern shop methods . . . *professional short cuts* . . . mistakes to avoid. Learn by *personal attendance* or spare time *home study*. Individual training. Start any time. *Free sample lesson*. No obligation. Write today!

CHICAGO SCHOOL OF WATCHMAKING
2330 N. Milwaukee, Dept. 446, Chicago 47, Illinois
Founded 1908 • Approved for veterans

JIM NORMAN and Millions did it! So can YOU!



LAST CHANCE Photo Book of STRONG MEN also FREE for quick action

Come on, Pal STOP Being **SKINNY** Like I Was

In 10 MINUTES of FUN A DAY

Quickly **GAIN 25 LBS.** of HANDSOME, POWER-PACKED MUSCLES all over! like I did.



Send for these 5 Picture Courses

ALL 5 **FREE** Before $1 price goes back.

1. How to GAIN MIGHTY ARMS
2. How to GAIN A BIG CHEST
3. How to GAIN A MIGHTY BACK
4. How to GAIN POWERFUL LEGS
5. How to GAIN A GRIP OF STEEL

Send a dime for postage NOW for all 6 AMAZING HE-MEN ITEMS to **JOWETT INSTITUTE**
Dept.PS-64 220 Fifth Ave., New York 1, N. Y.

EARN GOOD MONEY-Spare or Full Time IN A BUSINESS OF YOUR OWN...



SMALL INVESTMENT — NO EXPERIENCE NEEDED

Thousands of men are making big money in their own business. You too, can have a fine income with an assured future in spare or full time with the Universal lawn mower grinder. Investigate our success plan now, it includes everything you need plus facts on how others have earned over $3,600 in one season, working part time. Act now! Mail coupon today!

ROGERS
MANUFACTURING CO.
Lindsey, Ohio

ROGERS MFG. CO., Dept.P-46, Lindsey, Ohio
Gentlemen: Rush me FREE details on easy inexpensive way to get into my own business.

Name_____

Address_____

City_____ State_____

Copyrighted material

BUY DIRECT and SAVE!

You Save the Dealers' and Jobbers' Profits!

COMPLETELY AUTOMATIC "SEA-HORSE" DIVING LUNGS

with exclusive SAFETY features
Complete..Filled..Ready to Use

$169 Value



2-TANK UNIT 99.50
COMPLETE
Approx. 2 Hours Underwater Time

SINGLE TANK Outfit Complete
$110 Value
Approx. 1 Hour Underwater Time
$69

The 2-stage demand REGULATOR automatically releases air as needed; effortless breathing in any position, includes both emergency *and* warning device; New I.C.C. approved TANKS with current dating . . 84 cu. ft. cap. at 2000 psi; standard fittings; can be refilled anywhere; check valves in NON-RETURN MOUTHPIECE keep water out of hose. Complete comfort with full adjustable HARNESS. Rugged, rust-proof construction throughout. Parts and service available. Weight 55 lbs.

FREE Valuable Book on SAFETY in Skin Diving with each Diving Lung.

SIGNED GUARANTEE of SATISFACTION
Send Check or Money Order. If C.O.D., 25% with order. 10% deposit holds your purchase.

Write for Literature TODAY *Club Inquiries Invited*

DIVING INDUSTRIES Division of HONUS WAGNER CO.
Quality Sports Products since 1918
813 Liberty Ave. Dept PS -4 Pittsburgh 22, Pa.



Bird Baths
Jars and Vases
Flower Boxes
Flagstones
Lawn Seats
etc. etc.



Spare-Time Income from Gardencrete

Wherever there's pride of home, there's a place for Gardencrete. That's why the sales field is so broad, and so rich in profit potentials.

Gardencrete is basically made of cement and sand, then Colorglazed in a choice of 30 attractive colors that stay new. Easily washed or scrubbed. Add beauty to every lawn and garden.

On a small investment for molds and Colorglazer you can develop a line of products that sell for two or three times your cost of materials and labor. Easily made in shed or garage. We supply full instructions.

Write for book "Make Money." Describes equipment and gives figures on costs and selling prices on dozens of different items.

Colorcrete Industries, Inc.
711 Ottawa Avenue, Holland, Mich.



The Bird Bath shown above, sells for $6.50. Cost of materials and labor, $2.25. Your mark-up, $4.25.

---

133 PIECE SURPLUS POWER TOOL SET $2



Brand New—U. S. Gov't Surplus
Once in a Lifetime Bargain on Power Tool Accessory Set.
Guaranteed $11.00 Retail Value — Now Yours for only $2.00.
A must for every homeowner, hobbyist, craftsman and carpenter.

12½ Million Tools—Less Than 2 Cents Each

Now the famous Blue Steel Tool Co. can make this fabulous offer because they just bought out an an entire U. S. Gov't. Surplus warehouse—12½ million tools in all. Every single piece is absolutely and completely guaranteed to be of the first professional and industrial quality. If bought separately would cost you at least $11.00. But now yours for only $2.00, less than 2 cents apiece.

You can use this U. S. Gov't. surplus bargain 133 tool set with any electrical drill . . . any flexible shaft . . . any grinder. And here's what you get in this guaranteed $11.00 retail value . . . for only $2.00. Grinding wheels—sanding cartridges and discs—steel cutters—mandrels—burnisher—mounted stones—knife edge rubber wheels, etc.

You'll find thousands of uses for this set around the house, for home repairs, hobby work, tool-shop work, wood, metal and plastic hobby work. You'll use it for sanding, grinding, buffing, polishing, carving, burnishing, etching, milling, cleaning, cutting off, hole cleaning, deburring and hundreds of other jobs.

You must order now to make sure you get this tool bargain of a lifetime.

Send $2.00 and 25c for postage and handling for one 133 piece set—$4.00 for (2) 133 piece sets or $6.00 for (3) 133 piece sets.

Because of the large number of tools we must ask for 25c for postage and handling on all one set orders. We absorb these costs on 2 or 3 tool set orders.
You will refund my money if I am not satisfied.

BLUE STEEL TOOL CO., Dept. M-1, HARTSDALE, N. Y.



DRAW The First Day!

NO LESSONS! NO TALENT!

New Amazing Invention—"Magic Art Reproducer." You can draw Your Family, Friends, Anything From REAL LIFE—Like An Artist. Even If You CAN'T DRAW A Straight Line! Anything you want to draw is automatically seen on any sheet of paper thru the "Magic Art Reproducer." Then easily follow the lines of the "picture image" with a pencil for an original "professional looking" drawing. Also reduces or enlarges. SEND NO MONEY! Free 10 Day Trial! Pay Postman on delivery $1.98 plus postage. Or send only $1.98 with order and we pay postage. Money Back Guarantee.

NORTON PRODUCTS, Dept. 4404WA, 296 Broadway, N.Y.

BIG NEW "MAKE-IT-YOURSELF" *FURNITURE BOOK*

★ Saves You Time, Money!

That's right . . . with the aid of "*How to Build and Repair Your Own Furniture*" you'll make sturdy, handsome furniture at a fraction of what you'd pay in stores! For only $2.49, you get 256 information-packed pages, 759 detailed illustrations, 163 easy-to-do- projects!

MAKE FURNITURE FOR EVERY ROOM IN YOUR HOME!

Hundreds of simplified plans and photos show you how to make or repair tables, chairs, bookcases, desks, bedroom sets, built-in cabinets, shelves, two-way lamps, and tables, and much, much more! PLUS useful tips on mirrors, glass table tops, kitchen appliances, picture frames, rugs, etc.

SEND NO MONEY NOW!

Simply fill in and detach coupon below and mail promptly. On delivery, pay postman only $2.49 (plus postage)—if not completely satisfied after 7-day free trial, return book for money back!

POPULAR SCIENCE PUB. CO., Dept. 456
353 4th Ave., New York 10, N.Y.

Please rush my copy of "How to Build and Repair Your Own Furniture" in the edition checked below. On delivery, I'll pay low price indicated, plus postage. Money-back guarantee after 7-day free trial!

☐ Regular Edition, Linen Finish Kivar, Only $2.49. #96

☐ DeLuxe Edition, Red Duotone Kivar, Silver-stamped, Only $2.99. #7017

NAME .....

ADDRESS .....

CITY & ZONE ..... *STATE* .....

☐ Check here if you remit now. We pay postage. Same return guarantee.

Copyrighted material

U.S. DEPT. OF AGRICULTURE PERFECTS NEW GRASS THAT SMOTHERS CRABGRASS & *STAYS GREEN DESPITE DROUGHT!*



GREEN BEAUTY GRASS Won't Burn Brown! Thrives Under Scorching Sun!

At last, a care-free lawn that *stays* lush green! GREEN BEAUTY MEYER Z-52 ZOYSIA GRASS thrives in hottest weather. Its deep root system (2 ft. or more) holds deep water. Goes weeks without rain or watering. Eliminates ugly brown or bare spots due to drought.

U. S. Government Approved

Credit for amazing Meyer Z-52 Zoysia Grass belongs to U. S. Dept. of Agriculture and the U. S. Golf Assn., Greens Section. After years of research their specialists perfected this amazing grass with advantages never before available. Now thousands of delighted lawn owners all over the country have proven that a GREEN BEAUTY lawn improves year after year.

Chokes Out Crabgrass, Weeds, Needs ⅔ Less Mowing

GREEN BEAUTY Zoysia Grass spreads from root runners to form a dense velvety turf! Grows so thick that crabgrass, weeds, disease, insects cannot live in it. Grows on steep hills, sandy soils . . . even at ocean beaches. Never requires re-seeding. Goes off color after heavy frosts . . . survives sub-zero temperatures . . . reverts to deep rich green each spring. A true winter-hardy perennial! Resists "playground" punishment.

GREEN BEAUTY GUARANTEED TO GROW!

GREEN BEAUTY is the finest pure strain of Meyer Z-52 Zoysia Grass. Guaranteed free of weeds. Shipped fresh from the ground. Processed, packaged and guaranteed to reach you at peak vitality! We guarantee any GREEN BEAUTY sprigs which fail to grow will be replaced absolutely free of cost.

Not Enough for Demand!

There is not enough Meyer Z-52 Zoysia Grass in the ground to supply the fast growing demand. Order now for prompt delivery.

MEYER Z-52 ZOYSIA GRASS
Gives Rich Velvety Turf

- For Present or New Lawns
- Grows Well In Any Soil
- Needs ⅔ Less Mowing
- Never Needs Re-Seeding

FEATURED in LOOK and Other Mags. Also by Godfrey on TV



Easy to Plant. Not Grown From Seed

GREEN BEAUTY comes in runners (sprigs) of living grass. Once planted GREEN BEAUTY's flourishing root runners spread to form a thick velvety turf. ONCE ESTABLISHED YOU CAN TAKE 150 SPRIG TRANSPLANTS FROM EACH SQ. FT. YEARLY.

ORDER BY MAIL AT ADVANCE LOW PRICES

STARTER PKG.....$4.98
Enough to plant 100 sq. ft. set 12" apart

SUBURBAN PKG.....$9.98
Enough to plant 300 sq. ft. set 12" apart

ESTATE PKG.....$24.98
Enough to plant 900 sq. ft. set 12" apart

Enclose check or Money Order. We pay postage anywhere in U. S. Air Mail where necessary. Sorry. No C.O.D.'s.

Write For Prices On Larger Quantities

SPECIAL NUTRI-20 WATER SOLUBLE FERTILIZER
Amazing scientific discovery ideal for shrubs, trees, gardens, lawns. 3 lb. can now $3.75—5 lb. pkg. now $5.00.

ORDER BY MAIL **GREEN BEAUTY ZOYSIA CO., Dept. 10D**
333 N. Michigan Ave., CHICAGO 1, ILL.
225 W. Monument St., BALTIMORE 1, MD.

Over $3,000.00 Monthly
—NET PROFIT!—

($40,000.00 A YEAR PROFIT)

My Income Tax Records PROVE This a Fact

My unique different method can be applied by almost anyone almost anywhere to any sensible mail order speculation. An exciting opportunity. Your easy-to-follow Instruction Manuscript, **"How I Made Over $3,000 a Month"** (every month in the year) selling BY MAIL from my home, will be sent for ONLY $1.00.

California customer writes:

"Through your efforts I am clearing better than $25.00 a day. Everything you have said worked. This past week I have taken in $238.50. Altogether it has taken about *one hour* of my time. *No money* at all. The business is getting better every day."

(Unsolicited letters like above, from customers in many States will be sent with your $1.00 Instruction as undisputed proof of my method.)

Do you want to help fill fantastic demand? One dollar ($1) credited to you, brings complete story and instructions. No time to waste with curiosity seekers . . . answering with post cards or letters.

This Ad MUST Be Returned with Your $1.00 Remittance

I. B. SERVICE

P.O. BOX 248, ROWLEY, MASS.

No need to write, slip THIS AD in an envelope with $1 in any convenient form. Allow 2 to 4 weeks for your shipment to reach you THIRD CLASS, or send 9c service fee for FIRST CLASS or 18c for AIR MAIL delivery.

FREE in appreciation of your promptness, if you send your $1.00 **today**, we will include the famous . . . "The ONE Right Way to Sell By MAIL." **40-PAGE BOOK**

Do it Yourself and SAVE!

MOULDING, PLANING, EDGING, SANDING, JOINTING *On the Job!*

Std. Model ES-1 no blower or fiber hold-downs

Only **$66.50**



Hand-feed Deluxe Bench Model (as shown) 12"x8" Bed Heavy cast, precision ground. Shipping wt. 95#.

Model ED-1 $88.50 Deluxe with blower and fiber hold-downs

Here is the low-cost, hand-feed bench model Moulder-Planer you have been waiting for! Especially designed for the home workshop, hobbyist or specialty woodworking shop, this rugged machine produces fine finishes in equal stock capacities as larger, more expensive models. Selected moulding patterns can be produced in widths up to 5¾". Planing capacity 4"x6" or 11" wide on second pass. *Dealer franchises available.*

Moulder-Planer **HEBERT**

SEND FOR FREE BROCHURE
of Complete Information

EASTMAN FOUNDRY & Machine Co., Inc.
Dept. S456 — 113 Fair Street, Laconia, N. H.
Division of HEBERT MFG. CO., Est. 1912

Copyrighted material


ELECTRICAL WIRING JOBS

Official CODE RULES made clear by PICTURES!

2 GIANT Volumes 3168 Pictures!

now made Easier! Surer! SAFER!

Newest idea in ages! Official National Electrical Code rules made crystal-clear by PICTURES! Books contain thousands of pictures explaining every Code rule, parts of rules, exceptions, etc. Based on latest Code. Shows how to do a right job every time. Saves you time, money, inspection headaches. Pictures are big and clear . . . on 8½x11 page size . . . **over 1600 pages.** Covers things like wiring design and protection, wiring methods, hazardous locations, etc.

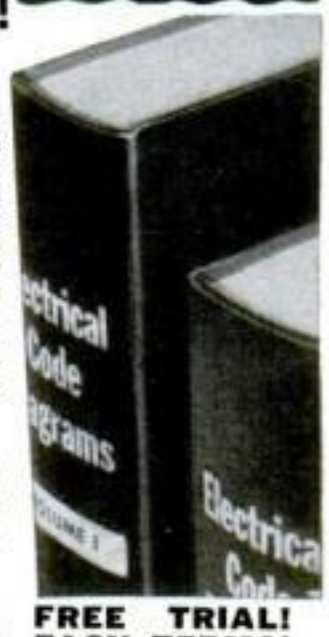

ELECTRICAL CODE DIAGRAMS

A few minutes study a day makes you a real Code expert . . . helps you on the job every day.

- Speeds your electrical planning and installation
- Saves costly errors, expensive violations
- Numbered exactly like Code for quick reference

FREE TRIAL! EASY TERMS!

McGRAW-HILL BOOK CO., Dept. PS-4 *(This offer applies to U. S. only)*
327 West 41st St., New York 36, N.Y.

Send for 10 days' FREE trial Segall's ELECTRICAL CODE DIAGRAMS, 2 vols. If not satisfied, I will return books. Otherwise I will send $5.00, plus delivery charges, then $5.00 a month until $25.00 is paid. (We pay delivery if you remit with coupon; same return privilege.)

Name.....

Address.....

City & State.....

Employed by.....PS-4

I'll Send You This Famous TRAVIS BIKE MOTOR

AT TREMENDOUS 30% SAVING





IF YOU'LL AGREE TO DEMONSTRATE TO YOUR BIKE-RIDING FRIENDS

AMAZING NEW RIDER-DEMONSTRATOR PLAN CAN PAY FOR YOUR MOTOR...AND BRING YOU EXTRA CASH, TOO!

If you'll agree to demonstrate to friends, we'll sell you a rugged, powerful 1½ H.P. world-famous Travis Motor for your own bike at amazing low Demonstrator Price of 30% off! Just ride around town and see how everyone wants a Bike Motor like yours. Only 3 orders and your own Travis is paid for—costs you nothing. Then you keep on making wonderful profits in your spare time!

World's Lowest-Priced Bike Motor... Unequalled Features!

SAFE . . . mounts on front fork away from rider, always under control of bike brakes. **POWERFUL** . . . climbs hills, carries heavy loads. **SMOOTH-RIDING** . . . 2-cycle airplane-type multi-finned air cooled engine, ball bearing construction, **direct** drive to front wheel (no belts or pulleys to break). **LIGHTWEIGHT** . . . only 17 lbs., perfectly balanced. **MOUNT IN LESS THAN 30 MINUTES** . . . anybody can do it with just pliers and screwdriver. FITS ALL BIKES . . . boys' or girls', balloon or lightweight. Motorcycle-type control. Unconditionally guaranteed . . . carries unique LIFETIME Factory Rebuilding Policy.

FREE! Rush name, address NOW for complete details of amazing Rider-Demonstrator Plan that saves you 30% and shows you how Travis pays for itself, makes EXTRA MONEY for you. Everything FREE. No obligation. Write:

TRAVIS "BIKE" MOTOR

TRAVIS PRODUCTS CO., 224 W. Huron, Dept. D-4, Chicago 10, Ill.

we're sorry...



that we have not had the production to supply all the demand for **Life-Time 50,000 Mile Spark Plugs.** New equipment and greatly accelerated production enable us now to make immediate delivery. If you have ordered and your check has been returned, please place your order again. **Life-Time Spark Plug Sets** may be ordered from this advertisement. We will postpay at regular retail price. Specify make, model and year of car. **Set of 6, $7.14; set of 8, $9.52.**

DISTRIBUTORSHIPS

Some additional distributorships are now available. If you have already written us regarding your area, please contact us again. If you have not written before, please send us an outline of your previous business experience and qualifications.

CONTINENTAL MANUFACTURING CORP.
Washington Blvd. at Motor Ave. Culver City 130, California

RUPTURED

BE *FREE* FROM TRUSS SLAVERY

NOW there is a new modern **Non-Surgical** treatment that permanently corrects rupture. These **Non-Surgical** treatments are so certain, that a Lifetime Certificate of Assurance is given. Write today for our New FREE Book that gives facts that may save you painful and expensive surgery, and tells **how non-surgically** you may again work, live, play and love and enjoy life in the manner you desire. There is no obligation.

Excelsior Hernia Clinic Dept. 3705 Excelsior Springs, Mo.



NOW! Test Your Own TV AND RADIO TUBES

with new Omni-Tester. Save the cost of one TV service call and Omni-Tester pays for itself. Easy to operate —no technical knowledge required. Absolutely safe. Use 110 volts AC or DC. Complete with test cords and instructions. Guaranteed. No C.O.D. Please. ONLY..... **$3.98**

OMNI-ELECTRONICS CORP. 911 W. 53rd ST., DEPT. 21 CHICAGO 9, ILL.

What Every Mason Wants

We have Important Masonic books for Blue Lodge, Chapter, Commandery, Scottish Rite, and Shrine.

OUR RITUALS ARE USED THE WORLD OVER

Send for free catalog of books and rituals for Masons, Odd Fellows, Knights of Pythias, Knights of Columbus, etc.

EZRA A. COOK PUBLICATIONS, Inc., P.O. Box 796-16D, Chicago 90, Ill.

• automatic •

POWER TILL



- Tills Automatically
- Works ALL SOILS!
- Width: 24" to 7"

SEE YOUR DEALER OR WRITE

Smith-Lawn UNIVATOR

UNIVATOR, Inc., 2030-47 Center St., Berkeley, Calif.



Reg. U.S. Pat. Off. Pend.

Build 16 Receiver, Transmitter, Signal Tracer, Code Oscillator, Signal Injector Circuits at Home

ONLY **$19.95** COMPLETE

All parts, instructions, punched metal chassis, Printed Circuit materials, electric Soldering Iron, Tester included. 30 Day Money-Back Guarantee.

PROGRESSIVE "EDU-KITS" INC.
Room 540A, Progressive Building,
497 Union Ave., Brooklyn 11, N. Y.

...Free Tools With kit...

Please Rush me Free Descriptive Literature concerning "EDU-KIT." Also send me Free Radio-TV Servicing Literature. No obligation.

NAME _____

ADDRESS _____

CITY _____ ZONE____ STATE____

Copyrighted material

MEN!! TRAIN NOW FOR A BIG PAY FUTURE



Be a Trained Diesel Man

- Diesel Construction
- Diesel Engine Repairman
- Diesel Operator
- Industrial Maintenance
- Auto Engine Rebuilding
- Bus & Truck Maintenance

Go places with DIESEL! Farms, factories and power plants, trains, ships, trucks, busses all use DIESEL POWER . . . all need DIESEL-trained men! You can start your DIESEL training at home, in spare time, with tested, proved UEI training. Course includes practical work on Diesel engines under skilled instructors. You learn the operation, maintenance, servicing of all types of Diesel engines, PLUS Scientific Motor Tune-up.

ACT NOW! If you have mechanical ability, **YOU'LL LIKE DIESEL!** High School diploma not necessary. Write now for FREE book, "EARNING POWER IN DIESEL."

UTILITIES ENGINEERING INSTITUTE, Dept. DM-44
2521 Sheffield Ave., Chicago 14, Ill. (Founded 1927)



It's New! Handy — Compact "12 in 1" Rubber Stamp

All the Stamps You Need—On 1 Roll!

Here's a real time and money saver. No more groping for the right stamp. Just a twist and you have the one you need. This new 12-in-1 Stamp contains FRAGILE. AIR MAIL. PARCEL POST. FIRST CLASS. DO NOT BEND. SPECIAL DELIVERY. PLEASE REMIT. PAID. C.O.D.. INSURED. REGISTERED. DUPLICATE. Saves you the cost of 12 separate rubber stamps. Built to last for years.

only $1.00 *postpaid no C.O.D's.* Mail your order today SPECIAL PRICE TO DEALERS

MEDFORD PRODUCTS, INC., Dept. PS4, P.O. Box 209, Cathedral Station, N.Y.25, N.Y.



OVERLOAD SPRINGS

$9.95 Per Pair postpaid
2000 LB. SIZE $11.95

For cars and trucks. Front and rear. Gives 2000 lbs. extra capacity for all ½, ¾, and 1 ton trucks; 500 or 1000 lbs. extra for all cars. Easily installed. Guaranteed. State make, model. Dealers wanted.

BRINKMAN MANUFACTURING CO.
2315 Clay Dept. 6-A Topeka, Kansas



UPHOLSTERY
BE YOUR OWN BOSS

Practical, low-cost, LEARN-BY-DOING CUTS Course, complete with tools, materials, frames, trains you quickly AT HOME in spare time. Start making money in Upholstery almost at once! Big **FREE** illustrated book and **FREE** sample lesson shows you how—gives full facts about business, job opportunities for men and women. Write TODAY! Also Resident Training. Approved for Vets.

UPHOLSTERY TRADES SCHOOL
Dept. ED-1609 721 Broadway, New York 3, N.Y.

FIXIT TIPS
WITH "SCOTCH" 33 PLASTIC TAPE



MEND AUTO HOSES with tight wrap of stretchy, waterproof "SCOTCH" 33 Plastic Tape. Stretchy plastic seals tight, resists corrosion.



WRAP TOOL HANDLES. Tough, long-wearing plastic tape covers rough handles, makes smooth non-slip grip. Get "SCOTCH" Brand 33 Plastic Tape, 39¢ or 79¢ at stores everywhere.



MINNESOTA MINING & MFG. CO.,
ST. PAUL 6, MINN.

OIL BURNER
SERVICING

Learn at home in your spare time. Earn big money

MASS. TRADES 161-B High St. Boston 10, Mass.

WRITE for FREE Sample Lesson



New book rips the curtain of silence about "FLYING SAUCERS"

The flying saucers have not gone! Despite every form of discouragement and ridicule, "flying saucers" continue to be reported in the United States and 21 other countries. Official authorities admit that hundreds of these sightings cannot be explained.

Harold T. Wilkins, eminent English historian and author of **Flying Saucers on the Attack,** has devoted the past ten years to a study of the "flying saucer" phenomena. A global network of private correspondents pass along to him **scores of breath-taking flying saucer reports.** All the recent baffling incidents suppressed by the world press have found their way to his desk.

NOTHING IS LEFT OUT. In FLYING SAUCERS UNCENSORED, page after page is documented with place, time and dates of strange events that have never before been reported. Harold T. Wilkins reveals the whole incredible uncensored story of: Disturbing messages from other worlds; The Martian Death Ceiling; Where and when space ships have actually landed; The official report of the Australian Saucer Investigating Committee and much, much more.

FLYING SAUCERS UNCENSORED is essential reading. Everyone should know the facts of these latest uncensored accounts of flying saucer activity.

FREE! Confidential Saucer Bulletin. A supplement based on current reports including new space satellite developments, is now in preparation. If you send your order for FLYING SAUCERS UNCENSORED today, you will receive the CONFIDENTIAL SAUCER BULLETIN as soon as it comes off the press.

ORDER WITH THIS COUPON TODAY

Citadel Press, Dept. P-101
222 Fourth Avenue, New York 3, N. Y.

Rush me a copy of FLYING SAUCERS UNCENSORED and reserve a copy of the Confidential Saucer Bulletin which I will receive as soon as available. I'll pay postman $3.50 plus C.O.D. postage on delivery.

NAME.....
ADDRESS.....
CITY.....ZONE...STATE.....
☐ SAVE! Remit $3.50 with coupon and we pay postage.

10-Day Satisfaction or Money Back Guarantee

Copyrighted material

...TURN CONCRETE INTO GOLD!



MAKE UP TO $75 A DAY IN YOUR OWN BUSINESS

If you want to have your own business — to start a business on your own — here's your big opportunity! New high speed, low cost General block machine produces up to 1,000 concrete blocks a day. Sell all you make to builders, supply houses, and others for homes, factories, buildings, garages. Cash in on the building boom! You can make profits of 100% to 150% — up to $75. a day! General block machine equipped with ½ h.p. electric motor — or can be supplied with gasoline engine — works anywhere, in little space, indoors or out. Operates from ordinary house light socket. Simple, foolproof 3 step operation — so easy a child can do it. Makes superior 3 core blocks any size from 4" to 12". Also makes chimney, sash, corner and other types. Blocks meet any building code anywhere in the country. Materials — sand, water, cement, available anywhere. Simple illustrated operating instructions and mixing formulae for cement and cinder blocks supplied with each machine. Write for FREE folder with full information.

R. L. T. of New York City reports: "MY GENERAL BLOCK MACHINE PAID FOR ITSELF IN FIRST 2 WEEKS!" Hundreds now in use the world over! Write for FREE details today!

EXTRA *Amazing illustrated book gives floor plans for 6 sensational concrete block bungalows. Tells how to lay blocks, lay out building lines, mix concrete, build steps, porch and concrete floors all at great savings. Written by experts. Can save many times the cost of the machine! Get it now! No strings attached. Send $1.*



BOOK SENT FREE IF YOU BUY MACHINE.
$1 REFUNDED IF YOU BUY LATER.

GENERAL ENGINES CO.
DEPT. S-46 ROUTE 130, THOROFARE, N. J.

LEARN METALCRAFT and JEWELRY MAKING




Low Cost Home Training Now Available

Make money. Learn profitable skills and arts of decorative metal and jewelry crafts. Course is complete. Professionally prepared. Easy to master. Special tools and materials furnished.

Write for Free Booklet

INTERSTATE TRAINING SERVICE
DEPT. K-2 PORTLAND 13, OREGON

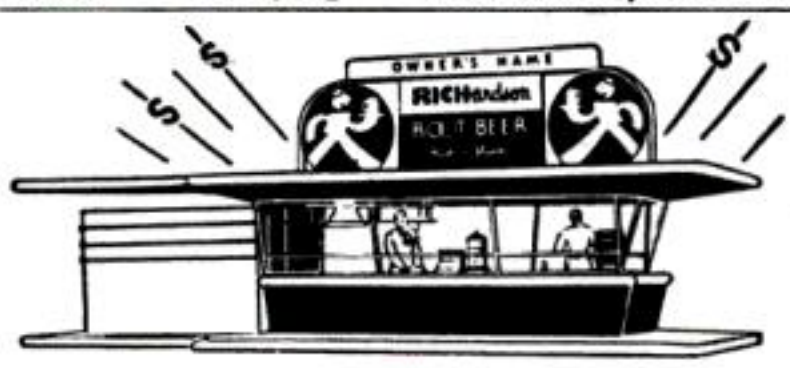

OWN YOUR OWN BUSINESS

Free folder tells how! Build and operate this profitable roadside stand—seasonal or year 'round. Mail coupon now.

RICHardson ROOT BEER Rich in flavor

RICHardson Corporation
Dept. PS-4, P.O. Box 790, Rochester 3, N. Y.
Please send me FREE folder on your tested, franchised refreshment stand.

Name.....

Address.....

Place.....

AN IMPORTANT BOOK!



VALUABLE INFORMATION FOR COMMERCIAL ART STUDENTS

- salaries, earnings in actual figures of most categories and free-lance prices
- Trade pointers and trade terms
- Salaries for beginners
- Mistakes most beginners make
- Many jobs do not require drawing ability
- Do some artists earn $100,000 per year?

ADVANTAGES AND DISADVANTAGES
— of working for art studios
— of working for advertising agencies
— of free-lancing

This book helps you avoid mis-steps in your career

For cloth bound edition send $2 to (postpaid)

COMMERCIAL ARTISTS' GUIDE, Dept. 2A
P. O. BOX 146, Grand Central Station, N. Y. C.

BARBELLS



140-Pound, **CHROME DELUXE** Barbell-Dumbbell set only **$16.80.** This is our feature set and is the finest ever manufactured.
Training with adjustable weight is the **BEST** way to keep fit; the **ONLY** way to develop great strength and a perfect body. As the oldest and best equipped barbell company, **BUR** gives value and prices no one can equal.

SEND FOR FREE CATALOG.
BUR BARBELL CO.
Lyndhurst 5, New Jersey

BUY IT WHOLESALE!

GET UP TO 40% OFF

☆ Start a Buying Service at Home, SPARETIME. GET BIG-NAME MERCHANDISE FOR SELF AND CLIENTS UP TO 40% LESS THAN REG. PRICE. SALES EASY, AS YOU CAN GIVE SIZEABLE DISCOUNTS, STILL MAKE FAT COMMISSIONS. *Post Card brings FREE COPY "The Wholesale Plan".*

FREE! "THE WHOLESALE PLAN"

American Buyers Service
HERTEL STATION, DEPT. PS BUFFALO 16, N. Y.




MARCO 14
$189.50 Delivered

KIT BOATS - DO IT YOURSELF - SAVE 50%


- Factory To You No Dealers
- Mahogany Decks and Framework
- All Brass Fastenings
- Delux 14' Boats, $159.50, Freight Incl.

WRITE FOR FREE FOLDER
or send 50¢ for complete catalog
ACCESSORIES • FIBERGLAS
Marine ASSOCIATES
BOX 6188 S LONG BEACH 11, CALIF.

make your own Gems 29.50 F.O.B.



The Gem Maker comes complete with all necessary equipment, including a super-charged diamond blade for sawing, and all wheels for grinding, shaping and polishing; also complete instructions. The complete equipment as shown, less motor and belt, for only $29.50, f.o.b. Burlington, Wisconsin. Write today for information and literature.

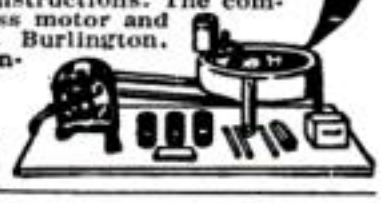

B & I MANUFACTURING CO.
Dept. S Burlington, Wis.

YOU BUILD 'EM—WE SELL 'EM EARN UP TO $50.00 A DAY AT HOME

Here is a new business for people who would like to make extra money full time or spare time. Our program enables you to work in your home and participate in national sales secured through our firm. You assemble luggage and special cases for photographic equipment—musical instruments—salesmen's samples and all types of portables. We supply complete instructions—materials—tools—everything. No previous experience is necessary. Write for free details. Abarsi Casecraft, Dept. CD, 807 W. Sunset Blvd., Los Angeles 12, California.

Copyrighted material

If Ruptured

For lasting relief your rupture must BE HELD BACK DAY and NIGHT.

Consult Your Doctor.



Entirely different

SOFT, FLEXIBLE, and fits neat as a glove. The famous Miller saves you TIME, MONEY, DISAPPOINTMENT. Write for my FREE booklet today.

FRED B. MILLER Manufacturer
Dept. P-46 Hagerstown, Maryland



GIANT FREE CATALOG of OPTICAL BARGAINS

ASTRONOMICAL TELESCOPE HEADQUARTERS

Complete Line of Astronomical Telescope Parts and Assembled Telescopes. Also huge selection of lenses, prisms, war surplus optical instruments, parts and accessories. Telescopes, microscopes, binoculars, etc. America's No. 1 source of supply for Telescope Makers. **SEND ONLY $1.00** for beginner's 10-lens kit and big instruction booklet Stock 2-N. Ask for FREE catalog N

EDMUND SCIENTIFIC CORP., Barrington, N.J., U.S.A.

POWER MOWER KITS FREE PLANS



Have one of the finest mowers money can buy. Write for FREE PLANS and PARTS LIST showing you how to SAVE MONEY by assembling Triangle's POWER MOWERS.

SPECIAL FACTORY PRICES

Kits, Parts, Engines, Wheel, etc. 18" and 20" sizes; 3 or 4-wheel models; belt or direct drive. Latest improvements, sturdy construction, money-back guarantee fully told in FREE color folder. Also complete TRIANGLE MOWERS ready to mow at low Factory Prices. Write today.

▲TRIANGLE MFG. CO. Dept. SA4, Ft. Scott, Kan.

WHEELS WHEELS WHEELS

7" Disc Wheel ¾" Tire ⅜" sleeve	45c ea.
8" Disc Wheel 1⅛" Tire ½" sleeve	70c ea.
7" Disc Wheel 1" Tire ½" ball bearing	80c ea.
8" Disc Wheel 1⅛" Tire ½" ball bearing	$1.00 ea.
6" Disc Wheel 1.50 semi-pneum. Tire ⅓" B.B.	$1.35 ea.
8" Disc Wheel 2" semi-pneum. T. ½" B.B.	$1.50 ea.
10" Disc Wheel 1.75 semi-pneum. T. ½" B.B.	$1.50 ea.
10" Disc Wheel 2.75 semi-pneum. Tire 5¼" B.B.	$3.50 ea.
12" Disc Wheel 1.75 semi-pneum. T. ½" B.B.	$1.85 ea.

Above wheel prices includes hub cap. Plus Postage. C.O.D.'s accepted.
AXLES—Sizes 5/16 in., ¾ in., ½ in.—Cut to size—End holes drilled.

UNITED WHEEL STAMPING CO.
12131 S. PEORIA STREET PS-4 CHICAGO 43, ILLINOIS



AMERICA'S NEWEST OPPORTUNITY

New fur-bearing animal now being bred in U. S. Offers huge profits to breeders. This fur is next to Mink NOW in price and will soon surpass it. 15 to 20 young per year. Most easily and economically raised animal known. 1½c per day to feed, ANY CLIMATE, disease resistant. Build yourself a sound future with this fine, registered stock. WRITE TODAY FOR FREE BOOKLET.

CABANA NUTRIA, INC.
636-P West Lemon Ave., Arcadia, Calif.

---


free! 1956 ALLIED



ELECTRONIC SUPPLY CATALOG

324 value-packed pages

Save on Everything in TV and Radio Parts & Equipment

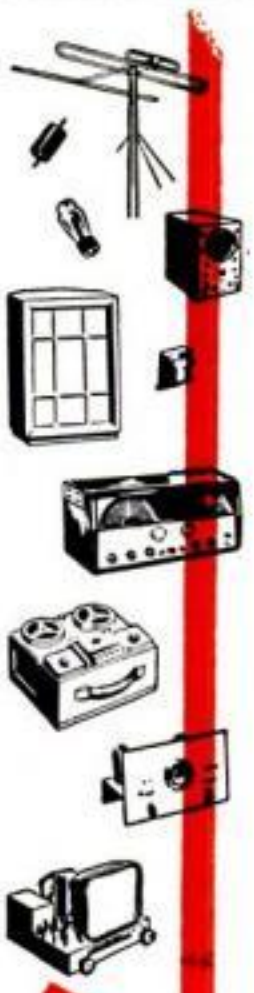

Everything for Experimenters, Builders, Amateurs, Servicemen, Engineers & Hi-Fi Specialists

Send for ALLIED's big 324-page value-packed guide to *everything* in TV, Radio and Electronics! Select from the world's largest stocks of High Fidelity systems and components; recorders and phono equipment; TV tubes, antennas and accessories; Amateur station equipment and supplies; P.A. systems; test instruments; latest build-your-own kits; industrial electronic supplies—plus *everything* in electronic parts, tubes, transistors, tools and books. Save on everything in Electronics—send today for your FREE 1956 ALLIED Catalog.

Everything in Electronics From One Reliable Source

send for it **FREE CATALOG**

ALLIED RADIO

ALLIED RADIO CORP., Dept. 7-D-6
100 N. Western Ave., Chicago 80, Ill.

☐ Rush FREE 1956 ALLIED 324-Page Catalog

Name _____

Address _____

City _____ *Zone* _____ *State* _____

Copyrighted material

Some make more, some less; **T. THORN reports:**

$690 gross in single MONTH IN MY OWN BUSINESS!



Start your own business!

Here's YOUR chance to start a money-making, year-'round business of your own and make the success you've dreamed about. R. O. Donnley took in $40 in seven hours. O. W. Ware landed a $750 hotel job. J. S. Corbit grossed $279.50 his first month. Homes, hotels, offices, clubs, offer you big profit possibilities. Auto upholstery also.

NO SHOP OR OFFICE NECESSARY. You clean furniture on customers' premises. No hauling. No high rents. Supplies inexpensive; operate from your home. What you take in is mostly profit.

● If you want to be your own boss—free from layoffs, strikes and bosses, we will help you to start and succeed. Don't delay...read the facts, then decide for yourself.

MAIL COUPON TODAY FOR FREE BOOK

VON SCHRADER MFG. CO.
411 "D" Pl., Racine, Wisconsin

Without obligation rush your **FREE** booklet about how I can start my own permanent, profitable electric Upholstery Cleaning business.

Name_____

Address_____

City_____ Zone____ State_____

LAW FREE BOOK

THE LAW TRAINED MAN

Write today for a FREE copy of illustrated law book, **"THE LAW-TRAINED MAN,"** which shows how to earn the professional Bachelor of Laws (LL.B.) degree through home study of the famous Blackstone Law Course. All necessary books and lessons provided. Moderate cost; convenient monthly terms. Write for FREE law training book today.

Blackstone School of Law, 225 N. Michigan Ave.
Founded 1890 **Dept. 124, Chicago 1, Ill.**

HARLEY-DAVIDSON DEALER OPPORTUNITIES

A few excellent opportunities are available to sell and service the world-famous Harley-Davidson motorcycle for pleasure, police, and commercial work. If you are mechanically inclined, like outdoor activities, enjoy selling and are willing to work to build a successful business for yourself, we want to hear from you.

Tell us about yourself; your age, business background and how much money you have to start — motorcycle experience desirable but not essential. You'll receive a prompt reply telling you about our franchise, factory co-operation and our extensive national advertising support.

Write **Department PS-1**

HARLEY-DAVIDSON MOTOR CO.
MILWAUKEE 1, WISCONSIN

AMAZING NEW PERSONAL POCKET RADIO



LISTEN WHILE YOU WALK DOWN THE STREET!

Slips in any pocket—Wt. only 7 ozs. Size 2¾" x 4¾" x 1⅛". Beautiful Black Gold plastic case. NO HOOKUPS — NO WIRES — NO PLUG-INS! Self contained with 150 hour life flashlite batteries. (Available anywhere) and BUILT-IN ANTENNA! **GUARANTEED RECEPTION OF RADIO STATIONS TO 50 miles—up to 1500 miles for powerful stations! Has new** Patented Super-regenerative Duotriode tube and transformer audio stages for sharp **selectivity and sensitivity! Easy to** use top controls (while walking). Almost **invisible plastic foam personal earplug lets you alone listen while you walk, visit, work, ride or sleep—any-**time—anywhere. **Money Back guarantee**—1 year service guarantee.

SEND ONLY $5.00 **(Ck, Mo) and pay postman $14.95 plus postage on delivery or send $19.95 for** postpaid delivery. Get YOUR Tinytone REAL pocket radio now and be **ready to listen to Civil Defense alarms, news,** music, sports, etc. on a moment's notice. Not an unworkable–Incomplete Kit or plaything! Shipped complete with batteries–Ready to listen! Available only from

WESTERN RADIO Dept. APS-4 Kearney, Nebr.

WHAM-O. THROWING KNIVES



Balanced to stick!

TARGET SPORT 3 *for* $2.98

Now everyone can enjoy this knife-throwing game. With very little practice you can stick these balanced knives every time. Outdoors—Indoors. Lots of fun for entire family. Three 10" knives. Tempered steel, leather handles. With target. Money back guarantee. $2.98 at dealers or write

WAMO MFG. CO. Box S-61, San Gabriel, Calif.


NOW! YOU CAN TEST YOUR OWN TV AND RADIO TUBES



All of Them—even picture tube! It's easy and safe with this A. B. C. Tester. Simply insert tube in socket. Pilot light instantly indicates if tube needs replacement. A precision instrument. Rugged metal case (not plastic). Operates on AC or DC. One service call saved pays for tester. Only $3.95 postpaid (De-Luxe model $4.95) or C.O.D. plus charges. Instructions included. 5 Year Guarantee.

OMEGA ELECTRONICS, Dept. T-74, 670 N. Michigan Ave., Chicago, Ill.

250 POWER . . . . .

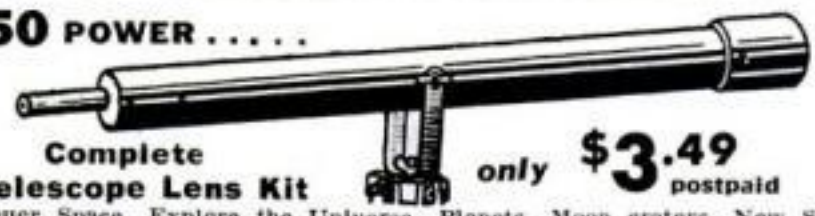

Complete Telescope Lens Kit *only* **$3.49 postpaid**

Conquer Space, Explore the Universe, Planets, Moon craters, New Stars, etc. Complete Lens Kit consists of 80 inch focal length ground and polished objective lens, eyepiece lenses for 50 POWER, 100 POWER, 150 POWER, 200 POWER, 250 POWER, and all necessary lens fittings. Easy to make from simple step by step instructions. (Tripod and mount not included.) Money back guarantee.

BUSSE SALES CO., Hartford, Conn., Dept. PS42

When Writing to Advertisers Please Mention Popular Science

"YOU ARE UNDER ARREST!"



There's a Thrill in Bringing a Crook to Justice Through Scientific

CRIME DETECTION!

We have taught thousands this exciting, profitable, pleasant profession. Let us teach you, too, *in your own home*. Learn Finger Printing, Firearms Identification, Police Photography and Criminal Investigation thoroughly, quickly and at small cost.

FREE!!! "BLUE BOOK OF CRIME"

INSTITUTE OF APPLIED SCIENCE
(A Correspondence School Since 1916)
1920 Sunnyside Ave., Dept. 1364 Chicago 40, Ill.

Please send me free "Blue Book of Crime."

Name_____

City_____ **State**_____ **Age**____

Copyrighted material

The Amazing New

CRAFTKILN



for Metal Enameling and Porcelain Decorating
MAKE MONEY IN YOUR SPARE TIME!

A new concept in kiln design with a firing chamber of 6½ x 6½ x 2". Make Jewelry, Bowls, Ashtrays, etc. at a fraction of what you can sell them for. Kiln complete with Firing Shelf, Tongs, Asbestos, and Electric Cord..... **$12.95**

No. MA-1 (not Ill.) Metal Enameling Accessory Kit Complete supplies for metal Enameling..... **5.95**

No. PA-1 (not Ill.) Porcelain Decorating Accessory Kit Complete Supplies for Porcelain Decorating..... **5.95**

SPECIAL OFFER!
CRAFTKILN and either Accessory Kit.....**$17.95**
CRAFTKILN and both Accessory Kits.....**$22.95**
ADDITIONAL SUPPLIES ALWAYS AVAILABLE

STEWART CLAY CO., INC., Dept. PS
133 Mulberry Street New York 13, N. Y.

TRAVEL DREAMS COME TRUE!



write dept G

Cast loose to follow the sun... explore the byways, relax by a rippling stream... enjoy the sea, the woods, the mountains, with all the comforts of home. **Write for free booklet!**

AIRSTREAM TRAILERS INC.
110 CHURCH ST., JACKSON CENTER, OHIO
1755 N MAIN ST., LOS ANGELES 31, CALIF.

CLOSE OUT! HEAVY DUTY 6-VOLT MOTOR

ALL BRAND NEW! ORIGINAL PRICE $16.50. Only $1.49




Just 1200 Left—Hurry!

A terrific buy! Oilite bearings. ¼ inch shaft. High starting torque. Enclosed body. Perfect for car heater & defroster or any 6 volt battery operated mechanism. Send $2. ($1.49 plus 51c) and we'll ship postpaid on 10 day money back offer.

ILLINOIS MERCHANDISE MART, Dept. MA, 1227 Loyola, Chicago 26, Ill.

Print Your Own



Cards, Stationery, Advertising, labels, circulars, photo and movie titles, church work, tags, etc. Save money. Sold direct from factory only. Raised printing like engraving, too. **Print for Others, Good Profit.** Have a home print shop. Easy rules supplied. Pays for itself in a short time. Write for free catalog of outfits and all details.

KELSEY PRESSES, N-33, Meriden, Conn.

See Dan on TV "Big Top" Show



Save 60% on FAMOUS "TV-BIG TOP"

DAN LURIE BARBELLS

FREE—60 muscle building courses—68 photos with your order

50 lb. set **$8.48** 150 lb. set **$20.48**
100 lb. set **$13.98** 200 lb. set **$25.98**

Send for free catalog

Order by mail—50% with order. Balance C.O.D. Extra wts. 13c lb. FOB Plant.

DAN LURIE BARBELL CO.
52-54 Bristol St., Dept. 670-D, Brooklyn 12, N. Y.

Let Strongman Dan Make You A Man
Results guaranteed or money back

BOAT KITS 28 MODELS—8 to 19 ft. $39 up—FREE FREIGHT



SAVE 2/3!
Easy-to-build
MAHOGANY
DECKS & FRAMES
SEND 10¢ for CATALOG
Includes Hardware—Trailers—Fiberglas

Boat Plans-Patterns-Frame Kits

Build over 50 modern boats from large scale plans, available with FULL-SIZE patterns, new PRE-FAB frame kits! All types: prams to cruisers, 6 to 25 ft. Best buy for Ameteurs! SEND 10¢ for CATALOG.

Craig Craft
Tonawanda, N.Y.

THE LITTLE STICKER



STRONGEST White Glue you ever used! Rated "EXCELLENT" by leading research organizations.

LEPAGE'S
WHITE GLUE

Its SURE GRIP will stick ANYTHING!
NOW in handy refillable squeeze bottles



Economy Size 98¢
Regular Size 29¢

Try also LE PAGE'S Glue — Paste — Mucilage Miracle Mender — Liquid Solder

EYE GLASSES *by* MAIL As low as $1.95

WRITE for FREE CATALOG with 14 LENS SAMPLE CARD
Thousands of Customers
Est. 1939



QUALITY READING-MAGNIFYING OR BIFOCAL GLASSES FOR FAR AND NEAR

ADVANCE SPECTACLE COMPANY, Inc.
537 S. Dearborn St., Dept. SP-4 Chicago 5, Illinois

Paint STRIPES with New "PAINT PEN"!



Straight, Curved or Parallel Lines

Use like a fountain pen with any color paint to stripe furniture, bikes, autos, model planes, toys, linoleum, wall board. Beautiful clean, crisp results every time. Can't clog or smear. Also use with glue, tempera, textile paint or ceramic under glaze. Paints on wood, glass, plastic, metals, fabrics and paper. Tool complete with tip for 1/16" stripe only $1.25 postpaid. Other complete tools with following tips, 1/64", 1/32", 3/64", 5/64", 3/32", ⅛"—$1.75 each. Extra tips 90c each. Entire kit with tool and 7 tips—$5. A ¼" tip only $1.20 each. C.O.D.'s postage collect.

New! "DOUBLE-STRIPE" 5 Way Combination Model only $3.25
Double Stripes—one wide and one narrow or two wide or two narrow at the same time.

FREE Send postcard for complete information—or ORDER TODAY.

$1.25

DEALERS: Master Paint Striping Tool in display cartons of 1 doz. FAST, PROFITABLE SALES. Write for new discounts.


HOME CRAFTSMEN! New Paint Striping Tool gives "professional" results every time, simple, easy to use. Send $1.25 now.

MANUFACTURERS: Write today for information about industrial models and production striping tools.

WENDELL MFG. CO., Dept. 216
4234 Lincoln Ave., Chicago 18, Ill.

Copyrighted material

Multi-Million Dollar Business Now Being Split Up Among Home Operators in Small Communities

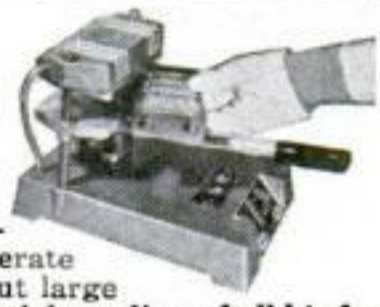

Inexpensive Table Top Machine Pays Profits UP TO $9.20 AN HOUR

The multi-million dollar Rubber Stamp Business is now being taken over by small home operators throughout the U.S. Men and Women who operate this inexpensive machine can turn out large numbers of Rubber Stamps with special wording of all kinds. Material costing only 27c makes a stamp that sells for $1.80. The machine is easy for anyone to operate. It molds as many as six Rubber Stamps at a time, each with different wording such as names, addresses, notices, stock numbers, prices and other 'copy' needed by offices, factories and individuals. At full capacity, it can earn as much as **$9.20 an hour for the operator!** You don't need experience to get into this big profit business at home. We supply everything, including complete instructions and eight ways to get orders for stamps coming in fast. Start making up to $9.20 in one hour right away. We'll mail full particulars FREE and no salesman will call. Be first in your locality. Rush coupon.

RUBBER STAMP DIV., 1512 Jarvis Ave., Dept. R-34, Chicago 26, Ill.

RUBBER STAMP DIV., Dept.R-34, 1512 Jarvis Ave., Chicago 26, Ill. **FREE!**

Please mail all facts showing how I can get started in the profitable Rubber Stamp business at home in spare time. Everything you mail me is FREE and no salesman will call.

NAME_____

ADDRESS_____

CITY_____ Zone____ STATE_____

BOLENS

LAWN MOWING MAGIC

SIDE TRIM *Reduces Hand Trimming*

MULCHES LEAVES *Eliminates Raking*

SIDE DISCHARGE *Windrows Vanish*



Bolens' power mowers have all the features that make lawn beauty care easy. Once over with a Bolens Rotary Mower leaves a carpet-like finish—no scalloping, no cuttings to rake. And you get a mulch that preserves moisture and protects against burnout. Write for free brochure.

THIS IS NATIONAL BOLENS MONTH


Get the details on the 40 prize contest. Your chance to win a trip to Bermuda—a Weekend at the Waldorf—FREE!

BOLENS PRODUCTS DIVISION
267-G Park St., So., Port Washington, Wisc



YOU MAY THINK YOU'RE TALL ENOUGH... BUT


It's easy to be taller! Change to "ELEVATORS", the amazing height-increasing shoes that make you **almost 2 inches taller** instantly . . . confidentially. Only **you** know "ELEVATORS" secret, but everyone notices the difference. So, don't just **think** you're tall enough; BE SURE! Wear "ELEVATORS"!

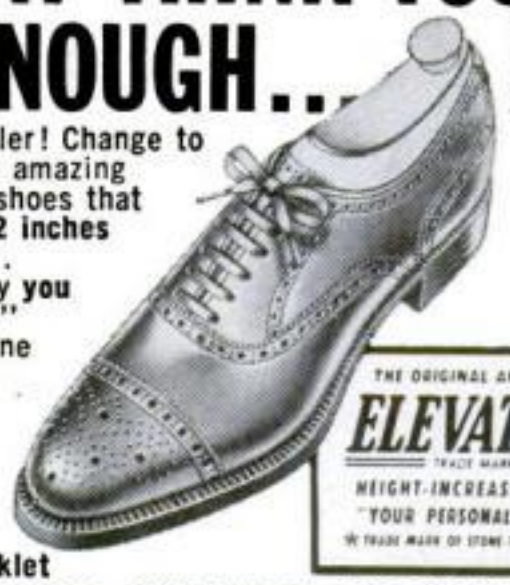

WHAT DO OTHERS THINK?

Write for free booklet

STONE-TARLOW CO., INC., DEPT. PS4-56, BROCKTON 68, MASS.

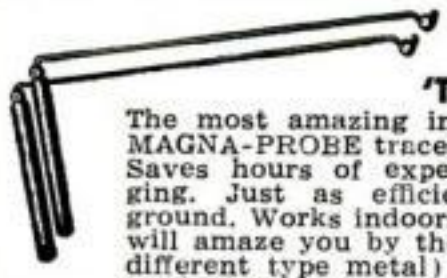

DON'T DIG 'TIL YOU KNOW WHERE

The most amazing instrument you've ever seen! MAGNA-PROBE traces water, gas and sewer lines. Saves hours of expensive and unnecessary digging. Just as efficient over concrete as bare ground. Works indoors or outside. MAGNA-PROBE will amaze you by the way the probes (each of a different type metal) are attracted to each other in the presence of linear moisture sources in pipe lines. Simple, unique, practical. Thousands of satisfied users include Public Utilities and Government Agencies. Money back guarantee. Send Check or money order. (No C.O.D.'s)

ONLY $2.98 Postpaid

Complete with easy-to-use instructions.

THE MAGNA PROBE CO.
6024 Mayfield Road Cleveland 24, Ohio

MEN PAST 40

Men afflicted with Bladder Trouble, Getting Up Nights, Pains in Back, Hips, Legs, Nervousness, Dizziness, Physical Inability and General Impotency send for our amazing **FREE BOOK** that tells how you may correct these conditions and have new health and Zest in Life. Write today. No Obligation.

Excelsior Institute, Dept. B-5, Excelsior Springs, Mo.

TERMITES IN YOUR HOUSE?

GET RID OF THEM YOURSELF!



DON'T PAY $300.00 AND UP TO ERADICATE TERMITES FROM YOUR HOME OR PREVENT INFESTATION. DO IT YOURSELF IN ONE AFTERNOON. EASILY! QUICKLY! INEXPENSIVELY WITH *"TERM-OUT"*! SEND STAMP FOR HANDBOOK

COMPASS RESEARCH
90 B CLAIRTON BLVD., PITTSBURGH 36, PA.

© 1956

Petty Girl Shorts

Perfect gift for he-men! Two pairs of Nylon crepe boxer shorts, each with a different Petty Girl screened design. You'd swear they are hand-painted! Order #1420.

Waist sizes 32 to 42. White or assorted Pastels. Price, 2 pairs—only **$3.50.**

Mail order today! Hurry! Send $1 dep. on C.O.D.'s



fredericks OF HOLLYWOOD

Dept.9205, 1430 N. Cahuenga Blvd., Hollywood 28, Calif.

Copyrighted material



Classified Ads only $1.00 per word insertion, payable in advance. Minimum ad 10 words. To be included in June issue, copy should be in our office by April 24. No cancellations accepted after April 15th. Address orders to O. K. Kelly, Classified Adv. Mgr.

1 AUTOMOBILES & MIDGET CARS

ALL makes 1956 automobiles wholesale. Save hundreds of dollars. Free details. Quality Products, 516 Fifth Avenue, New York 36.

MIDGET auto plans $1.25—buy our parts. Gilmore, Box 26, Bowling Green, Ohio.

CROSLEY Owners? Join Crosley Club. Big Discount on Parts. Crosley Club, Bedford, Pa.

BUY surplus jeeps, cars, direct from government. List $1.00. Box 1842Y, Hartford 1, Conn.

ANTIQUE Automobile color slides, 2x2. Illustrated catalog. Free. Universal, Box 779P, Beverly Hills, Calif.

HUNDREDS of automobile catalogs—American, antique, Foreign; Dealer Books, glossy photographs, shop manuals; Free motor Magazines—offered by non-profit club. Write immediately; Get on free mailing list. Auto Maniacs, Inc., Stockbridge, Michigan.

MIDGET Auto Plans, Parts. Powered by small gasoline engine. Plans $1.00 Postpaid. S & T Machine Products, Box 267, Carlisle, Indiana.

2 AUTO SUPPLIES & EQUIPMENT

AUTO Accessory & Parts Catalog. 1956 edition—All New! 164 pages. Save up to 50%—over 50,000 items, including Hollywood Accessories, Hi-Speed Equipment, Rebuilt Engines, all parts and accessories for all cars and trucks! Hard-To-Get parts! Send 25c (refundable). J. C. Whitney, 1919-PS Archer, Chicago 16, Illinois.

FREE Discount catalog—Speed, power, custom equipment. Almquist Engineering, Milford 3, Pennsylvania.

BUY Wholesale nationally advertised auto supplies, thousands other products at big discount. Free "Wholesale Plan." American Buyers', Hertel Station, Buffalo 16-S1, N. Y.

LATEST Custom accessories . . . Items not in stores. New low prices. Continental tire kits, push-button doors, trunks, etc. New illustrated catalog . . . biggest ever, 25c. Eastern Auto, 3319-D South Grand, Los Angeles 7, California.

RADIOS' Custom for 1952-3-4-5-6 Fords $38.90. Free literature. Nordic Radio, Box 582, Evanston, Illinois.

CARPORTS, Patio roofs, Partitions. Build them yourself with beautiful Fiberglas "planks." Details free. Concourse, 4004 Dyre, New York 66, N. Y.

SAFETY Belt Bargain! Latest type, greater safety. Only $5.95! Two, $11.00. Guaranteed. Clayton, 3606-R Maple, Dallas 19, Texas.

AUTO Parts for any car mailed anywhere. Mechanics' discounts. State year—model No. Merit Auto Parts, 86 W. B'way, New York City.

MOTORISTS! Stop having flats! Our Guaranteed liquid sealing compound makes any tire puncture proof. Easily and quickly applied with self-applicator tube. Only $1.98 per tube. (Does one tire) or $7.92 for four. Flat-Pruf, 10036-B, Norfolk 13, Virginia.

USE THIS HANDY INDEX TO FIND WHAT YOU WANT

Advertising, Agencies for Advertisers	53
Agents Wanted	43
Antiques, Relics & Indian Goods	29
Artists Supplies	76
Authors Service	52
Auto Supplies & Equipment	2
Auto Trailers	3
Automobiles & Midget Cars	1
Aviation	5
Batteries, Generators, Etc.	6
Boats, Outboard Motors	11
Body-Building Courses, Jiu Jitsu, Etc.	12
Books & Magazines	23
Build It Yourself	66
Business Opportunities	37
Business Service, Information, Name Lists	50
Buy It Wholesale	38A
Cameras, Photo Supplies	34
Camping Equipment & Tents	16
Cartooning, Sign Painting, Chalk Talks	54
Chemistry & Physics	41
Claim Investigators	37A
Coins & Currency	26
Contests	46
Detectives	47
Dogs, Birds, Hamsters & Pets	17
Educational & Instruction	45
Electrical Supplies & Equipment	7
Engines, Motors, Etc.	10
Farms, Other Real Estate	19
Field Glasses, Telescopes	14
For Inventors	60
For Sale Miscellaneous	71
For the Home	69
Formulas, Plans, Etc.	39
Frogs & Earthworms	18
Games & Entertainment	24A
Geiger Counters, Treasure Finders	77
Help Wanted	42
High-grade Salesmen	44
Hobbies, Collections	31
Home Craftsman	65
Hypnotism	24
Inventions Wanted	61
Language Outfits	48
Machinery, Tool Supplies, Etc.	9
Magic Tricks, Puzzles, Etc.	25
Manufacturing	63
Minerals & Precious Stones	30
Miscellaneous	79
Models, Model Supplies	64
Moneymaking Opportunities	38
Motion Pictures, Slides, Sound Equip.	33
Motorcycles, Bicycles & Supplies	4
Music, Song Writers & Records	35
Of Interest To Women	70
Old Gold, Jewelry, Watches	67
Old Stamps Wanted	27
Patent Attorneys	59
Patents For Sale	62
Personal	80
Photo Finishing, Photocopies, Etc.	32
Plastics	40
Plays, Stories, Etc.	49
Poultry & Supplies	21
Printing, Multigraphing, Etc.	57
Printing Outfits, Supplies	58
Profitable Occupations	22
Radio, TV, Supplies & Equipment	36
Razor Blades, Shavers	74
Rubber Stamps & Office Supplies	56
Special Services	51
Sporting Goods, Guns, Fishing Tackle, Etc.	15
Stamp Collecting	28
Tattooing Supplies	75
Tobacco & Pipes	68
Trees, Shrubs, Roots & Herbs	20
Trigonometers	9A
Typewriters & Office Machines	55
Wanted to Buy	72
Watch Repairing	78
Wearing Apparel	73
Welding, Soldering	8

ELECTROPLATE autoparts, novelties, mirrors. Easy, inexpensive home processes. Free booklet. Tyco Metals, Box 13231-FC, Houston 19, Texas.

CAR Burning oil? Losing compression? Try Clifford's Compression Seal. Tube $2 postpaid. Clifford's Engineering, 452 Claim, Aurora, Illinois.

DELUXE Rear Seat Speaker Kit. Send $6.95. Karl's, Box 333, Lodi, New Jersey.

FREE illustrated, descriptive information "The Truth About Water Injection." Injector, Box 526, Burbank, California.

JEEP Owners—V8 Power. Read Jeep Owners ad. Page 80.

DISCARDED GM71-110 Injector Parts Wanted. Bonus on HV. Mayer, 7120 Carnegie, Cleveland 3, Ohio.

AMAZING Aresto stops Battery Corrosion—$1.00 postpaid, guaranteed. Kenson Enterprises, 114 W. Wilder Avenue, Tampa 3, Florida.

MOTORIST Save Gasoline Vacumating overrich mixtures. For Free particulars, how to install on your car for introducing write, Vacumatic, Dept. 856, Wauwatosa, Wisconsin. Salesmen Wanted.

TAPPET noises in Fords, Chevrolets and Mercurys stopped with our silencers. Literature, Kaye Products, 2067C S. Layton Blvd., Milwaukee 15, Wisconsin.

DANGER and annoyance eliminated squeaky brakes. Patented compound quickly applied. Prolongs life. Ample supply for passenger commercial vehicle. $1.25 Postpaid. Tate Mineral Products, 531 12th Street, Sparks, Nevada.

VALVE Absorbers for Chev. 6, Ford 6 V-8—Mercury Pushrods, Cushions camshaft shock, quieter valve action, smoothness, mileage. 6 cyl. set $14.32. Moye's, Warren, R. I.

MAKE tune-up additives. Save 75%. Details free. Gay-Dean Products, P.O. Box 9-P, Redlands, California.

BUY wholesale 750,000 products. Free details. Carter, Box 6011—PSA, Chicago, 80.

START your car, inside your home! Motor warming, while having breakfast. Build it yourself, few dollars. Simplified instructions, $1.25. Complete kit (less wire), instructions, $5.95. Patents pending. Control, Box 64-P, Melrose 76, Mass.

GLOW-In-Dark Safety Marker. Self-Adhesive, Automatically Recharged by Light, 50, 1"x1", $1.00. American Advertising, 220 Broadway, New York City 38.

3 AUTO TRAILERS

MOBILE home supplies, free list, Planette's 15c. Sharratt, Chili, Wisconsin.

EXCEPTIONAL Expanding eight foot trailer. Accommodates family of five. Build Yourself—literature, 10c. Framar Company, Wilmington, Mass.

4 MOTORCYCLES, BICYCLES AND SUPPLIES

1,000 BANKRUPT motorcycle bargains. Catalog 25c. Bunico, 146, Covington 3, Virginia.

Copyrighted material

POPULAR SCIENCE OPPORTUNITIES

RECONDITIONED Motorcycles and motors. Chromium accessories. Complete stock Indian parts. Expert rebuilding. Fast service. Indian Motorcycle Sales, Kansas City 27, Missouri.

WHIZZER engine $5.00; Cushman engine $4.00; James motorcycle $20.00; Micromidget $65.00. (Mail-order only.) Send 25c (35c for First Class Mailing) for directory-Catalog number 70, listing these and hundreds of other bargains, new and used, home-builders parts, plans, etc. Midget Motors Directory, Athens, Ohio.

CUSHMAN—small engine speed cams $8.50 exchange. High compression heads—Cushman $8.59. 25c Motorcycle Catalog. Weber Tool, Los Angeles 33, California.

SERVICYCLE $20.00; Whizzer Motorbike $25.00; Cushman motorscooter $25.00; midget auto $25.00. Rush 25c (35c first class mail) for new catalog #958 listing many other amazing bargains in motors, midget cars, motorscooters, motorbikes, construction plans. Associated, Box 534, Toledo, Ohio.

5 AVIATION

AVIATION Surplus Bargain Catalogue. One Dime. Box 22S3, Thomasville, Penna.

THEORY and Guide Manual for Small Helicopters. Plus building instructions. $4.00. Sandhill Aircraft, Box 315, O'Neill, Nebraska.

PARACHUTES used once. Send $3.00 for one postpaid. Small chutes $1.00. Jarvis Bros., Box 126, Bostonia, California.

BUILD a man carrying helicopter Jet Engine Yourself! "Practical Ram Jet Design" $1.00, "Practical Pulse Jet Design", $1.00. Also Centrifugal Propulsion Details $1.00 or Cyclic Propulsion Details $1.00. Decker Engine Works, Plasterco, Virginia.

BUILD a fast, safe airboat or snow sleigh from your 65-200 H.P. aircraft engine. Propellers, Plans, Supplies. Satisfaction guaranteed 48 page catalog 25c. Banks-Maxwell Co., Box 3301G, Ft. Worth 5, Texas.

BUILD jet helicopter. Detailed blueprints $8.00. Apache Aircraft, St. David, Arizona.

BUY Surplus Aircraft: Fuselages; Accessories; Engines; Instruments; Electronics—Direct from U.S. Government Depots—List and Procedure $1.00. Brody, Box 8-PS, Sunnyside 4, New York.

HELICOPTERS. 1 and 3 man. Construct own. Plans $3.50, $6.00, respectively. Details 35c. Mayberry Aircraft Mfg., P.O. Box 343, St. Clair Shores, Michigan.

"SKYBABY" "World's Smallest" (7' wing) Large Color Photo $1.00. Homebuilt Sportplane Literature Included. Kits, Blueprints Available. Stits Aircraft, Box 3084, Riverside, California.

6 BATTERIES, GENERATORS, ETC.

EDISON Nickel Storage Batteries. Any voltage, any amperage. Unconditionally guaranteed. Power Plants, Generators, Motors. Literature. Hawley Smith Co., Croton Falls 2, New York.

7 ELECTRICAL SUPPLIES & EQUIPMENT

ELECTROPLATING equipment, anodes and solutions for all types of plating. Instructions. Assemble your own plater and save. Free Catalog. Ramyr, Dept. E-2, 1624 East First Street, Los Angeles 33, California.

ELECTRIC Pencil: Engraves all Metals. $1.50. Beyer Mfg., 10511-C Springfield, Chicago 43.

LAMPS—Parts Catalog containing wiring instructions, 25c. Gyro Lamps, 5402B Clark, Chicago 40.

NEON stripping, straight tubing (straight electrodes). 89c per ft. (minimum order 40 ft.) transformer, tube supports, insulators and simple instructions on how to install included. Colors: White, green, blue, red and rose. Give measurements of building and colors desired. Hulme Neon Sign Co., 125 W. Earle Street, Anderson, S. Car.

ELECTRIC dry shavers $36.20 dozen, sample $4.00. Electric vibrators $30.00 dozen, sample $3.00. NYF Products, 44 West Houston Street, New York 12, N. Y.

POWER Plants, all sizes, lowest prices. Builders Supply Co., Dept. 2, Carrollton, Illinois.

8 WELDING, SOLDERING

NEW And different oxy-acetylene outfit welds, cuts, heats, brazes with interchangeable tips. No attachments needed. Light, portable. Complete outfit, full instructions, only $76.50. Special moneysaving plan for oxygen and acetylene supply. Write for free literature today: Dept. S, Linde Air Products Company, 30 East 42nd Street, New York 17, N. Y.

BUY welding supplies direct from manufacturer. Cable, welding rods, helmets, etc. Portable arc-welders and kits at tremendous savings. Free factory catalog! LeJay 23, Minneapolis, Minnesota.

"BUILD-Ur-Own" a.c. welder and a.c. power plant with a good used engine and low cost Hobart generator. Welds anywhere and supplies 5KW stand-by power for any emergency. Write Hobartweld, Box P-463, Troy, Ohio.

A. C. Welders, four sizes, lowest prices. Free Literature. Holgerson Co., Canton, Kansas.

ACETYLENE Welding outfits new $49.00; used $29.00; Arcwelders $56.50. Eagle Welding, Dept. 42, 5085 Broadway, Chicago 40, Ill.

WELDERS, 110/220, Welds ½". $39.50. Morris, 1070 Inner Drive, Schenectady, New York.

BUILD 300-Ampere Welder using aircraft generator. Plans 10c including Big Catalog welder-kits, generators, motors, hydraulics, winches. Dunbar Mfg., 6610 Sylvan, Houston 23, Texas.

WELDERS, your questions answered. Problems solved. By men who have done your job. Send $1.00 and all information to Salina Welding, Box 275, Salina, Kansas.

9 MACHINERY, TOOL SUPPLIES, ETC.

FEELER Gage. Swedish steel with Electro-Etched Markings. 3½ Inch 25 Blades .0015, .002, thru .016, .018, .020, .022, .024, .025, .028, .030, .040. Send $1.50. We pay postage. Johl, 72 Mill River Street, New Haven 11, Conn.

LAWNMOWER grinder. New fast, different. Write: Turner-Cline, 430 Yellowstone, Pocatello, Idaho.

JEEP Owners—V8 Power. Read Jeep Owners ad, Page 80.

AT Discount Prices—Hardware, hand and power tools, motors, Machinists tools, etc. Send $1.00 for big illustrated catalog. Alfred A. Supina, Dept. S-4, 35 Evergreen Avenue, Hartford 5, Connecticut.

HIGH Speed Drills, salvage, thirty under ¼", need repointing, $1.00. Resharpened, $2.00. Surprise premiums. Dickey, Newfield, New York.

OIL Drum Cement Mixer, Assembly Kit. Circular. NuWayDo Co., Newaygo, Mich.

3 WHEELED Electric 16" rotary lawn mower. Blade for ½" or ⅝" motor shaft. State size. $15.50 less motor. Glencross Industries, RR2, Morden, Manitoba, Can.

MILLING Machines: Rugged, Heavy Duty, Complete Bench Machine Tools. 6" Table Travel $149.50. Ram Type Overarm with 12" Table Travel $250.00. Southern Machine Tool Co., Conyers 4, Georgia.

RADIUS: And Ball Turning Tool Post—Turns Thousands of Different Size Concave, Convex Radii 0" To 4"—No Special Tools To Grind. Radius Tool, Box 476, St. Louis 12, Missouri.

BUILD your own tools. 60 page book of drawings and catalog of castings. $1.00. Casting Specialties Co., Theinsville 12, Wis.

9A TRIGONOMETERS

SOLVE right triangle problems easily with "Trigsie" Trigonometer (patent pending). Just construct triangle by setting on known data—read off unknown sides and angles. Precision made, highest quality plastics. Sufficiently accurate for practical purposes. Pocket size. Only $4.85 postpaid if you send check or money order. Or pay postman $4.85 plus postage and C.O.D. Money Back Guarantee of Satisfaction. Vanora Products, Dept. S-4, P.O. Box 8485, Kansas City 14, Missouri.

10 ENGINES, MOTORS, ETC.

REWIND Motors yourself. Complete instructions $1.00. Lewis Mfg., Howell 11, Michigan.

PARTS For Briggs Stratton, Clinton, Lauson, Power Products, Wisconsin, Continental Engines. Weeden Company, Wakefield, R. I.

11 BOATS, OUTBOARD MOTORS

NEW, used rebuilt marine motors. Marine conversions, fittings. Free Catalog. Stokes Marine Supply, Dept. 23, Coldwater, Mich.

FREE Catalog! Boat Kits, Trailers, Fiberglas, Marine Hardware. Luger Industries, Dept. K-4, 4452 Nicollet, Minneapolis, Minnesota

BUY Wholesale nationally advertised outboards, thousands other products at big discount. Free "Wholesale Plan." American Buyers', Hertel Station, Buffalo 16-T1, N. Y.

FULL size, cut-to-shape Boat Patterns, Blueprints, 7½-38 feet. New 1956 illustrated "Build A Boat," catalog of 50 naval architect-designed Cruisers, Runabouts, Sloops, Skiffs, Outboard Boats, Sailing, Racing, Houseboats, 50c. Small Boat Hardware Catalog, $1.50. Bigger, better 1956 "How to Build Boats" book, $2.50. Cleveland Boat Blueprint Co., Dept. A-77, Box 1651, Cleveland 4, Ohio.

FREE instructions. Boat Docks. Built, installed out of water. Dock Products Company, 3422 26th Avenue South, Minneapolis, Minnesota.

OUTBOARD Motor Parts—New—Used—For All Makes. Send list of parts needed. Enclose stamp. We save you money. Outboard Motor Mart, Inc., 229S State Street, Boston, Mass.

ALUMINUM Boats—Grumman lifetime aircraft construction. More pleasure—less maintenance. Free Catalog—Boats or Canoes. Metal Boat Company, 38 South, Marathon, New York.

A1 Rebuilt Marine Engines, Parts. Helwege, 741 Ocean, Freeport, New York.

STOP Boat Leaks forever! No-sanding Fiberglas process. Evershield . . . 918(A) St. Paul, Baltimore 2, Maryland.

BOAT Plans, Patterns, Frame Kits, Modern inboards and outboards 11'—22' for amateur builders. State requirements or send 40c for complete Catalog. Glen Marine, Box 568, Compton, California.

MARINE conversions for Ford and Jeep engines. Catalog 25c. Lehman Manufacturing Co., 972A Broad St., Newark 2, N.J.

KIT Boats, Free Folder. Marine Associates, Box 6188M, Long Beach 11, Calif.

BOAT plans: Welded steel, wood, plywood. Inboards, cruisers, sail. Free Literature. Please specify size, type. John B. Clark, N.A., Box 51, Bay Village, Ohio.

FIBERGLASS Top marine grade. Yard or kit. Ontario Fiberglass Co., Box 20, Ontario, New York.

SAVE nearly 20%. Outstanding aluminum outboard boats. See our advertisement page 50. Aqualine Boat Corporation, Yorklyn 4, Delaware.

FIBERGLAS Complete stocks. Send 30c for two fully illustrated handbooks on Coating and Molding. Allied Resin Products, 216 Milk Street, Boston 9, Mass.

"GLASBOTE" Plastic and glass cloth for boat covering. Complete information and material price list free. Buchanan Plastics, Dept. M, 1728 Hamilton Road, Okemos, Michigan.

WATER Skies, $21.95: kits, $9.95 up. Literature. Enterprise Products, 28400 Gilchrist, Willoughby, Ohio.

FIBERGLAS boat coating. Plexiglas boat windshields—clear, blue, green tints. Wholesale—retail. Complete information catalog—15c. Gem-O'-Lite, Box 686S North Hollywood, California.

WHOLESALE! Sea Legs Boat Kits, factory prices from $31.98. Savings to 25%. Pre-assembled frames, pre-cut parts, illustrated instructions. Penney Woodcraft Industries, Dept. C-62, Defiance, Ohio.

POPULAR SCIENCE OPPORTUNITIES

12 BODY-BUILDING COURSES, JIU JITSU & ATHLETIC EQUIPMENT

BUILD powerful arms, chest, shoulders! 22 exercises, $1. Fonsad, Box 601-C, 1100 Market, Wilmington 99, Delaware.

MEN'S Athletic Supporters — Knitted Form-Fitting Pouch. S-M-L. $1.00. Gordon's, Dept. PS, Box 3203, Fort Worth 5, Texas.

BARBELLS—Free booklet, Health, Strength, Physique. Reading Barbell Co., Box 455, Reading, Pa.

100 TRICK Knockouts for self defense $1.—1c each. Priest, Box 251, Evanston 2, Illinois.

PUSHED around? Why take nonsense from Bullies. Give them the surprise of their lives. Easy when you know Police Jiu Jitsu. Complete fully illustrated course in one volume same as taught police and armed forces. Send $1 now for Police Jiu Jitsu postpaid. Satisfaction guaranteed. Books Publishing Company, Amityville 2, New York.

4 MUSCLE Courses 25c (Fully Guaranteed). Sid's System, Southgate, California.

14 FIELD GLASSES, TELESCOPES

BUILD your own Reflector Telescope. Complete kit: Mirrors, Eyepieces, Tripod, all other accessories. Request free illustrated literature. Criterion Manufacturing, Dept. KP-18, Hartford, Connecticut.

FREE Catalogue! Thousands war surplus optical bargains. Lenses, Prisms, Telescopes, Binoculars, etc. Send $1.00 for 10 Lens Hobbyist Set and Project booklet. G. Jaegers, 691 West Merrick Road, Lynbrook, New York.

WAR Surplus bargains! Millions of lenses, instruments, telescopes, binoculars, components and complete line of astronomical telescope items. World's greatest optical market place! Send only $1.00 for beginner's 10-lens kit and big instruction booklet Stock 2-CN. Write for catalog-CN Free! Edmund Scientific Corp., Barrington, New Jersey.

DYNASCOPE—Sensational New Reflector Telescope. Send for details. Criterion Company, Dept. DS-24, Hartford, Connecticut.

REFLECTING Telescopes, completely assembled. 60X, $29.75. Guaranteed Observatory clearness. Free information. Skyscope, 475 Fifth Avenue, New York 17.

6 THUMBS on each hand? Even you can assemble our Telescope Kits from our easy instructions. Enjoy the heavens with a high precision telescope assembled in less than an hour. You'll like our complete line of telescopes, microscopes and accessories, biological stains, etc. Send for free catalog T of finest quality and newest design astronomical kits or free Catalog M of microscopes. Optical Engineering Co., 164-19 Northern Boulevard, Dept. PS, Flushing, New York.

AMAZING prices binoculars, gunscopes. Free trial. Folder "Binocular Selecting", catalog free. Prentiss Importers, Mercury Bldg., West Los Angeles 25, California.

BINOCULARS, telescopes, microscopes. Terrific values $3.98 up. Request free money-saving catalog. Criterion, Dept. S41, Hartford, Connecticut.

MICROSCOPE Catalog Free. Research Scientific Supplies, 60 Wall Street, New York 5.

SAVE. Buy United. America's largest selection. 103 models. $3.95 to $250.00. Use on 30 Day No Risk Offer! Free 56 Page —Binocular, Telescope, Riflescope Catalog. United, 9043 S. Western, A-2716, Chicago 20. Dealers Wanted.

MICROSCOPES, Telescopes, Binoculars, everything optical, photographic. Importers prices. Catalog 25c. Magnification Instrument, 2 East 45 Street, New York City.

BEAMSPLITTERS. Transparent Mirrors Pocket Size, Five $3, Ten $5. Fritz, 1352 W. 83, Cleveland.

ASTRONOMICAL Books, Star-Atlases, free list. Herbert Luft, 42-10 82nd Street, Elmhurst 73, New York.

REFLECTOR Telescope Kits $6.25 (3") to $175 (12"). Mirrors, Cells, Focusing Mounts, Tripods, Eye-Systems. Anything, everything in telescopes. Free Illustrated Catalog. Also ready to use telescopes from $25 to $176. Inquiries to Esco Products, Dept. PSM-4, Oakridge, New Jersey. Sales Showroom, 166 Church Street, New York City.

400X TELESCOPE easily made. Kit includes focusing tube, erector, five finished lenses and building instructions—$3.75. Giant astronomical telescope completely assembled with tripod—$15.00. Free information. Suffolk Science, Mattituck 4, New York.

MAKE 6" Telescope reflector. Glass, abrasives, instructions—$10.50. F. Cameron, Box 65, Inwood 96, New York.

15 SPORTING GOODS, GUNS, FISHING TACKLE, ARCHERY, TRAPPING

180 PROFUSELY illustrated pages, antique pistols, swords, daggers, armors, etc. 50c. Robert Abels, PS860 Lexington Ave., New York 21.

FREE Fishing Catalog—148 Pages. Over 3,500 Hard To Find Fishing Specialties. Netcraft Company, Dept. PS1, Toledo 13, Ohio.

BUY Wholesale nationally advertised sporting goods, thousands other products at big discount. Free "Wholesale Plan." American Buyers', Hertel Station, Buffalo 16-U1, N. Y.

FISHERMEN—Make your own sinkers with our molds. Free illustrated booklet. Reading Instrument Co., Box 78, Reading, Pa.

FISHING Tackle—30% to 50% off! Also Guns and Camping Equipment. Cash or credit. Free Bargain Catalog—Write to: Klein's, Dept. C-P4, 227 W. Washington St., Chicago 6, Illinois.

SKIN Diver's Catalog. Free. Shows everything from Aqua-Pencil to Submarine! Skis. Trunks. Books. Premiums. Aquafun P-S, Davenport, Iowa.

FISHERMEN!! Get your limit fast with SureBite Golden "Jumbo" Grubs. Millions now being shipped. Live delivery guaranteed. Keeps months. 200 extra large $1.00 prepaid. Introductory offer. Dealers, distributors wanted. SureBite, Box 1033, Culver City, California.

1,000,000 ITEMS—Every Gun Accessory! New—Used—Antique. Kentuckies, Lugers, Mausers, P38's, Colts, double rifles, swords, armor. Agramonte's, Yonkers 2A, N. Y.

5,000 BARGAINS, firearms, binoculars, war relics, catalog 50c. Smith Museum, Runnemede, N. J.

FLY makers! Free catalog. D.H. Thompson, 335 Walnut Avenue, Elgin, Illinois.

SAMPLE: 25c copy of "The Archers' Magazine." Send 10c: 1200 Walnut Street, Philadelphia 7, Pennsylvania.

MOLDS for Fisherman's Sinkers. Jigs, Squids, Casting and Spinning Lures. Free Catalogue. Sweet's Molds, Tonawanda 3, New York.

JEEP Owners—V8 Power. Read Jeep Owners ad. Page 80.

JAP rifles altering American shells $6.00. Jap shells $3.65, catalog 5c. TP Shop, West Branch 10, Michigan.

MANY Modern, Antique guns. List 10c coin. Ed Howe, 26 Main, Coopers Mills, Maine.

GOLFERS, practice at home. Foam rubber golfballs. $3.00 dozen. Klein, 1804 Harrison, New York City 53.

AMMUNITION: 8MM Mauser rifle cartridges. Army issue, 179 gr. pointed, excellent for target use. 50—$4.25, 100—$7.50. No COD's. Send for free complete ammo list. Philip Jay Madicus, 18 Fletcher Street, New York 38, New York.

NYLON Rope, Lines, Cords. Every description for all household and sportsmen's uses. Finest made. Free catalog and samples. Beebe Cordage Co., Cranford 7, New Jersey.

UNDERWATER Towfins. Thrilling with mask behind two horsepower up. $2.50. Pop Hall, Willsboro, New York.

16 CAMPING EQUIPMENT & TENTS

TENTS (direct from manufacturer), camping equipment. World's largest selection. Send 15c for 120 page 1956 tent & camping equipment catalogue-handbook. Morsan Tents, 10-21G 50th Avenue, Long Island City 1, New York.

BIG 1956 Catalog of Outdoor Equipment only 10c refundable on 1st order! Tents, sleeping bags, clothing, etc. Bargain center for the outdoorsman for over a decade! Rockaway Sales Co., Route 46, Rockaway 3, New Jersey.

17 DOGS, BIRDS, HAMSTERS, RABBITS & PETS

MAKE Big Money! Raise Chinchilla Rabbits. Cash Markets Supplied. Write Today! Rockhill Ranch, Sellersville 16, Pa.

RAISE moneymaking Angora, New Zealand Rabbits. Particulars free. White's Rabbitry, Jackson, Michigan.

HAMSTERS—golden; young, $3.00 pair; fully developed, $4.00 pair. Adirondack Hamstery, Prospect 153, New York.

$5,199.90 WAS Paid to John Betts in few weeks. Grow Mushrooms. Cellar, shed. Spare, full time, year round. We pay $3.50 lb. Free Book. Mushrooms, Dept. 177, 2954 Admiral Way, Seattle, Washington.

SALE Bred Red Squirrels, Chipmunks. Balch Squirrel Farm, Castleton, Vermont.

MAKE Big Money Raising Chinchillas, Cavies, Mink, Rabbits, or Pigeons for us. Free information. Keeney Brothers, New Freedom, Pennsylvania.

CHINCHILLAS Closing out $100 to $200 Pair. Bright's Chinchillas, 2312 N. 38 Street, Kansas City, Kansas.

RAISE Beautiful Parakeets in your home for big profits! Millions sold last year! Send only $8.00 for guaranteed breeding pair and instructions. $10.00 for trio. Full particulars free. Breeders of Budgerigars, 64 Kamper Street, Buffalo, New York.

MODERNISTIC build it yourself insulated raised floor Swinging door dog house. Zimmerman's, Fairfax, Minnesota.

ANGORAS, Chinchillas — World's most profitable rabbits! Catalog free. Grinsteads, Edwardsville, Illinois.

18 FROGS & EARTHWORMS

$10,000 YEAR possible, earthworms. 32 Page booklet tells how 35c. Missouri Earthworm Research, Box C-6851, Kansas City, Missouri.

19 FARMS, OTHER REAL ESTATE

FLORIDA Waterfront homesites on famous Saint John's River $50.00 front foot. Also inland lakefront five miles from River, $195.00—$995.00. Specify which literature. Easy monthly payments. Pine Lakes, Eustis, Florida.

FLORIDA Lakefront homesites near Ocala Forest. Excellent fishing-hunting. $10.00 monthly without interest. Complete price $195.00-$995.00. Literature. Grace Parker, Paisley, Florida.

FLORIDA—Nice homesites, $245 at $10 monthly. Folder Free. Winfree Vernor, DeLand, Florida.

HOMESITES $15 Monthly—California's finest garden section—Morro Bay's scenic shores. Wonderful fishing, boating. Fertile soil, softest water, temperate climate, congenial community. Free literature. Richard Otto, Department P, San Luis Obispo, California.

NEW Strout Catalog, just out! Mailed Free! Farms, Homes, Businesses, Coast-to-Coast, 34 states, 3,046 bargains described. World's Largest: 56 Years Service. Strout Realty, 255-ZB 4th Ave., New York 10, New York.

CALIFORNIA farm and ranch lands. $15 to $35 per acre. 10 to 640 acre parcels. Easy terms. Free catalog. Pacific Tax Sales, 1621-B Cahuenga, Hollywood 28, California.

Copyrighted material

POPULAR SCIENCE OPPORTUNITIES

FLORIDA Lot—$5 down. Full price only $99. Located on fabulous east coast near Daytona Beach. Streets, Electricity, Phones, Churches, Schools, Shopping. Near ocean and St. Johns river. World's best fishing! Write for Free photos. H. D. Leff, Box 826, Orange City, Florida.

CANADIAN Tax Sale Lands for three dollars an acre and up. Small monthly payments. Farms, timber, hunting and fishing camps, minerals. Limited number of properties. Write at once for free catalog. Tax Sale Service, Room 113, 120 Bloor St., West, Toronto 5, Canada.

SOUTH Carolina Homesites. Send $1.00 and enter your name on my book. Down payment $40.00. 10 equal monthly payments $34.00 each. Lake Greenwood Development. Write Bob Hollingsworth, Box 824, Greenwood, South Carolina.

FLORIDA—Several 5 acre tracts, grand climate, & Location near Gulf of Mexico. For Fishing, boating and bathing. Priced at only $985.00, $20.00 down, $20.00 month. For Information write G. B. Potterfield, Dept. X, Union Bldg., Charleston, W. Va.

CENTRAL-American Homesteads open, file—develop while living U.S.A., mining—construction—Import—Export business. Foreign and U.S. Islands. Information $1.00. Inter-American Development, P.O. Box 264, Avalon, California.

FLORIDA tax lands. Inexpensive. Complete procedure, $2.00. FSU, Box 2113, Tallahassee, Florida.

20 TREES, SHRUBS, ROOTS, HERBS

TREES And Shrubs—Raise your own from seed for shade, windbreak, snow fence, ornament, erosion control, etc. For free planting guide—price list, write Woodlot Seed Company, Norway 46, Mich.

GINSENG, Goldenseal. Roots bring up to $12.00 pound. Full information. F. G. Collins, Viola, Iowa.

CANNAS. 100 Varieties. Owner, 322 East Oregon Ave., Phoenix, Arizona.

$$$$ GROWING Bamboo Fishing Poles. Shackel's, Route 5, Columbia, Mississippi.

21 POULTRY & SUPPLIES

EMDEN, Toulouse, African Goslings; Descriptive Literature. Seminole Ranch, Goulds 42, Florida.

22 PROFITABLE OCCUPATIONS

$5000 FROM Half Acre growing Ginseng, crop bought. Particulars 10c. Associated Growers, Sperling, Manitoba.

BUY Wholesale thousands nationally advertised products at big discount. Free "Wholesale Plan." American Buyers, Hertel Station, Buffalo 16-M1, New York.

DETECTIVES Earn Big Money. Excellent opportunity. Detective Particulars free. Write, Wagoner, P-125 West 86th, New York 24.

FREE! "301 Profitable Small Businesses!" Amazing shoestring plans! Work Home! Start Sparetime! Deumant Surveys, Kenmore 23-S, New York.

VENDING machines earn big money! Request 32 page free catalog. Parkway Machine Corporation, Dept. 17, 715 Ensor Street, Baltimore 2, Maryland.

$150 WEEK—easy! Start home Venetian Blind Laundry. Revealing book free. A. V. Co., 101 S. 44th, Philadelphia 4, Penna.

YOUR Own Wholesale Business With No Investment. Free Catalog. Jay Norris Co., 487-H Broadway, New York.

EXTRA weekly income from profitable work at home. Free details. Apex Trading Company, Box 101, Passaic, New Jersey.

WHOLESALE Catalog! 30-80% Discounts! Appliances, Musical Instruments, Typewriters, Phonographs, Watches, Jewelry, Recorders, Housewares, etc. Consolidated Distributors, 21-19 Lafayette, Paterson 15, New Jersey.

$5,199.90 WAS Paid to John Betts in few weeks. Grow Mushrooms. Cellar, shed. Spare, full time, year round. We pay $3.50 lb. Free Book. Mushrooms, Dept. 101—2954 Admiral Way, Seattle, Washington.

JOBS—High Pay. South America, the Islands, USA, foreign countries. All trades. Clerical, labor, engineers, drivers, others. Women also. Fare paid. Application forms. For information Write Section 92C, National Employment Information, 1020 Broad, Newark, New Jersey.

"RUSH." Your Contacts for Construction, Clerical, Sea Jobs Airmailed $2. Satisfaction or Refund! Model Service, Box 777-A, St. Louis 1, Missouri.

MEN, women profitable work making figurines, book ends. Quickly learned. No expensive molds. Plastex, Water Street, Mount Holly, New Jersey.

WELDING Pays $$$. Learn easily at best equipped school in country. Non-profit school with low cost training. G.I. approved. Write Hobart Trade School, Box P-462, Troy, Ohio.

MAKE new greaseless doughnuts in kitchen. Sell stores. Free recipes. Samuel Ray, 3605 South 15th, Minneapolis 7.

EARN $40 weekly addressing envelopes. Instructions $1. Berckun, 2763 Linden, Knoxville, Tennessee.

MUSHROOM Spawn ("Seed") plus growing, marketing instructions $1.00. Literature Free. Chrisenross, 641 South 19th, Newark 3, New Jersey.

23 BOOKS & MAGAZINES

BARGAINS Galore. All Subjects. Free Catalog: Bargain Books, 1324 Wilshire, Los Angeles 17P.

BOOKHUNTERS! All Subjects. Send Wants! Jaher Book Service, 183 Hazelwood Drive, Westbury, New York.

BRITISH books—All Subjects. Catalog 10c. Wants solicited. Transbooks, Box 22-PSD, Brooklyn 26, N. Y.

NATIONAL Geographic Magazines 1888-1952. Any issue. Periodical Service. Box 465-PS, Wilmington, Delaware.

ATHEIST Books. Catalogue free. Truth Seeker Co., 38 Park Row, New York 8.

BOOKS. Free 1956 catalog, 100 pages. Text, vocational, educational, instructional subjects. Millions of volumes, new and used. Bargain prices. Books bought. Est. 1902. Long's College Book Co., Dept. PS, Columbus 1, Ohio.

POPULAR Novels Six for $5. Fifteen for $10. Grab-bag. All A-1. Bookmart, P. O. 2054, Riverside, California.

UNUSUAL books 10c each. Curtis, 6711 Sunset, Hollywood 28, Calif. Send 2c stamp for catalog.

BOOK Catalog, 1000 interesting titles, send 10c. Books Publishing Company, Amityville 2, New York.

WIN Success Quickly! Send Dime. (Refundable). Paul Vallon, 63 Perry, New York 14, N. Y.

FINE Used Novels. 2—$1.00. Pocket Novels, 9—$1.00. Science Fiction Magazines, 8—$1.00. Comics, 16—$1.00. Geographics, 4—$1.00. Postpaid. State Special Wants, Interests. Thousands Used Books, Magazines, All Subjects. Pik-A-Book Co., 2729 South Robertson Blvd., Los Angeles, Calif.

"NUTRIA Raising For Profit." 57 Illustrations. $3.25. Satisfaction Guaranteed. Aldridge, 3413 Danbury Road, Richmond 24, Virginia.

FREE list, unusual book bargains. Williamsburg Books, Box 90, Brooklyn 11, New York.

FORBIDDEN knowledge, book of nature 7 keys to power, the strangest book ever written. Each $1.00 postpaid. Edna Howsare, Route 1, Everett, Pa.

24 HYPNOTISM

FREE Illustrated Hypnotism. Selfhypnosis. Catalogue. Write: Hypnotist, 1324 Wilshire, Hollywood 17P, California.

HYPNOTISM! Party Demonstrations, Neige Diehl, Post Office Box 2002, Seattle, Washington.

EX-Ray Mind! Hypnotize, one glance. Guaranteed $3.00. Wamsteker, Box 10, Ottery, Cape, South Africa.

MASTER Hypnotism in 25 Lessons, complete easily learned fascinating course in one volume. $1 postpaid in plain wrapper. Satisfaction or dollar refunded. Books Publishing Co., Amityville 2, New York.

SECRET Power Amazing 25c. Lidian Press, 446 Crown Street, Brooklyn, New York.

FREE literature: Hypnotism, Autohypnosis, Mechanical hypnosis. Revealed by scientists. Hypni, Box 6097, Oklahoma City 11, Oklahoma.

STUDY Hypnotism! Amazing illustrated lessons. Big 280-page treatise jam-packed with fascinating information. Simple understandable language you'll enjoy. Full price only $2.95 postpaid—or C. O. D. Plus Postage. Satisfaction or refund guaranteed. Order "Hypnotism" today. Nelson Company, 210 South Clinton, Dept. 2DU-1, Chicago 6.

HYPNOTIZE Successfully! Learn easy, fast, modern methods—including secret nerve pressure technique (Guaranteed harmless)! Complete illustrated course $1.00. H. Fowler, 1252 Dahlia Lane, Wantagh, N. Y.

REINCARNATION impossible? Experiment hypnotically! Phonograph device, free. "Personalized," 210 Fifth Avenue, New York 10.

"MECHANICAL Hypnotist", New "Pocket-Size" invention, fascinating way to cause trance, simply, quickly. Also 32 page book—Command others, entertain, Instantaneous Hypnosis, etc. . . . $1.98. Must work or Moneyback. Click, PS-4, 30 East 20, New York City 3.

HYPNOTISM—Learn to Hypnotize almost anyone in one Hour. Copyrighted Course. Become a Professional. Complete Course sent Pre-paid for only $1.00. Instructor Services, P.O. Box 109, Akron, O.

"SPEED Hypnotism" folio $1.00. "Master Methods" book $2.00. Guaranteed. Pennway, Box 166, Scranton, Pa.

AMAZING results with new approach to hypnotism 600 ft. Hi-Fi Tape Recording $5.00. Learn from experts. Professional Center, Box 3191, West Palm Beach, Fla.

FREE Hypnotism, Autohypnosis, Suggestion Record. Catalogs. Lloyd Collins, Appalachia, Virginia.

25 MAGIC TRICKS, PUZZLES, ETC.

BEST magic. Joker's novelties. Lower prices. Catalog 10c. Top Hat, Evanston 13, Illinois.

3100 NOVELTIES. Jokes, Tricks, Gadgets, Funmakers, Hobbies. Big catalog 10c. Johnson-Smith, D-253, Detroit 7.

500 TRICKS. Douglas famous 120-page Catalog, only 10c. Fastest service to magicians for 30 years. Send 10c today. Douglas Magicland, Dept. 2, Dallas, Texas.

5 SUPER and 38 assorted paper tricks, big surprise included $1.00. Lhgco, 19-J East 16th Street, New York 3, N.Y.

GAMBLING System Exposed. Book $1.00. Catalog 10c. Book, Box 671, St. Louis 1, Missouri.

GREATEST Catalog thrilling magician's tricks. Houdini sensational handcuff escapes, 224 pages famous mysteries together with book "Magic Made Easy"—tells, all prepaid, send dollar—Heaney Magician, Oshkosh, Wisconsin.

VENTRILOQUISM Selftaught. Quick, easy instructions, 25c. Texas Roy, Leming, Texas.

GO Ventriloquist, all secrets told. Make money, surprise friends. Send 35c for information. Free $1.00 catalog of dummies, dialogues, etc. Limited supply. Gough, R. 3, Hartford City, Indiana.

FREE 50c trick and $1.00 catalog. Send only 75c. Terry Magic Studio, 1921 66th Street, Brooklyn 4, New York.

BE a Magician! Large professional catalog of latest tricks, 35c. Ireland, F-109 North Dearborn, Chicago 2, Illinois.

SMOKEBOMBS 25c, 7 for $1.00. (Terrific!) 4463-PS Greene, Philadelphia 44.

"SVENGALI Deck" trick cards 50c with catalog. 1746-S Market, Philadelphia 3.

"VENTRILLO" Professional Voice Thrower and Catalog 25c! Box 971-PS, Philadelphia 5.

DOLLAR Magic Set Free with Catalog 25c. 4462-PS Germantown, Philadelphia.

SENSATIONAL Magician's Wand (Vanishes Handkerchief!) 25c, catalog included. Box 1352-PS, Philadelphia 5.

Copyrighted material

POPULAR SCIENCE OPPORTUNITIES

26 COINS & CURRENCY

GET Profit and Pleasure in collecting old coins. Send 10c for 36-page illustrated coin catalog. You'll be delighted with it. Send for it now. B. Max Mehl, 374 Mehl Building, Fort Worth, Texas. Largest rare coin establishment in U. S. Established 56 years.

FREE! Foreign coin banknote and Coin Collectors' Illustrated Catalog to approval service applicants. Send 3c postage. Tatham Coin Co., Springfield-50, Mass.

FIVE Indianhead Cents, Bargain lists, 25c. Economy Sales, 156-A Dean, Mansfield, Mass.

FULLY Illustrated Catalog U.S. Currency. Gives Values. $1.00 Postpaid. Large $5.00 Note $8.00. Quaker Currency Co., Box 3654, Washington 7, D. C.

FIVE foreign coins from Switzerland, Belgian East Africa, etc. plus foreign banknote, only 10c with coin approvals. Littleton Coin Company, Littleton R2, New Hampshire.

$3,000.00 FOR 1913 Liberty Head Nickel. Dimes 1894-S, 1895-O, 1916-D. Quarters 1827, 1896-S, 1901-S, 1913-S, 1923-S, we pay $5.00 to $1,500.00. Certain dates—Lincoln Cents, $60.00. Indianheads, $60.00. Large Cents, $500.00. Eagle Cents, $200.00. 2c Pieces, $45.00. 3c Pieces, $60.00. Half-dimes, $500.00. Shield Nickels, $100.00. Old Dimes, $300.00. 1875 Canadian Quarter, $50.00. Hundreds of others worth $5.00—$500.00. Wanted—Half Dollars, Dollars, Gold Coins, Paper Money, etc. Know their true value. Our large illustrated Guarantee Buying-Selling Catalogue, giving complete allcoin information—send $1.00. Purchase catalogue before sending coins. Catalogue money refundable. Worthycoin Corporation, Leaders Numismatic Quotations (K-137-C), Boston 8, Mass.

COIN Magazine, 160 pages. Sample 35c. Numismatic, 7320 Milwaukee, Chicago 31.

MORGAN Dollars; 1878-79-80-81-82 uncirculated $2.00 ea. Illustrated coin catalogue 25c. Shultz, Salt Lake 10, Utah.

INDIAN Cent with bargain lists 10c. Hutchinson, 3463 "I" Street, Philadelphia 34, Penna.

1955 SAN Francisco coins are advancing in price. Per roll: Cents, $1.90; Dimes, $7.25. 1955 Denver dimes, $6.75 per roll. Smallest Denver issue since 1938. Proof Maria Theresia Thaler 1780, $2.50. Oliver James, Box 299, San Francisco 1, California.

THREE Different Barber Half Dollars $2.00. Bargain Lists Free. Sayers, 1000 East Unaka, Johnson City, Tennessee.

EIGHT different Liberty Nickels $1.00. Five different Canadian Large Cents 50c. Six different U. S. Indian Cents 25c. Our price list of U. S. and foreign coins included with order. Bryson Stamp Company, 612 White, Toledo 5, Ohio.

WANTED U.S. Coins. Confederate currency. Highest prices paid. Send 50c for price list, plus five foreign coins. J. W. Longino, 611 E. Columbia Ave., College Park, Ga.

SENSATIONAL illustrated U.S. 16 page coin list. 10c. Stoney, 192-S Washington, Boston 8, Massachusetts.

GOLD Bargains—$5.00 Gold $9.85; $10.00 Gold $19.85; $20.00 Gold $39.85; All three $67.95. Giant Bargain Catalogue, 50c. Bebee's, 4514 North 30th, Omaha 11, Nebraska.

$12,500 FOR one silver dollar! What are other U.S. coins worth? Fell's U.S. Coin Book gives value of all U.S. Coins from Colonial times to present. Also, how to collect them, what makes them valuable, how to sell coins, and everything else. Profusely illustrated, hard-cover book. $2.00 postpaid from: Fell, Publishers, 386P-10 Fourth Ave., New York 16.

28 STAMP COLLECTING

TWO $5.00 US stamps plus 20 different, 10c with US approvals. Irwin Stamp Co., Box 1109, Brooklyn 30, New York.

AMAZING Offer! 200 U.S. stamps—including commemoratives, airmails, high denominations to $1.00—only 10c to Approval Applicants!! Illustrated Bargain Lists free. Mystic Stamp Co., Dept. 55, Camden, New York.

WEIRD Diamond Shape Coffee Stamps, lovely Flower Triangle. First American Big Commemorative, Greenland Idol Dancer, etc. Free with approvals. Capital Stamps, Little Rock 10, Arkansas.

"WOW! 135 All Different Germany 10c" Zeppelins, Semi-Postals, Airmails, High Values. Big bargain lists and approvals included. Jamestown Stamp, Dept. A4PSC, Jamestown, New York.

300 DIFF. World wide 25c. Plus surprise packet. Mammoth packet list free. Econopackets, Box 168, Riverside 22, Calif.

ADD 10,000 different stamps of the World to your collection for less than ½c each. $5. down, $4.25 month brings you book of 1000 each month for ten months. I. Huppert, 1972 East 18th Street, Brooklyn 29, New York.

50 DIFFERENT U.S. 5c with bargain approvals, lists. Bookman, Box 8245-S, Madeira Beach, Fla.

U.S. Classics—Over 50 Yrs. Old. 15 Selected oldtimers. Missing in biggest collections. All 15 at less than 1c each. 10c with approvals. Jaro, Box 246-P, New York 8.

225 STAMPS For only 10c! This mammoth value includes Airmails, Pictorials; stamps from strange Countries cataloguing up to 25c each! Also Approvals. Mystic Stamp Company, Camden 55, N. Y.

100 DIFF. Latin America 25c. Packet list Free. Econopackets, Box 168, Riverside 22, Calif.

FREE! Catalog! About stamps. Illustrated. Free! The Stampmart, Hartford 1, Conn.

UNITED States commemorative collection containing 33 different—10c;—approvals. White, 516-W Avenue L, Brooklyn 30, New York.

FIRST U.N. Set. Among World's Prettiest. Only 10c. Approvals. Welles, Box 1246-V, New York City 8.

FREE!! Giant Catalog Offering thousands of bargains Sent with beautiful approvals. Jamestown Stamp Co., Dept. E4PSC, Jamestown, New York.

APPROVALS attractively priced for advanced collectors. References. Econopacks, Box 168, Riverside 22, California.

FREE U.S. Stamps. 1943 Occupied Nations Flag, Airmails, Commemorative included in Collection of 25 Different U.S., Plus $5.00 Stamp. Everything for 10c Mailing charge. Approvals. Willett Stamps, 141-T E. Main St., Mount Kisco, N. Y.

WORLD'S Largest Stamp (7½x14 inches). A real curiosity! Retails for 50c, only 3c to approval applicants. Tatham Stamp Co., Springfield 50, Mass.

ICELAND 10 different beautiful stamps for only 10 cents to applicants for our good old fashioned approvals. Old Colony Stamp Co., Dept. B, Milford, Conn.

FREE monthly stamp newspaper. Stories, contests, cartoons, etc., and an exciting stamp error. Send 25c for handling. TV Stamp News, 109P West 43 St., N.Y. 36.

PICTORIAL Packet from Antigua, Barbados, British Guiana, British Honduras, Burma, Curacao, Leewards, Rhodesia, Trinidad, Tobago, and many other hard to get countries. Bi-colors, topicals. Tremendous value. Each stamp a beauty. 10c with inexpensive, attractive approvals. Wolverine Stamps, Dept. B-27, Fruitport, Michigan.

FREE: Mint British Colonies from Brunei, Papua, New Guinea, Caymans, Gilbert Ellice, Seychelles, Sarawak, Grenada. Free with approvals. Viking, Great Neck 5, New York.

U.S. Stamps. Top Philatelic Investment. At Discount Prices. Giant Illustrated Cataloguide. Only 10c. Raymax, 37-VX Maiden Lane, New York City 38.

PAYING High Prices for approvals? Try ours at 1c and 2c in books of 1,000. Special offers and U.S. available. Clark Stamps, Dept. B-45, Muskegon Heights, Michigan.

LUXEMBOURG 25 different 5c. Approvals. Neal, 5950 Tower, Riverside, Calif.

FREE!—Roosevelt, Flower Triangles, 26 others. Postage 3c. Approvals. Marylandco, Arlington, Baltimore 15, Maryland.

FREE—Stalin Giant "Iron Curtain" Set. Approvals. Seminoles, Dayton, Tenn.

FREE! 107 British Colony Stamps. All different, from Britain's farflung colonial empire. Catalog value $2.50. Free Stamp Magazine. Approvals. Send 10c for handling. Act now! Niagara Stamp Co., St. Catharine's 72, Ontario.

KOREA Flowers, Formosa Chiang Kai-shek birthday issue, Hungary pictorials, Ceylon (elephant) Royal Visit, South Africa Cape of Good Hope triangle Centennial, Italian Colony flowers, Niue bi-color maps, African wild animal set. Many more beauties. All for 25c with interesting approvals. Every continent represented in this collection. Modern Stamp Co., Dept. B-3, Ferrysburg, Michigan.

GORGEOUS Orchid Diamond, Enormous Colored Flag, Will Rogers Airmail, First American Commemorative, 27 others, 3c to approval buyers. Belmont Company, Washington 15, D.C.

AMERICAN Stamps! Coins! Extensively! Sullivan, 127-D East 4th, St. Paul 1, Minnesota.

ROOSEVELT Greece, Pope Triangle, Greenland, Israel, 51 others, 5c. Approvals. Longhorn, Box 3068-P, Lubbock, Tex.

CANADA—Newfoundland collection including early issues, commemoratives, pictorials and high values. Plus set of fascinating triangle stamps. Plus set of unused British Colonies. Plus large stamp book. All four offers free. Send 10c to cover postage. Empire Stamp Corp., Dept. PR, Toronto, Canada.

DEALERS Wholesale catalog. Postage 3c. Franksco, 5031 Queensbury, Baltimore 15, Maryland.

BEAUTIFUL collection. Fifty large pictorials from fifty Countries, only 50c. Ask for approvals Faith, 1225 Campbell, Alhambra, California.

UNHINGED U.S. mint approvals. Illustrated catalog 10c. Dale A. Dronso, 3647A Plankinton, Cudahy, Wisconsin.

40 SELECTED Philippines 25c. Approvals. Merkel Stamps, 45 Cherry, Holyoke, Mass.

500 WORLDWIDE Mixture. Big variety 25c. Monjar, Fairmount, Cincinnati 14, Ohio.

FREE giant American Flag stamp. Others. Approvals. William, Box 34A, Diamond, Penna.

PENNY Approvals by country. M. H. Hoerning, Merriam, Kansas.

14,000 DIFFERENT yours on our streamlined, systematic Club plan for only 50c weekly. Big shipment every two weeks. Details free. Sjoquist, Box 217, Valley Stream 70, New York.

OLD scarce U. S. seconds on approval. Slightly defective, bargain prices. Hearnfeld, Clintonhill Station, Newark 8, N. J.

30 DIFFERENT commemoratives, 1893 up. 10c U.S. Approvals. K & B, Box 5, Brooklyn 14, N. Y.

GIANT Approvals Thousands Different! 1 and 2c. Wahl's Stamp Exchange, 7008K Farragut, Chicago 31, Ill.

ECONOMICAL ½-1-2c Approvals, 22,000 varieties available. Dresel, Box 270-T, New York City 25.

100 OLD U.S. Stamps between 1861 and 1935 $1.00. Rousch Stamps, 51 Chestnut, Mansfield, Ohio.

WONDERFUL Offer Seven complete mint sets only 10c with approvals. Reich (S26), 1033 Lawrence, Chicago 40.

CORONATIONS, Triangles, Animals, Sports, Free with Approvals. Exotic, Box 482-S, Coral Gables 34, Florida.

WORLDWIDE, 50 all different, absolutely free, just to introduce our incomparable approvals. Kent Stamp Company, GPO Box 87, Brooklyn, New York.

FREE! 25c Worth from wholesale priced approvals. Your choice. Buy wholesale. Cactus Stampco, Box 729, Redlands 2, California.

RUSSIA, 25 Exciting gems 5c, approvals. Bellmont Stamp, Washington 15, D. C.

70 DIFFERENT U.S., including 35 Commemoratives 25c. Seidenberg, Appleton, Wisconsin.

Copyrighted material

POPULAR SCIENCE OPPORTUNITIES

50 DIFFERENT Bulgaria 10c! Approvals. Ensign Stamp Company, Dept. S, Berdan Avenue, Paterson 2, New Jersey.

SUPERIOR worldwide mission mixture. Amazing variety! Half pound only $1.50. Ray Nielsen, 4545A Harvard, Montreal 28, Canada.

TRIANGLE, airmail and pictorial collection Free! Colorful approvals. Baird, Box 8713, Portland 7, Oregon.

ASSORTED stamp packets: 50c or $1.00 size. Ellenada Stamp Service, 10408 Harvard Avenue, Cleveland 5, Ohio.

FREE Sample—Interesting, informative, illustrated! National Stamp News, Anderson, South Carolina.

U.S. Mint Commemoratives! 13 different, 25c. Free Price List. Brooks 2352P East 23rd Street, Brooklyn 29, New York.

U.S. 1000 Fine Mixed 25c. Wright, 723 Washington, Hagerstown, Maryland.

FREE! Surprise packet with approvals. Pioneer, Box 414M, Pasadena, California.

100 JAPAN 10c, with approvals. Gould's, Box 631, San Francisco 1, California.

TRINIDAD, 12 different, 10c with approvals. Seminole Stamps, Box 1138-S, Coral Gables 34, Florida.

PENNY Approvals jammed with Bargains. For better values, try Putnam Stamp Company, Mahopac, New York.

45 DIFFERENT U.S. 10c, approvals. Standard, 10840 Woodview, Parma Hts. 30, Ohio.

THOUSANDS of Exciting Stamps. All Different, Yours for 1c, 2c each. Fill your Album for Pennies! Big Collection Sent for Free Examination. Cole, 43-G Rinewalt, Buffalo 21, New York.

COLORFUL Pictorial Assortment Free, with Approvals. Variety Stamps, 57-M Circuit, Newton Highlands 61, Mass.

FREE! "Worldwide Packet," when requesting Approvals! Wayside, Livermore 8, California.

SURPRISE Bundle! Stamp Album—Gifts—Money-making offers. 10c to approval applicants. Adventurers, Buckland, Connecticut.

1,000 DIFFERENT, 50c, approvals. Ouellette, Box 66S, Flint, Fall River, Mass.

SENSATIONAL illustrated U.S. 72 page catalogue free. Stone, 192-S Washington, Boston 8, Massachusetts.

1500 MIXED foreign stamps $1.00. No approvals. Aaron, 789 Valencia, San Francisco 10.

U.S. different commemoratives—100—70c, 150—$1.00, 200—$1.65. Walter Ure, 2926 Stewart, Kansas City 4, Kansas.

ITALY 100 different, 10c with approvals. De Respinis, GPO Box 771B, New York 1, New York.

MANY premiums given when buying approvals half catalogue. Tru-Value, P.O. Box 2098, Santa Ana, California.

QUITTING business! $4.25 value stamps, mint British Colonies, Asia, world, only 10c with bargain penny approvals. Lyben, 5560 Buckingham, Detroit 24, Mich.

101 EXCITING Pictorials, topicals, Queens, 25c with approvals. Rainy Day Stamps, Wellsville, New York.

200 DIFFERENT Including Macau, Rhodesia, Mauritius, 10c to approval applicants. Evden, Box 128, Valley Stream 42, New York.

U.S. Revenues on approval. Eljay Stamps, Box 286S, New York 36, New York.

TEN Triangles also 50 others, 10c with approvals. Bennett, Candor 2, New York.

RHODESIA, Caledonia, Guadeloupe, Martinique, Cameroons, Madagascar, Morocco, Reunion, Senegal, Oceania, 100 others—10c! Thrifty Stamp Company, Silver Spring, Maryland.

UNITED States or Canada collection on approval. Enclose 10c. Peterson, 405 Empire Bank, St. Paul 1, Minnesota.

100 DIFFERENT Spain 25c. Penny approvals included. Reed, Box 980, Chicago 90, Illinois.

TRAVEL thru fifty countries! A virtual world cruise! Each stamp from different country, Abyssinia to Zanzibar. Bargain unsurpassed! To new approval applicants, 5c. Avalon Stamp Co., Dept S, Springfield, Massachusetts.

EXCITING Mozambique Company Pictorial Stamps! Issued 1918-1931! 20 Different 25c. Approvals. Star Stamp Company, 11 East 15th Street, Jamestown 1, N. Y.

BARGAIN Approvals—Mounted. Discounts. Free Gift. Cranmoor Stamp Shop, Pine Beach, New Jersey.

GERMANY. Russian Occupation. Mint Set, Bears, 10c, approval applicants. Kenny, Box 2142, Pittsburgh 30, Penna.

PENNY Approvals, write today. James Vance, Box 342S, Newark, Ohio.

EXCITING "Strange countries" packet. Free with approvals! Saxon, Vista, Calif.

125 DIFFERENT U.S.—$1.00. Approvals. Utechts, 1143D North Keeler, Chicago 51.

25 DIFFERENT Greece 5c with approvals. N. Wineholt, Woodbine, Penna.

BARGAIN approvals! Save! Write Dan Blohm, Westbank Rd., Rye, New York.

29 ANTIQUES, RELICS & INDIAN GOODS

2 WAR Arrowheads, Tomahawk, Spearhead, — Scalping Knife — $5.00. Catalog Free. Arrowhead, Box 1249, Hot Springs, Arkansas.

SELLING 50,000 Indian Relics, arrowheads, etc. List free. Lear's, Glenwood, Arkansas.

3 WAR Arrowheads, Scalping Knife $2.00. List Free. Arrowhead, Box 1249, Hot Springs, Arkansas.

30 MINERALS & PRECIOUS STONES

FIND Uranium, tungsten, mercury, hundreds of other minerals with Mineralight. Free information kit on fun and profit in fluorescent minerals; hobby set. Write Dept. PS4, Ultra-Violet Products, San Gabriel, California.

TEN N. Mex. Minerals $1.50, Six Fluorescents $1.00. Five Crystallized Minerals $1.00. Fool's Gold 25c. Lists Free. Hartson, Winston 5, New Mexico.

GEMCUTTING—Silvercraft magazine. Learn to cut gems, make jewelry. Ads give sources equipment, gems for cutters, collectors. Free literature. Sample copy 25c. Lapidary Journal, Del Mar 3, California.

MARINE Catseyes green, brown or white. $1.00 pair. Gemco, Eisner Ave., Sheboygan, Wisconsin.

GEMSTONES. Mineral specimens for cutters and collectors. Every variety. Lowest prices. Free catalog. Plummer's, 4720 Point Loma Avenue, San Diego 7, California.

SAPPHIRE, Topaz, tourmaline, garnet, peridot. Five uncut gem specimens, $1.00. Ten polished gems, baroque shaped, $1.00. Free big bargain list jewelry, gems, profitable, easy, do it yourself projects. O'Brien's, 1116B Wilcox, Hollywood 38, California.

LARGEST gem and mineral magazine tells how to have profitable fun with rocks, gems, jewelry. Monthly, $3.00 year. Sample 25c. Gems & Minerals, Dept. S4, Palmdale, Calif.

SPECIMEN uranium autunite crystals, 25c. The Science Shop, Box 74, Station "A", Spokane 17, Washington.

GEM Locations—Treasure, Gold, Uranium! Subscription only $1. Prospector's Gazette, Bellflower 51, Calif.

HIGGENS' Gems & Minerals. Finest quality. Free price list. 2117 Park, Salem, Oregon.

TWENTY-five minerals plus Geology booklet $2.00. Ten polished baroque gems $1.00. Free price list. Money-back guarantee. Reed's, 4930 Palo Alto SE, Albuquerque, New Mexico.

31 HOBBIES, COLLECTIONS

INVENTING can be an interesting and profitable hobby. Write for complete particulars. Institute of American Inventors, Dept. 30-E, 631-E St., N. W., Washington 6, D. C.

GENUINE Nazi medal $1.00; 37 different American emblems $1.00; Catalog 10c. Insignia Club, 550-A Fifth Avenue, N. Y.

UNUSUAL Hobby: Authentic Army Patches, Insignias, Ribbons, enameled Crests, Navy rates, 50 assorted for $1.00. Rex Military, Dept. C, 1261 Broadway, N.Y.C.

FREE three months subscription Leathercraft News, write Tandy Leather Co., Box 791-E21, Fort Worth, Texas.

BEAUTIFUL Canadian Decals, sixteen designs, Five for dollar. Decals, 380 King West, Toronto, Canada.

FREE! Leather-coppercraft catalogs. Do it yourself. Tandy Leather, Box 397BH, Tulsa, Oklahoma.

65 ASSORTED Army Patches, Insignias, Ribbons $1.00. Surprise included. Lhgco, 19-Y East 16 St., New York City 3, N.Y.

MAGNETIZER and Demagnetizer—instantly magnetizes or demagnetizes screwdrivers, etc.—$4.95 Postpaid. Literature on request. Electric Motors Service Co., Dept. D, 347 Crescent Street, Jamestown, N. Y.

MILITARY Miniatures, insignia, flags. Two catalogs 35c. Griffin and Gray, A-3, 72-05 67th Street, Glendale 27, New York.

MILITARY Miniatures: U.S. Marines, American Revolution, Civil War, Custer's Cavalry. Illustrated Catalog 25c. Bussler Miniatures, Dept. E, 40 Howe Street, Quincy 69, Mass.

GROW Giant crystals! Send dime for booklet explaining hobby. Crystocraft Co., College Station, Texas.

NAZI Insignia. 12 Different, $1.00. Armbands, daggers, flags, medals. Illustrated lists. Medcrafts, 1923 34th St., S.W., Calgary, Canada.

JAPANESE Matchbook covers—rare—unused—pressed—12 different $1.00. Collector's Corner, Box 165, Laurel, Maryland.

MATCHBOOKS for collectors, catalog 25c. Charles Edelman, 1311-P East 84, Cleveland 3, Ohio.

COLLECTORS and Hobbyists. Beads imported and domestic, wide selection, sizes, shapes, colors, designs, pound contains thousands, 5 pounds $5.00. Sample pound $1.50. Lhgco, 19-N East 16th St., New York 3, N.Y.

NEW fascinating hobby. Micromodeling. Make realistic, 3-D, miniature replicas of historic buildings, trains, ships. Printed on card to cut and assemble. Send dollar for descriptive booklet, price list, Sample model. Thayer and Storm, 50th and France, Minneapolis 24, Minn.

32 PHOTO FINISHING, PHOTOCOPIES, ETC.

PHOTOGRAPHY For Pleasure or profit. Learn at home. Practical basic training. Long established school. Free booklet. American School of Photography, 835 Diversey Parkway, Dept. 1721, Chicago 14.

SURPRISE gift with first roll developed. 8 jumbo superpak album prints or 16 contact prints 40c. 12 exposure roll 50c. Certificate for 3—5x7 enlargements. Dept. B-14, Owl Photo Co., Weatherford, Okla.

FREE 5"x7" introductory enlargement with roll. Finest quality Jumbo dated prints in handy Super paks. 8 exposures 35c; 12, 55c. Globe Photo, Dept. PS, Box 3508, St. Paul, Minnesota.

8—12 EXPOSURE rolls 39c, jumbo prints. Free 5x7 enlargement with each roll developed. Guaranteed work, one day service. Lincoln Studios, Dept. L, Box 13, Lincoln, Nebraska.

FREE! 5"x7" Sepia Tone Enlargement, double weight silk paper, with each roll. 8 exposures 60c, 12 exposures 80c, 16 exposures $1.00. Jumbo prints Sepia Toned at no extra cost. Complete color service, also. Satisfaction guaranteed. Have printed over 150,000,000 perfect pictures. One of world's largest, finest labs. Target Photo Finishers, Dept. H, Box 3581, Jackson, Mississippi.

FREE Roll Developing. Pay for prints only. Jumbos 4c. Regulars 3c. Failures Refunded. Rush Service. Guaranteed. Square Deal Photos, Hutchinson, Kansas.

EKTACHROME—Anscochrome Processed—Mounted $1.00. Fast Kodachrome—Kodacolor Service. Send for Prices. National Color Corporation, Box 55, Northside Station, Atlanta 5, Georgia.

Copyrighted material

POPULAR SCIENCE OPPORTUNITIES

8-HOUR service on deluxe jumbo prints. 8-Exposure roll developed and 8 jumbo prints 40c, 12 exposure 55c, 16 exposure 70c; 35 mm. 20 exposure 75c, 36 exposure $1.25. Jumbo Deckledge Reprints 4c each. Contact prints made if specified. Bay Photo Service, P. O. Box 210, Oakland, California.

4 X 6 OR 3¼ X 4½ oversize glossy prints. 8 exposures 40c, 12 exposures 60c, 16 exposures 80c. Hagner, 1318 West Columbia Avenue, Philadelphia 22, Penna.

FREE Mailers, 8 jumbos 40c, 12—55c, 20 exp. $1.00, 36—$1.50. Western Photo, Dept. PS46, Box 298, San Francisco 1, California.

QUALITY Kodak finishing, 8 exposure roll 35c; 12 exposures 50c; 16 exposures 60c. Reprints 4c. Fast service. Guaranteed quality, 40 years continuous operation. Be a satisfied customer. We do color. Send for mailers. Mail Order Photo Service, Box 297, Watertown, Wisconsin.

ENLARGEMENTS heavyweight eight 5x7's or five 8x10's, $1.00. Jack Koons, Huntington Mills, Luzerne County, Penna.

PHOTO Statuette of your child, sweetheart, friend, or pet. So real, so charming, so lifelike . . . it almost breathes. A cute action, a becoming pose, a favorite age is captured with a realism no photograph can duplicate. A treasured and lasting possession for your own home or for a gift. Your picture—snapshot or negative—enlarged up to 7", cut out and mounted on a display stand. Money Back Guarantee. $2.50. Oil Colored—$3.50. Send Check or M.O. with photo or negative. Whitehall Studios, 85 Cleveland Ave., Elmira, N. Y.

33 MOTION PICTURES, SLIDES SOUND EQUIPMENT

MOVIE Camera Film 8 mm roll $1.50. 16mm 100' $3.00. Free processing. Better Films, 742 New Lots, Brooklyn, N. Y.

SAVE 50%! Guaranteed-fresh color, b&w movie film! 8mm, 16mm. Free catalog! Eso-H, 47th Holly, Kansas City 12, Mo.

FREE! Blackhawk's big sale catalog new and used 16mm., 8mm. films; 2"x2" color slides; used 16mm. sound projectors. Biggest stock in USA. Blackhawk Films, 1201 Eastin, Davenport, Iowa.

GUIDE To Free Film Sources, 25c. Film Guides, Box 4300, Lubbock, Texas.

FREE Catalogues. 5,000 8-16MM. Films. International Films, Greenvale, New York.

THRILL to slides processed from your favorite negatives, 10 for $2.00. Thirty-five Slides, Green Mountain Falls, Colorado.

HUGE listings, color, B&W sports, comedies, travel, musicals, etc. Catalog 15c. Turke Films, 423 S. Lincoln, Hinsdale 1, Illinois.

TAPE Recorders, tapes; wholesale prices. Korstan, 215 E. 88, New York City 28.

2"X2" KODACHROME. Finger Lakes, Glens, Falls, Flowers, Tollis, Lima 335, New York.

ANTIQUE Automobiles, Covered Bridges, Locomotives. Free Catalog. Weldon Color Slides, Monson, Mass.

TAPE recorders, tape. Unusual values. Free Catalog. Dressner, 69-02 174 Street, Flushing 65, New York.

34 CAMERAS, PHOTO SUPPLIES

BASS Says: Quality Cameras Since 1910. When in Chicago visit the Camera Cross Roads of the World . . . or write us for your favorite equipment, new or used. Satisfaction Guaranteed. Bass Camera Co., Dept. AG, 179 W. Madison Street, Chicago 2, Illinois.

BUY wholesale nationally advertised cameras, photo supplies, thousands other products at big discount. Free "Wholesale Plan." American Buyer's, Hertel Station, Buffalo 16-P1, N. Y.

20 TO 50% Discount everything photographic, giftware. Free catalogue. Dart, 3812F Atlantic Avenue, Brooklyn 24, N. Y.

REAL Wholesale Sources. Thousands Nationally Advertised Products. Details Free. Martex, 132-D Nassau Street, New York 7, N. Y.

ATTENTION Camera owners. Can you use several hundred dollars? See Polypix ad in "Moneymaking Opportunities."

35 MUSICAL INSTRUMENTS, SONG WRITERS & RECORDS

ACCORDIONS—Direct from importer—save 50% and more! Free trial. Lifetime guarantee. Trades accepted. Free Catalog. Write Accordion Outlet, Dept. 46-P, 2003 Chicago, Chicago 22, Illinois.

WANTED! Poems for musical settings. Write Songwriters' Service, Clifton, N. J.

POEMS Wanted for New Songs. Send poems. Immediate consideration. Crown Music Company, 1472-P Broadway, New York City 36.

POEMS needed for new songs. Send poems for free examination, details. Immediate consideration. Songcrafters, 2724 Arcade Station, Nashville, Tenn.

FREE Records of your song—Your words—My Melody. Free information. Johnny Mack's Melody Mart, 1094 West 39th Street, Dept. K, Los Angeles 37.

SONGS—Poems wanted. Good opportunity. Hollywood Tunesmiths, 1609 Vista Del Mar, Dept. N, Hollywood, California.

SONGPOEMS and lyrics wanted. Mail to: TinPan Alley, Inc., 1650 Broadway, New York 19, N.Y.

SONGWRITERS: Recording company wants new songs. Royalty basis. National sales, promotion if selected. No charge for melodies. Send material. Music Makers, Dept. G-20, Box 2507, Hollywood, California.

POEMS Wanted to be set to music. Free examinations. Send poems. McNeil, Master of Music, 510-PS, S. Alexandria, Los Angeles, California.

SONGWRITERS: Music composed and songs arranged by Hit songwriter! Correct procedure explained. Song Service, PS, Indian Lake, New York.

POEMS wanted for musical setting. Send poems. Immediate Consideration. Five Star Music Masters, 646 Beacon Bldg., Boston, Mass.

NEW Suitcase Organs, Easily Played, Such Pleasure. $195. Organ Shop, 3805 Fulton, Canton 9, Ohio.

VIOLINMAKERS. Repairers. Fine tone wood, and all violin supplies. Send for free wholesale price list. International Sales Co., 414-PS E. Baltimore St., Baltimore 2, Maryland.

SONGS Into $$$$$—Share $29 million dollars yearly for New Songwriters, songpoets. Songs composed, published, promoted by largest firm. Information, appraisal Free. Send to Nordyke Publishing Company, 6000 Sunset Blvd., Hollywood 28, PS, California.

SONGWRITERS! Send poems, songs. Music Service, 243 West 72nd St., PS, New York 23.

PLAY piano the first day! Copyrighted secret. Details free. Miracle Method, Box 5203-S, Phoenix, Arizona.

ELECTRIFY reed organs. Instructions $1.50. Galloway, Box 211, Beaufort, S. C.

POPULAR Songs. How to write and sell them. Write for free booklet Successful Songwriting. Gateway Songs, Box 2470, Hollywood 28, California.

ELECTRIC Guitars, amplifiers, accordians, wholesale. Free catalog. Carvin, PS287, Covina, California.

TO $50.00 for poems—Greeting cards, magazines. Details—Hobbies, 1603-A Sun Valley, Austin, Minnesota.

1956 ACCORDIONS — Wholesale. Free catalog. American Accordion Center, PS-4, 5329 Belmont, Chicago.

36 RADIO, TELEVISION, SUPPLIES & EQUIPMENT

MAKE Simple, Tubeless, Batteryless, Distance-Getting radio. Genuine Melomite crystal Detector. Illustrated instructions. 50c postpaid. Allen, 427-PS5, Clinton, Mo.

CAR Radio Reception Stinko? Send $6.95 for Glass-Tenna. State Color. C. V. Signorello, 155 Norwood Ave., Lodi, New Jersey.

RECORDERS, Tapes. Sensational discounts. Free Catalog. Towers, Box 155, Philadelphia 5.

EASY build radios, Hi-Fi, phono-amplifiers. Plans $1.00 each. Wolins, Amazon Rd., Peekskill, N. Y.

TELEVISION remote control. Kills commercials. Effectively locks set off. Order Teleswitch $1.98 postpaid. J&J Electronics Corp., 4 Union Street, Peabody, Mass.

NEW TV Catalog Free. Loaded with bargains. Finest new TV antennas, Converters, Motors, Boosters, Parts, Instruments, hundreds of quality accessories. Get your catalog now. National Electronics, Dept. S-4, 6608 Euclid, Cleveland 3, Ohio.

POWERFUL one tube radio, instructions, 50c, with tube, $1.00. Electronic Specialties, Box 15, Beechwood Station, Rochester 9, New York.

MAKE Long distance crystal radio that works anywhere. Fully illustrated booklet 15c. Money back guarantee. Francis, Box 5963, Cleveland, Ohio.

FREE! Newark's New 1956 Catalog. A postcard will bring you 260 pages full of the latest releases and largest selections of the world's finest Radio, TV, Amateur, Electronics and High Fidelity Equipment. Write today to: Newark Electric Company, 223 W. Madison St., Dept. PS-4, Chicago 6, Illinois.

WALKIE-Talkie. Build wireless two-way portable radiophone for less than $10.00. Plans 50c. Springfield Enterprises, Box 54-A4, Springfield Gardens 13, New York.

T.V. Signal intensifier makes picture 50% clearer. Installed 5 minutes, money back guarantee. $1.00 Postpaid. Marion's T.V., Parma, Idaho.

GEIGER Counter and Metal Detector Kits. Inexpensive, Educational. Free Literature. Electronic Applications, 5024 Lee Highway, Arlington 7, Virginia.

BUILD your own Hi Fidelity Equipment. Complete catalog. Free. Write Arkay, Box 581, Church St. Sta., New York, N. Y.

REPAIR Diagrams, Radios, $1.00. Televisions, $1.50. Give Make, Model, Chassis. TV Miltie, Box 101-S, Hicksville, N.Y.

10 RADIO plans 50c. Tube, transistor, crystal. Lawrence, Wellesley Road, Swarthmore, Pennsylvania.

FREE! Huge Bargain Filled Bulletin: 30 $1.00 Kits, "Sun-Powered Transistor Radios, tools, cameras, meters, tubes, parts, telescope, microscope, gadgets and more!" Lektron, 28A Gardner Street, Chelsea, Massachusetts.

3 SUN Batteries $5.00. Handbook $1.50. Details free. Strong, 601G El Centro, South Pasadena, California.

37 BUSINESS OPPORTUNITIES

START A Buying Service, buy wholesale thousands nationally advertised products. Make big profits selling at sizeable discounts. Postcard brings details. American Buyers', Hertel Station, Buffalo 16-N1, N. Y.

ENVELOPES addressed accurately, reasonably. Fast service. We have capable addressers in your city. Glenway System, 5713 Euclid, Cleveland 3, Ohio.

"MAKE Perfumes", other products—Sell mailorder. International, 6347 Parnell-PS4, Chicago 21, Illinois.

IMPORT-Export! Opportunity, profitable, world-wide, mail-order business from home, without capital; or travel abroad. Established World Trader ships instructions for no-risk examination. Experience unnecessary. Free details. Mellinger, F691, Los Angeles 24.

WE Love our mailman. He leaves over $1,000.00 monthly in our rural mailbox. My college professor husband drafted a scientific home mailorder method. We bought a Texas ranch, live as we always wanted. Now we sell the "Ranch Mailorder Method." Operates anywhere. Inquire: Eveningshade Ranch, Helotes, Texas.

GROW Orchids at home—profitable—fascinating. Year 'round, Maine to California. No Greenhouse. Gorgeous Cattleyas, Cymbidiums, etc. Successful home grower shows you how. Free—full details. Flowerland, 4622 Wilshire, Los Angeles 5.

OPERATE profitable mail order business. Write Walter Service, 4159-B East 112th, Cleveland 5, Ohio.

Copyrighted material

POPULAR SCIENCE OPPORTUNITIES

BRONZE Baby Shoes. Instructions, Equipment and mountings for genuine electroplated process. Free catalog. Hollywood Bronze Supply, Dept. B-1, 1624 East First Street, Los Angeles 33, California.

MEN.—Income from local information. No selling. Neherco, LaVerne 6, California.

NEWEST Spare, Full-Time Home Business. $5 to $10 hour possible. Paint with suede—the finish with touch And eye-appeal. Beautify auto dashboards, signs, radios, toys, figurines, lamps—1001 others. Complete, Step-By-Step Instructions sent for no-risk examination. Free details. Coast, Los Angeles 61.

BE appointed state notary public now. Write—Stationers, Helotes, Texas.

YOUR Own name brand business. No investment; no inventory. Part time or full time. Sell famous brands of appliances, housewares, silverware, radios, vacuum cleaners, lamps, tools, clocks, watches, jewelry, etc., etc., over 1,000 items. Join thousands of successful independent dealers. Send for Free catalog and dealer price list. H. B. Davis Corp., Dept. P, 145 W. 15 St., New York City.

FIX Typewriters Inexpensive home course teaches Factory Secrets. Free Booklet. Write, Typewriter, Tarentum 2, Pennsylvania.

$1,000 MONTHLY, home, mailorder, free advertising method. Revealing information. Seidel, 6000-BQ Sunset, Los Angeles 28.

WANT To Make Big Money At Home? $5 profit in an hour possible with Invisible Reweaving. Make tears, holes disappear from clothing, fabrics. Steady year-round demand from cleaners, laundries, homes. Details Free. Fabricon, 8338-S Prairie, Chicago 19, Illinois.

BREED Rare Tropical Fish at home. Earn Big Money! Learn Secrets! Help fill huge demand. Amazing Opportunity! Free Plan. Tropical Fish Breeders, Los Angeles 61, Calif.

MINK Raising information free. Complete, Lake Superior Mink Farm, Superior E E5, Wisconsin.

MAIL Order—advertising agency executive reveals sensational no-risk advertising and merchandise methods. Start in office or home—minimum capital—positive profits. Free details: Impact! 2108 Payne, Dept. 2-4, Cleveland 14, Ohio.

WHOLESALE—Get the big merchandise-furniture, appliances, TV's, clothing, tools, auto accessories—most anything. Save half. Literature Free. Associated Wholesalers Service, 1016-C2 Starr, Burlington, Iowa.

FREE! "301 Profitable Small Businesses!" Amazing shoestring plans! Work Home! Start Sparetime! Deumant Surveys, Kenmore, 23-S, New York.

MINIATURE Trees. Why pay $2.00—$10.00 for growing secrets? Free details. Tiny Trees, Box 3084-S, Chicago 54.

ONLY new Moneymaking Plan!! We sell your products. You build luggage and cases at home—we supply instructions—materials—tools—everything. Free details. Casecraft, 807-DD Sunset, Los Angeles 12.

VENDING machines earn big money! Request 32 page free catalog. Parkway Machine Corporation, Dept. 18, 715 Ensor Street, Baltimore 2, Maryland.

ADVERTISING book matches—Cash in on big demand—sell Union Label matches. Cuts for all businesses and political parties—Free powerhouse selling kit—low prices—protection guaranteed on repeat orders—Cash Commissions. Superior Match Co., Dept. PX-456, 7530 Greenwood, Chicago.

$150 WEEK—easy! Start home Venetian Blind Laundry. Revealing book free. A. V. Co., 101 S. 44th, Philadelphia 4, Penna.

HAVE Home Business! Get $10.00 Merchandise Orders in every mail—Keep $8.00. Everything Furnished. Hutchinson, Box 87-C, Dorchester 22, Massachusetts.

TURN Garbage, lawn clippings, waste into money. Plant our large red fishworms. Worms, culture, instructions postpaid $1.00 and this adv. Oregon Worm Co., Box 386, Gresham, Oregon.

TOPFLIGHT mail order business opportunity. Modest capital. Request convincing details. Stav, 147 Victoria Street, Kamloops 9, B.C. Canada.

HOW and where to obtain Capital? Free details. Star Service, Wapakoneta, Ohio.

$5,199.90 WAS Paid to John Betts in few weeks. Grow Mushrooms. Cellar, shed, Spare, full time, year round. We pay $3.50 lb. Free Book. Mushrooms, Dept. 178, 2954 Admiral Way, Seattle, Washington.

EARN Up To $2000.00 monthly with spare or full time route of automatic 3 in 1 Hot Drink Merchandisers using Maxwell House Coffee, Bakers Chocolate, Tenderleaf Tea, in your community. We train you. $1190.00 starts you. Write Superior, 4555-BG East Warren, Denver, Colorado.

AMBITIOUS? We establish you in your own business, supply catalogs, circulars, etc., ship orders under your name, paid or C.O.D., show you exactly what to do. Household items needed in every home. Sell direct, by mail or through agents. Catalog, plans, details absolutely free. Write Topval Corp., Lindenhurst 421, N.Y.

BUY Wholesale! Resell at Big Profits. Sell Nationally advertised brand name merchandise. Appliances, cookware, housewares, watches, jewelry, dry goods, clothing, sporting goods, toys, gifts, etc. Build a profitable repeat business. Send for Free 124 page illustrated color catalog with separate confidential cost sheet. Merit Home Products, Dept. PS-4, 107 Manhattan Ave., Brooklyn 6, New York.

MONEY Raising methods. Copyrighted—"How and Where to Raise Capital". Revealing! Establish your own business. Expand! Free details, A. P. Service, Box 1377-PD, Miami 8, Florida.

WORK from home in spare time. Start profitable magazine renewal service. We show you how; furnish everything Free. No experience needed. Write McGregor Magazine Agency, Dept. 510-B, Mt. Morris, Illinois.

TO $100.00 weekly. Sparetime, home operated mailorder business. Successful "Beginner's" plan. Everything supplied. Lynn, 10420-C National, Los Angeles 34.

LEARN home mailorder. Fascinating, profitable. Free details. Spera, Box 596, Toronto 1.

EARN $70.00 Weekly sparetime. Everything supplied. Free details—No obligation. Plastico, Box 674, Pottstown 1, Pennsylvania.

$1,000 MONTHLY possible in collection agency business. Free details. Write Cole Associates, Syracuse 2, New York.

LIQUID Rubber makes flexible molds. Free Sample. Chaney, 1130 E. 16th St., Jacksonville 6, Fla.

REWEAVE damaged clothes yourself! Harris Reweavers, Box 7112, New Orleans 19, Louisiana.

WHOLESALE catalogue! Appliances, cameras, watches! Cam Company, 6806PS-20th Ave., Brooklyn 4, New York.

REBUILD batteries; Make rubber stamps; Repair dolls. Catalog "60 Ideas" free. Universal, Box 1076-B, Peoria, Illinois.

THRILLING Profitable Home Business. Make fast-seller chenille monkey trees, dolls, flowers. Terrific holiday demand. Information free. Velva, Bohemia 17, N.Y.

BIG Profits Raising Fishworms and Crickets. Free Literature. Carter Worm Company, Plains, Georgia.

NATURAL molding rubber, extra thick. Free sample. W. Wooley, 115-B, Donald, Peoria, Illinois.

BOOMING Swimming Pool Industry cries for New Blood. New materials make opportunity for $20,000 to $40,000 income. Send $1.00 for thoroughly tried plan to get started to: Northeast Pools, Box 95, Hamilton Square, N.J.

DOLLARS: Baby record books, Kitty Kat shoes. My Baby albums. Eleven Thousand new prospects daily. Sold by mail. Use our literature. No-Co-Ro, Capitola 8, California.

SAVE 20% to 50%. Buy wholesale! Nationally advertised merchandise. Free details! Beecher Sales, Box 2161-E, Cincinnati 1, Ohio.

ELECTROPLATE autoparts, novelties, mirrors, baby shoes. Easy, inexpensive home processes. Free booklet. Tyco Metals, Box 13231-CQ, Houston 19, Texas.

MONEY in new greaseless doughnuts. Start in kitchen. No smoke. Sell stores. Free recipes. S. Ray Co., 3605 South 15 Ave., Minneapolis 7, Minn.

BRICKLAYERS sell nationally known tools. Details Horseheads Supply Co., Horseheads, New York.

BRUSH Plating Outfits for plating articles in the home and shop. No tanks necessary. Good income spare or full time. Free particulars. Gunmetal Co., Ave. E, Decatur, Illinois.

MAKE up to $3 hour sparetime taking orders for Stainless Steel Tableware guaranteed 50 years. Details free. Block, 35 Hoeltzer, Rochester, New York.

SPECIALIZED Magazines give you new ideas. Examine current copies, one or all those covering your field. 5,166 different publications—all businesses, trades, vocations, professions, etc. Write today for Free current List. Commercial Engraving Publishing Company, 34S North Ritter, Indianapolis 19, Indiana.

REAL Wholesale Sources. Thousands Nationally Advertised Products. Details Free. Martex, 132-E Nassau Street, New York 7, N. Y.

23 WAYS for home mail business with lifetime repeat income. Free details. Hardys, Box 546, Cantonment, Florida.

VENDING machines—every description. New or used. Lowest prices. Start a route or sell outright. Mack Postel, 2952 Milwaukee, Chicago 18.

OPPORTUNITY to earn $15,000-$30,000 annually. Franchise protected. Granted on $12,500 guarantee. Live at home. No merchandise to buy. Selfemployed. One of most exclusive and noncompetitive Businesses in United States and Canada. Send for free explanatory booklet. Harrell and Company, Box 8-D, Louisville, Illinois.

"MAILORDER Laws and Regulations". Discusses federal, state, local licenses, necessary taxes, legal requirements governing mailorder businesses. $1.00. "Mailorder Rules for Beginners". Additional helpful information. $1.00. Play Safe. Order both. Tasker, 105 East Custis, Alexandria, Virginia.

MAKE flexible molds. Cast figurines, plaques. Free sample. Tooker, 630-A Chestnut, Hamilton, Ohio.

A MONTHLY repeat business which you can operate in your own community. For free details write Grasak, Dept. B-202, P. O. Box 494, McKeesport, Pennsylvania.

POPCORN and Potato Chip Equipment. Eakins, Box 933-B6, Springfield, Ohio.

$4,000.00 PROFIT in two months. No investment. Details, 50c. Charles Company, 12-EDP, Norwood, Ohio.

IMPORT fast selling articles direct from foreign manufacturers in small quantities. Clocks, 65c, cigarette lighters, 19c. No capital required. Details. Ga. Overseas Trading Co., Dept. D-4, 715 Persons Bldg., Macon, Georgia.

PRINT for Profit at home. Amazing new method prints colorful posters, banners, greeting cards, glassware—anything. Hundreds at time. No press needed. No art. Fantastic profits! Need representative your area immediately! Free home-business plan. Screen-Print, Dept. PS-4, Los Angeles 61, California.

CASH from Sawdust (seventy methods). Tin-Cans (thirty methods). Newspapers (eighteen methods). Instructions 50c each. All three $1.00. Charles Company, 12-EXV, Norwood, Ohio.

"23 WAYS to build a home mail business." Free details. Penn General Distributors, Monessen, Pennsylvania.

$70 WEEKLY—Home, spare time. Simplified mail bookkeeping. Immediate income—easy! Auditax, 34757D, Los Angeles 34.

MIMEOGRAPHING brings sensational local profits. Exciting secret plans exposed! Rush postal. Mozell Mimeo Service, Bonham, Texas.

$250 WEEK cleaning venetian blinds. Patented Machinery. Free literature. Robinson, 7213A, Indianapolis 1, Indiana.

PLASTERCRAFT molds, liquid rubber, plasters, flocks, candle supplies. Catalog and manual free. Jayhawk Plasters, Blue Rapids, Kansas.

EXTRAORDINARY business opportunities provided via inexpensive, self-teaching capsule course "Air Conditioning Simplified". Free impressive particulars. Kowalski, Box 409, New Britain, Conn.

POPULAR SCIENCE OPPORTUNITIES

HUSBAND—Wife Team successful in mailorder business. Details free. Edwards, 6614Ap Lakeshore, Dallas 14, Texas.

TYPEWRITER ribbons $1.00 (any color). Dozen, $9.00. Gross $72.00. 100 sheets carbon paper, $3.00. 1000 sheets, $20.00. (Sample free). Stock up and save while they last. Tasker, 105 East Custis, Alexandria, Virginia.

$46.00 FROM Square Foot Plywood; Jigsaw necessary. Details Free. Woodarts, Bridgewater, Mass.

MANUFACTURE Successfully! Fortunes made daily. Free Booklet. Alltools, Box 268-CK, New York 5.

MAKE Fast Buck. Sell Nationally advertised merchandise. Free Wholesale Catalog. Harry Cohon & Sons, Inc., 1069-PS Utica Avenue, Brooklyn 3, New York.

MONEYMAKING Mailorder Business Plan. Free! Write: George Lenhoff, Lincoln 1, Nebraska.

97 SCHEMES to Make a Million. You might! Information free. Jellen, Thorndike, Massachusetts.

WHOLESALE Buyers' Service! Buy Nationally Advertised Merchandise Wholesale. Sell way below Retail. Fabulous profits. Write Wholesale Buyers, 1720 Market, St. Louis 3-SC, Missouri.

RAISE Earthworms for Profit. Literature, full information, 25c. 125 Lexington, El Monte, California.

ANYONE! Mass-produce 100 of my patented product per day. Easy. Fun. Sell fast. $1 each. Send $2 for rights, specifications. Refundable. John Massey, Box 898, Turlock, California.

RESEARCHING for Information, Newspaper Clipping, Addressing. Brings Dollars! Cutler Enterprises, Reading, Pa.

$26,500 SALES in two weeks! Amazing radio-mail order method. Free details. Broadcast Service, 1412-AS Great Northern Building, Chicago 4, Ill.

CASH from scrap wood. Four patterns Western type articles, $1.00. Arnold, 3121 Alexander, Waco, Texas.

EARN $10,000 yearly raising Angora Rabbit Wool for us. Information, 25c coin. American Angora Company, Malta 1, Mont.

"EVERYBODY Likes Candy." Make professionally home. (Our 45th Year.) Ragsdale Candies, East Orange, N. J.

TOPFLIGHT specialist shows how to start a profitable mail order business. Convincing booklet free. Eisert, 2119 Sansom, Box 34, Philadelphia 3, Pa.

YOU can earn extra cash selling our rubber stamps. Easy. Average $1.00 profit per stamp. Free details. Green Bay Mail Order Co., 613 Phoebe Street, Green Bay, Wisconsin.

BE WORTH $300,000 in 5 years. Startling Manual reveals exciting home business proposition. Learn how. Write today. Free details. Robert Albers, So. 1 Airport Road, St. Johns, Michigan.

SELL Merchandise By Mail. We Furnish Literature, Names—Fill Orders. Start low as $100.00. Associated, Box 53-D, Boston 22, Massachusetts.

YOUR Own Business . . No Investment . . No Inventory. Sell Name Brand nationally advertised items. Free Catalog. Confidential Wholesale Price List. Normandy Dist. Co., Dept. PS, 133 Fifth Ave., N. Y. 1, N. Y.

COLORGLAZED Concrete pottery made without molds. Patented method. Cemetery products, novelties, tiles. Basement leak-sealing. Money-making projects. Booklet, details free. Men only. National Potteries, Grand Rapids, "Minnesota."

HOME Business. Spinning Angora wool. Steady cash market for wool. Angora House, PSM, Springfield, Illinois.

FRANCHISE opportunities nationwide! Profitable distributorships, dealerships, agencies. Request interesting information immediately. National Franchise Reports, 333 North Michigan, Chicago 1.

FLARE Salesman full or part time. Finest Highway reflector flare. Established Company. Make $150.00 to $250.00 weekly. Others are! Be your own boss. Sell fleet operators—truckers—garages—car owners. Big Market! Year around demand! Vari Products, 2450 S. Prairie, Chicago 16, Ill.

MAKE tough, attractive building plastic, easily. Build better for less. 800% profit. Exclusive district. Bays Laboratory, Oklahoma City 9.

A new and different business. Import—Export. Operate from home full or spare time. We show you how. Items manufactured in foreign countries at low, low prices. Sold at high, high U.S. prices. Not necessary to travel all over world. Brought right to your door. Learn how you can receive free imported samples and free publicity and radio advertising Terrific profits. World Trade Plan complete only $2.00. Money back if not satisfied. Eddell Importing Co., Box 54, Dept. 101, Dallas, Texas.

DISCOUNTS 20-50%, thousands nationally advertised products; own use; sell others at big profits. Postcard brings free information. National Wholesale Service, Dept. M, Box 397, Buffalo 5, New York.

BUY Wholesale 750,000 Products. Free Details. Carter, Box 6011-E, Chicago 80.

BECOME Tax Consultant. Our students earn to $3,000 in 3 month season, part-time. We train you—help you start. State approved. Union Institute, 68 Hudson, Hoboken 1J, New Jersey.

LATHE Owners: Build, sell mandrel for 16" to 24" rotary mowers. Heavy duty, ball bearing, V-belt drive. Build new mowers, also large demand for replacements on most V-belt drive mowers. Prints and instructions $1.00 P.P. Alda Machine Works, Ashburn, Georgia.

$50.00 PER Day. Be your own boss. Operate your own car waxing business. Every auto owner a prospective customer. No equipment, investment, or experience needed. Send $1.00 at once for Instructions and Supplies. Wm. Best, Jr. & Co., Bryn Mawr, Pennsylvania.

$1,000's CAN be made raising Hybrid Red Worms. Send for Free Fascinating Raising & Marketing Booklets. Golden State Red Worm Hatcheries, Box 338, Norco, California.

37A CLAIM INVESTIGATORS

EARN $50.00 Day in Billion-Dollar Adjustment Field. Tremendous opportunities. Train at home. Placement counsel. Free book—Now! No obligation. Universal Schools, 6801 Hillcrest, B4, Dallas 5, Texas.

38 MONEYMAKING OPPORTUNITIES

WIN contest money. General Contest Bulletin gives hundreds of tips. Lists current contests and rules. Sample 25c. General Contests, 1609-A East 5th, Duluth, Minnesota.

START A Buying Service, buy wholesale thousands nationally advertised products. Make big profits selling at sizeable discounts. Postcard brings details. American Buyers', Hertel Station, Buffalo 16-O1, N. Y.

MAKE Spare Time Money preparing and mailing sales literature. Adams Surveys, 3513-AS Sunset Blvd., Los Angeles 26, California.

DETECTIVES—Work home—Travel. Experience unnecessary. Detective Particulars free. Write, Wagoner, P-125 West 86th, New York 24.

ENVELOPE addressing facts—extra income opportunities revealed thru HM service. Free details. Maxwell, Dept. 44-4, Cleveland 14, Ohio.

SELL Titania Gems; far more brilliant than diamonds. Catalog free. Diamonite, 2420-S 77th, Oakland 5, California.

$25 WEEKLY possible, sparetime, addressing envelopes at home. Temple Co., Muncie 7, Ind.

FREE! "301 Profitable Small Businesses!" Amazing shoestring plans! Work Home! Start Sparetime! Deumant Surveys, Kenmore, 23-S, New York.

$150 WEEK—easy! Start home Venetian Blind Laundry. Revealing book free. A. V. Co., 101 S. 44th, Philadelphia 4, Penna.

VENDING machines earn big money! Request 32 page free catalog. Parkway Machine Corporation, Dept. 19, 715 Ensor Street, Baltimore 2, Maryland.

$5,199.90 WAS Paid to John Betts in few weeks. Grow Mushrooms. Cellar, shed. Spare, full time, year round. We pay $3.50 lb. Free Book. Mushrooms, Dept. 179, 2954 Admiral Way, Seattle, Washington.

"MONEY-Getters Bulletin". Loads of spare time, money-making ideas, 25c. Wolfe, 8106-C S. Park, Chicago, Illinois.

FREE booklet "How To Make Money In Your Own Business" spare or full time, beginner or experienced, with or without capital. Household items needed in every home. No stock to carry. We ship orders for you. Choose any of ten plans of making money! Postcard brings full details free. Topval Corp., Lindenhurst 222, New York.

SPARETIME Addressers make $25.00-$50.00 Weekly. Details free. Glenway, 5713 Euclid, Cleveland 3, Ohio.

MAKE Nursery plaques at home. Unassembled sample and instructions, $1.00. Kaylo, Box 145, Station C, Toledo 7, Ohio.

PROFITS by Mail. Literature free. Fithon, 8007 SE 65, Portland, Oregon.

LEARN Research as a profession. No previous training. Send 10c to cover cost of literature. Ray Putt, 1640 Dyre Street, Philadelphia 24, Pa.

PROFITS. Home Magazine Mail Business. Details 25c. Palm, Box 1221-PS, Baton Rouge, La.

MONEY in spare time. You supply information, most of which you can obtain free. No previous training needed. Frank Fix, 2056 Switzer Ave., St. Louis 21, Missouri.

GET samples from overseas. Learn import-mail order system. $1.00 starts you. Haime Trading Co., 1132 Bluff, Beloit, Wisconsin. Dept. L1.

SCHOOL Seniors—Sell Classmates America's most beautiful Graduation Name Cards. Largest selection. Highest commission. Outsells all others. Free sample kit. Printcraft, Dept. P, 1509 Maple Street, Scranton 5, Penna.

MAKE Money Writing Short Paragraphs! No tedious study. I tell you what to write, where and how to sell; and supply list of editors buying from beginners. Many small checks add up quickly. Write to sell, right away. Send for free facts. Benson Barrett, 1751 Morse, Dept. C-86-R, Chicago 26.

"MONEYGETTER'S Bulletin" sample 25c. Donovan, 793 Greenbelt, Levittown, New York.

PRINTING, Office Supplies wholesale. Save 50%. Royal, Box 368-S, Cleveland 27, Ohio.

LEARN Technical Metaphysics and insure your future. Easy, inexpensive correspondence course. Simplest method known. Diploma Write: Premier College of Technical Metaphysics, 2532 McKenzie St., Vancouver 8, B.C., Canada.

MAKE $25-$50 Week, clipping newspaper items for publishers. Some clippings worth $5.00 each. Particulars free. National Plans, Box 81-C, Knickerbocker Station, New York.

WANTED: Typewriter owners. Make handsome profits. Write today. Groves Company, 682 Hastings 3, Nebraska.

SELL Yourself—sell neighbors. Aluminum awnings—Beautiful Baked Enamel Colors—All sizes—factory prices! Write "Groff," Box 10254, Tampa, Florida.

BIG Profits stamping social security plates. Catalog free—General Products, 188PS1 State, Albany, New York.

FASCINATING Backyard growing business: Something homeowners are looking for. Unlimited possibilities. Make money and new friends every year. My successful plan $1.00. Larry Lanier, 783 East College, Decatur, Georgia.

HOMEWORKERS Wanted Painting Novelties. Good Earnings. N. Roland, RR1, Vincentown, N. J.

WANTED! Urgent! Men—Women. Earn extra cash. Address, Advertising postcards. Langdons, 5057-PS GlenIris, Los Angeles 41, California.

"HOW To Make Money In Mail Order Business." By Dartnell Award Winner. Postcard request brings details. Scroggs, Box PS-442, Stillwater, Okla.

MAKE $100.00 Weekly addressing, mailing catalogs. Products, 2342P Washington, Chicago 12, Illinois.

Copyrighted material

POPULAR SCIENCE OPPORTUNITIES

PLASTIC Laminating. Pleasure and profit. Self-sealing. No machines. Complete home kit, $1.00. Mountainside 4, Springwater, New York.

WHOLESALE Coverage, Complete! Amazing Details. Mailtrader, Box 643, Ann Arbor, Michigan.

97 SCHEMES may make a million. Mail Order and otherwise. LaTourette's, Box 261Y, Redlands, California.

SENSATIONAL new mailorder consumers' item—60 Million daily users, sold thru costfree "relay advertising." This amazing no-investment plan, samples, year's supply for own use, 400% profit proposition, all $1.00 exclusively from manufacturers Aurolabs, 1305-9 Oaklane, Philadelphia 26.

EXCEPTIONALLY Profitable Opportunity in Tape Recording. Write Baron's—Lynden, Washington.

START Home mailorder business. Small investment brings wonderful profits. Postcard brings free details. I.W. Service. P.O Box 1083, Tacoma, Washington.

I made $24.00 in one hour taking orders for new invention every woman wants. Facts free. Ken Kessler, Kessler Enterprises, Dept. S44-E, Fremont, Ohio.

BUY Wholesale! Save 66-2/3%! Appliances. Furniture. Jewelry. Toys. Sporting Goods. Tools. Free Catalogs. National Buyers Service. Box 426FB, Oakland, Calif.

RECEIVE hundreds homework, mailorder opportunities! Year's service, 25c. Peterson's, 4030-M East 14th, Des Moines 13, Iowa.

MAKE Money with your camera. Amazing new low cost color enlargements can bring you hundreds of dollars in spare time. Nothing else like it! Send 10c for samples and eye-opening facts. Dept. PS-4A. Polypix Co., 723 S. Wells, Chicago 7, Illinois.

$35.00 WEEKLY addressing envelopes. Instructions $1.00 Refundable. Adservice, Spring Valley, New York.

PIANO Tuning Pays. Learn this profitable profession at home easily with patented Tonometer and mechanical aids. No knowledge music necessary. Diploma granted. Write for booklet. Niles Bryant School, 3731 Stockton Blvd., Dept. S, Sacramento 20, Calif.

MAKE Money at Home. Leading Mail Order Magazines show how. 3 copies offers 25c. Al-Don Products, Box 414, Woodstown, New Jersey.

$13.50 PER Thousand. Home addressing. No selling. Details for stamp. Service, Box 37215, Los Angeles 37.

DETAILS—500 Moneymaking plans, addressing work. Nelson Sales, Elkhorn 22, Nebraska.

"HOW to invent Successfully." Free: test, details. Burger, 11592½ Gateway, Los Angeles 64.

BIG Profits! Sell Merchandise by mail from your home. Everything supplied. Details free. John Hall, Room 1002, 509 Fifth Avenue, New York 17, New York.

38A BUY IT WHOLESALE

BUY Wholesale! Large Illustrated Catalogue! 25-75% Discounts! Nationally Advertised Products. Appliances. Housewares, Clothes, Jewelry, etc. Send $1.00 Refundable. J. P. Frank Co., 1856 Blue Island Ave., Chicago 8, Illinois.

WHOLESALE Brand Named Products Catalog $1.00. D. Kabel, 870 Lafayette, Buffalo 9, New York.

WHOLESALE Catalog! Appliances, cameras, watches. Postcard: Selbyco, Decatur 267, Illinois.

39 FORMULAS, PLANS, ETC.

FORMULAS—All kinds. Latest products. Literature free. Kemico, Park Ridge 15, Ill.

OUR 201 best cosmetic formulas. Now available. Tremendous profits. $2.00. Lamodele, Box 6097, Oklahoma City 11, Okla.

AUTHENTIC Formulas. Thousands, listings free. Brockway, 1145 High, Topeka, Kansas.

MILLER'S Modern manufacturing formulas make fastest-selling products that get the business and pay! Fifty years supplying the best. Valuable Literature free! Miller, Chemist, 1517-C, Tampa, Florida.

ANY Formula $3.00. Catalog—Mfg. Treatise 10c. J. Belfort, 192 North Clark, Chicago 1.

40 PLASTICS

PLASTICS home-craft course for Men and Women. Tells and shows how to make hundreds of fast selling plastics products. All plastics and materials for 23 projects included in course. No special tools needed. Course pays for itself. Write for Free booklet. Interstate Training Service, Dept. D-2, Portland 13, Oregon.

NEW Liquid Casting Plastic, clear, colors. Embed real flowers, insects, photos, coins. Saw, drill, carve. Send 25c for handbook "How to Cast with Liquid Plastic" and proved success plan showing how to make money at home. Castolite, Dept. D-102, Woodstock, Illinois.

PLEXIGLAS—Cut to size—Clear—Any thickness — Colors — Rods — Tubing. McClarin Plastics P. O. Box 168B, Hanover, Pa.

LAMINATING Supplies. Price List Free. Solomson, 46 Cornhill, Boston 8, Mass.

YOU can make own molds, from liquid material to cast plastic. Course only $2.00. Namberlite, 422 Douglas, Redwood City, California.

PLEXIGLAS, Lucite. Square foot cost 1/16"—$1.15; ⅛"—$1.52; 3/16"—$1.86; ¼"—$2.21; ⅜"—$3.23; ½"—$4.38. Colors add 10%. Send 15% for postage. Aristocrat Plastics, 23-25 Sussex Avenue, Newark, New Jersey.

PLEXIGLAS, Fiberglas, Polyester, Acetate. Unique wholesale-retail catalog—15c. Gem-O'-Lite, Box 686S, North Hollywood, California.

41 CHEMISTRY & PHYSICS

HOME laboratory and apparatus kits. Laboratory supplies. Catalog 25c. Established 1931. John H. Winn, 124B West 23rd Street, New York, N. Y.

BEGINNER'S Chemistry: Exciting. Fascinating. All ages. Sample lesson 10c. Future Chemists of America, McKees Rocks, Pennsylvania.

ILLUSTRATED Catalog: Chemistry, mineralogy, biology 20c. Tracey Laboratories, Evanston, Illinois.

EXPERIMENTERS: Terrific Bargains catalog—20c. Hagenow Laboratories, 2414 Clarks, Manitowoc, Wisconsin.

SPECTROSCOPE for quick chemical analysis. $3.00. Cutting Sons, Los Altos, California.

BOOKLETS: 60 pages each! "Beginners Chemistry," "Chemistry," "Einstein's Relativity," "Physics," "Atomic Theory," "Electron Theory," "Scientific Oddities," "Light," "Sound," "Heat," "Electricity," "Radio," "Astronomy," "Useful Tables," "Geometry," "Mathematical Oddities," "Scientific Terms." (Order by Titles) 10c each. Franks, 3121 South Racine, Chicago 8.

CHEMICALS and apparatus for industrial, analytical and private laboratories. Catalog 25c. Dept. M-26, Biological Supply Co., 1176 Mt. Hope Ave., Rochester 20, N.Y.

CHEMICALS, Supplies. Catalog 25c, refundable. Laboratory Sales, Box 161-F, Brighton, Mass.

AMAZING New Book of Science. Experiments, Formulas and Catalogue of Laboratory Supplies. Only 25c. National Scientific Co., Dept. PS-4, 2204 W. North Avenue, Chicago 47, Illinois.

42 HELP WANTED

FOREIGN Jobs—Latin America, Alaska, Canada, up to $1500 monthly. Up-to-date 1956 Foreign Service Directory gives complete information; hot list of firms hiring for Military and Civilian Construction, Aircraft, Oil, Exporters—Importers, Mining, $1.00. How-When-Where to apply. 9th Successful year! Global Reports, Box 883-P, Hollywood 28, Calif.

FRENCH Foreign Legion. Action hungry men! Enlistment procedure, papers. 50c. Legion Information, Box 483, Joplin, Missouri.

N.Y. Help wanted. Sunday columns airmailed $1.00. Kelly, Box 1104, New York.

BOOMING Atlanta, Help Wanted sheets Airmail $1.00. Orlando, same. Racson's, Barwick, Georgia.

1200 JOBS monthly. Inside, outside, skilled, unskilled. Current list $1.95. Speedihires, #3 Campbell Block, Honolulu.

NEW York City help wanted columns airmailed, $1.00. Service, 48 Irving Street, Bethpage, N. Y.

SEATTLE Classified ads. Airmailed, $1.00 per ad. Davis, 1305 Ridge Road, #1, Shelton, Washington.

JOB Hunting? Helpful brochure tells how to go about it. Send $1.00. Associated Offices, 406 Kress Bldg., Long Beach, California.

SAN Francisco Classified Jobs $1.00. 10 Views Redwood Hiway $1.00. Herring, Box 41, Cutten, California.

CLEVELAND job listings, over 3000. Airmailed $1.00. Hill, 258-4th Street, Carrollton, Ohio.

CONFIDENTIAL Reports on best paying jobs with travel, adventure, promotions. Construction, aviation, shipping, laborers, clerical, trades, supervisory, factory, unusual opportunities, all types of work. Skilled and unskilled. Foreign and stateside openings for men and women. Only $2.00, including year registration-advisory service. Reports airmailed same day order received. Guaranteed best service available or double your money back. Research Services, Suite 207-PSB, Brown Building, St. Louis 5, Mo.

FOREIGN Employment construction work. If interested in foreign projects with high pay, write: Foreign Service Bureau, Dept. PS, Metuchen, New Jersey.

JOBS on ships. Experience unnecessary. Write Box 494-W, Baltimore 3, Maryland.

LOS Angeles complete classified section, Sunday edition, $1.00. Edstrom, P.O. Box 401, South Gate, California.

FOREIGN and American Employment!! High Pay. Overtime Work. Transportation expenses. Most all trades. Many average $1250.00 per month. Truck Drivers, Electricians, Plumbers, Carpenters, Mechanics, Clerks, Laborers. Latest Digest of firms to contact, application form, how-where to apply. Includes special report on big Spanish Base Job! Also, Oil, Aviation and Steamship contacts. If our service does not help you we offer money back guarantee. Complete list including one year registration and advisory service. Send $2.00 or C.O.D. plus postage. All replies sent same day order received!! Midwestern Services, Box 124-M, St. Louis 5, Missouri.

"FOREIGN, Alaskan, USA, Jobs!!" Earn to $1500.00 Monthly. Million Americans employed overseas! Opportunities galore. Latest copyrighted reports. Who to contact for highest paying jobs. Laborers—Trades—Truck Drivers—Equipment operators—helpers—clerks—engineers—many others. Over 52 countries—St. Lawrence Project, Spain, Latin America, Northern Projects, Europe, Pacific, etc. Year registration, advisory service. Application forms. Unconditional money-back guarantee. Act today! Only $2.00. Airmailed $2.25. (COD's accepted). International Reporter, St. Louis 1-SE, Missouri.

$5.00 PER hour for your spare time. No selling, mailing. Sue Storm, Cedarville, N.J.

BOOK Listing Hundreds of Government jobs giving location and salaries, $1. Box 5531, Oklahoma City 10, Okla.

"WORK on the Gold Coast!" Long Island Help Wanted and Business Opportunities Classified Airmailed daily, $1.00. National, 201, Port Washington, New York.

SAN Francisco—Oakland or San Jose complete Sunday Classified section, airmailed $1.00 each. Kemp, P.O. Box 224, Santa Clara, California.

JOBS Paying To $350 weekly now available on overseas and American projects. Men and women. All trades. Transportation paid. Free information. Write Transworld, Dept. S1, 200 W. 34th St., New York, N. Y.

CLASSIFIED Colorado Springs or Denver airmailed $1.00. Remailing 25c. C. Cousin, Box 1454, Colorado Springs.

PORTLAND, Oregon, Boise, Idaho, Classifieds. Dollar airmails all. Mrs. Grace Levey, Marsing, Idaho.

Copyrighted material

DENVER booming help columns questions answered $1.00. Remails 25c. Wheeler, 977 Broadway, Denver 2, Colorado.

LAS Vegas. Job and Business opportunities. $1.00. Smyth, Box 2205 Huntridge Station, Las Vegas, Nevada.

43 AGENTS WANTED

YOUR own business—Suits $1.50; Overcoats 65c; Mackinaws 35c; Shoes 12½c; Ladies' Coats 30c; Dresses 15c. Enormous profits. Catalog Free. Nathan Portnoy Associates, 605-J West 12th Place, Chicago 7.

AGENTS—300% profit selling genuine gold window letters; stores and offices. Free samples. Metallic Sign Letter Co., 431-E North Clark, Chicago.

GOLD or Silver letters, numbers. Windows, Doors, Trucks 1" to 6". 500% Profits—Free Samples. Atlas-U, 544 West 79th, Chicago 20.

START Your Own Business On Credit. Your own boss. 1598 Dealers sold $5,000 to $32,000 in 1955. We supply stocks, equipment on credit. 200 home necessities. Sales experience unnecessary. Pleasant profitable business backed by world-wide industry. Write Rawleigh's, Dept. D-U-PSC, Freeport, Illinois.

NEW Jobs open in selling! Send name, address for five free issues of Opportunity Magazine's money-making guide, listing hundreds of companies who'll pay you well, full or part-time. No experience needed. Opportunity, 850 N. Dearborn, Dept. 18, Chicago, Illinois.

BUY Wholesale thousands nationally advertised products at big discounts. Free "Wholesale Plan." American Buyers', Hertel Station, Buffalo 16-L1, N. Y.

GOLDMINE Of 600 money-makers. Copy Free. Specialty Salesman Magazine, Desk 6-B, 307 N. Michigan, Chicago 1.

GET New Shirt Outfit Free: make $90.00 weekly on 5 average orders a day. Famous quality Made-To-Measure dress and sport shirts at $3.95 up sell fast to all men. No experience needed. Full or part time. Write: Packard Shirt Company, Dept. 270, Terre Haute, Indiana.

RUN a Spare-Time Greeting Card and Gift Shop at home. Show friends samples of our new 1956 All-Occasion Greeting Cards and Gifts. Take their orders and earn up to 100% profit. No experience necessary. Costs nothing to try. Write today for samples on approval. Regal Greetings, Dept. 60, Ferndale, Michigan.

EVERY man a prospect. Request free sales kit. Show line of belt buckles, individualized with prospect's personal name and emblems also transportation, police, fireman badges. Choice 3,000 emblems. Hook-Fast, Box 1425-PS, Providence, R. I.

ANYONE can sell famous Hoover Uniforms for beauty shops, waitresses, nurses, doctors, others. All popular miracle fabrics —nylon, dacron, orlon. Exclusive styles, top quality. Big cash income now, real future. Equipment free. Hoover, Dept. D-101, New York 11, N. Y.

BIG Money-making opportunity. Exclusive line work uniforms. Jackets, pants, shirts, coveralls. Advertising embroidered. Every business prospect. Outfit Free. Master Div., 673 Water, Ligonier, Indiana.

MEN, Women, Make money spare time plus New Car as Bonus for Encouragement. Amazing hosiery Guaranteed to wear without holes, snags, and runs, or replaced Free. For example, lovely 60 gauge nylons Guaranteed for as long as 1¼ years, or replaced free. Write Wilknit, 2064 Washington, Greenfield, Ohio.

CASH in on 1956 elections! Big advance comm. selling low priced Union Label political posters, cards, Labels, book matches to candidates. Complete printing line for all businesses. Free Kit. National Press, North Chicago 3, Illinois.

AGENTS—Salesmen: Sell beautiful hand colored plastic enlargements and sensational new personalized photo compacts, rings, bracelets, lockets, etc. Experience unnecessary. 40% advance commissions. We deliver, collect. Wonderful sideline—better full time. Free sample outfit. Novel Portrait Co., 3343 North Ave., Chicago, Ill.

EVERYTHING for food! Unlimited demand for cookware, dinnerware and tableware. Make 75c profit on dollar! No stock to carry. We ship orders for you. Choice of ten money-making plans. Catalog, plans free! Topval Corp., Lindenhurst 90, N.Y.

FREE! Beautiful Feather Pictures 200% Profit! Apartado 9036, Mexico 1, D.F.

LIST of foreign firms seeking agents for their products $2.00. Israel Saltzman, Dept. PS, 7635 Hinds Avenue, North Hollywood, California.

BONANZA For Salesmen! Sell work uniforms embroidered to advertise. Complete selection of colors, styles, fabrics, including miracle Orlon, Acrilan, Dynel. Prospects everywhere—factories, garages, institutions, all businesses! Profits unlimited! Sales-making outfit Free. Write Topps, Rochester 624, Indiana.

BIG profits! Sell miracle "No ring" spot remover in stick form. Non-inflammable. Guaranteed. Free details. M & M, Dept. 1-PS, 842 Third Avenue, New York.

CALENDARS, Advertising Novelties, Matches. All styles, including Religious. Varnished 12 sheet. Girls. Hundreds of Advertising Novelties, Book Matches, etc. Fleming Calendar Co., Promotional Division, 6539 Cottage Grove, Chicago 37, Ill.

BUSINESS Kit Free! Postcard puts you in business! Complete line, 160 shoe styles, also jackets. New discoveries pay Big commissions. No investment. Send for Free Kit. Mason Shoe, D7, Chippewa Falls, Wisconsin.

UP To 80% Discounts On Name Brands! Giant 100 page catalog. BTS Products, Box 217, Oakland 4, New Jersey.

CHANGEABLE Plastic Letter Electric Sign 18x24. Sells for $12.50. Make $5.00 Each Sale. Write Kenray Industries, 47 Franklin, Jersey City 7, New Jersey.

FREE Deodorizer. Over 100% profit showing new Odor-Zone disinfectant to homes, restaurants. Write Norwich Chemical Company, Dept. 7, Norwich, Conn.

FREE—1 Dozen Beautiful Pins With Every 3 dozen gorgeous assorted Earrings. Send $6.00 complete deal. Bargain Jewelry Company, Box 215, Brookline, Mass.

WILL you wear new suits and topcoats without one penny cost and agree to show them to friends? You can make up to $30.00 in a day even in spare time without canvassing. Stone-Field, 532 South Throop St., Dept. S-926, Chicago 7, Illinois.

VITAMINS. Buy direct—Wholesale. Highest potency, lowest prices. Build very profitable repeat business. Complete sales program free. Write Now! Daly Vitamins, 2605-B Temple St., Los Angeles 26, California.

CALIFORNIA sweet smelling beads, sensational sellers. Particulars free. Mission, 2328-P West Pico, Los Angeles 6, Calif.

WILL send (2) wholesale catalogs and another money making plan. $2.00. Latonia Pilgrim, Box 31, Latonia, Kentucky.

60% PROFIT on cosmetics—Famous nationally advertised Hollywood Cosmetics pay 60%! Make $25.00 day up! Hire others. For free samples, details, write Studio Girl, Glendale, California, Dept. 1164G.

EASY handwork makes fast-selling articles. Sample free. Sunmade Company, Brockton 64, Massachusetts.

MAKE Extra Money. Sell front door name plates to friends, neighbors. Retail $1.98—you make $1.00! Free selling kit. Modern Engraving Co., P.O. Box 194, Boston 14, Mass.

$1.00 PROFIT selling $2.95 photo enlargement offer. Allen Studio, Reigler Bldg., Little Rock, Arkansas.

HERE'S the "perfect" sales item! Talk sixty seconds to any woman. If eight out of ten don't buy, better give up selling because it isn't for you. Perfect for mail order. 100% profit. Overseas Imports, Bridgeton 34, New Jersey.

EXCLUSIVE territories open. Top quality imported Chamois. Babrok Tannery, 4P, Hudson Falls, New York.

BIG Money! Buy Wholesale, Sell Retail. Dresses, children's wear, family apparel. Lowest factory prices. No stock to carry. No samples to buy. Big Sales Kit with actual fabrics Free. C. E. Israel, Dept. R-5704, Cincinnati 25, Ohio.

SELL exotic Imported African Wood Carvings. Tremendous profits. Free details. Carvings, Box 4098, San Diego 4, Calif.

FREE—Kit. Power Mowers. Wholesale. Sell Dealers. Farm Products-PS, Excelsior Springs, Mo.

BUY Wholesale! 100,000 Name Brand Products! Save 66-2/3%! Big profits selling others spare time! Free Catalogs. National Buyers Service, Box 426FE, Oakland, Calif.

STAY Home! Get $10.00 Merchandise orders by Mail—Keep $8.00. Everything Supplied. National, Box 88, Dorchester 22A, Mass.

NAMEPLATES for Doors, Desks. Biggest Profits. Samples. Whitney Plates, West Springfield, Mass.

UP to $200.00 weekly selling amazing puncture proofing compound. Terrific seller. Big profits. Free details. M & M, Dept. 2-PS, 842 Third Avenue, New York.

DISTRIBUTE MP Stak Heater—recovers waste chimney heat—will save up to 40% on fuel bills—terrific profits—virgin market. MP Research Corp., Seaford, N. Y.

SHINE Cars Without "Polish". New invention. Lightning seller. Cars gleam like mirror. Samples sent on trial. Kristee 85, Akron, Ohio.

$125 WEEKLY. New, doctor approved products for home use. Prospects galore. Free details. DeAns, 259 So. Robertson, Beverly Hills 51, California.

NEW household item, tremendous market, fast seller, big profits. Free details. M & M, Dept. 4-PS, 842 Third Avenue, New York.

44 HIGH-GRADE SALESMEN

AD Matches! Sell amazing designs—10, 20, 30, 40, and 240-light book matches. Bigger spot cash commissions; every business a prospect. Low prices for high quality. Repeats. Start without experience; men, women; full, part time. Buy nothing! Sales kit furnished. Match Corp., Dept. PS-76, Chicago 32, Illinois.

ADVERTISING book matches—Cash in on big demand—sell Union label matches. Cuts for all businesses and political parties—Free powerhouse selling kit—low prices—protection guaranteed on repeat orders—Cash commissions. Superior Match Co., Dept. P-456, 7530 Greenwood, Chicago.

45 EDUCATIONAL & INSTRUCTION

USED Correspondence Courses and Books sold and rented. Money back guarantee. Catalog free. (Courses Bought.) Lee Mountain, Pisgah, Alabama.

BE a Real Estate Broker. Study at Home. Write for Free book today. GI approved. Weaver School of Real Estate, 2018R Grand, Kansas City, Mo.

BOOKKEEPERS! Increase your earnings! Operate your own simplified "Dollar-A-Week" Bookkeeping and Tax Service. Full or spare time. Details Free. No obligation. Ellis, Box 203, Cedar Grove, North Carolina.

COMPLETE Your High School at home in spare time with 59-year-old school. Texts furnished. No classes. Diploma. Information booklet free. American School, Dept. X446, Drexel at 58th, Chicago 37, Illinois.

FREE! Send for amazing illustrative lesson. Rapid mental multiplication. Math Institute, Box 204, Mobile 3, Alabama.

STUDY For Doctor's degree of Psychology, Metaphysics and Divinity. Correspondence courses only. College of Divine Metaphysics, Dept. P-S, 2811 North Illinois, Indianapolis 8, Ind.

WANT A Diesel Job? New Opportunities to increase income. Higher Pay, More Money. We can help you Qualify. Tools Shop method home training. Write today! Diesel, Tractor, Heavy Equipment Division. Interstate Training Service Dept. B-2, Portland 13, Oregon.

EARN While You Learn Auto And Diesel Mechanics. Master this top paying trade. Many graduates earn $100 a week and up. Approved for Korean veterans. For free information write Dept. No. 262, Nashville Auto-Diesel College, Nashville 3, Tenn.

QUALIFY for college equivalency degrees. Increase opportunities for promotions, better pay. No courses. Bulletin 10c. Cramwell Institute, Adams 7, Mass.

Copyrighted material

POPULAR SCIENCE OPPORTUNITIES

A Dynamic Singing and Speaking Voice can be yours! Self-Training records. Thrilling details! Canfield, 2018-C Fifth Avenue South, Minneapolis 4, Minnesota.

HIGH School diploma at home. Licensed teachers. Approved materials. Southern States Academy, Box 144 PX, Station E, Atlanta, Georgia.

$5,199.90 WAS Paid to John Betts in few weeks. Grow Mushrooms. Cellar, shed. Spare, full time, year round. We pay $3.50 lb. Free Book. Mushrooms, Dept. 180, 2954 Admiral Way, Seattle, Wash.

GAG-Writing pays $200-$400 monthly. Amazing. Simple. Easily understood instructive folio tells how. Satisfaction guaranteed. $1.00 (Refundable). Fields, 409 Boundary, Portsmouth, Ohio.

MATTER and Universe. A Truer Concept in 20 easy pages. The Ether—Origin Of Cosmic Rays—Atomic Evolution and Suspension—Gravity and Magnetism—The Molecular Function—The Human Brain—Send $1.00 for treatise. "The Nature Of Infinite Entities". Orleo Angelucci, 4034 Verdugo Road, Los Angeles 65, California.

EARN College degree. Remain employed. Fremont College, 915-s Grandview, Los Angeles 6, Calif.

TRANSFORM yourself via subconscious dynamics. Free Amazing Brochure. Box 847 (A-4), Ocean Park, Calif.

REAL Estate Course home study low cost. Diploma awarded. Pass state exam. Money back guarantee. Earn $1000.00 month sure. Graduates have proved our course. You can qualify through our course now. Free literature. Seavy Realty Institute, 13346-M Bessemer, Van Nuys, California.

SIMPLIFIED analytics teach algebra clearly, instantly. $1.00, guaranteed. Ziemba, I-6123 Orchard, Dearborn, Michigan.

WELDING training pays at Hobart Welding School, Box P-461, Troy, Ohio. VA contract. Best equipment. Catalog free.

OFFICE Automation: Prepare for the future with the only home study course instructing application of electronic computers to business clerical operations. Free Information. Business Electronics, Computer Division, Box 3330 Rincon Annex, San Francisco 19, Calif.

BLUEPRINT Reading—train at home. Learn to read blueprints with confidence in 10 easy lessons. Write today. Belton School, 1059-M North Lawndale, Chicago 51.

COLLEGE degrees—Independent study. Keep employed. Brentwood College, Box 19-721, Los Angeles 19.

BECOME a Doctor of Psychology, Divinity or Philosophy in Metaphysics. Learn the secret of contentment, happiness. Write for Free Booklet. Correspondence Courses only. College of Universal Truth, 23-A East Jackson, Chicago 4, Ill.

OPPORTUNITY To earn $15,000.00 or more annually. Business of your own. No selling nor merchandise to buy. Over 5000 persons operating these exclusive offices. Free booklet. Franklin Credit, Roanoke 7, Virginia.

HIGH School—No Classes. Study at home. Spare Time. Diploma awarded. Write for Free Catalog HBA-54, Wayne School, 2527 Sheffield, Chicago 14, Illinois.

PHYSICAL Therapy and Massage—We Train You At Home. Earn Big Profits from your own Private Practice or Work with Hospitals and Doctors. Free Catalog. National Institute, Desk 3, 159 East Ontario, Chicago 11.

USED Correspondence courses and educational books bought, sold, rented. Free Catalog. Educational Exchange, Menlo, Georgia.

HELP yourself! Solve personal problems by self-mastery. Free information. The Leavitt Science, Clinton 4, Illinois.

LEARN Mineralogy at home. Diploma course. Fortunes now being made in Uranium and other minerals. Free catalog. Mineral Science Institute, Desk 3, 159 East Ontario, Chicago 11.

WANT Strong, masculine voice? Send for Free booklet. Prefect Voice Institute, 210 South Clinton, Studio 2DU-1, Chicago 6.

MEMORY training. No studying. Reading only. School of Memory, 1020 W. Fiat Street, Torrance, California.

U.S. Civil Service Tests! Training until appointed. Men-Women, 18-55. Start high as $377.00 month. Many jobs open. Qualify Now! Get Free 36-page illustrated book showing salaries, requirements, sample tests. Write: Franklin Institute, Dept. R22, Rochester, New York.

LET powerful recorded suggestions via Subconscious, give you pleasing, dynamic Singing-Speaking Voice and Master Salesmanship. New, amazing, unique and revolutionary. Golden Plains, Inc., Box 765, Chicago 90, Illinois.

UNIQUE Home Study Yearbook! Informative. Rush $2.80. Aurea House, 156 West 73rd Street, New York City.

$500.00 MONTHLY! Operate Collection Agency—Home, Sparetime! Financial, B-740-S4, Chicago 90.

LEARN how to eat scientifically. Improve your health and efficiency. New, exclusive booklet tells how, 25c. New, exclusive Visual Aid shows how, $4.95. Satisfaction guaranteed or money back. Dowler's, Dept. 101, 514 Gray, St. Louis 19, Missouri.

46 CONTESTS

PRIZE Contests provide Fabulous and Confidential Home Income Opportunity! Here's How and Where to Win Your Share! Send stamp! National Contest Bulletin, Box 2685-PS, Miami 16, Florida.

47 DETECTIVES

DETECTIVE Training. Phillips Secret Service System, 1917-C North Kenneth, Chicago 39, Ill.

DETECTIVES—Work home—Travel. Experience unnecessary. Detective Particulars free. Write Wagoner, P-125 West 86th, New York 24.

SECRET Service Fingerprint Training at home in spare time. Write Associated Special Investigators, 50 Princess, Saint John, N.B., Canada.

LEARN Civil and criminal investigation at home. Earn steady good pay. Institute Applied Science, 1920 Sunnyside, Dept. 334, Chicago 40, Ill.

48 LANGUAGE OUTFITS

FREE Trial—Complete language course for home study by Linguaphone, The World's Standard Conversational Method. At home, easily, quickly learn to speak French, Spanish, German, Japanese, Modern Greek—any of 34 languages. It's like living in another country. Send for Free Book and details of 10-day Free Trial. No obligation. Try, don't buy! Linguaphone Institute, T-54-046 Rock. Plaza, New York 20.

50 BUSINESS SERVICE, INFORMATION, NAME LISTS

LATEST Names on Gummed labels and originals. Gul's, 2419 Thomas, Chicago 22, Illinois.

INFORMATION, any subject, $1.00. Certified research! Griffith, 613 Latham, Wynnewood 1, Pennsylvania.

51 SPECIAL SERVICES

ENVELOPES Addressed. Extremely Neat, Accurate. $8.00 per thousand. Mildred Crowley, Pearl Road, Chardon, Ohio.

GHOSTWRITING—E. J. Eller, 1000 Sutter St., San Francisco 9, California.

MANY jobs, three Connecticut cities, classified ads, $1.00, Remails 25c. Agentservice, Box 1039, New Haven 11, Conn.

52 AUTHORS SERVICE

WANT Your Book Published? Learn how we publish, advertise, promote, distribute. Many successes. Free booklet PS. Vantage, 120 West 31, New York.

WRITERS: Book Manuscripts invited for publication on our cooperative plan. Greenwich Book Publishers, (Atten. Mr. Ibsen), 489 Fifth Avenue, New York 17, New York.

53 ADVERTISING, AGENCIES, ETC., FOR ADVERTISERS

FREE expert assistance for mailorder advertisers. Ratebook leading newspapers, magazines, 10c. Chicago Advertising Agency, Chicago 4.

ADVERTISE: 24 words, 100 Canadian Newspapers $5.50. Lists Free. Advertising Bureau, 10511-P Springfield, Chicago 43.

54 CARTOONING, SIGN PAINTING, CHALK TALKS

"HOW To Make Money With Simple Cartoons"—A book everyone who likes to draw should have. It is free; no obligation. Simply address Cartoonists' Exchange, Dept. 194C, Pleasant Hill, Ohio.

PAINT Signs! Using Patterns! Alphabet, $1.00. Harwell, 319-46, Byrdstown, Tenn.

CARTOONIST: Amateur, Professional. Prepare for animation with Max Fleischer's plan. Write Vera Coleman, 60 East 42nd Street, New York, N. Y.

YOU can Entertain with Chalk Talks. Catalog 10c. Cartoonist Balda, Oshkosh, Wisconsin.

PAINT Signs—Master die cut, outline letter patterns. Complete assortment. 1½" to 12" high, prepaid $2.00. Eyerly, P-583, Newton, Iowa.

55 TYPEWRITERS & OFFICE MACHINES

DUPLICATORS, Spirit; Stencil; Postcard; Lowest Prices. Duplicators, 3001 Troost, Kansas City 9, Missouri.

ADDING machines, new, weight 4 pounds, direct subtraction, multiplication, credit balance, percentage. Year Guarantee. Ideal: Traveling Salesmen, Interior Decorators, Garages, Truckers, small business, in home. Capacity: 99,999.99—$51.45; 9,999,999.99—$61.95. FET included. Send check or M.O. Beautiful carrying case: $3.00. Resulta, 3367 Fernside, Alameda, California. (Salesmen, dealers wanted).

TYPEWRITERS—Rebuilt like new, send for pamphlet, guaranteed. Holts, 313 Adams Street, Fairmont, West Virginia.

56 RUBBER STAMPS & OFFICE SUPPLIES

THREE Line, Self Inking Pocket Stamp, $1.00 Postpaid. Hadfield Stamps, 205 West Crosstimbers, Houston 18, Texas.

RUBBER Stamp Catalogs free. Jos. Abernathy—Mail Division, Barnesville, Ga.

3 LINES, $1.00. Fast Service. Catalogue. Johnson, 443 McDonough, Brooklyn 33, New York.

57 PRINTING MULTIGRAPHING, ETC.

OFFSET printing $6.50—1000, 8½X11, 16 lb. National Letters, 251 W. 42nd St., New York 36.

PERSONALIZED stationery, fine quality heavy vellum, 200 sheets, 100 envelopes, $2.00 postpaid. No COD's. Print complete address plainly. Southern Stationery, Box 235, Hallandale, Florida.

QUALITY Printing—Lower Prices—Lists Available — Selco Products, Department PS456, Danvers, Massachusetts.

QUALITY Mimeographing. Samples, prices free. Bowman, 200 Oak, Warrington, Florida.

QUALITY Mimeographing, printing. Free catalog. Currier, PSM, New Lebanon Center, N. Y.

QUICK Service Printing. Letterheads etc. Free folder. Harold Kroll, Seymour, Wisconsin.

FREE Catalog, Business Printing, Embossing. D M Press, Sebastopol, California.

AMERICA'S finest economical printing letterheads, envelopes, business cards, illustrated catalog. Steinbergen Press, GPO 291X, New York City.

"HOW To Buy And Use Printing"—Free booklet, samples and prices. R-K Press, 825 Powder Mill Lane, Penfield Downs, Philadelphia 31, Penna.

500 3¼x2¼ FOUR line gummed stickers 50c. Red Border $1.00. Moritz Printer, Saginaw, Michigan.

MIMEOGRAPHING Neat work. Samples prices free. Callender, Box 91, New York 30.

Copyrighted material

POPULAR SCIENCE OPPORTUNITIES

500 CIRCULARS $5.40; 1000 $6.50. Photo-Offset 8½x11. Photolith, 715 Broadway, New York City 3.

58 PRINTING OUTFITS, SUPPLIES

DO your own printing. Save money. Simple rules. We supply everything. Print for others; good profit. Raised printing like engraving too. Have home shop. Details free. Kelsey Presses, V-8, Meriden, Conn.

MAKE your own self-molding rubber stamps and printing cuts. Plexirubber, Argyle 2, Wisconsin.

PRINTING presses, type, supplies. Lists 3c. Turnbaugh Service, Mounted Route, Mechanicsburg, Pennsylvania.

RUBBER Stamp making presses, supplies. Custom, Box 211-N, Springfield, Mo.

59 PATENT ATTORNEYS

INVENTION Record form free and "Patent Information Every Inventor Should Have". Carl Miller, Registered Patent Attorney, Woolworth Building, New York.

INVENTORS: Without obligation, write for information explaining the steps you should take to secure a Patent. John Randolph, Registered Patent Attorney, 207 Columbian Bldg., Washington 1, D. C.

C. A. Snow & Co.—S-427, Snow Building, Washington 1, D. C. Registered Patent Attorneys. Write for information.

INVENTORS—If you believe you have an invention you should find out how to protect it. The firm of McMorrow, Berman & Davidson with offices in Washington, D. C., is qualified to take the necessary steps for you. Send for copy of our Patent Booklet "How to Protect Your Invention." We will also send you an "Invention Record" form. No obligation. They are yours for the asking. McMorrow, Berman & Davidson, Registered Patent Attorneys, 143-T Victor Building, Washington 1, D. C.

INVENTORS—Send today for instructive booklet "Patent Protection for Inventors" giving detailed patent information and outlining preliminary steps to take toward patent protection,—also "Evidence of Invention" form. Victor J. Evans & Co., 241-D Merlin Building, Washington 6, D.C.

INVENTORS: Learn how to protect your invention. Unless the inventor is familiar with patent matters, he should engage a competent registered patent attorney or agent to represent him. We are registered to practice before the U. S. Patent Office and prepared to serve you in handling your patent matters. "Patent Guide for the Inventor" containing detailed information concerning patent protection and procedure with "Record of Invention" form will be forwarded to you upon request—without obligation. Clarence A. O'Brien & Harvey Jacobson, Registered Patent Attorneys, 62B-D District National Building, Washington, D. C.

"INVENTORS Guide", "Record of Invention", sent free. Frank B. Ledermann, 154 Nassau St., New York City.

PATENTS—Irving L. McCathran, 316 McLachlen Bldg., Washington 1, D. C. Registered Patent Attorney.

INVENTORS: When you are satisfied that you have invented something of value write me, without obligation, for information as to what steps you should take to secure a Patent. Write Patrick D. Beavers, Registered Patent Atty., 938 Columbian Bldg., Washington 1, D. C.

60 FOR INVENTORS

INVENTORS. If you have an invention for sale, patented or unpatented, write Institute of American Inventors, Dept. 30A, 631-E St., N.W., Washington 4, D. C.

INVENTORS: Without obligation, write for information explaining the steps you should take to secure a Patent on your invention. John Randolph, Registered Patent Attorney, 206 Columbian Bldg., Washington 1, D. C.

INVENTION Record form free and "Patent Information Every Inventor Should Have." Carl Miller, Registered Patent Attorney, Woolworth Building, New York.

INVENTIONS And Patents Promoted. A-1 service for inventors for many years. Write Adam Fisher Co., 5418 Idaho, St. Louis, Missouri.

INVENTORS—Send for free patent information book and inventor's record. Registered Patent Attorney, Associate Examiner, Patent Office 1922-1929; Patent Attorney & Advisor, Navy Department 1930-1947. Gustave Miller, 46PSI Warner Building, Washington 4, D. C.

CREATE successful inventions! Positive, proven method. $1.00. Waldman, Box 131, Brownsville Sta., Brooklyn 12, N. Y.

INVENTORS—If you believe you have an invention you should find out how to protect it. The firm of McMorrow, Berman & Davidson with offices in Washington, D. C., is qualified to take the necessary steps for you. Send for copy of our Patent Booklet "How to Protect Your Invention." We will also send you an "Invention Record" form. No obligation. They are yours for the asking. McMorrow, Berman & Davidson, Registered Patent Attorneys, 143-S Victor Building, Washington 1, D. C.

INVENTORS—This firm is registered to practice before the United States Patent Office and available to assist you in the preparation and prosecution of your patent application. "Patent Protection for Inventors" booklet containing detailed information and steps to take toward patent protection sent promptly upon request. No obligation. Victor J. Evans & Co., 242-D Merlin Building, Washington 6, D. C.

INVENTORS! Have you good, patentable ideas? Write Patent Agent Metzlerr, 11 West 42nd, New York.

PARTS, Mechanisms, Supplies. We supply anything Mechanical. Free Estimates, details 10c (refundable). Inventors Shopping Service, 509 Fifth Avenue, New York 17, N.Y.

FREE Patent Booklet. Write Blasius, 15-B Park Row, New York City.

INVENTORS: Learn how to protect your invention. Unless the inventor is familiar with patent matters, he should engage a competent registered patent attorney or agent to represent him. We are registered to practice before the U. S. Patent Office and prepared to serve you in handling your patent matters. "Patent Guide for the Inventor" containing detailed information concerning patent protection and procedure with "Record of Invention" form will be forwarded to you upon request—without obligation. Clarence A. O'Brien & Harvey Jacobson, Registered Patent Attorneys, 62A-D District National Building, Washington, D. C.

"INVENTORS Guide" sent free. Frank B. Ledermann, 154 Nassau St., N.Y.C.

PATENT Searches, $5.00. Free protection forms, prompt airmail service. Reliable, accurate reports. Patent Service Institute, 725-B Albee Building, Washington 5, D.C.

SEARCHES—Put your patent searches in the hands of a Registered Patent Attorney or Agent as he qualifies to give a worthwhile patentability report. Record of invention form upon request and information on patent protection. Patrick D. Beavers, Registered Patent Attorney, 939 Columbian Bldg., Washington 1, D. C.

PROTECTION before Patent Application. New. Details $1.00. Drafting Associates, Box 65, Roslyn, Pa.

PATENT Searches, including copies of nearest patents. $6.00. Reports airmailed within 48 hours. More than 100 registered patent attorneys use my service. For Free invention protection forms, write Miss Ann Hastings, P.O. Box 176, Washington 4, D. C.

PATENT Searches $5.00. 48-hour service. Free Invention Protection forms. Write Raymond L. Smith, Patent Searcher, 620 Sheraton Building, Washington 5, D. C.

PATENT Searches $5.00. 48-hour airmail service. Invention Protection forms free. Write Patent Engineering Service, 711 14th Street, N.W., Washington 5, D.C.

FREE Record of Invention protection form airmailed. Keep your idea secret until recorded and witnessed on this form. Then we will search Patent Office, ($5), reporting and furnishing nearest patent copies, also telling how to sell the invention. Inventors Sales and Engineering Bureau, Box 4973, Washington 8, D. C.

61 INVENTIONS WANTED

INVENTIONS wanted. Patented; unpatented. Tremendous Manufacturers lists. Global Marketing Service, 2420 77th, Oakland 5, Calif.

INVENTORS: Hundreds of manufacturers have requested our assistance in locating marketable new products. Complete information free. Institute of American Inventors, Dept. 30C, 631—E Street, N.W., Washington 4, D. C.

INVENTORS: If your invention is adaptable to promoting we will contract on cash or royalty. If not, we will attempt selling it for you. Special booklet free. Kessler Corporation, 741W, Fremont, Ohio.

SUPERIOR promotions. Patented; unpatented inventions. New, informative booklet on request. Superior, 338-342 North Rodeo, Beverly Hills, California.

YOUR Idea May be worth a fortune—For full and complete information write: Inventors, Box 1481, Milwaukee 1, Wisc.

INVENTORS Don't sell your invention Patented or Unpatented until you receive our offer, write Cowgill, Box 298, Marion, O.

INVENTIONS Wanted. Patented or Patent Pending. 25 years experience Promoting Inventions. National Service Bureau, 3122 Meramec, St. Louis 18, Mo.

CASH Buyers for ideas and inventions. Write National Inventors Institute, 457 Munsey Building, Washington 4, D.C., or 4900 Euclid Avenue, Cleveland 3, Ohio.

INVENTIONS wanted now by my Manufacturer-Clients. Patented, Unpatented. Details Free. Adams, Patent Broker, 80-R Wall Street, Financial District, NYC.

SELL inventions and buy materials directly. State type of manufacturer you wish to contact. 25—$1.00. Manufacturers' Listings, 608 Summer Street, Eau Claire, Wisconsin.

62 PATENTS FOR SALE

MACHINE Cultivates completely around row plants. Pat. No. 2,571,191. Lawrence E. Bowman, RR1, Greenfield, Ind.

COPYRIGHT for sale. Prediction Cards "Pictures Do Tell The Story"—a revelation. J. V. Martin, 805 W. Wisconsin Avenue, Milwaukee 3, Wisconsin.

63 MANUFACTURING

METAL or wood parts made to your specifications. Chenette Company, 5812 Johnson, Hollywood, Florida.

64 MODELS, MODEL SUPPLIES

SHIP and yacht model fittings; blueprints. Send 35c for illustrated catalog #29 listing hundreds of items. A. J. Fisher, 1002-2 Etowah Ave., Royal Oak, Michigan.

SHIP Models. Most complete line in New England. Kits, fittings, plans, books, tools, engines, motors. Illustrated catalog 25c. James Bliss and Co., Inc., Dept. PS, 342 Atlantic Avenue, Boston 10, Mass.

"ST" Steam engine castings, fittings, boat plans catalog 15c. Ship Models Ltd., 186 Summer, Andover, Mass.

LIONEL American Flyer Trains repaired. Year around service. Catalog Free. Big Discounts. Mack Bros., 2039 Chicago Ave., Chicago 22.

SHIP Model kits and numerous fittings from authentic plans including clippers, trawler, fishermen, frigates, privateer, radio control tug, etc. Send 25c for our new 1956 catalog. Model Shipways, Folio P, 39 West Fort Lee Road, Bogota, N. J.

RAILROADERS get 1956 Catalog—Reference manuals. O Gauge scale, tinplate 50c. HO 50c. Terminal Hobby, 269 Erie, Milwaukee 2, Wis.

STEAM engines, boilers, castings. Catalog 25c. Anton Bohaboy, 2297, Price, Rahway, N. J.

MODEL Steam Plant (English) ready for assembly; Engine $16.00, Boiler $18.00, accessories. Literature: Floyd R. McGuckin, 314 Monroe, Ridgewood, N.J.

65 HOME CRAFTSMAN

PLASTICS home-craft course for Men and Women. Tells and shows how to make hundreds of fast selling plastics products. All plastics and material for 23 projects included in course. No special tools needed. Course pays for itself. Write for Free booklet. Interstate Training Service, Dept. D-2, Portland 13, Oregon.

Copyrighted material

POPULAR SCIENCE OPPORTUNITIES

ALL Crafts, Supplies. Large Free Catalog. National Handicraft, 199 William St., New York 38.

LEATHERCRAFT. Send 10c for new 60-page catalog of tools, supplies, kits. Including metalcrafts, enameling, ceramics, all other crafts. Complete stock. Reasonable. Since 1910, Sax Bros., Dept. PS-4, 1111 N. 3rd, Milwaukee, Wisc.

BUY wholesale nationally advertised power, hand tools, thousands other products at big discounts. Free "Wholesale Plan." American Buyers', Hertel Station, Buffalo 16-R1, New York.

WOODWORKING for home craftsmen. Twenty-two manuals. Over 1,000 pages. 75 training projects. Only complete home training program available. Carefully written, profusely illustrated. Covers everything in cabinet making from wood selection to final finishing. Complete instruction in care and use of all hand and power tools. Prepared by manual training instructors. Write for free booklet. Interstate Training Service, Dept. G-2, Portland 13, Oregon.

LEATHERCRAFT, metal enameling, beadcraft, shellcraft, metal tooling, textile painting, many other crafts. Free big illustrated catalog. Kit Kraft, Dept. 334, Studio City 1, California.

STYLECRAFT sure fire hits. "Pretraced" leather kits. Handbags. Billfolds. Filigree Belts, over fifty other projects. Patterns on leather. Why trace? Just carve, assemble and lace. Large assortment "Precarved" kits also available. Send 25c for catalog, free folder. Refunded first order. Apache Leather Company, 2804 E Washington St., Phoenix, Arizona.

OLD Cape Cod finishers' formula gives professional results staining new wood, refinishing old with warm, mellow look—in Antique Pine, Guilford Pine, Salem Maple, Driftwood, Colonial Cherry, Natural. $1.50 pint; $2.00 quart postpaid. Color card, brochure on request. Cape Cod Finishes, Dept 4A, 145 Main Street, Cambridge 42, Mass.

JIGSAW, Bandsaw owners, let your machines bring extra profits, fun. Free details. Nu-Art, Box 2235, Boston, Mass.

DRILL Glass! Pottery! Bottles! Complete Kit with Instructions. Drills 1/4"—3/8" Holes. $1.00 Postpaid. Glasdril, 10968—127 Street, Edmonton, Canada.

PAINT Brushes, new, fully 7" wide (Manufactured by Pittsburgh Plate Glass Co., retailed $3.69) Postpaid $1.25 each. David-Fay Co., Dept. P-1, 403 East 45th Street, Brooklyn 3, New York.

ORNAMENTAL Iron designs. 1500 Beautiful, practical designs for railings, columns, etc. Free literature. Cunningham, 3881 South 3200 West PS, Salt Lake City, Utah.

FREE catalog. 1560 Patterns and Designs. Craftplans, 1321-B South Michigan, Chicago 5.

KNOCKDOWN cedar chest and lumber free price list. Bedford Lumber Company, Shelbyville, Tennessee.

SQUAREKNOTTERS: Make belts, handbags, lanyards, dog leashes, etc. Special offer! Beginner's book, catalog and quality cord samples 15c. P. C. Herwig Co., Dept. 71-P7, 39 Henry St., Brooklyn 1, New York.

GENUINE Mother of Pearl. Make Beautiful jewelry, carvings, inlays. Pearl. Instructions for shaping, polishing $2.00. P. P. Ocean Gems, 359 Bergen Avenue, Lakewood, New Jersey.

129 NEW full-size jigsaw patterns. Artist-drawn. $1.00. Craftplans, 1321-B South Michigan, Chicago 5.

OVER 900 Woodworking projects. Books and patterns. Free Catalog. Craftsman, 115 Worth Street, New York City 13.

JIGSAW Patterns below 1c ea. Free details. H. Barebo, O'Fallon, Missouri.

66 BUILD IT YOURSELF

WANT A Swimming Pool? It's Easy! Read Exciting New Book, "Let's Build A Swimming Pool!" $1.00. Robertson, Box 604, Stockton, California.

GEIGER Counter and Metal Detector Kits. Inexpensive. Educational. Free Literature. Electronic Applications, 5024 Lee Hwy., Arlington 7, Va.

LOG cabins. Pre-cut cedar. $1,295 and up. Plan book—$1.00. Wilde & Co., Eagle River, Wisconsin.

LUXURIOUS 10,000 gallon swimming pool built for $525.00. Send $4.00 for engineered plans to: Cascade Pools, Box 95, Hamilton Square, New Jersey.

BUILD streamlined plywood kitchen cabinets. Plans, photos, instructions! Prices? Write Playnecabinets, 4617 Johnson, Western Springs, Illinois.

PLANS build portable core drill. $1.00. Isles, Redding, Box 25, Connecticut.

BUILD large practical Barbecue for less than $5.00 using ordinary tools. Plans instructions and recipes $1.00. Casimir, 1735 Indiana, Houston, Texas.

BUILD your own electric garage door opener. Complete detail and assembly drawings any home owner can follow. Satisfaction guaranteed. Send $2.00. Electric Garage Door Co., Box 301C, Park Ridge, Illinois.

GEIGER tube, 4 simple counter circuits, $2.98. Blackwell Electronics, 2801 W. College, Denver, Colorado.

67 OLD GOLD, JEWELRY, WATCHES, ETC.

COSTUME Jewelry supplies. Catalog and Samples. 35c. Largest line in America. Milady-Fair Co., G.P.O. Box 1328, New York City 1.

RHINESTONES. Jewelry settings, copper enameling, hobby kits. Illustrated catalog 10c. J & M Novelties, Dept. CD-4, Grafton, Indiana.

HIGHEST Cash For Old Gold, Broken Jewelry, Gold Teeth, Watches, Diamonds, Silverware, Spectacles, Platinum, Mercury. Free information. Satisfaction Guaranteed. Rose Refiners, Heyworth Bldg., Chicago 2.

GOLD, Silver, platinum, diamonds wanted. Cash immediately, highest prices, appraisals made. Wilmot's, 2547 102nd Street, Toledo 11, Ohio.

USED and new watches. $2 up. Free List. Southern Watches, Gray, Georgia.

10 SWISS watches $18.00, catalog 10c. Berkowitz, 1150 Castlehill, New York 62.

MAKE costume jewelry at home in minutes. Good profits selling friends, clubs. Beautiful earrings and 1956 illustrated catalog, 35c. Antoinette Creations, Box 363D, Cooper Station, New York 3.

68 TOBACCO & PIPES

TOBACCO Sensation! "Curt's Private Stock". Tantalizing aromatic blend. Rare Eurasian tobaccos, honey impregnated. Mild-tasty. 30c pkg. convinces. $3.50 lb. prepaid. Curt's, 248 East Broadway, Long Beach, California.

69 FOR THE HOME

FREE Foam Rubber Catalog: Cushions, pillows, etc. 50% discount. Barry-Foam, 10F Ardsley Ct., Newark 2, New Jersey.

LAWN Mower Conversion Kit $8.00. Make your present mower electric. Free literature. Motron, 5212-D Foothill, Oakland, California.

DECORATING Idea Guide "How to Decorate Your Own Home" plus "Color Schemer". Both $2.00. Color Monitor, 297-B Rybe Avenue, Rye, New York.

FOAM rubber furniture cushions—Factory seconds 50% discount. Free catalog. Perma-Foam, 429a Central Ave., East Orange, New Jersey.

CHRISTIAN Records, books, gifts. Big catalog 25c. Westminster, Pioneer, Ohio.

5 CACTUS—$1.00 postpaid. Catalog 10c. Enterprises, POB 161, Vista, California.

NEW Hoover Constellation Canister Vacuum $64.90 (regularly $97.50). Terrific savings appliances, photo equipment. Free catalog. Mailers Mart, Box 135-P8, New Rochelle, New York.

BEAUTIFUL, modern Flower Vase and Candlestick set. New 'Wirecraft'; fits any decor. Your choice of Brass, Nickel, Copper, Black Oxide Finish—$3.00. Cameron, Box 2131-A, Cleveland 8, Ohio.

OVERSTOCKED—$34.95 value automatic electric coffeemakers. Send check or money order for only $22.00. B&D Sales Company, Dian Street, So. Hadley, Mass.

70 OF INTEREST TO WOMEN

ENVELOPE addressing facts—extra income opportunities revealed thru HM service. Free details. Maxwell, Dept. 83-4, Cleveland 14, Ohio.

WANT To Make Big Money At Home? $5 profit in an hour possible with Invisible Reweaving. Make tears, holes disappear from clothing, fabrics. Steady year-round demand from cleaners, laundries, homes. Details Free. Fabricon, 8336-S Prairie, Chicago 19, Illinois.

HOME Sewers Wanted! Earn extra cash making readi-cut ties, experience unnecessary. No selling. We instruct. Free details: Jud-San, 518 E. 105th, Dept. D-25, Cleveland 8, Ohio.

$5,199.90 WAS Paid to John Betts in few weeks. Grow Mushrooms. Cellar, shed. Spare, full time, year round. We pay $3.50 lb. Free Book, Mushrooms, Dept. 181, 2954 Admiral Way, Seattle, Washington.

$5.00 DAILY, Making scented Orchids. Easy. No canvassing. Free Sample. Boycan Industries, Sharon 29, Penna.

SOLID Stainless Steel Tableware. 30 Piece set only $12.95, postpaid. Free catalog. F.L. Price, 403 37 St., Lubbock, Texas.

WOMEN Wanted to sew ready-cut neckwear. No selling, no experience necessary. No machine needed. Free details. Fashion Ties, Post Office Box 2066-0, Inglewood 4, California.

HANDI-Hostess Kit. Cake Decorator, 3 plastic lined pastry bags, 4 metal tips, 1-star, clover, cookie and one writing tip, for Birthday and Anniversary Greetings, with instructions. Send $1.50. Murphy's, 924 Roscoe Street, Chicago 13, Illinois.

71 FOR SALE MISCELLANEOUS

PURE Vermont Maple Syrup—new crop—excellent flavor: quarts $2.75 East Mississippi, $3.00 West, postpaid. Cake, soft sugar, Cream. Hickory nuts. List. Marshall Maples, Poultney 14, Vermont.

FREE Hawaiian Gift Circular! Write—Fobel, 3132-A George Street, Honolulu.

NEW kind Envelope. Speedy opening device built in each. Guaranteed. Standard size 100 for $1.00. Frank Jeney, 1027 Farmington Avenue, West Hartford 7, Conn.

72 WANTED TO BUY

SCRAP Mercury (Quicksilver) containers supplied. Tantalum—Bismuth—Tungsten. Metallurgical Products Co.—Established 1909, 35th & Moore Streets, Philadelphia 45, Pa.

QUICKSILVER. Sterling, Silver Solders, precious metals. Mercury Terminal, Norwood, Massachusetts.

WANTED—Mail order items on consignment. Returned at your request. Ship samples prepaid. Charles E. Murphy, 924 Roscoe Street, Chicago 13, Illinois.

WANTED—box tops. Buyers address, 10c. Ormsbee, 7106 Holly Hill, Dallas 31, Texas.

73 WEARING APPAREL

DRESSES 24c; shoes 39c; men's suits $4.95; trousers $1.20. Better used clothing. Free catalog. Transworld, 164-T Christopher, Brooklyn 12, New York.

74 RAZOR BLADES, SHAVERS

ELECTRIC shavers wholesale, free list. Eastern, 404 Union, Irvington 11, New Jersey.

100 FINEST Quality, Double edge blades. Guaranteed. Send $1.00—after you receive blades. Kalnmals, 1934 N. Hoyne, Chicago 47, Illinois.

75 TATTOOING SUPPLIES

TATTOOING Outfits, licensed course. Brochures 25c. Zeis, 728 Leslie, Rockford, Illinois.

77 GEIGER COUNTERS & TREASURE FINDERS

LITHIUM—Wonder metal of the Atomic Age. Free Booklet describes prospecting information, uses, etc. Nu-Age, Box 142, North Battleford, Sask., Canada.

Copyrighted material

POPULAR SCIENCE OPPORTUNITIES

SELECTIVE metal and mineral detector. Revolutionary design. Distinguishes metals from black magnetic sands. Readily detects metals under salt water. Also Geiger Counters. Free literature. Gardiner Electronics Company, 2545 E. Indian School Rd., Phoenix, Arizona.

FIND Buried Treasure, gold and silver, with Goldak's sensational 3½ lb. "Find-It" locator, only $49.50. Write for free literature on complete line of mineral, metal locators; Geiger and scintillation counters. Goldak, 1540 W. Glenoaks Blvd., Glendale, California.

FOR Treasure Locators, Geiger, Scintillation Counters, Mineralights, M-Scope. Fisher Research Laboratory. See Advertisement Page 298.

URANIUM Finding made easy! Completely transistorized Geiger counters. Extra sensitive. Lightweight. Scientifically engineered. Unconditionally guaranteed. Also complete line prospecting instruments from $19.95. Write for free information, techniques. Universal Atomics Corp., Dept. PS4, 19 East 48th Street, New York City.

INDICATOR: Locates uranium, buried money and minerals. Price $25.00. Dirt tested free for oil. Horton's Surface Oil Survey, Belle Rive, Illinois.

DELUXE Geiger Counters—$32.50 complete. Carson, 316 Lee, Iowa City, Iowa.

GOLD, Silver, Metal Detectors, Geiger Counters for Uranium. Mineralights. Sensational new fully guaranteed models. None Finer. Information Free. Detectron Corp., 5528 Vineland Ave., North Hollywood, California.

URANIUM: Radioactive analysis of Rocks, Clays, Sands. $2.00 per sample. Red Hill Uranium Ltd., 809-B4 Miles, Hereford, Texas.

URANIUM, Gold, silver treasure. New, power-packed, highly sensitive Metal Detectors, Geiger Counters and Mineralights. Kit and Assembled Models from $12.50. Lightest weight, guaranteed, free literature. Electronic Applications, 5024 Lee Highway, Arlington 7, Va.

NEW Uranium detector kit, $8.49. Free catalog. CMG, Box 611-PS, Laramie, Wyo.

TRANSISTORIZED geiger counter, 3" meter, probe, speaker, inexpensive batteries, $59.50. Blackwell Electronics, 2801 W. College, Denver, Colorado.

78 WATCH REPAIRING

WATCHMAKERS'—Jewelers' Supplies, Instructions. Catalog 20c. Bengal Company, Culver City, California.

WATCHMAKERS' Tools, Materials, Supplies, Watches. Catalog. Gales, Box 1000, Chicago 90, Illinois.

USED and new watches, $2 up. Free List. Southern Watches, Gray, Georgia.

WATCHMAKERS' Journal contains instructive articles on watch repairing. $1. year. Sample copy 20c. Dean Company, Box 3218-A, Daytona Beach, Fla.

WATCH and clock repairing books. Free information. North American, Dept. 26D, 2320 N. Milwaukee, Chicago 47, Illinois.

79 MISCELLANEOUS

BUY Wholesale thousands nationally advertised products at big discount. Free "Wholesale Plan." American Buyers', Hertel Station, Buffalo 16-V1, New York.

WHOLESALE Catalog! 30-80% Discounts! Appliances, Musical Instruments, Typewriters, Phonographs, Watches, Jewelry, Recorders, Housewares, etc. Consolidated Distributors, 21-18 Lafayette, Paterson 15, New Jersey.

$5,199.90 WAS Paid to John Betts in few weeks. Grow Mushrooms. Cellar, shed. Spare, full time, year round. We pay $3.50 lb. Free Book. Mushrooms, Dept. 182, 2954 Admiral Way, Seattle, Washington.

PAINT With Fire! Glowing black light colors. Different as day from night because you literally paint with light! Water colors, oils, chalks, crayons—Blak-Ray lamps. Free—write today for Idea Packet. Black Light Corporation of America, San Gabriel S, California.

BIG Mails. 25c Listing with us will fill your mail box with mail. C. M., Box 1211-PS, Chattanooga, Tenn.

RECEIVE Samples, magazines, catalogs, 10c. Star Directory, B-81, Leming, Texas.

SHORT Secretarial. Remails, sending or receiving. 25c each. Other services. 435½ Third Avenue, San Francisco 18, California.

BIMBO—the 12 in 1 pocket tool kit—of finest Sheffield steel—2⅞"x¾"—weight 3 oz. Perfect for the office, model makers, campers—every household purpose. Exclusive with us. Price $1.50 ppd. Empire Import-Export Co., 2514 Genesee Street, Utica 4, New York. Dept. S156.

CESSPOOL Trouble? Use Sursolvent, the miracle cesspool and septic tank cleaner. No pumping necessary. Restores systems to a condition approaching newness. Electric Sewer Cleaning Co., Boston 34, Mass.

RECEIVE Magazine samples, Mails. Offers By Hundreds. Get listed 25c. Rorick's, Cincinnati 26, Ohio.

WAIT—before you buy that gift! We offer rare and unusual gifts from foreign lands for all occasions. (Many never seen here before). Send for free catalog. Empire Import—Export Co., 2514 Genesee Street, Utica 4, New York, Dept., S156.

GIANT mails, samples, offers, 25c year. Interstate, 13-D Vetville, Raleigh, North Carolina.

BOOKS on antiques and their prices. Free circular. Warman Publishers, Uniontown, Penna.

BIG Mails, four months listing, 25¢. Wright Publications, 2276 Hubbard, Memphis 8, Tennessee.

CIGARETTES—Roll 20 for 9c, guaranteed to please. Facts free. Pete Moberly, Box 796, Owensboro, Kentucky.

WHOLESALE Catalog! Save to 80%. Gateway, Box 5194, San Antonio, Texas.

WHOLESALE — Sporting Equipment — Cameras — Homewares — Everything. Free Catalogs! Econ-O-Mart, Whippany 6, New Jersey.

INVESTORS Small Business. Learn conservative systems and procedures that will insure financial success. $1.00. Research Institute, 6525 Sunset Blvd., Hollywood 28, California.

PROFESSIONAL gambling systems exposed! Complete analysis of scientific gambling methods for roulette, craps, blackjack, etc., never before published, only $1.00. Bill Parry, 611D Elm, El Cerrito, California.

FLORIDA Facts—Interested in Florida? You need this 60-page illustrated catalog telling where to get information about fishing, hunting, boat trips, guides, maps, camp lists, etc. Complete descriptions. No other like it. Send 25c coin to The Great Outdoors Association, 730 Second St. S, St. Petersburg, Florida.

80 PERSONAL

"HOW Can I Find Out?" You Can! Information confidentially developed. Any matter, person, problem. World-wide. Officially licensed Established 1922 William Herman, 170 Broadway, New York.

DETECTIVE'S Opportunities. Detective particulars free. Write. Wagoner, P-125 West 86th, New York 24.

BORROW By Mail From Postal Finance Co. Employed Men and Women can easily obtain $50 to $600 Fast, Entirely By Mail. Repay in small monthly payments. Friends, relatives, employer, tradespeople will not know you are applying for loan. Advise occupation, amount wanted. Postal Finance Company, 200 Keeline Bldg., Dept. 13H, Omaha, Nebraska.

JOBS council problems. One Dollar, Box 211, Inglewood, Calif.

LATEST Methods treating piles, fistula, Colon-Stomach disorders. Write for free book. McCleary Clinic and Hospital, E444 Elms Blvd., Excelsior Springs, Mo.

BORROWING by Mail. Loans $100 to $600 to employed men and women. Easy, quick. Completely confidential. No endorsers. Repay in convenient monthly payments. Details free in plain envelope. Give occupation. State Finance Co., 323 Securities Bldg., Dept. T-227, Omaha 2, Nebr.

MEXICAN Legal Matters. A. Espejo, Box 217, Tijuana, Mexico.

BALDNESS—Get new hair from Herb Formula. Stephen Benzo, Herbalist, Route 2, New Alexandria, Pa.

THE Courier! Sample of this fast growing mailorder publication for stamp! Courier, 910 Marion, Pharr 17, Texas.

LETTERS remailed from Corpus Christi or San Antonio, Texas, 25c. Box 923, Corpus Christi, Texas.

NEW York remails 25c. Liverpool, England, $1.00. Ray Finley, 515 West 174th Street, New York 33, New York.

REMAILING — 25c. J. Smithers, Box 233, Route 3, Roanoke, Virginia.

KNOWN Author offers Ghostwriting, Editing; Books. Reasonable Rates. Heath, 7221 Clinton, Hollywood, California.

NYC or NJ Classified Employment Sheets. $1.00. % Esquire, 112 Broadway, South Amboy, New Jersey.

LETTERS Remailed 25c. Classifieds $1.00. 5 Scenic views $1.00. Newspapers $1.00. Alaska Scarf $3.00. Dawn Service, Box 853, Juneau, Alaska.

FABULOUS New York City. Remails 25c. Any type want ads air-mailed $1.00. Calamari, 13 Vernon Place, Mt. Vernon, N. Y.

MAIL Received — Forwarded, $3.00 month. Letters remailed 25c. Baker, Box 4444, Mobile, Alabama.

LETTERS Remailed 20c, 6 for $1.00. Cards 5c. Chas. Bradley, Whitehouse, Ohio.

PSORIASIS Sufferers: Write for Free important information today. Pixacol Co., Box 3583-S, Cleveland 18, Ohio.

"INTERESTING Mails"—25c keeps your mail box full three months. Bentz, Desk-M/84, Chatawa, Mississippi.

DON'T be embarrassed with pimples or blackheads. Clear them up easy, fast with Dermateen. Details free. The May Company, 1120-D Main Street, Lynchburg, Va.

YOUR Lucky Numbers guard your health—tell your future. $1.00. Box 365, Oak Park, Illinois.

SURPRISE. Your letters reairmailed from "Top Of The World" 25c. Carlton-Slattery, Point Barrow, Alaska.

SUGAR Diabetes? Rheumatism? Results surprising using Whole Powdered Grapefruit. Information free. Wolf Laboratories, Orange City, Florida.

PECULIAR religious doctrines. Seven-ounce packet magazines, tracts and three issues "Discussion," 25c. Darnell, 323 East Cherry, Nevada 1, Missouri.

MAIL Received-Forwarded. $3 Month. Hedgpeth, Box 830, Alhambra 24, Calif.

MEXICAN Law, General Practice Attorney, Apartado 79, Juarez, Chih, Mexico.

SUPER Memory Overnight! Success guaranteed! Bijou, Box 1727-V2, Hollywood 28, California.

LETTERS remailed from romantic New Orleans 25c. Post Cards 6 for $1.00. Larry's Mailing Service, 4106 Franklin Avenue, New Orleans 22, Louisiana.

FLORIDA! "Retire to Florida—and Live Longer!" Detailed treatise describes climate, homestead exemption, Work Opportunities, recreation, Health, best Florida cities, addresses to write, other Florida suggestions! Only $2.00 postpaid. Gaylord Wood, Fort Lauderdale 75, Florida.

DANDRUFF, scalp-itch must go or money back. Use Danaway's hard-hitting medicated cream oil. 8 oz., $1.00. Da-Na-Way, Schuyler, Nebraska.

GENIUS Or Dunce—Which One Are You? Find out! Standard Intelligence Test gives exact "I.Q.". Score it yourself! $1 complete. University Testing Service, 4912-B Reid Way, Sacramento 19, California.

SEARCH No More! You are the answer to your own success and happiness! Eye-opening, life-changing facts about self-discovery and self-training free. Write Applied Christian Psychology, Inc., Box 1924-K, Louisville 1, Kentucky.

HANDWRITING analyzed. One Dollar. Esther Hong, 3509 First Northwest, Seattle, Washington.

MEXICAN mailing address. Correspondence received—forwarded. Three dollars monthly. Mexican bingo for children one dollar. Tillotson, Apartado 1305, Guadalajara, Jalisco, Mexico.

JOBS, homes, etc. Fat Sunday classifieds airmailed $1.00. Box 1110, Washington 13, D.C.

Copyrighted material

start a big profit business with a small investment
EARN UP TO $200 a DAY

Manufacturing Exciting New

RAINBOW ROCK

Concrete Slump Brick in your back yard

Earn big building boom profits with Rainbow Rock, the colorful new building brick that's taking the country by storm. Sell all you can make to contractors, builders, building supply houses. **RAINBOW ROCK CUTS LABOR COSTS BY 1/3!** Amazing low cost machine makes modern slump brick 24" long (3 times the length of ordinary brick) in a variety of widths and pastel colors . . . up to 1500 bricks a day! **NEEDS NO SPECIAL SKILL.** Operates indoors or out. Full instructions and valuable mixing formulae supplied. **YOU CAN START EARNING BIG MONEY NOW. PAY AS YOU PROFIT!** A limited number of machines available on easy payment terms. **NOW** is the time to start. Write today for free literature and full information.



STEEL PIER SENSATION
Luxurious RAINBOW ROCK fireplace wall in living room of the "Home of the Century" in Atlantic City, N. J.'s Steel Pier . . . acclaimed by over 500,000 Summer, 1953 visitors as the most beautiful they'd ever seen! Endorsed by the Pier's famous architect, William F. B. Koelle.



Makes beautiful, decorative fences, garden walls, garages, outside walls, room separators, etc.

GENERAL ENGINES CO., INC.
Dept. SR-46 Route 130
Thorofare, N. J. Tilden 5-5401

READY CUT HOMES

$2150 AND UP DIRECT FROM MILL

YOU SAVE the items which help make today's building cost expensive: high labor cost, contractor's profit and overhead, insurance, architect's fees. Cut-to-Fit eliminates usual lumber and material waste, also costly mistakes. Anyone can assemble. Simple, easy-to-follow plans furnished and each part numbered. Complete with all lumber, roofing, nails, glass, hardware, paint, doors, windows. Freight paid. Low-cost building plans sold separately if desired. 57 Homes and Floor Plans.



5 EASY PAY PLANS
COLOR CATALOG
Send 25c



INTERNATIONAL MILL & TIMBER CO.
Dept. PS-46 Bay City, Mich.

REAL OPERATING SUBMARINE



SUBMERGES . . . SURFACES . . . UNDER ITS OWN POWER

Of course you recognize it! It's the famed U.S.S. NAUTILUS . . . an accurately detailed, authentic scale model (fully half-a-yard long) of the world's first atomic submarine. This exciting sub model actually speeds along the water surface . . . submerges to periscope depth . . . then automatically resurfaces. Easy to assemble kit includes power unit and all prefabricated parts. A cinch to assemble! Only some lead ballast needed (available at any hardware store).

ONLY **$1.98**

Guaranteed to Work or Your Money Back
At Dealers or Order-By-Mail. Send $2.00 & we pay postage
SCIENTIFIC, Dept. PS3, 111 Monroe St., Newark 5, N. J.

60 POWER TELESCOPE $3.98

VARIABLE EYEPIECE 20X-40X-60X—BRASS BOUND

NEW! Three telescopes in one, 3 different magnifications, 20 power for ultra-bright images with 40 and 60 power for extra long range. Guaranteed to bring distant objects, people, sports events, ships, moon, stars, etc. 60 times as close.



Most powerful for anywhere near the money. 5 sections. Closes to 1 ft. long. Contains 4 ground and polished lenses. Also used as a powerful compound microscope. Directions included. Mass production enables us to offer this instrument at amazing price of $3.98 complete. Money back guarantee. We pay postage. Get yours today.

All-Bakelite Telescope—Coated Achro Lens **$7.98**
Criterion Co., 331 Church St., Hartford, Conn., Dept. PSB 35

Also Eshelman Adult 2 Pass. SPORT & GOLF CARS
1/5 the Price of most other Cars. 70 Miles Per Gal. Free Catalog.

ESHELMAN TRACTORS LOW AS $99

MAKES · PLOWS · CULTIVATES · SAWS
DOZES · HARROWS · SNOW-PLOW · ROLLS
SPRAYS · HAULS · MOWS · CUTS · TILLS



Shipping Points: BALTIMORE · CHICAGO · RENO

Eshelman Tractors, Tillers, Riding Rotary Mowers for Better Lawns and Gardens. Advertised in GOOD HOUSEKEEPING. Thousands of satisfied users.
Write for Free Literature
ESHELMAN CO., Dept. R-44
109 Light St., Balto. 2, Md.
2 to 8 HP

JEEP OWNERS

STA. WAGONS · JEEPSTERS · PICK-UPS!

RE-POWER NOW with a Ford 6 or 8 cyl. engine. Our F-J ADAPTOR-CONVERSION KITS fit ALL Willys Jeeps incl. 1956. Kit No. 4-K for 1949-56 Ford engines in 1954-56 Mod. 6-226 Jeep Sta-Wgn & Trucks priced at $52.85 incl. Fed. tax. Kits for 1932-56 Ford engines in all other Willys Jeeps . . . $43.25 tax incl. instructions furnished. Write for free details or send check or M.O. for prepaid shipment. Please indicate year engine you will use and whether 2 or 4 Whl-Dr. Order NOW.

HOOSIER MACHINE PRODUCTS CO.
314 S.E. 6th St. Telephone No. 676 Pendleton, Oregon

DRAWERS STICKING? INSTALL Roll-eez Trade Mark SET "A"



ROLLER BEARINGS FOR WOODEN DRAWERS
—the Sensational NYLON ROLLER BEARINGS that ELIMINATE the CAUSE of STUCK DRAWER TROUBLES!



Do-It-Yourself
Works Wonders on Furniture, Built-ins
49¢ Set for 1 drawer

Quick, easy to install. Roll-eez produce smooth drawer action because they eliminate friction of wood-against-wood and keep drawers in alignment — prevent sticking and binding even in hot, humid weather! Used in cabinet-shops. Noiseless NYLON rollers give lasting service. Each drawer set includes simple instructions and nails. Anyone can attach.

Performance Compares with High Priced Slides.



Nail 2 Roll-eez "N" on rail at drawer opening. If drawer has center guide, nail third Roll-eez "N" on top of back in the middle, and Roll-eez "M" on bottom of back, straddling the guide.

JOBBERS DEALERS WRITE At Hardware, Building Supply Dealers. If Not Available, Remit Direct to Factory.

Building? Remodeling? Have cabinets equipped with Roll-eez. Low Cost, convenient.

Junior-Pro Prod. Co., Dept. S 118 E. Marceau, St. Louis 11, Mo.

PENN YAN BOATS . . .



New Striptites!
All Wood—No Soaking, Work-Free!

Outboards incl. Cartops®, Trailboats, Racing Runabouts; also canoes—all beautifully finished, masterfully built. Types for fishing, hunting, cruising. Choose from over 100 models of fine, small watercraft.




Free **CATALOG:** 44 pages, color illustrations. Write TODAY! Penn Yan Boats, Inc., 35th St., Penn Yan, N. Y.

Copyrighted material

GET 15% MORE MILEAGE, 16.4% MORE HP

with DYNATONE DUALS AND HEADERS

Practically all leading car manufacturers now agree that duals are necessary to get the utmost in power, speed and gas economy from today's high-compression engines. Duals eliminate the excessive back-pressure built up by conventional exhaust systems. Now you can get the same results on your car with a Dynatone dual or header system. Your V8 will have improved carburetion, faster pick-up, greater performance. Dynamometer tests show that Dynatone duals deliver 11.7% more hp at 60 mph — headers 16.4% more at 70 mph. Dynatone duals and headers are precision made for *your* car, and will fit either the car factory or the Hollywood type of mufflers. Sets available with or without Dynatone—the muffler that's engineered, not packed. If you like a deep, mellow tone muffler, you can't beat a Dynatone, whether you use it singly or in pairs.

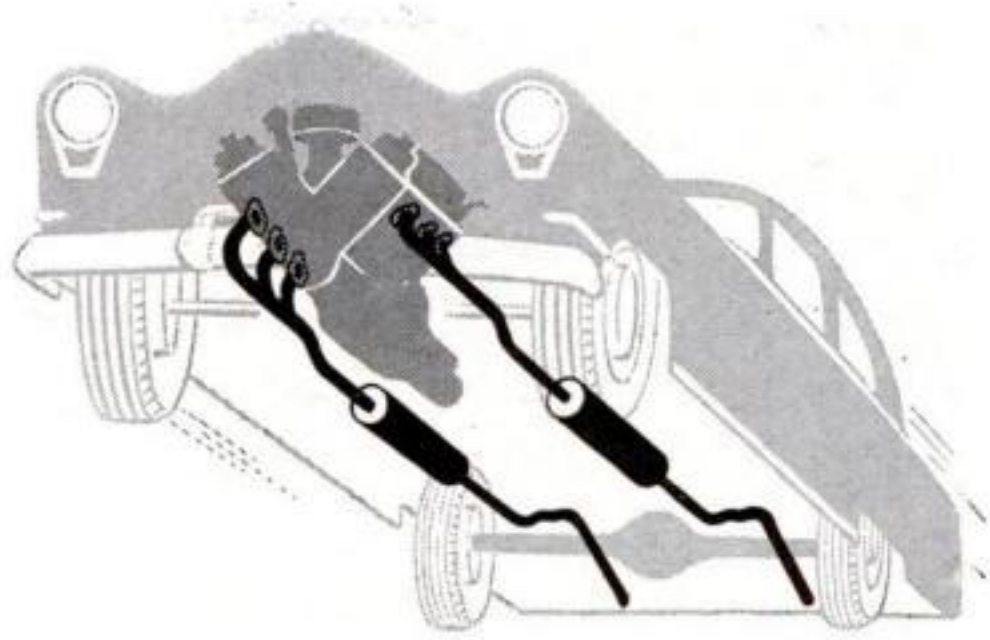

ASK FOR DYNATONE DUALS AND HEADERS AT YOUR FAVORITE DEALER OR AUTOMOTIVE STORE—OR WRITE

DYNATONE®

Dept. 4D

619 Smith Street, Toledo 1, Ohio

Will there be a vaccine against cancer?

It may depend on you

The other day scientists vaccinated a horse with dead cancer cells from 56 human cancer patients. The horse developed antibodies against cancer. These antibodies then killed live human cancer cells in a test tube.

Will this vaccine stop cancer? Only research will find out. And research takes money.


Give to your Unit of the American Cancer Society, or mail your gift to CANCER, c/o your town's Postmaster.

American Cancer Society®

NOW — A Real "Do-It-Yourself" OPEN FIREPLACE and CHIMNEY

Without Mortar or Masonry



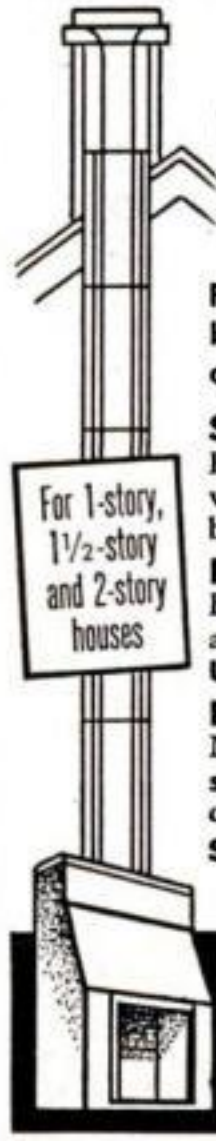

For old or new homes, cottages, cabins, shelters.

SAVE MORE THAN HALF!
Eliminate masonry materials **and save labor costs** with this complete, full-sized, full-service wood-burning fireplace and chimney!

FIRE-SAFETY CLEARANCES BUILT IN!
Butts right against wood flooring, walls, studs, joists and beams with complete safety. **Labeled by Underwriters' Laboratories, Inc.**

EASY ONE-MAN INSTALLATION!
No mortaring! Flue is of strong, permanent, **stainless steel.** Realistic brick-finish aluminum chimney top.

Scientifically proportioned—WON'T SMOKE!

Write today for free details!

Majestic THULMAN FIREPLACE

THE MAJESTIC CO., 467 ERIE ST., HUNTINGTON, IND.

Copyrighted material

These brand new SPERRY Gun Sights

Cost the Air Force nearly $200

Can you use one at this pennies-on-the-dollar price?



$5.88 TAX AND POSTPAID

7.45 west of Mississippi

EXPERIMENTERS
INVENTORS
TINKERERS
LABORATORIES

Here's a partial list of of what's inside!

- Silver Surface Optical Mirrors
- Big, 1½-inch F:1.9 Optical Lens
- 3 Miniature Differentials
- Electrical Fittings, Switches
- Scores of fine Gears . . Cams
- A 24-volt Rheostat and Lamp

Frankly we don't know what you'll do with these remarkable instruments! But we do know they're about the most amazing and intricate things we've seen. They're the original, super-secret (now declassified) Sperry gun sights that made our gunners the most deadly in the war. They're chock full of marvelously made gears, cams, wheels and electrical equipment, and put together with the precision and accuracy of a fine watch! Many individual parts are worth more than the price you pay now for the entire unit! **Dimensions, about 8x6x6 inches; weigh 8 lbs.** Brand new in original government cartons. Send for yours today.

RUSH YOUR ORDER TO:

JOSEPH SALES Co. Rm. 507-1740 E. 12th St. CLEVELAND 14, OHIO

UNMATCHED SPEED FOR OUTBOARDS



of all makes of 7½ HP and up on racing boats and fast runabouts is provided with the famous Michigan AQUA-JET propellers. No re-building of lower unit is necessary. Each propeller is specifically engineered for the motor on which it is to be used. Other propellers for superior performance in water skiing and general purpose operation; also, a complete line of fine boat fittings are described in our 1956 Outboard Catalog—the OUTBOARDERS' BIBLE. It's FREE. Write Michigan Wheel Company, Dept. PS4, Grand Rapids 3, Mich.

Bean's Free Catalog



Fully illustrated. 108 pages, showing special fishing tackle, footwear, clothing and one hundred and twenty other leather and canvas specialties of our own manufacture.

L. L. Bean, Inc., 54 Main St., Freeport, Maine

Mfrs. Fishing and Camping Specialties

HY-SCORE PELLET PISTOL



NO PUMPING — $19.95 Single shot

LONGEST BARREL (10¼") — $22.95 6 Shot repeater.

The nearest thing to a regulation firearm. The man-size grip of a LUGER . . . 3 lb. match trigger pull . . . match target accuracy . . . effortless to load and economical to use!

CAL. 177 OR 22

See your dealer or write Dept. SP-4 for literature

HY-SCORE ARMS CORP. BROOKLYN, N. Y.



FIREARMS & SWORDS

You don't want to miss our new thrill-packed catalog. Fascinating background and illustrations of 1800 authentic pieces. Exceptional values in hard-to-find items. For your 175 page catalog #29 simply send 50c to cover postage and handling with your name and address.

ROBERT ABELS, Box PS, 860 Lexington Ave., New York 21, N. Y.



Auxiliary Accelerator..

LEFT FOOT PEDAL



Step on the gas with either foot with equal ease. Drive relaxed. Guaranteed for the life of the car—which originally installed on. FITS ALL CARS.

PRICE $6.95 Delivered to You — Postpd. ORDER FROM R. V. LEHNER, Ness City, Kansas

---




$2.95 OR 2 FOR $5.00

Genuine Telephone Company Upright Telephones, fully re-conditioned, complete with cords, 50 ft. of wire, like new battery, and inter-communication instructions. Complete line of telephones and parts, dial, magneto, extension, inter-communication, army surplus, etc. Write for free list. All shipments FOB Simpson, Penna. C.O.D. orders, 50% deposit.

TELEPHONE ENGINEERING CO.
Dept. 4A6 **Simpson, Penna.**

ATTENTION HOME OWNERS!



No excuse now for not having a kitchen fan! Complete unit. Polished grill. Automatic fan goes on when door opens!

Don't let price fool you, this is the latest new model! **$15.95**

A wonderful gift for your wife.

Regular price $27.50

Buy direct and save. Parcel post paid if check is included with order.

Medford Mfg. Co., Medford, N. J.



"PERKINS" SMALL BOAT EQUIPMENT CATALOG

76 Pages full of Equipment for Small Boats, Outboards, Runabouts, etc.

SEND FOR YOUR COPY TODAY

Include 25¢ to cover cost of Mailing and Handling.

PERKINS MARINE
LAMP & HARDWARE CORP.
1946 PITKIN AVE., B'KLYN 7, N. Y.

Copyrighted material

you don't baby a Cadillac



Cadillac all-aluminum boats are light, fast and virtually indestructible . . . require no upkeep! Pound it in rough water, beach it on gravel or stones — there's no wood to gouge, rot or splinter. Cadillac outperformed 12 leading makes 6 ways in independent tests — gives you more go per h.p. Car-top models take up to 16 h.p. motors . . . do-it-yourself accessories available.

WRITE FOR FREE literature.

CADILLAC MARINE & BOAT CO.
172 Seventh St., Cadillac, Michigan

PORTABLE CAR COVER

Heavy Vinyl Plastic (formerly $8.95)

Protect Against RAIN • SUN • DUST. $6.95



Long-lasting plastic, folds compactly, off and on in a jiffy, sturdy elastic binding gives extra security. State make, model and year—buy direct from mfr.

Send **$6.95** plus 35¢ postage or sent C.O.D.

BEA SALES, Dept. G-69 125 E. 46th St., New York 17

ENJOY TRAVELING WITH AMERICA'S FINEST AUTO COMPASSES



TRAVELITE (ILLUMINATED) $5.95

GUIDEWAY (NON-ILLUMINATED) $4.95

DINSMORE...

Shows you the right way — the short cuts. Always accurate and dependable anywhere. Fits all cars. Send for free folder — "Pants, Knives and Compasses" and name of nearest dealer.

DINSMORE INSTRUMENT CO., 1814-27 Kelso Street, Flint 1, Mich.



SOCK-O SUPER SLINGSHOT

SILENT • RIFLE FAST • POWERFUL • ACCURATE

Great for small game and target shooting! 45 pound pull. Big, sturdy stock. Lively raw rubber. Sweet shooting. Free! 50 Sock-O "cannon balls", extra rubber and target. Sent by return mail. Guaranteed. Every sling fully tested. No COD's please.

SOCK-O, 7000 Melrose, Los Angeles 38, Calif.

You Can't Beat... BULLDOG JACKS



NEW BULL DOG SCREW TYPE TOP CRANK JACK


- **Fits Any Tongue**
- **Makes Hitching and Parking One-Man Job**
- **Adaptable to Channel, Angle or Wood Tongues Up to 4" Thick**
- **Solid Steel Threaded Shaft With 6" Steel Wheel**

$18.50

With its interchangeable mounting bracket, it is easy to install and move from one piece of equipment to another . . . handle folds. Model 52-F illustrated $18.50 F.O.B. Wausau . . . prompt delivery.

Also full line of trailer axle assemblies and trailer couplers. Write today for FREE Catalog 21-D.

HAMMER BLOW TOOL COMPANY
WAUSAU, WISCONSIN

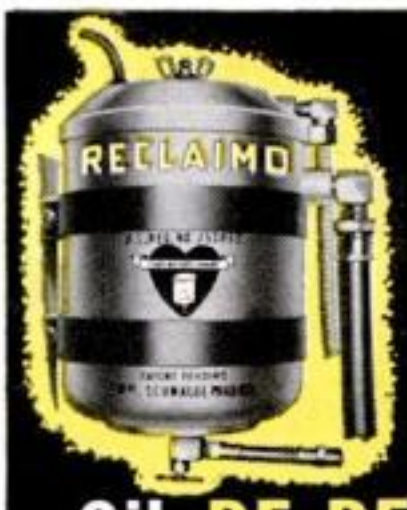

At Last!

The NEW RECLAIMO

A Wm. Schwalge Product

ELECTRICALLY HEATED
(Automatic Control)

Oil RE-REFINING Filter

For CARS—TRUCKS—TRACTORS

It's HERE! After many years in development—NEW Electrically Heated RECLAIMO—fully tested and GUARANTEED—**the most efficient motor oil filter available.** Filters and RE-REFINES OIL as you drive (by utilizing electric heat). Keeps oil at peak lubricating quality at all times. Proves beyond question U.S. Bureau of Standards (Bul 86) statement **"Oil *Does Not Wear Out* Mechanically."**

New RECLAIMO

Eliminates All Needless Oil Changes!

REMOVES SOLIDS by filtration—**REMOVES WATER** by evaporation—**PREVENTS** excess fuel dilution—**PREVENTS** acid and sludge formation—**MAINTAINS** stable viscosity.

NEW FEATURES: #1. Electrically heated from generator. #2. Thermostatic control prevents overheating. #3. Dual Flow permits oil by-pass when filter is clogged. #4. New non-corrosive steel body; built to last a lifetime. #5. Adjustable hinged mounting bracket, simplifies installation or transfer to other equipment.



OLD MODEL Discontinued OBSOLETE

Write at once for illustrated folder and SIX MONTHS *NO-RISK* TRIAL OFFER. Latest edition "Oil Facts", now in preparation, will be sent FREE later.

Dealers' Money-maker!

RECLAIMO MFG. CO.

6251 Touhy Ave., Dept. S-46, Chicago 30, Ill.

Old model "Reclaimos" (new or used) accepted for trade-in allowance on new model. Details on request.



WM. SCHWALGE
Inventor of "RECLAIMO."
Author of the famous booklet "Oil Facts."
Pioneer in oil reclamation since 1910.
MEMBER:
Chicago Academy of Sciences.
Microscopic Society of Ill.
Chicago Automobile Trade Ass'n.

DIGS • WEEDS • CULTIVATES

Brown Electro-Hoe

FITS YOUR ¼" DRILL

ONLY **$16.95**

Takes work out of gardening—leaves just the fun! Self-propelled *Electro-Hoe* digs, weeds, cultivates in fraction of time and effort. Mixes in peat moss, soil conditioners, etc. Makes furrows for bulbs, seeds. Easily attaches to any popular ¼-inch electric drill. New low price!


Ask your hardware, auto supply or gardening shop. Or order direct, giving dealer's name and address.

W. R. BROWN CORP.
2637 N. Normandy Ave.
Chicago 35, Ill.



Copyrighted material

★ AMERICA'S FAVORITE
H-I Preferred at famous Fishing Spots
★ AUTOMATIC REEL

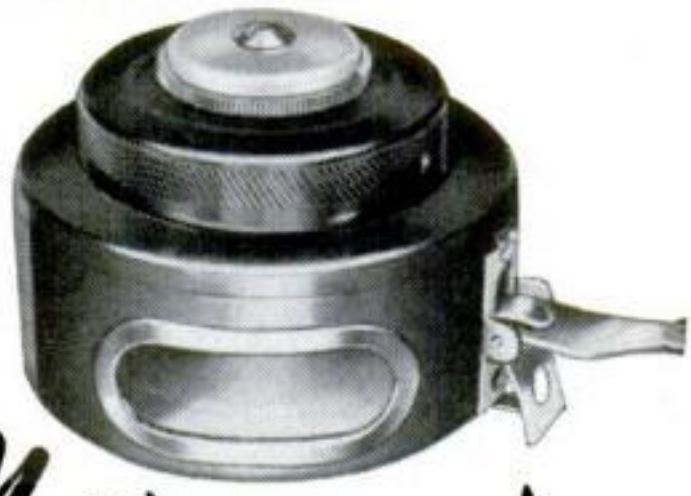

New improved model HICO-MATIC

No. 9 $8.50

A new model in H-I's world-famous line of automatic reels—especially designed and balanced for glass fly rods. Light weight—rigid aluminum construction . . . free-stripping . . . silent wind . . . right or left hand operation . . . striking anodized finish . . . all parts chromium plated. The finest "auto" reel you can buy. Also, Utica Automatic No. 7 (upright) $8.00 and No. 5 (standard) $7.00.

Look for H-I on the tackle you buy
Rods, Reels, Lines, Lures, for every fisherman and every kind of fishing



Valuable Fishing Guide. Send 25¢ to
HORROCKS-IBBOTSON CO. Dept. PS-426, UTICA, N. Y.
Manufacturer of the largest line of fishing tackle in the world

---

SENSATIONAL NEW BENJAMIN SUPER CO_2 ROCKET GAS PISTOL with HI-LO (2 STAGE) JET POWER
Cal. .177 or .22



$15.00

HARD HITTING — ACCURATE — ECONOMICAL
SAFE - CONVENIENT - PRACTICAL - NON TOXIC
EASY TO OPERATE—NO PUMPING—NO FLINCHING. Get 50 SHOTS from each 10¢ STANDARD SIZE CO_2 (Soda) CARTRIDGE. Up to ⅜" penetration RIFLED—Shoots Benjamin H-C Pellets & Darts. FOR TARGET and SMALL GAME. FREE FOLDER

Benjamin CO_2 CARBINE Rifle with HI-LO Jet Power $16.50

BENJAMIN AIR RIFLE CO., 852 BARRY ST., ST. LOUIS 4, MO., U. S. A.



GET MAXIMUM USE OF 4-WHEEL DRIVES!

MAKE 2 VEHICLES OUT OF 1!

Your 4 w. d. is a 4 w. d. work horse or 2 w. d. "pick-up" as you need it—*as you shift!* No drag, gear whine, shimmy in 2 w. d.; big savings in gas, tires, repairs. For all 4 w. ds. to 1½ tons at dealers or write:

New **LOCK-O-MATIC!**
- Automatic free-wheeling 2 w. d.
- Automatic 2 and 4 w. d. reverse
- Locking control for "solid" 4 w. d.

APPROVED Jeep EQUIPMENT

WARN HUBS
WARN MANUFACTURING CO.
Riverton Box 6064-B4 Seattle 88, Wash.

Brand New Government Release
NAVY SHALLOW WATER DIVING APPARATUS

Ideal for Salvage, Boat & Dock Repairs, Exploring and Spearfishing



$50 Value $12 Less Pump

Outfit Includes Mask, 50 ft. 3-ply Air Hose, Harness

Standard U. S. Navy
HAND PUMP
$75 Value Now Only. . 29.75

Big volume, double piston trouble-free hand pump. All brass and bronze parts, will not rust; heavy duty 2-braid air hose; adjustable mask and harness; full vision fog-free lenses. Effortless breathing and pumping. Durable, no upkeep. Portable, always ready for use. Ship. Wt. 65 lbs.
25% Deposit on C.O.D. Send Check or Money Order
CROWN CO. 207 S. EUCLID AVE., PITTSBURGH 6, PA.

POW!!! hunting slingshot

- accurate — powerful — silent
- kills small game, pests
- hits like a rifle




$1.50 postpaid (no cod's)

Used by expert marksmen! 7" hardwood stock, 45 lb. pull. Best rubber. FREE!! — extra rubber and big supply heaviest steel balls used by experts, illustrated catalog.

order today from— **I. J. STONE** DEPT. A-4 1616 Oak St. Santa Monica, Calif.

RADIO CONTROL YOUR MODEL PLANES BOATS CARS

"CUSTOM MIDGET" RADIO ONLY $9.98
LICENSE FREE BAND
OPERATES SAME AS $50.00 SETS INCLUDES LONG RANGE TRANSMITTER RADIO, RECEIVER RADIO AND CONTROL ACTUATOR ALL 3 EASY ASSEMBLY WITH OUR PARTS AND PLANS $9.98. PLANS ALONE $1.

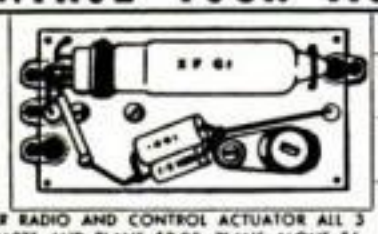

DETAILED INFORMATION & RADIO CATALOGUE 25c
SPECIAL "SUPPLY SOURCE DIRECTORY" & $7.00 SUPPLY COUPON $1.00
BOOK "RADIO CONTROL OF MODEL AIRCRAFT" CONTAINS 14 PLANS $3.98
RADIO CONTROL GARAGE DOOR DETAILS $1.00

RADIOMODELS BOX 36 DEPT. PS BALTIMORE 6, MARYLAND

HULA DANCER • GETS BIG FISH

Small but mighty, this deadly open-water hooker is heavy enough to make long casts easier. Sinks and runs medium depth. Special "lip" gives special action—fools the wise ones. 5/8 oz. or 1/4 oz. AT YOUR DEALER, $1.25 each.



FRED ARBOGAST CO., Inc., 2374 W. North St., Akron 3, Ohio

FREE WRITE TODAY FOR YOUR BIG FREE ARBOGAST COLOR CATALOG—FULL OF PICTURES OF CATCHES

14' Model Pictured



FREE! BOAT KIT CATALOG

42 TOP PERFORMING MODELS, 8' thru 18'
. . . from $39.25 incl. frt.

Runabouts, Cruisers, Convertibles, Fishing, etc., for every purpose with modern styling, advanced design. No experience necessary, amateurs can easily assemble. Save ½ to ⅔ "factory-built" prices!

FIBERGLAS, TRAILERS, ACCESSORIES

LUGER INDUSTRIES, INC. DEPT. A-4 3404 Lyndale S. Minneapolis 8, Minn.

Copyrighted material



Hard to beat
Easy to keep



ALUMACraft





It's hard to beat an Aluma Craft . . . no matter how you look at it. Fast, smooth, stable, Erich Swenson designs assure top performance. Pre-formed parts, strong aluminum extrusions, careful forethought in the small important details . . . no boat is better built.

And easy to keep . . . they are practically no work at all. No caulking, painting or annual overhaul. Always dry. Always ready. Always fast. Always steady. Easy to own on easy terms.



To select the right boat for your needs, see your dealer or write for beautiful 1956 free catalog today.

ALUMA CRAFT BOAT COMPANY

2627 27th Avenue South ★ Minneapolis, Minnesota

Make Gardening Easy
with the amazing new
Ariens Jr.
ROTARY TILLER...ONLY $139.50





Prepares garden without plowing, discing, harrowing or spading! Cultivates close to plants, kills weeds all season long without tedious hoeing by hand! 2 h.p. engine. "Paring Knife" tines. Tills 12" wide, up to 6" deep. Tip-toe clutch and other exclusive features which make Ariens Jr. unequalled for construction, looks, performance and price! See it soon!

Visit your dealer or write:

ARIENS COMPANY • 159 Calumet St. • Brillion, Wis.



Installs in less than ONE DAY!

This full-size prefabricated fireplace can be quickly installed in your home because it requires no costly masonry, no foundation, no facing or mantel. It comes complete with its own chimney, damper and flexible firescreen.

Installation of the new Uni-bilt Fireplace is so easy that it can be done even by the average home mechanic. It can be mounted directly against any wall, floor, ceiling or roof material . . . in either new or existing homes. And the price is surprisingly low.

Adds Charm to Any Room! Its dramatic design harmonizes with any style of architecture and it can be painted to blend with any color scheme.


Write today for FREE details

Vega Industries, Inc. Uni-bilt Division
784 E. Brighton Ave. Syracuse 5, N.Y.

Uni-bilt FIREPLACE

Copyrighted material

Craftsmen At Work ... on Garden Tractors

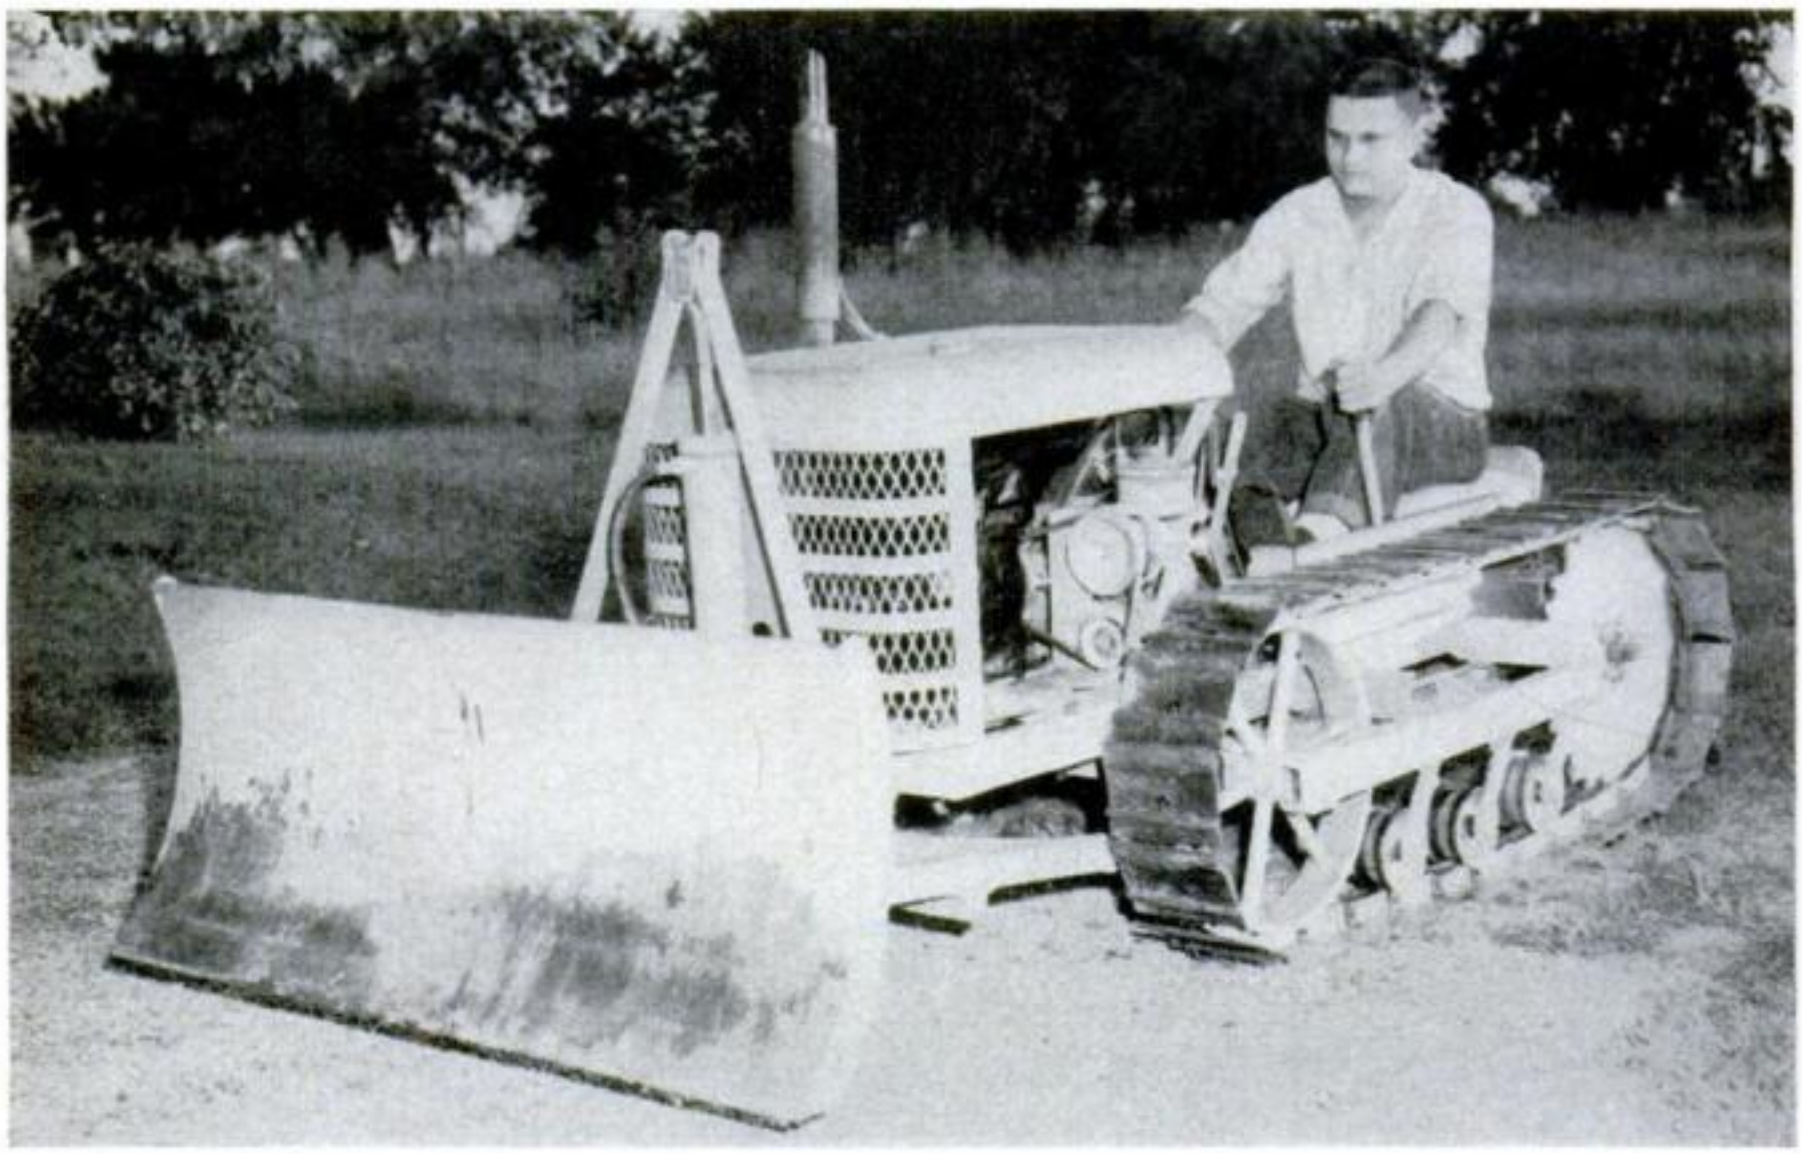

Track Type. It took a year of Charles A. Weber's spare time to build his seven-hp. tractor, outfitted with an electric starter and a hydraulically operated blade. The Elkhart, Ind., craftsman made the track from flat bar steel and case-hardened bushings and pins. A 20:1 gear reduction gives five-m.p.h. speed.




Hodgepodge. The transmission for this tractor came out of a Ford; the rear axle from a Studebaker; a Chevrolet furnished the brakes, and front wheels were a motor scooter's. It is powered by a 3.6-hp. Kohler engine. Builder Norman E. Baker of Sigel, Ill., rides on a three-inch-thick foam-rubber seat covered with plastic.



Bargain. A stripped-down '46 Crosley provided most of the parts for this tractor: engine, frame, steering wheel, transmission and differential. It cost Ralph Richards of Tampa, Fla., $50 to make. The comparatively slow-turning engine needed only a 6:1 chain-drive reduction gear to produce plenty of pull.

Copyrighted material

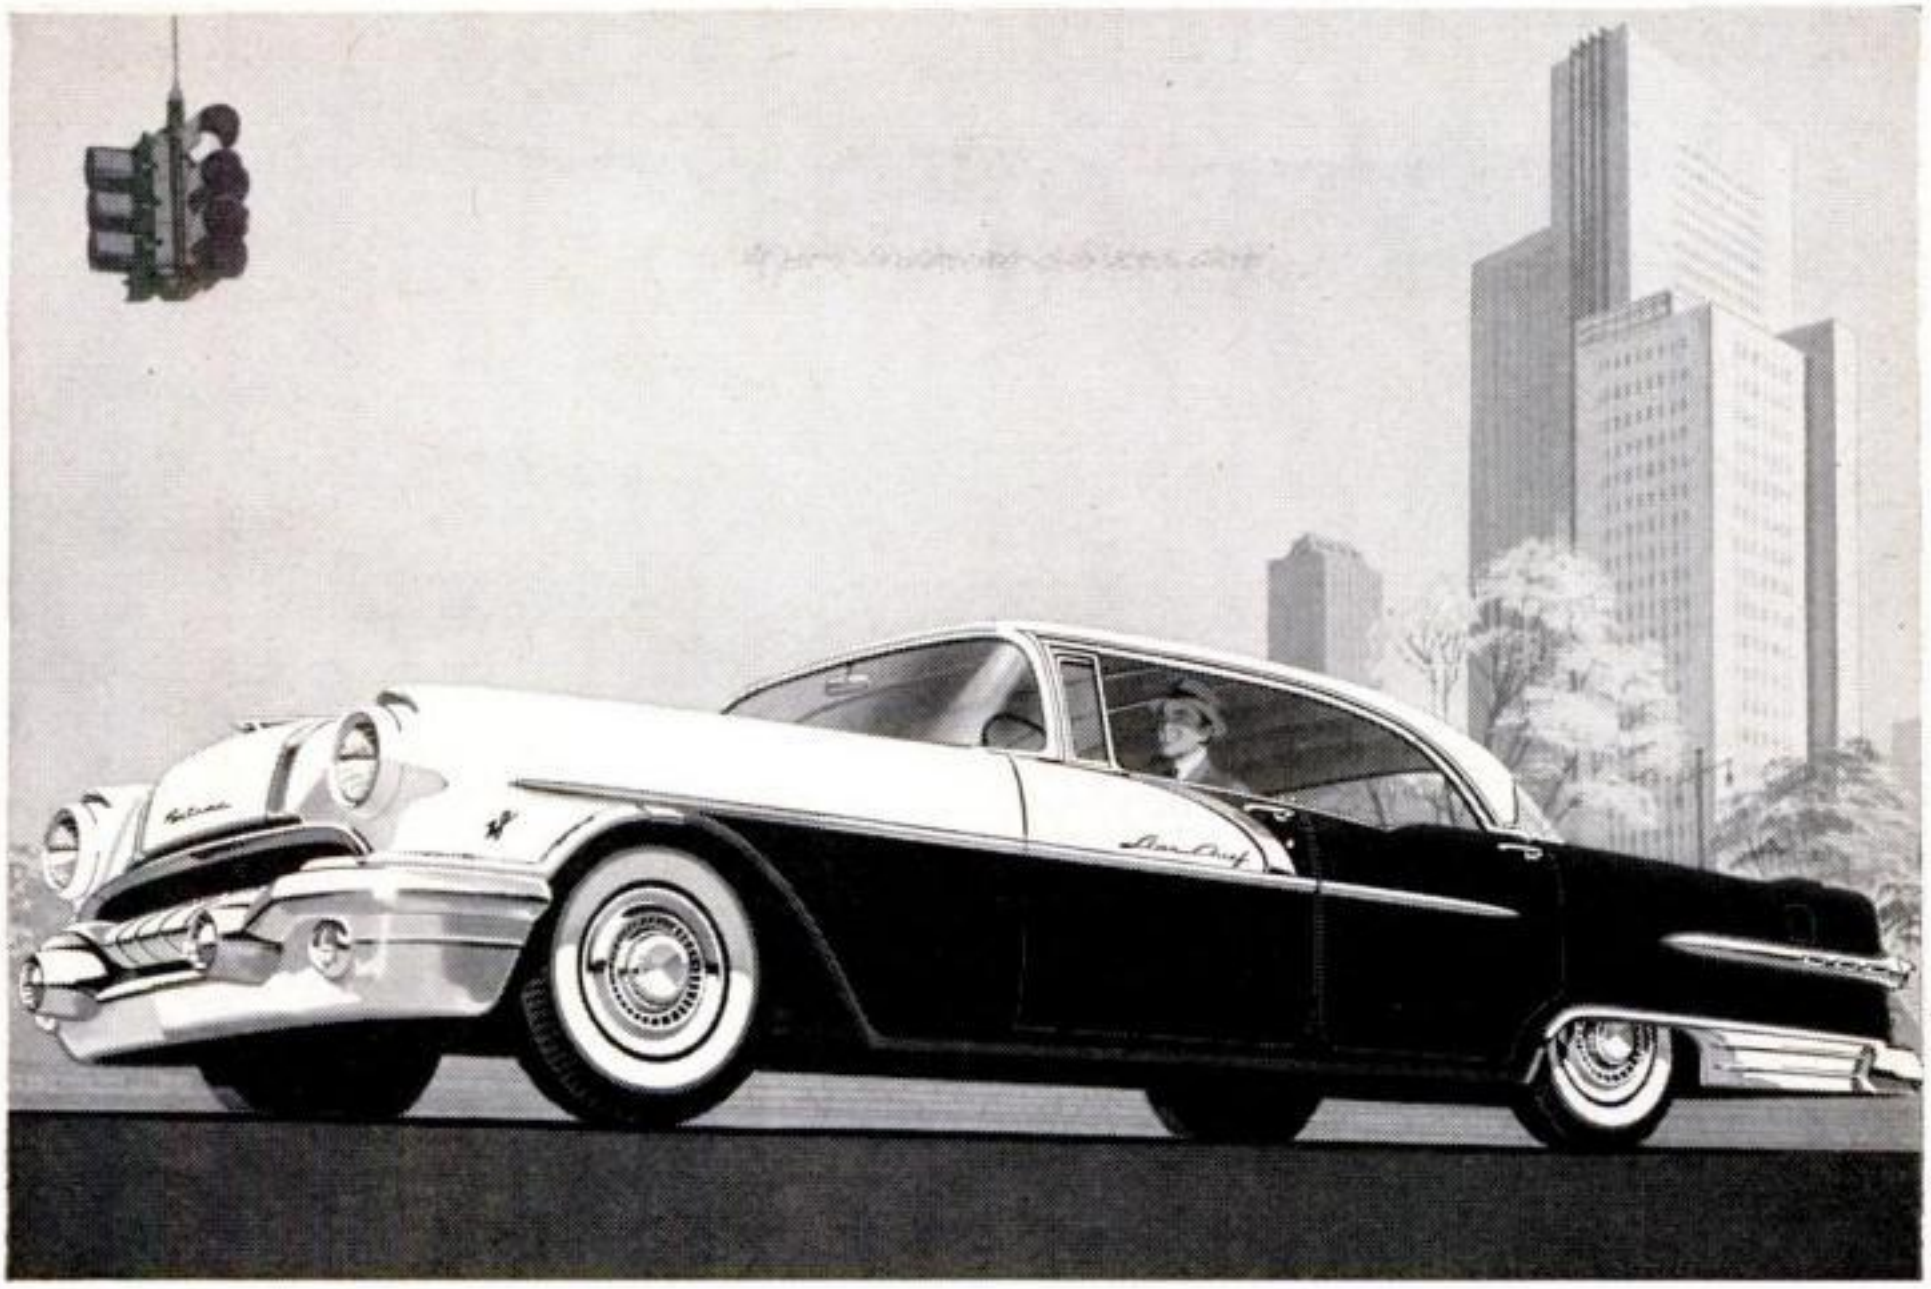

STAR CHIEF 4-DOOR CATALINA

The car says **GO** *and the price won't stop you!*

Easy Does It–*This One's Loaded!*

Here's all the *go* you'll ever want for normal driving . . . *with lots more where that came from whenever you need it!*

Take it easy . . . in seconds you'll be sailing serenely along at the legal limit or leaving the steepest grade behind unnoticed . . . and always with that big "something extra" for safety!

You're piloting *America's most modern V-8!* It's the mightiest, highest-compression, highest-torque V-8 in Pontiac history . . . available in 205 h.p., 227 h.p. (you can add another 12 h.p. to that 227 with low extra-cost dual exhausts).

And its teammate, the new Strato-Flight Hydra-Matic is just as advanced!* This revolutionary automatic transmission gives you gears for crisp, positive action —sparkling response at any speed. And with those gears there's an amazing new liquid-link coupling to make that flow of power oil smooth!

It's loaded all right, with more glamour and go than you ever dreamed possible at a price so low.

Come on in and see. Whether you're talking performance or price, *easy does it* with this fabulous '56 Pontiac!

**An extra-cost option.*

Over 40 models of the low-priced three cost more than a big, glamorous Pontiac 860.

PONTIAC MOTOR DIVISION OF GENERAL MOTORS CORPORATION

PONTIAC

Copyrighted material


POPULAR SCIENCE MONTHLY

LATE NEWS...

Astronomers may scratch one planet off their list. A new measurement gives Pluto a "day" equal to 6½ Earth days, too slow for a true planet so distant from the sun, according to Dr. Gerard P. Kuiper of Yerkes Observatory. This confirms suspicions raised by the strange tilt of Pluto's orbit—all other planets move in nearly the same plane with orbits that are practically concentric. Dr. Kuiper would demote Pluto to the status of a satellite—a moon that originally belonged to the neighboring planet Neptune, but that has escaped.

Money for science. Research is less dependent on the great philanthropic foundations than you might think, a new survey shows (see chart below). Even the wealthiest foundations spend only a small part of their funds on scientific research—the rest goes for other good works, such as education. And their total expenditure of about $25,000,000 in 1953 was minute compared to the national research bill of at least $5,000,000,000. What the foundations do invest, however, often returns unusually high dividends, since they can act more quickly than government agencies and allot sizable sums to exploit new ideas.

Science Gets Small Cut of Foundation Gifts

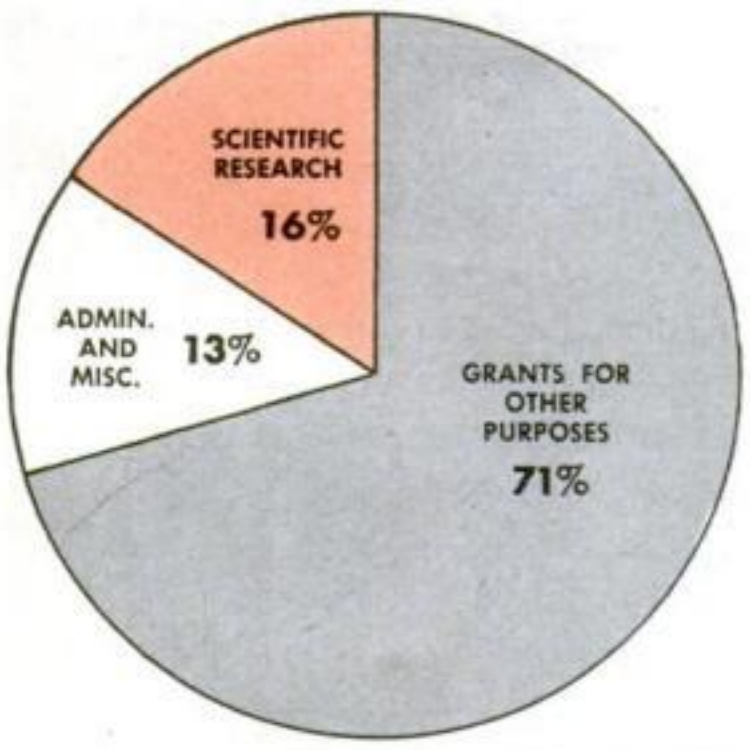

National Science Foundation

A machine has written a book—a 198-page lexicon listing possible names for new drugs of Chas. Pfizer & Co. Instructions—such as the number of syllables, and preferred letter combinations such as "cin" and "phyl"—were fed to an IBM 702 electronic computer, which typed out 42,000 names from Abechamycin to Ywuvite in two hours. The machine occasionally cusses, so a human editor is still needed to censor its "writing."

A diesel Plymouth may answer your call for a taxi in England. The bodies, Plymouth Belvederes, are assembled in Belgium and shipped to England, where 55-hp. Perkins diesel engines are installed.

The jokes you like and the way you laugh at them reveal a lot about your mental health, report Yale professors F. C. Redlich and J. Levine. Professor Levine says, "The basic themes of humor are the same everywhere. The significant differences [in sense of humor] are between individuals, and they reflect deep-seated aspects of personality and emotional development."


Wheels won't spin on ice or mud with a new non-slip differential available for Studebaker light trucks. It works opposite to an ordinary differential, delivering power to the wheel that has the more traction—is harder to turn. This is the first such device offered as factory equipment. (A similar differential is on some '56 Packards.)

Good book. Antarctic exploration, from Captain Cook in 1772 right up to the present international attack on the frozen continent, is excitingly reviewed in *The Antarctic Challenged* (John De Graff, $4.50), by Admiral Lord Mountevans. The Admiral knows what he writes about—he was with Scott on the 1910 expedition.

Copyrighted material

Some spark plugs are designed for low speeds, some spark plugs are designed for high speeds, but . . .

Only new POWER TIP "fires up" your engine at all speeds!

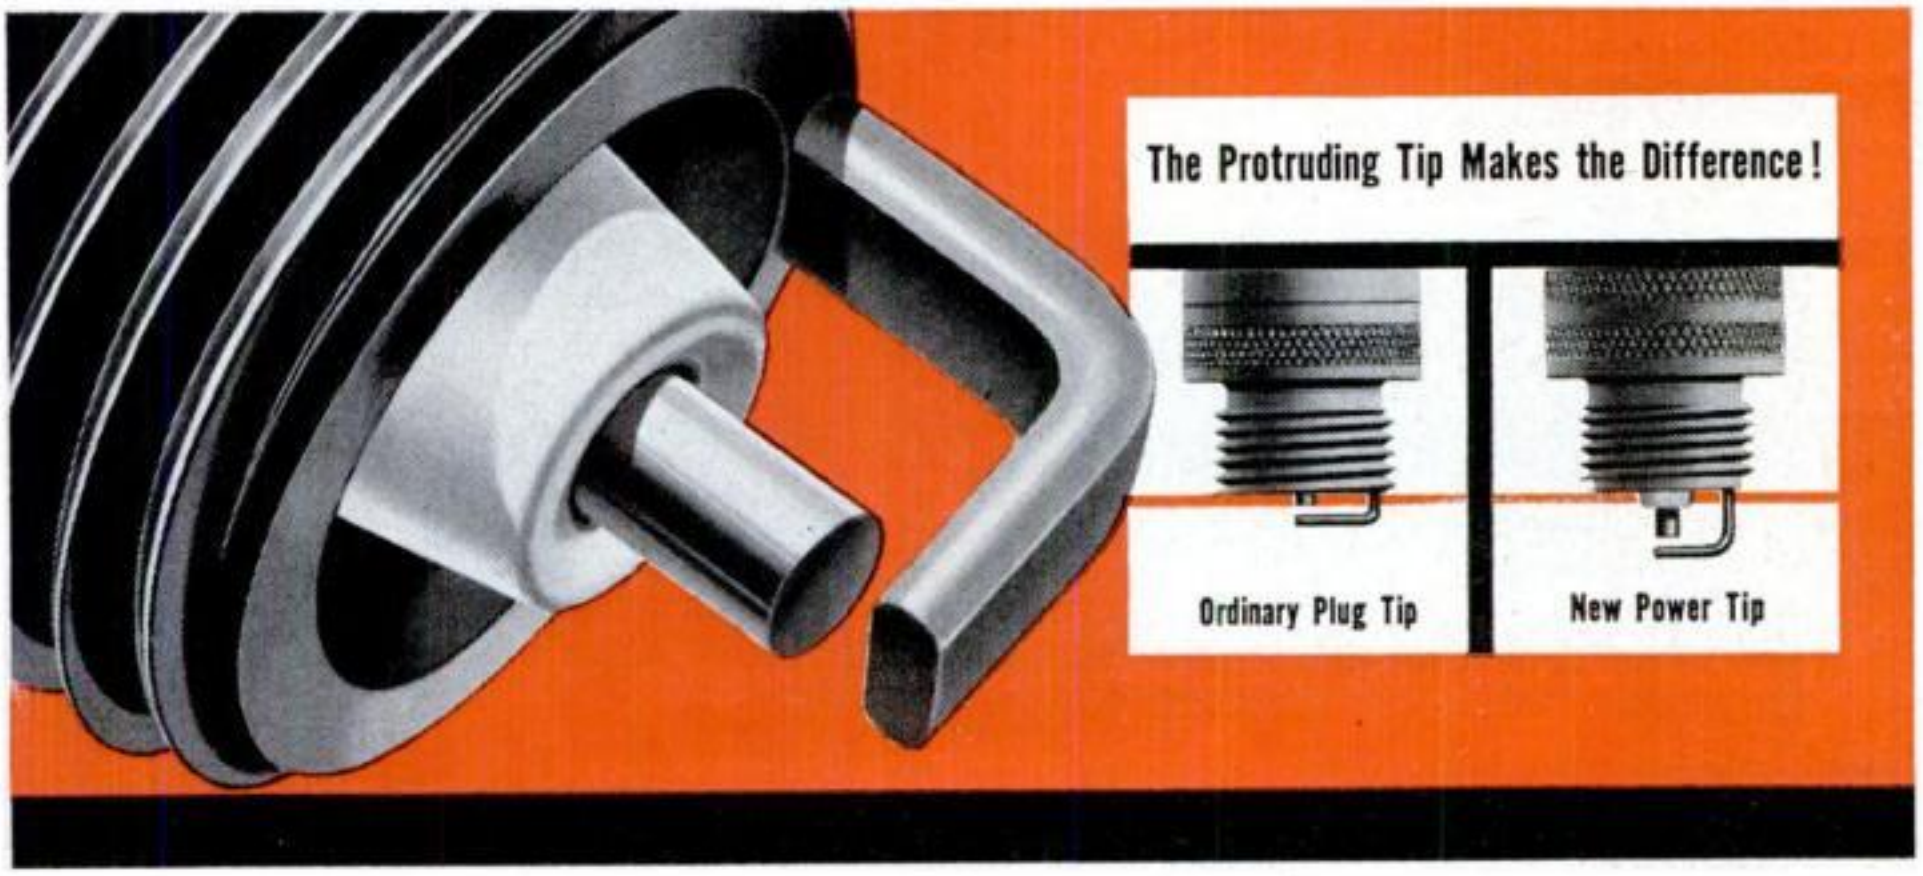

Up until now, if you really wanted top performance at all speeds you'd have to carry two sets of spark plugs. A set of "hot" plugs for slow city driving —to fight fouling. A set of "cold" plugs for fast highway driving—to fight pre-ignition.

POWER TIP TOPS AT ALL SPEEDS

But now Auto-Lite introduces a spark plug that "fires up" modern overhead-valve engines to deliver top performance and economy at all speeds: The amazing new Auto-Lite Resistor Spark Plug with Power Tip! It's the first and only spark plug "ignition-engineered" for today's engines and today's complex driving.

THE PROTRUDING TIP MAKES THE DIFFERENCE

The difference is the protruding spark plug tip . . . the Power Tip . . . that extends the spark gap inward toward the center of the combustion chamber. It's hot at low speeds because it's "in the thick" of combustion. Fouling is checked because deposits burn away clean. Yet the Power Tip is cool at high speeds to check pre-ignition because it gets the full benefit of cooling intake gases.

TESTED AND PROVED BEST

IS YOUR CAR LISTED HERE? If so, you need the Auto-Lite Resistor Spark Plug with Power Tip, as proved by actual road tests at all speeds. It fits all these cars with overhead-valve engines using 14 mm. plugs. So see your nearest Auto-Lite Spark Plug Dealer for Auto-Lite Resistor Spark Plugs with Power Tip for these fine cars . . . Buick, Cadillac, Chevrolet, Chrysler, DeSoto, Dodge, Ford, Hudson, Imperial, Lincoln, Mercury, Nash, Oldsmobile, Packard, Plymouth, Pontiac and Studebaker.

ENGINEERING CHART SHOWS HOW ONLY POWER TIP DELIVERS TOP PERFORMANCE AND ECONOMY AT ALL SPEEDS.



AUTO-LITE RESISTOR SPARK PLUG WITH POWER TIP . . . for all speeds.



AUTO-LITE RESISTOR SPARK PLUG WITH POWER TIP


Auto-Lite manufactures over 400 products, including Spark Plugs, Batteries, Wire and Cable and Automotive Electrical Systems . . . sold throughout the United States and Canada.

Copyrighted material

I'd like to see them make...



AN ON-OFF SWITCH at the end of the vacuum-cleaner hose to eliminate the hike to cut off current every time you pause to move furniture. *—Garth Tallman, Ft. Sumner, N. Mex.*

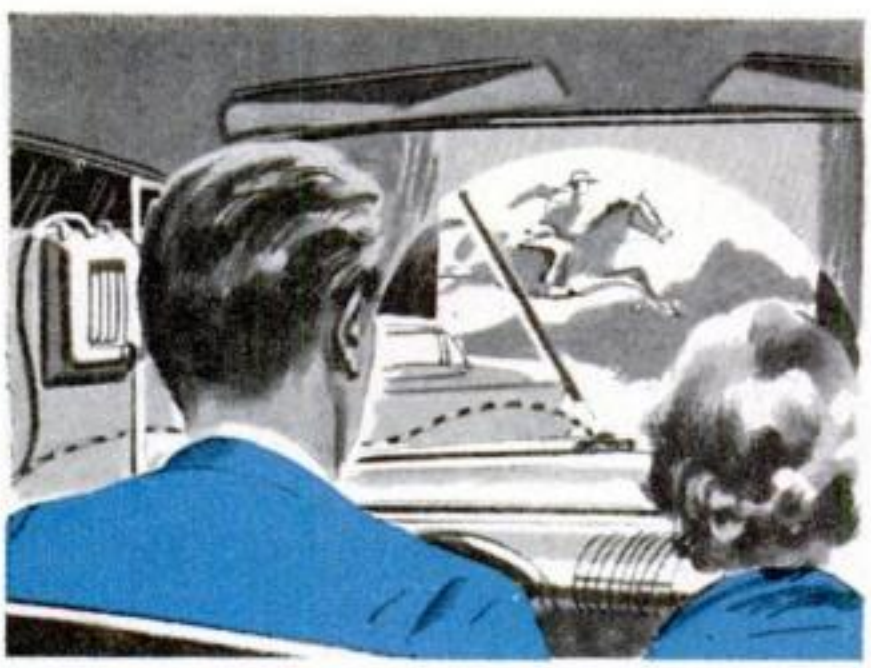

A VACUUM HOSE that could be screwed to the windshield wiper to operate it when the engine is turned off while parked at a drive-in theater.*—Joseph W. Krus, Manchester, Conn.*



COOKBOOK COVERS of clear plastic with elastic inserts at the end flaps. Reversed, the covers would protect opened pages from food stains.*—Mrs. Ernest Miller, Lansing, Mich.*



REEL-IN CORDS on electric shavers. Such a cord couldn't loop down to catch on faucets, nor would you have to wind it up to store the razor. *—C.W. Jones Jr., Brookhaven, Ga.*



PLASTIC GLOVES with abrasive-cloth palms and fingers for peeling new potatoes. Rubbing a potato under running water would take off the skin.*—Mrs. Stanley Rees, Canajoharie, N. Y.*

Everyone has his own pet idea of a gadget that he would like to see in general use. The five ideas illustrated above were suggested by POPULAR SCIENCE MONTHLY readers. What is *yours?* We will pay $5 for each one published. Please use Government postcards only. Write name and address clearly. Contributions cannot be acknowledged or returned.

Copyrighted material

Just what paste wax needed - a built-in cleaner!



Johnson's J-Wax

new Paste Wax Discovery does the cleaning work for you!



Start right in waxing! No extra cleaner needed—nothing else to buy!

Here's what you've been waiting for—a paste wax with a cleaner built right in! Johnson's new J-Wax saves you hours of pre-cleaning. J-Wax takes the dirt off for you—replaces grime with a crystal-clear coating of wax. Even the dirt you can't wash off loosens instantly and disappears as you rub on this new self-cleaning paste wax.

Then watch the high brilliant luster that comes as you buff. J-Wax sets smooth and hard—bonds itself into a long-lasting wax-tight seal. Gives your car tough wax protection it needs for any weather. And look! The colors are far brighter, truer—even the chrome glistens.

Get your car ready now for the months ahead—with J-Wax. It's the easiest, fastest way to genuine wax protection—*paste wax protection!*

Copyrighted material

set your course for *most* fun afloat



with Evinrude *Whispering Power!*



ALL'S CLEAR — you're set for years of pleasure ahead — with your fast and able Evinrude-powered cruiser! Delightful runs to lovely coves far up the shore. Carefree week ends afloat. Family vacations brimming with happy adventure. At modest cost you enjoy the comforts of larger inboard cruisers. And performance that is *luxury afloat!* You speed in the tranquil quiet of Whispering Power. You relax in blissful smoothness that makes riding seem like sailing.

SEE YOUR EVINRUDE DEALER. Look for his name under "Outboard Motors" in your phone book. Learn how easily you can join in the fast growing sport of outboard cruising. He will gladly help you choose the boat and motor exactly suited to your needs. Write for free catalog of the complete Evinrude line—9 models, 3 to 30 horsepower—3 models with finger-touch electric starting.

EVINRUDE MOTORS, 4248 North 27th Street, Milwaukee 16, Wisconsin.

A Division of Outboard, Marine & Mfg. Company
In Canada: Mfd. by Evinrude Motors, Peterborough

Evinrude
quiet Outboard Motors

Copyrighted material

POPULAR SCIENCE
REG. U. S. PAT. OFF. Monthly



Off to the dance in a truck. It helps if it's as handsome as this GMC "Town and Country."

You'd Hardly Know They're Trucks

In color, styling, neck-bending performance—new pickups are stealing passenger-car thunder.

By Frank Rowsome Jr.

ALL of a sudden, pickup trucks are real gone. For decades a frumpy, plain-Jane vehicle, the pickup has blossomed like a butterfly coming out of winter quarters. You have to see one to believe it.

You can now buy a pickup with *five inches* of foam rubber on the seat; with enough horsepower to out-drag most passenger cars; with colors that go *boinng* a hundred yards away; and with such adjuncts to contented trucking as white sidewalls, sound-deadened cabs, quilted plastic upholstery, back-up lights, tinted glass and fancy new suspensions that skim off the familiar jowl-shake on washboard roads.

How come the dowdy pickup has pulled off this chrysalis stunt? The answer—rather unsettling to people with an image of truck drivers as near Neanderthals—is that people like trucks that way. *Why* they do calls for a closer examinations of who drives pickups, and of

Copyrighted material



GLEAMY GAUGES report how things are with the 180-horsepower OHV V-8 under the hood of this GMC pickup. That selector quadrant is part of a heavy-duty Hydra-Matic transmission.



NO CRUDE CHAINS tether this tailgate. These recessed handles and disappearing steel cables are neater looking, though whether they'll work as handily on the farm will be argued.



TUCKED IN A POCKET behind a hinged bumper section is the spare tire of this GMC. "Tennessee hardtops," slang for dolled-up trucks, are nov often ordered with whitewall tires.




The prettified pickup is still a working truck.

the various reasons for driving them.

Still sturdy. It would be an error to assume that pickups have gone girly-girly. They still *behave* like no-nonsense vehicles, even if they are beginning to

Fancy pickups are now made by all the manufacturers

Though long a factor in selling light trucks, comfort features, colors and styling are now more important than ever. The chief U.S. makers, in order of sales, are Chevrolet and Ford, followed by GMC. International, Dodge, Willys and Studebaker. All the makers offer de luxe choices as added enticements to the prospective buyer. Some of the plush workhorses are shown at right and on page 96.

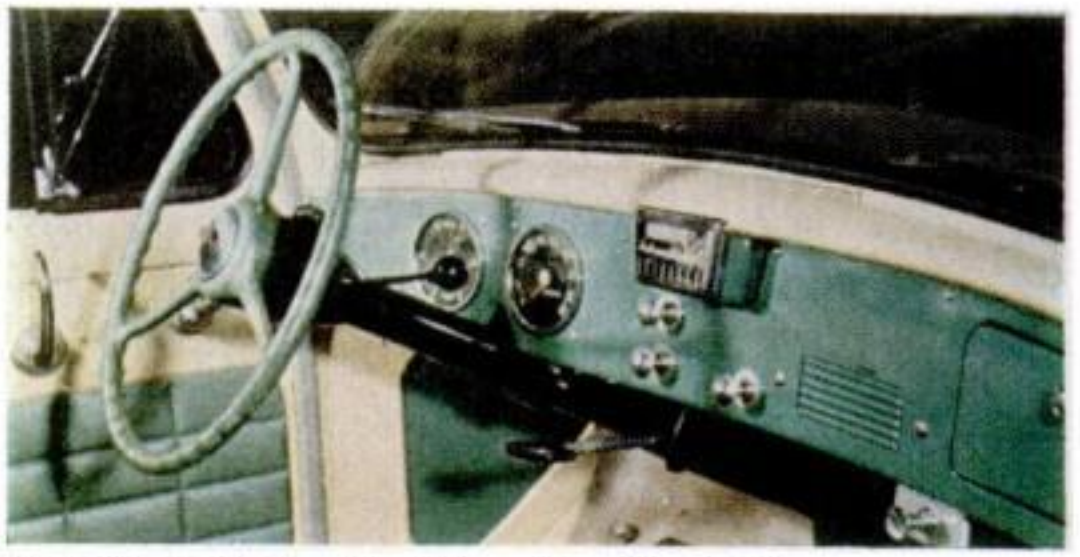

INTERNATIONAL calls this salon its "DeLuxe Comfo-Vision Cab" without a blush. The quilted door panels are vinyl. Twelve main color options are available, each with matching trim.

Copyrighted material

New balance-weight front suspension smooths out ride without impairing the load capacity.

look like cheese dreams. Transmissions continue to give the keening cry of gears; handling is still solid, and a brisk door slam still sounds like an explosion in a sheet-metal shop. Unlike some passenger-car members of the automotive family, pickup trucks are rarely "tender"—Detroit's polite word for any vehicle that needs continual tinkering to stay tuned.

Workhorse. Behind its three-passen-



DODGE suggests that whitewalls add a special cachet to the dog-catering business. Actually, fancied-up trucks are often bought on the idea of enhancing the prestige of a small business.



FORD puts forward the theory that its truck is nothing to be ashamed of in swank surroundings. Inside the "greenhouse," in customized version, are deep foam rubber and insulation.

Copyrighted material



BOX IN BACK carries ordinary loads, but either grain-tight steel sideboards or stake sides to corral livestock en route may be speedily fitted. This particular pickup is an International.

ger cab, a pickup totes an open steel box about 6½ to eight feet long and 4½ feet wide. The load placed in it is not supposed to exceed 1,000 pounds (1,500 pounds on some models), but this is largely a pious declaration by the manufacturer for warranty purposes. Pickups are notoriously affable about overloads, being aided in this in recent years by huskier tires and by stronger or two-stage rear springs.

What goes in the steel box is very nearly a roster of human activity. Farmers are the biggest single group of buyers (pickup sales executives can watch the crops come in by studying the sales pins on a map), but small business, including the retail and service trades and the construction industry, is a close second. Pickups are popular all over the country—almost half a million were sold last year and some four million are believed to be in use—but the Southwest, with its big ranches and its oil fields, has the most per capita.

Everyman's truck. A basic reason for this popularity is that the pickup is widely adaptable. Slide posts into the corner stake pockets and you can fit special sides and tops, covering it with canvas like a latter-day prairie schooner. Or slip in a dump body to take loose loads; add a winch, hoist or rigging gear; attach tool lockers, ladders and side racks; or rig it up with a water tank or fire-fighting equipment. A pickup tows house trailers better than most passenger cars, but if fitted out with bunks and a kitchenette it becomes its *own* trailer, prized by big-game and uranium hunters for its off-highway capabilities (four-wheel drive is an optional item on some pickups).

Women drivers are partial to pickups, too, and put on a considerable percentage of total pickup mileage. Pondering the way buyers have gobbled up pickups in recent years, resident thinkers in Detroit have theorized that the vehicle should actually be a kind of realistic station wagon: a dual-function car that can either haul good-sized loads over bouncy back roads or transport people comfortably to town via the main highway.


For people, too. The pickup's prettification arises, of course, from this second function. Used like a sedan to go to church, school, or the movies, it merits sedan attributes in performance, comfort and colors. (Some of the latter currently include Flame Red, Nocturne Blue, Goldenrod Yellow and Meadowmist Green.)

If Mom takes the pickup to get to an Eastern Star meeting, the foam-rubber seat and improved ride are sure to be welcomed. If Bud takes Selma to the school dance, he's going to enjoy a "draggin' wagon"—and some of the hotter new jobs can click off a zero-to-60 time of around a dozen seconds, dizzy going for any beast of burden. And Pop—once he gets over the odd feeling of entering a two-toned cab in his work clothes—is going to find that underneath the finery the pickup is still the handiest hunk of machinery around the place. END



CAMEO CARRIER is Chevvy's name for this job, and don't think for a moment that the resemblance to a Cadillac is purely accidental. Many of the body parts are made of special plastic.

Copyrighted material

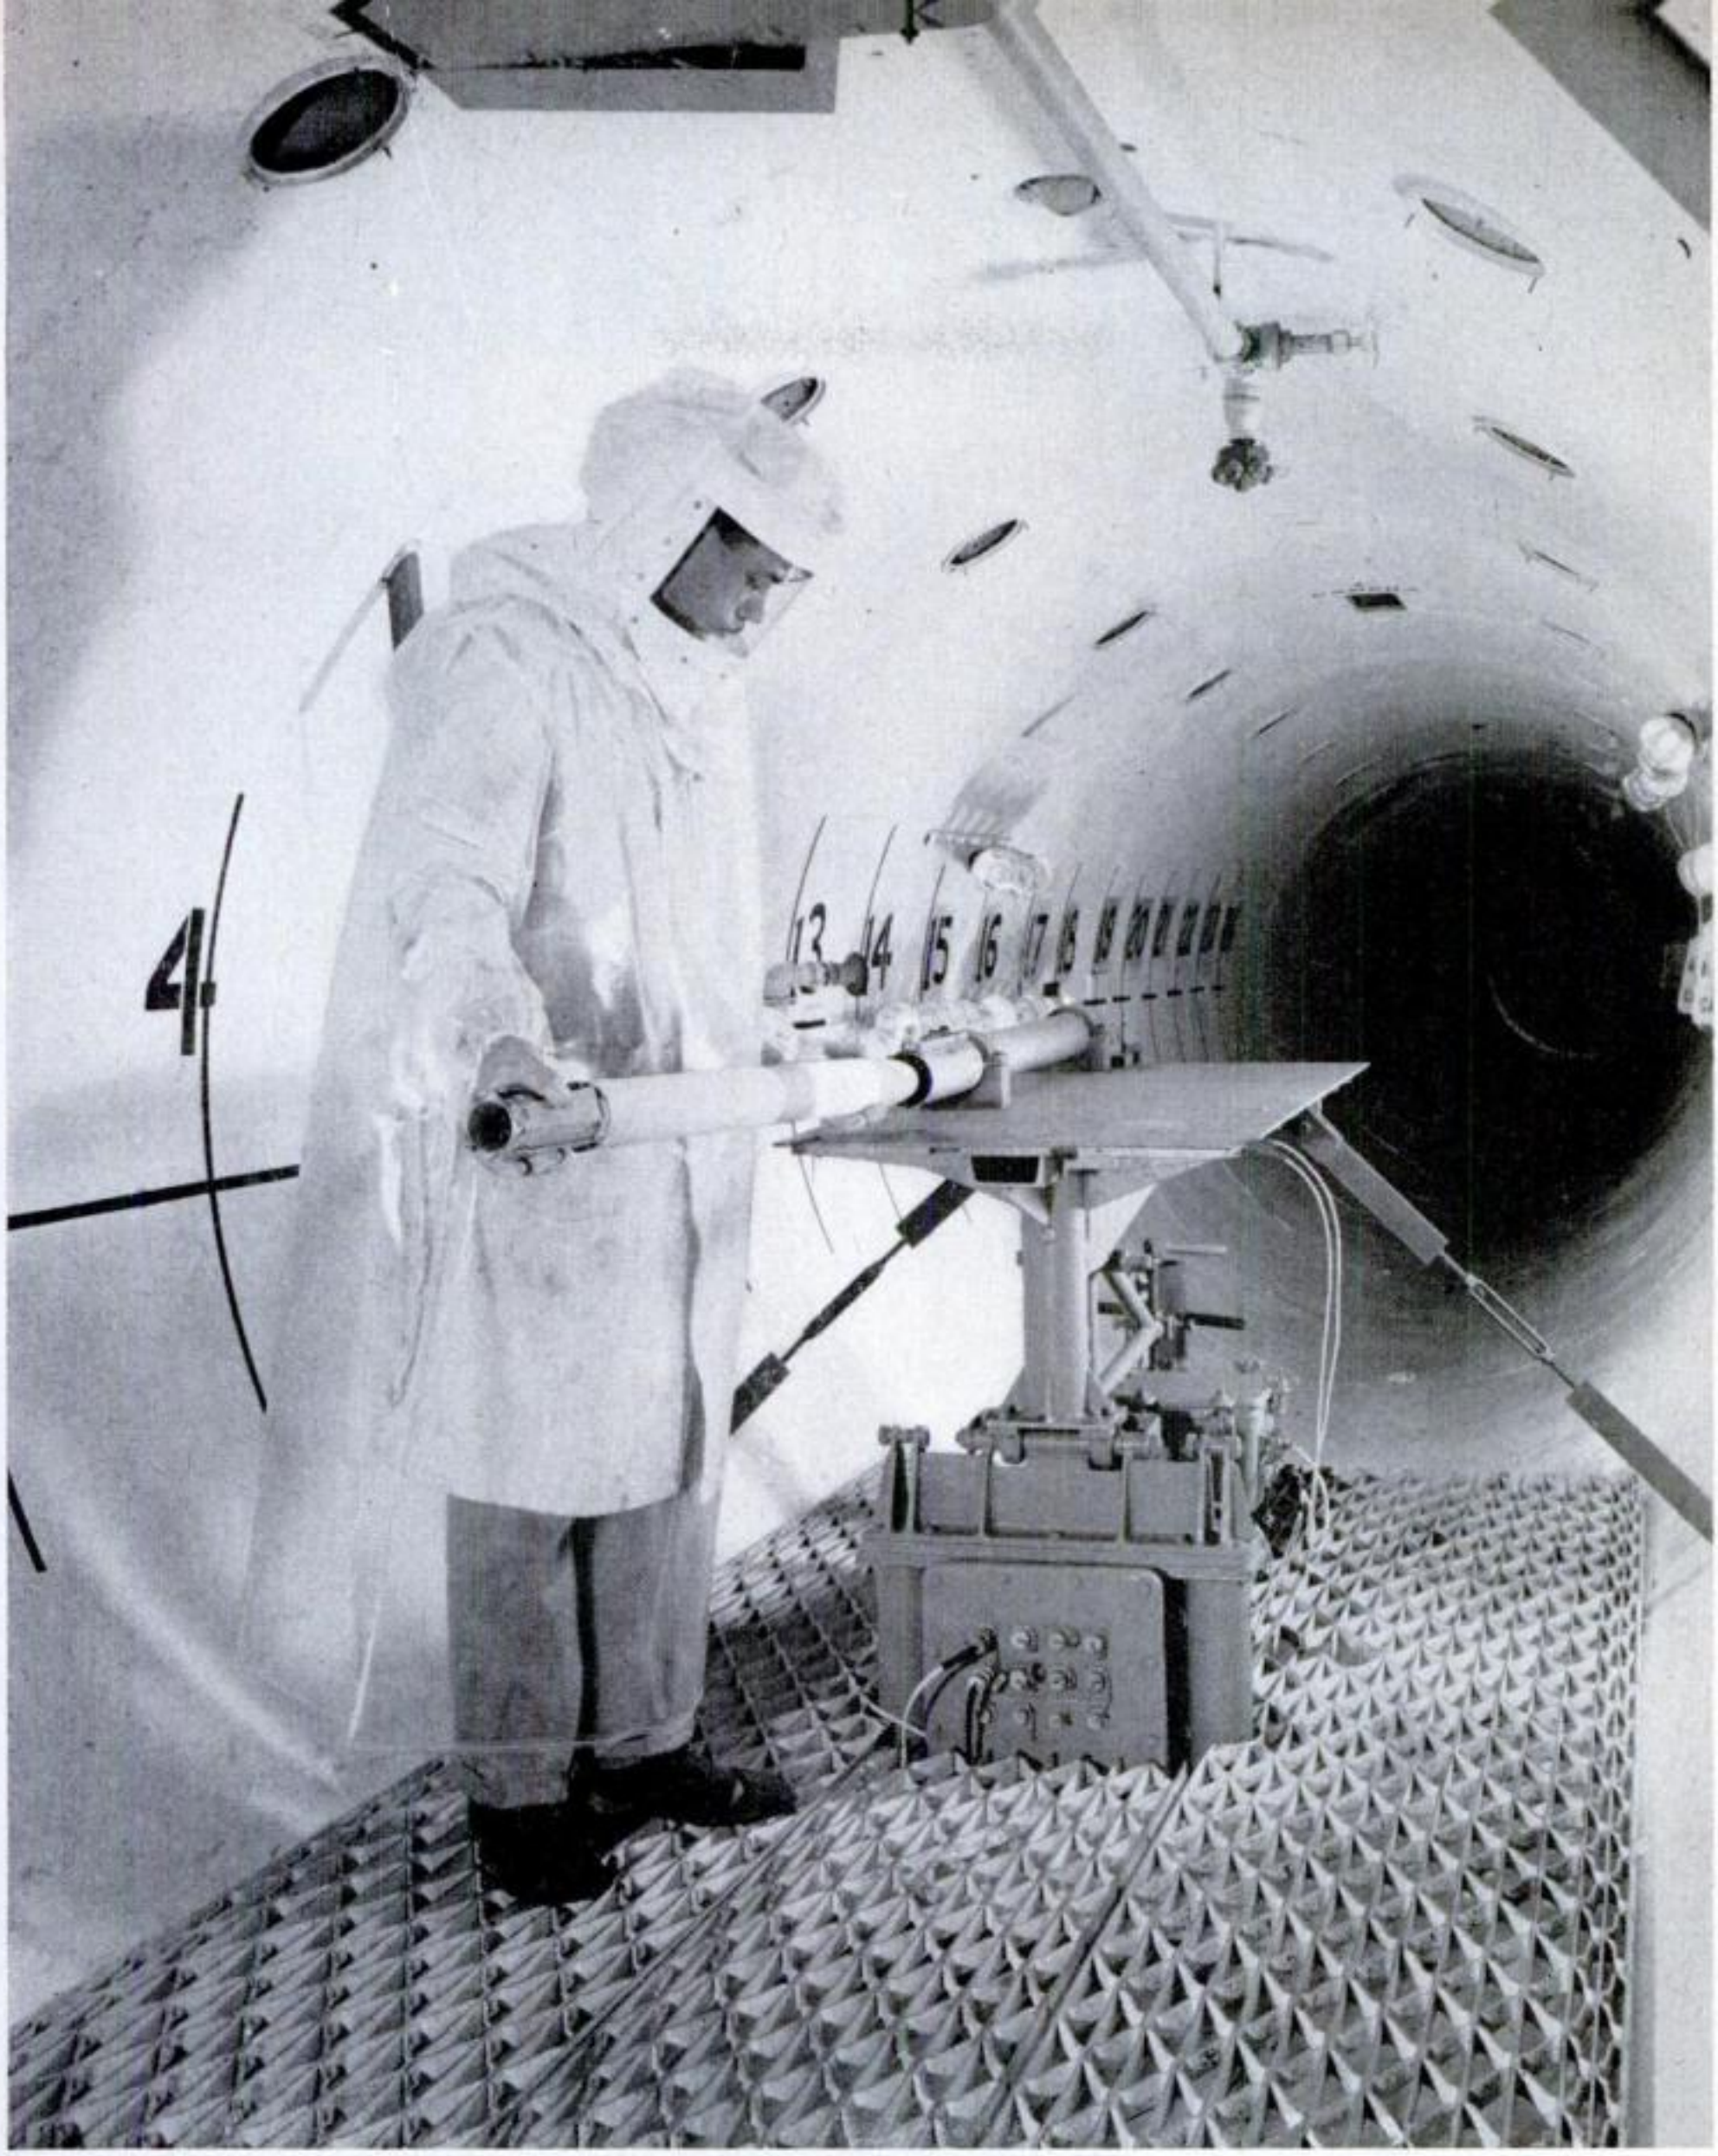


Airplane Rockets Fired and Filmed in Test Tunnel


IN CHEMICAL-PROOF gloves, slicker and helmet, this technician loads an aircraft rocket for test firing. The 110-foot tunnel at North American Aviation's Rocketdyne Division, has a heavy armor-steel plate at the far end. Ports through which high-speed movie cameras record flight data are in the ceiling and right wall. The numbers correlate time and distance. Firing is controlled from a blockhouse at the near end through the electrical terminal box under the launching table.

Copyrighted material


They Take the Rap

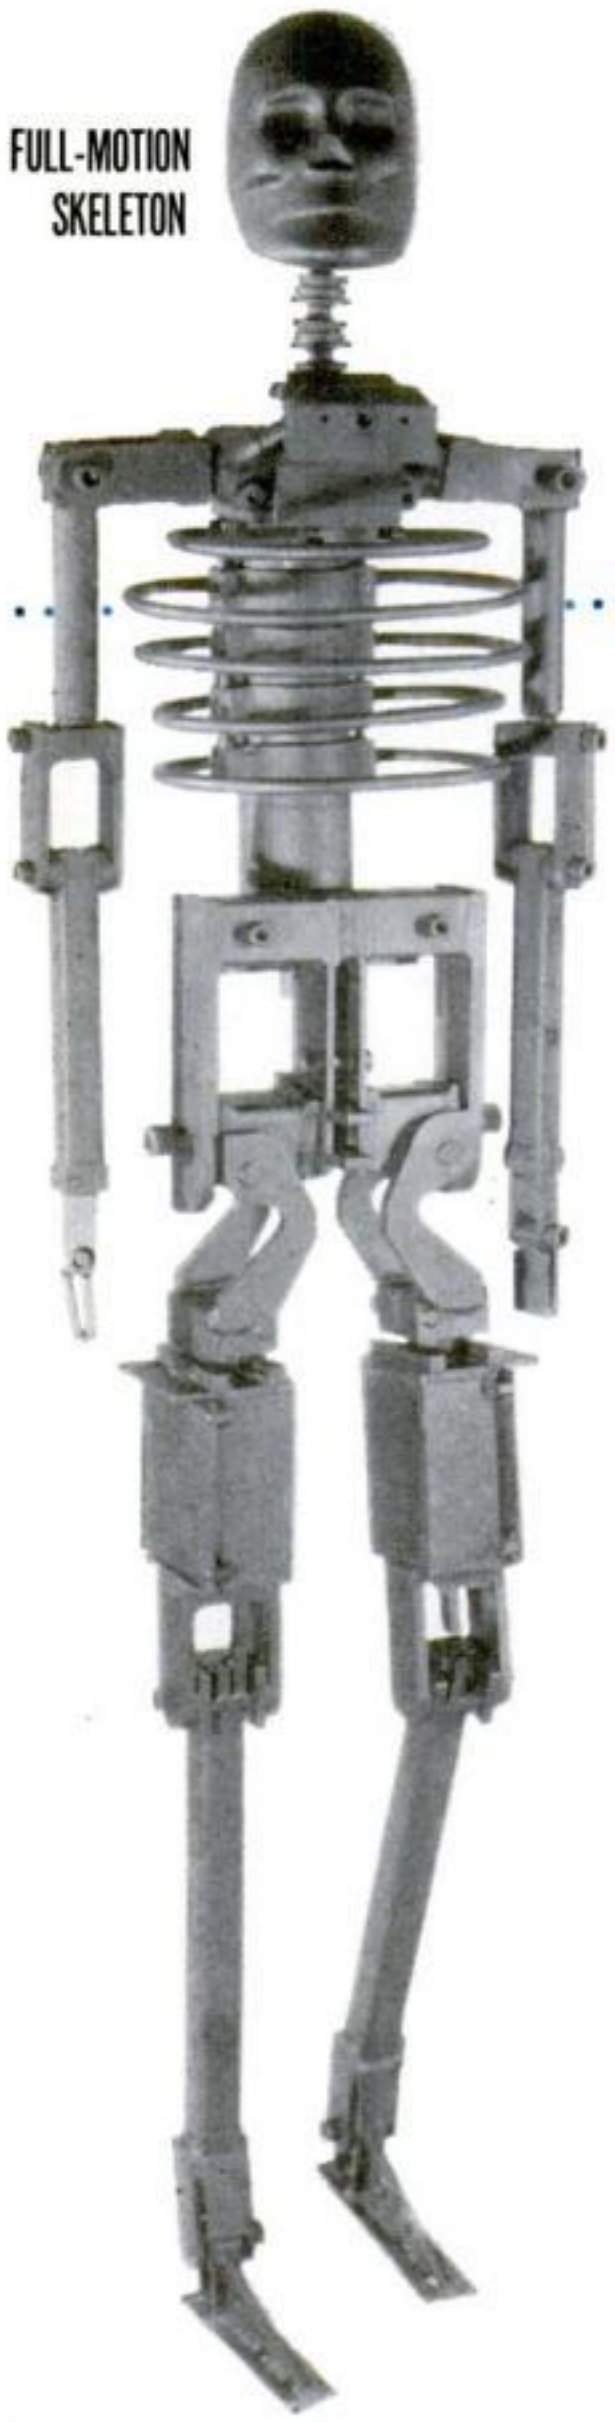


FULL-MOTION SKELETON

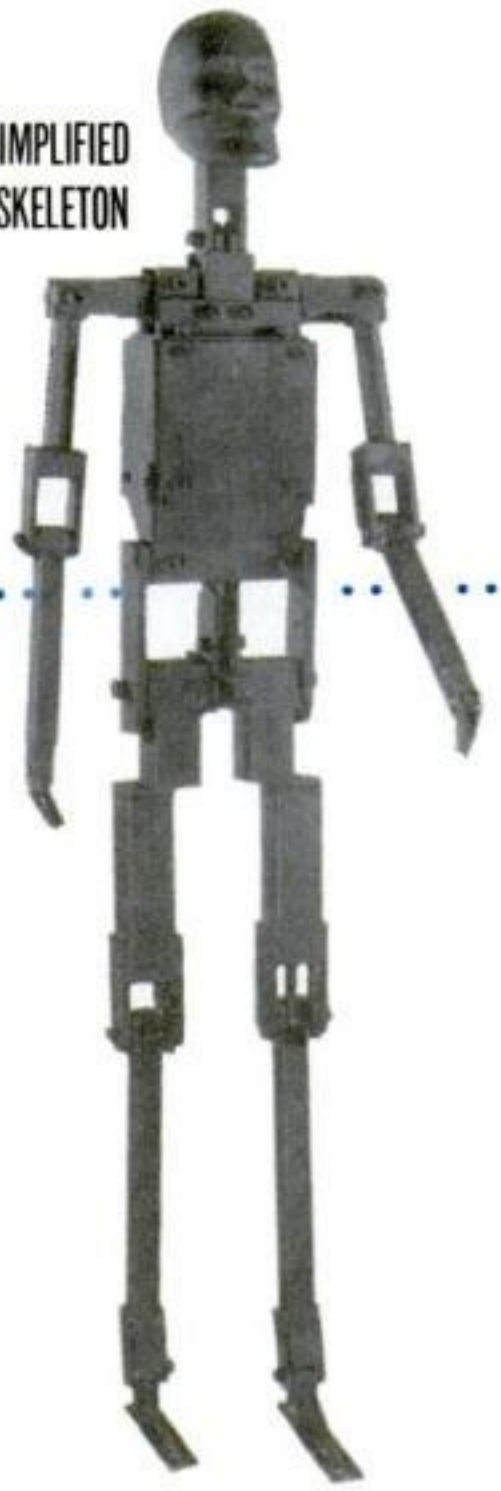

SIMPLIFIED SKELETON

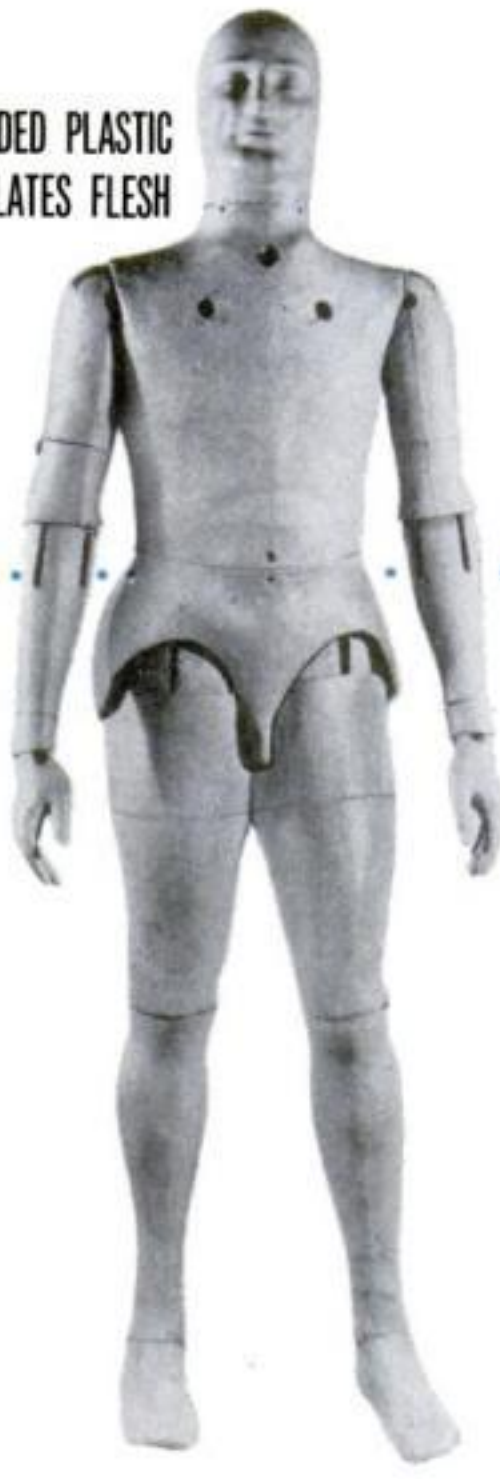

MOLDED PLASTIC SIMULATES FLESH

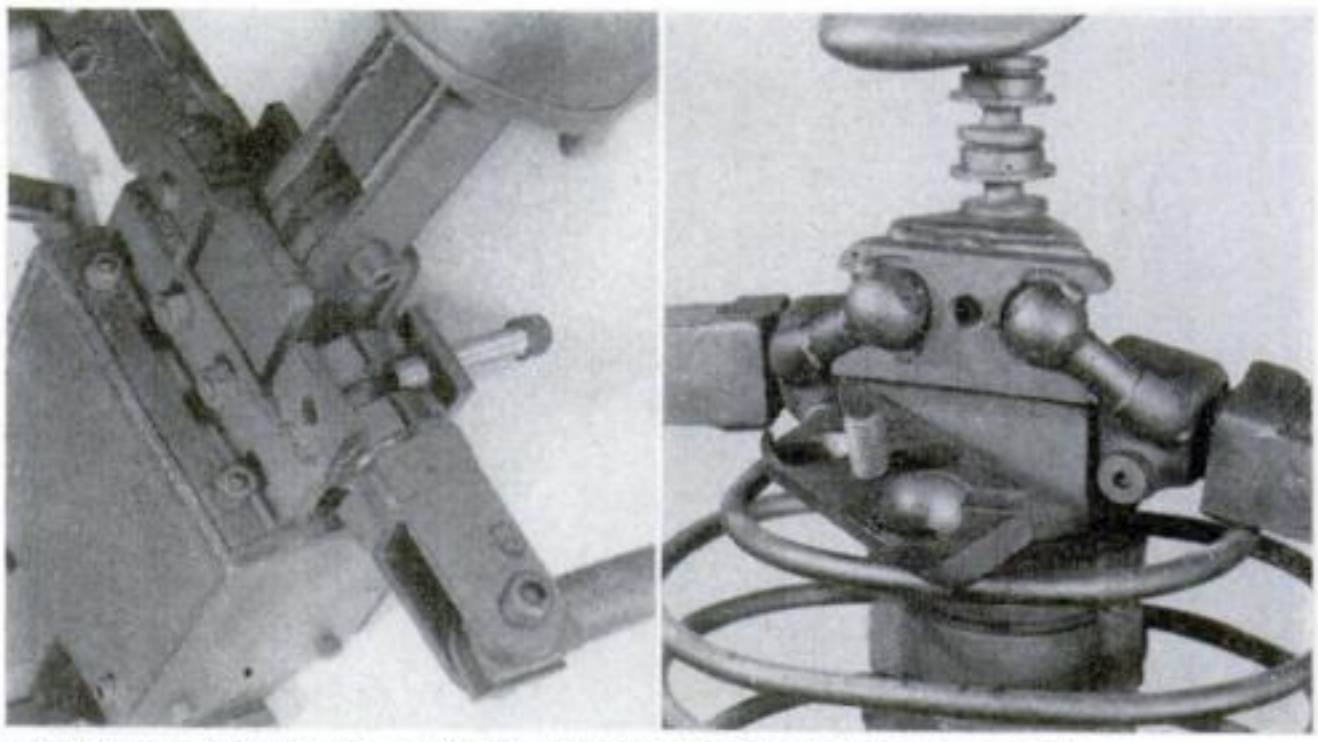


ROTATION AND BALL JOINTS, shown in detail above, enable full-motion skeleton like the one at the left to duplicate human body motions under severe impact conditions.


Copyrighted material

for You



BADLY BATTERED, this dummy gave his "life" while testing high-speed ejection from a rocket sled. Air Force scientists are studying telemetering equipment that is inside the torso.

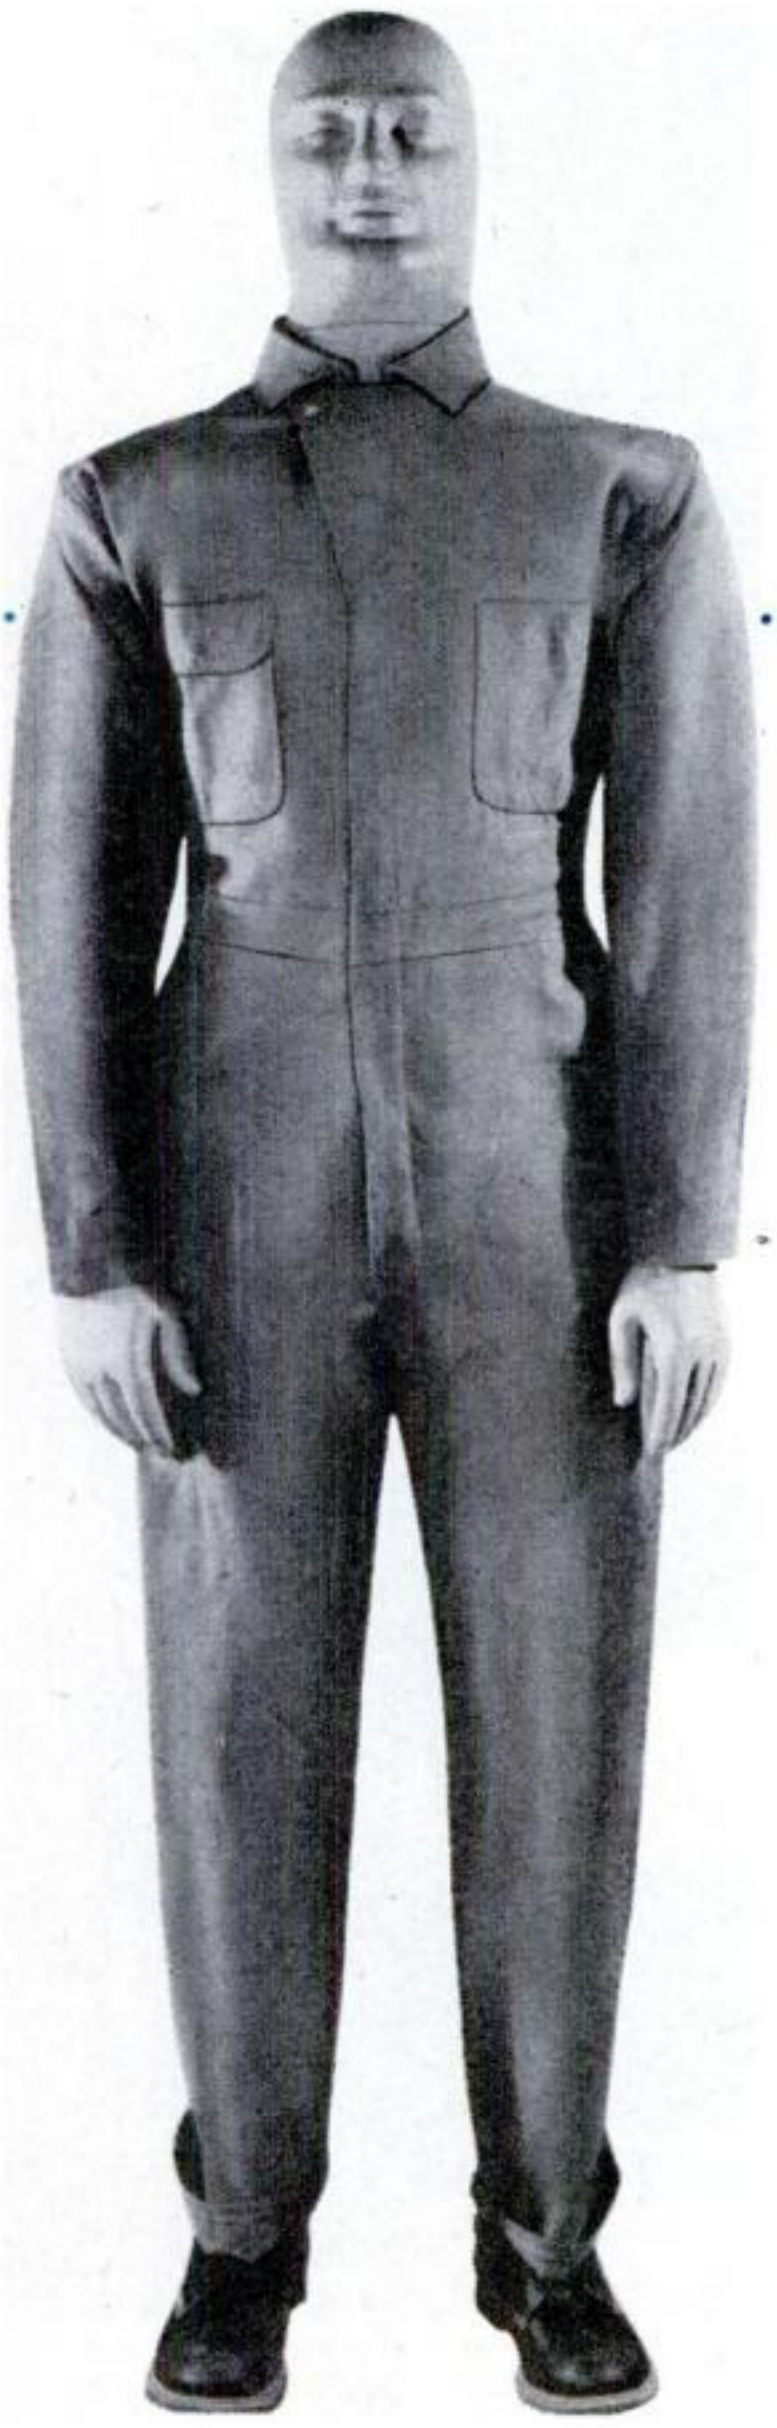

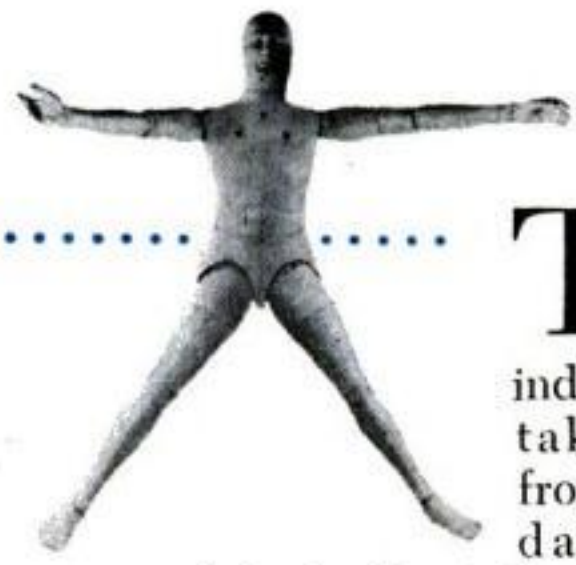


THERE has been some criticism in industry of machines taking jobs away from men. But to date no one has complained about the robots pictured here. These test dummies are man's stand-in at taking the beatings of plane crashes, automobile smashes, and catapult shots from ejection seats of supersonic jets.

Today these robots are kept busy testing safety devices and structures that may save human lives in high-speed accidents. To meet the demand for human substitutes, the Alderson Research Laboratories of New York has developed modular anthropomorphic test dummies made up of quickly replaceable parts.

The skeleton, made of rugged steel bars and plates, welded together, is covered with molded vinyl plastisols which simulate the soft tissues of human flesh. The standard model, shown at far left, can duplicate all the major motions of man. He stands six feet one inch high, weighs 200 pounds and comes dressed in blue cotton coveralls and heavy-duty oxford shoes. His skull is a large aluminum casting, and he can be instrumented with an "intelligence" consisting of accelerometer, rate gyro, telemetering equipment, recorders, and pressure devices.

Copyrighted material

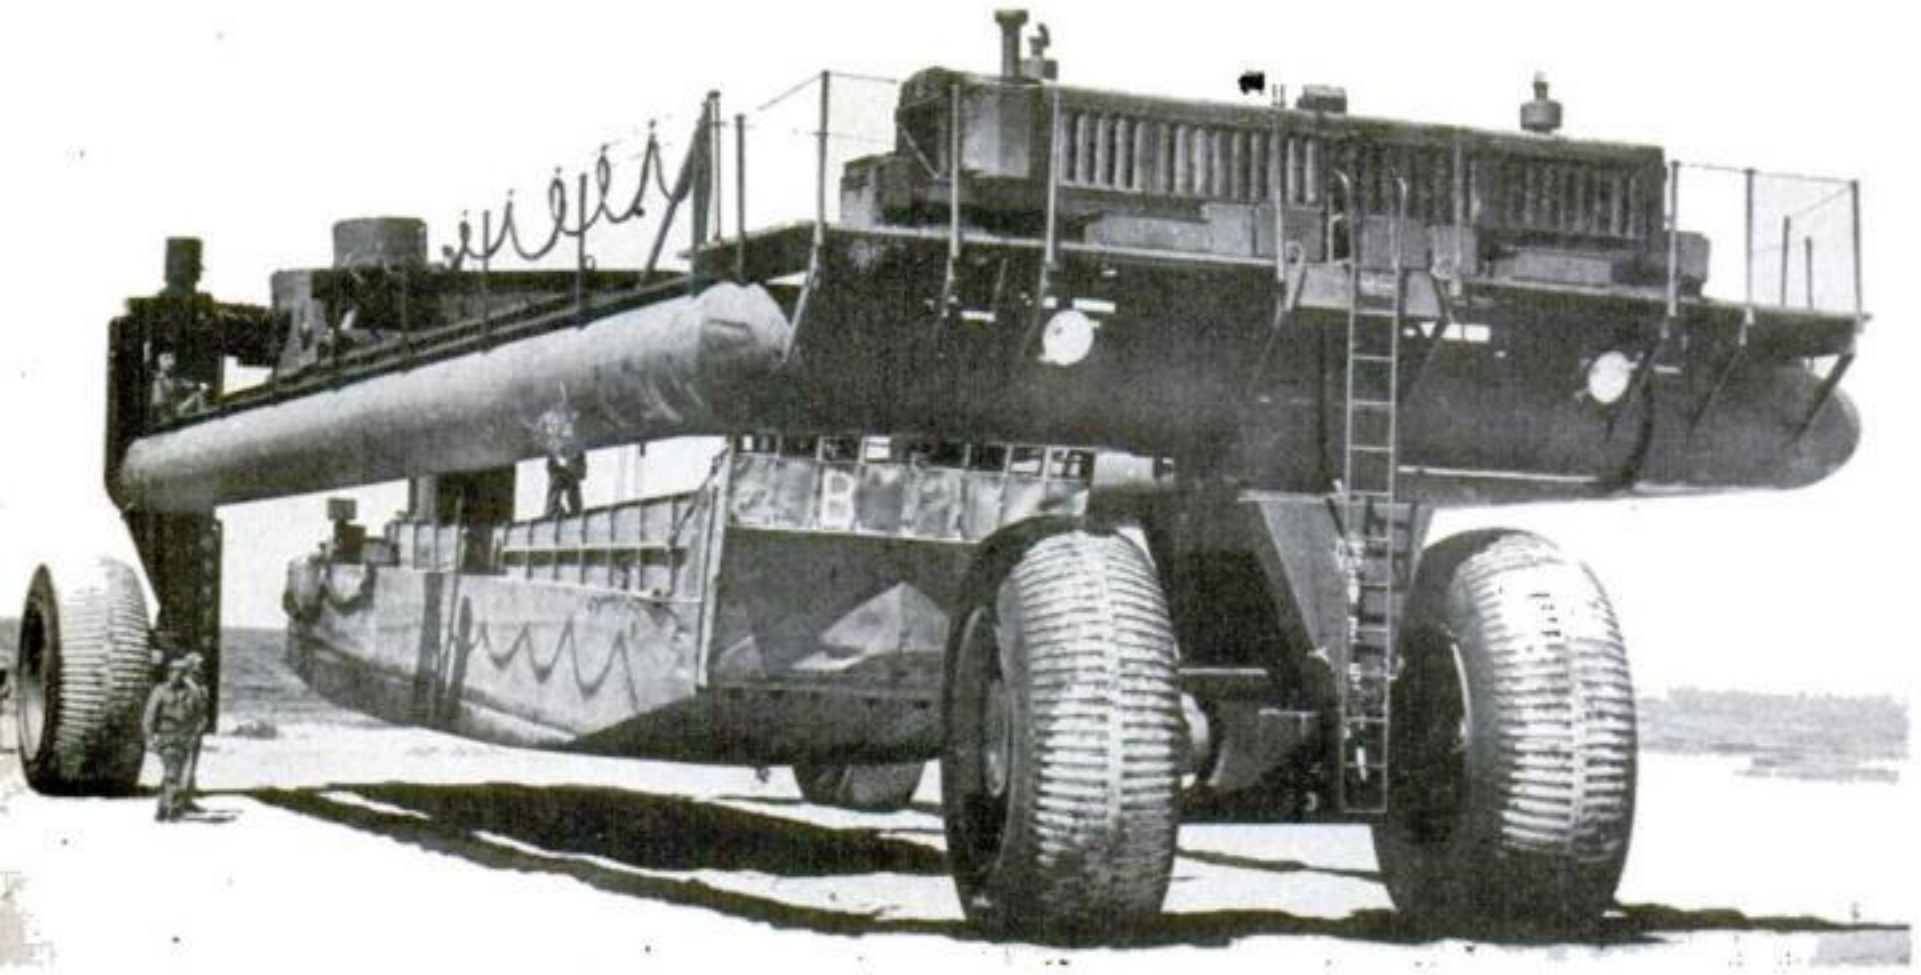


Huge Retriever Picks Up and Brings In Disabled Landing Craft


ELECTRIC motors in waterproof housings in each 10-foot wheel propel this big machine. The Army is testing it by using it to recover landing boats grounded or sunk in offshore operations. The 75-foot LeTourneau retriever can straddle a 67-ton vessel with its U frame, lift and carry it to deep water or dry land.



Solar Radio Runs 250 Days in Dark

THE pocket sun-powered radio at left weighs only 10 ounces and will work 500 hours without recharging. If used two hours a day, it will run 250 days in total darkness. It contains a miniature storage battery, four transistors and seven solar cells. Built by General Electric, it is not intended for production.

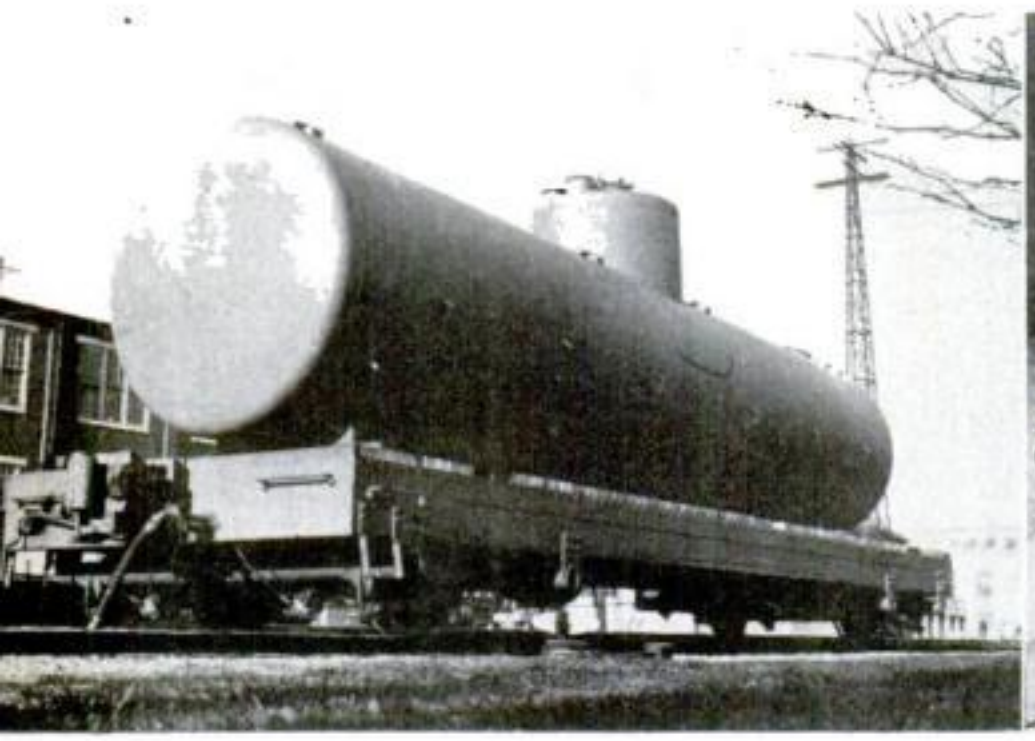

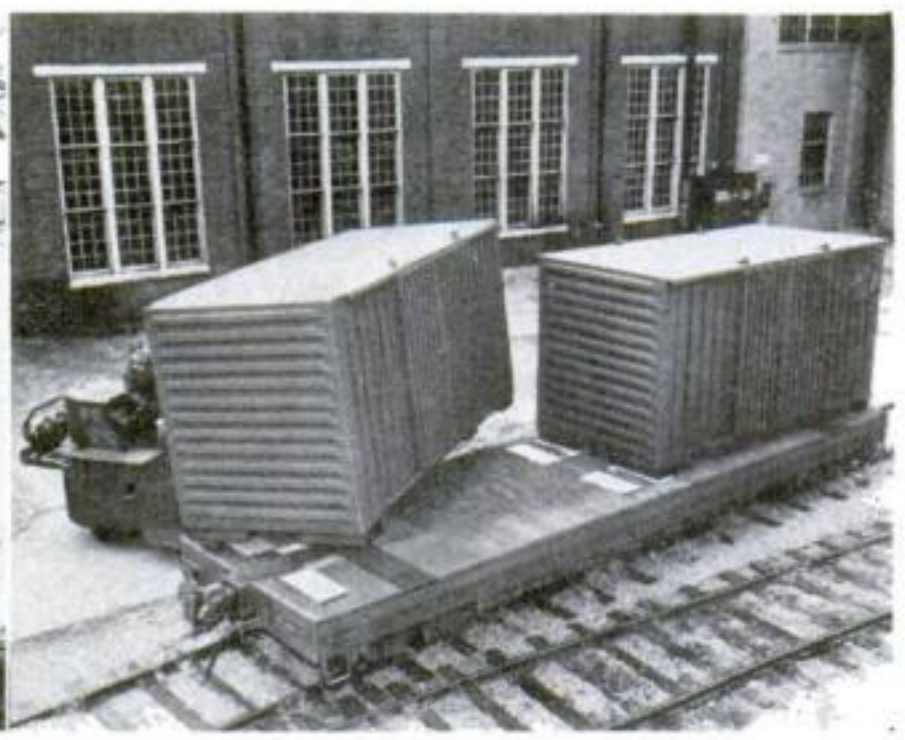


Railroad "Convertible" Has a Single Base for Many Bodies

ALL-PURPOSE flatcars weighing and costing half as much as standard equipment, and only two-thirds as long, will soon be in use on the Rock Island Railroad. Called the Adapto by American Car & Foundry, the new piggy-back can carry tank, box, gondola, hopper, caboose and other interchangeable bodies.

Copyrighted material

Billionth-of-a-Second Timer Is World's Fastest Stop Watch


DESIGNED to strengthen and measure the flight of atomic particles, this electronic device can measure light flashes less than a billionth of a second apart. The experimental photomultiplier tube developed by Westinghouse is a super stop watch run by an electron "chain reaction." Commercial sizes will be smaller.

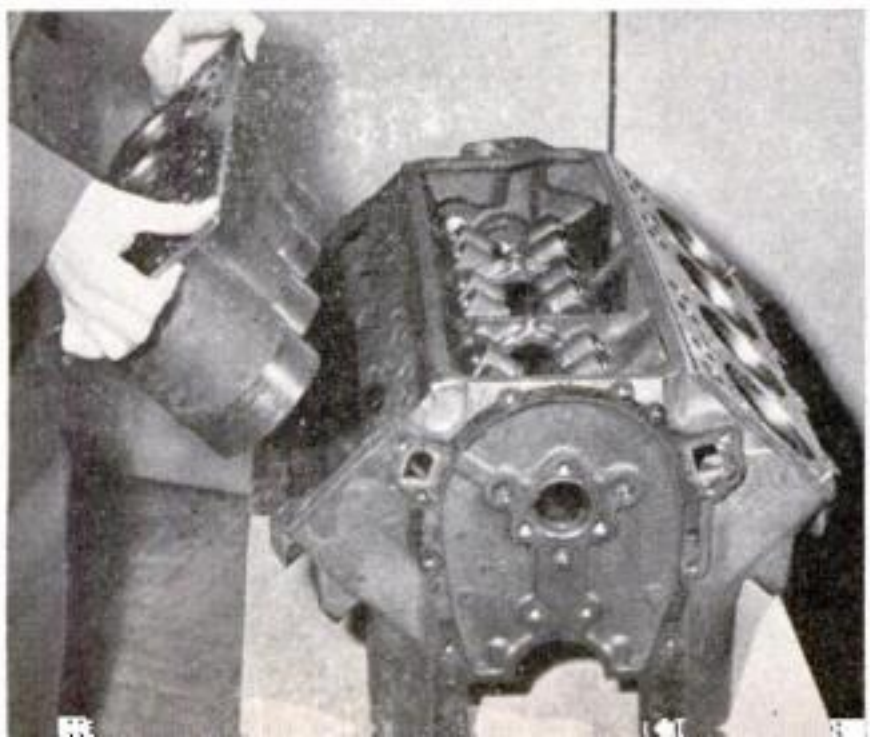


Engine Gets Pull-Out Cylinders

CYLINDER banks are separate units in this engine block said to be suitable for die-cast aluminum blocks now under research by automobile makers. Perfect Circle, piston-ring manufacturers, designed it in an effort to adapt truck-cylinder liners to passenger autos.


Copyrighted material

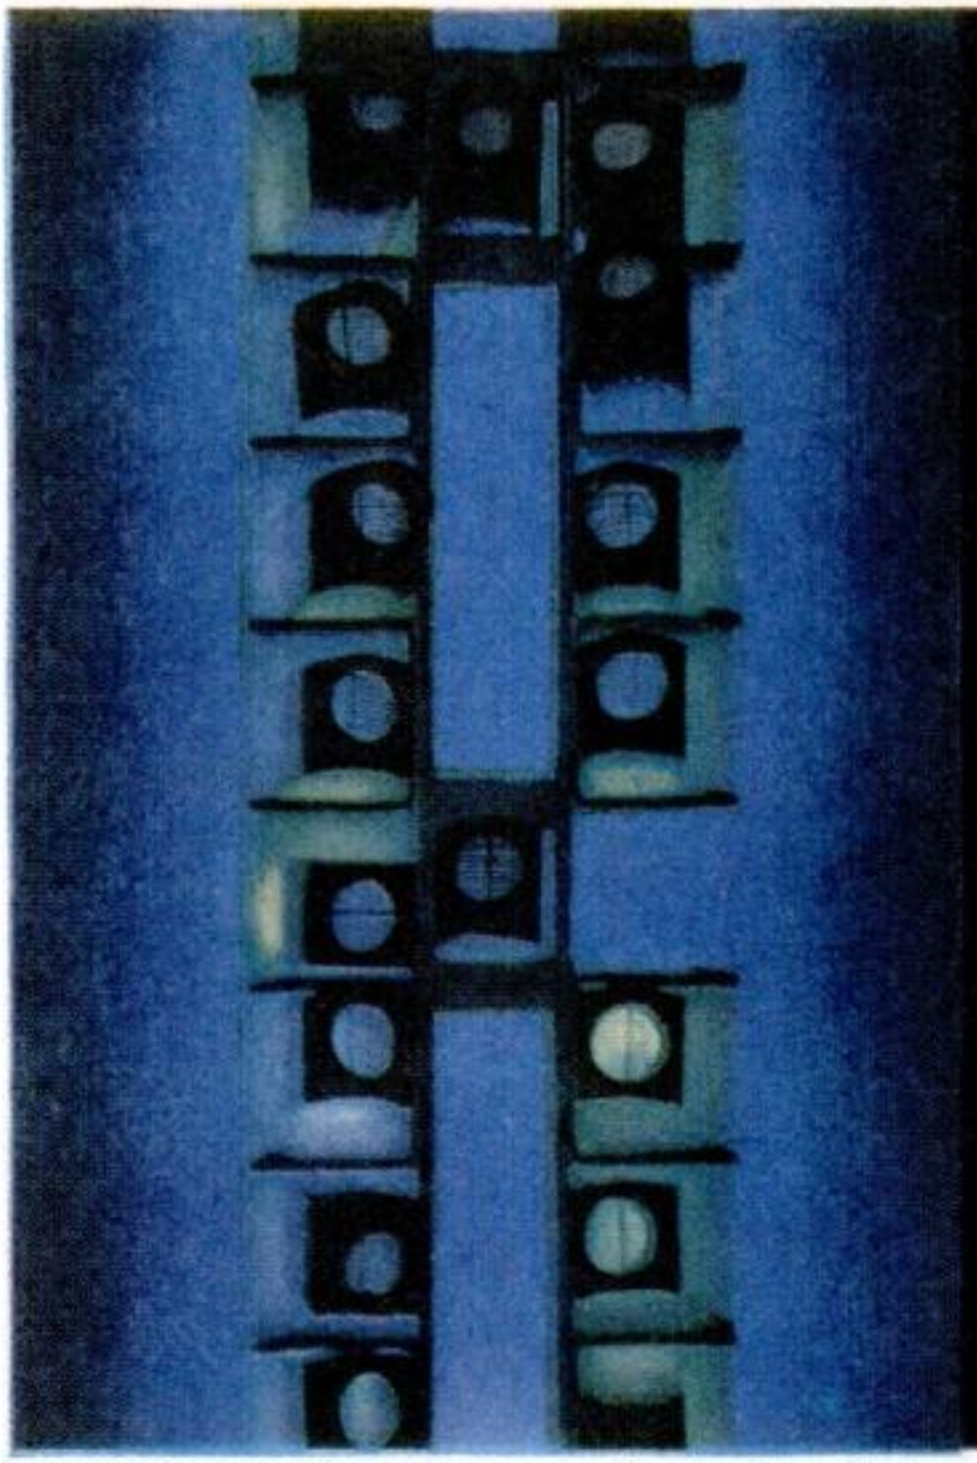

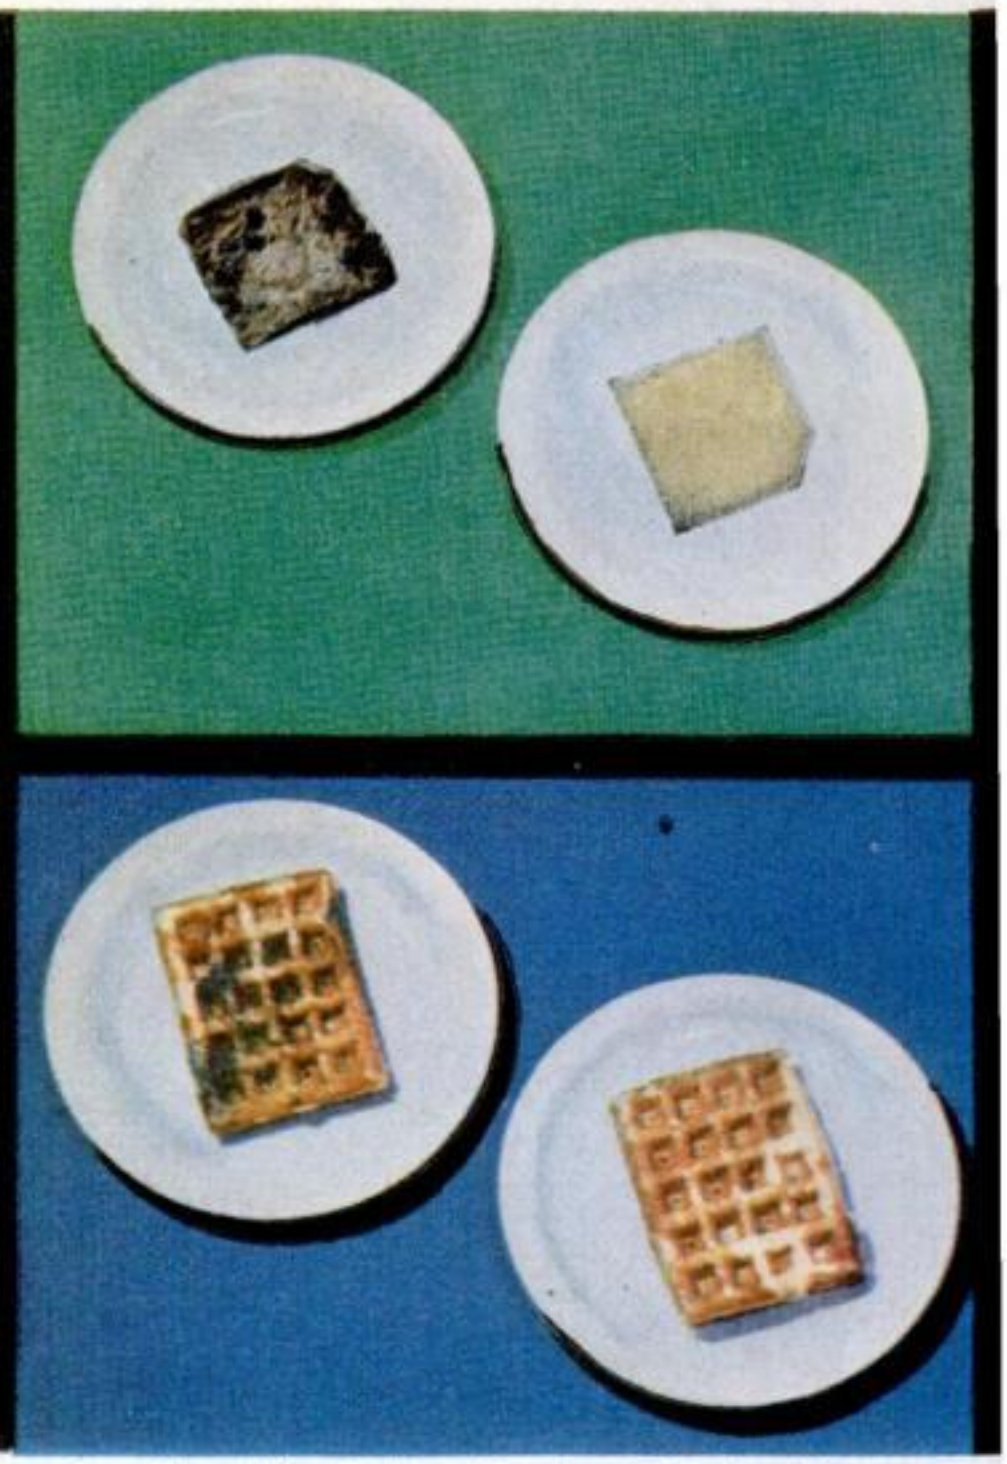

POWERFUL GAMMA-RAY SOURCE for food-irradiating experiments, seen above by its own eerie glow, is an underwater assembly of spent fuel rods from Materials Testing Reactor (MTR) in Idaho. Below, revolving rack holding food in can is lowered beside assembly. MTR's rods, one of many radiation sources on trial, irradiated the cheese, ground beef, waffles and corn that are pictured here.

Irradiated foods (at right in each view) keep

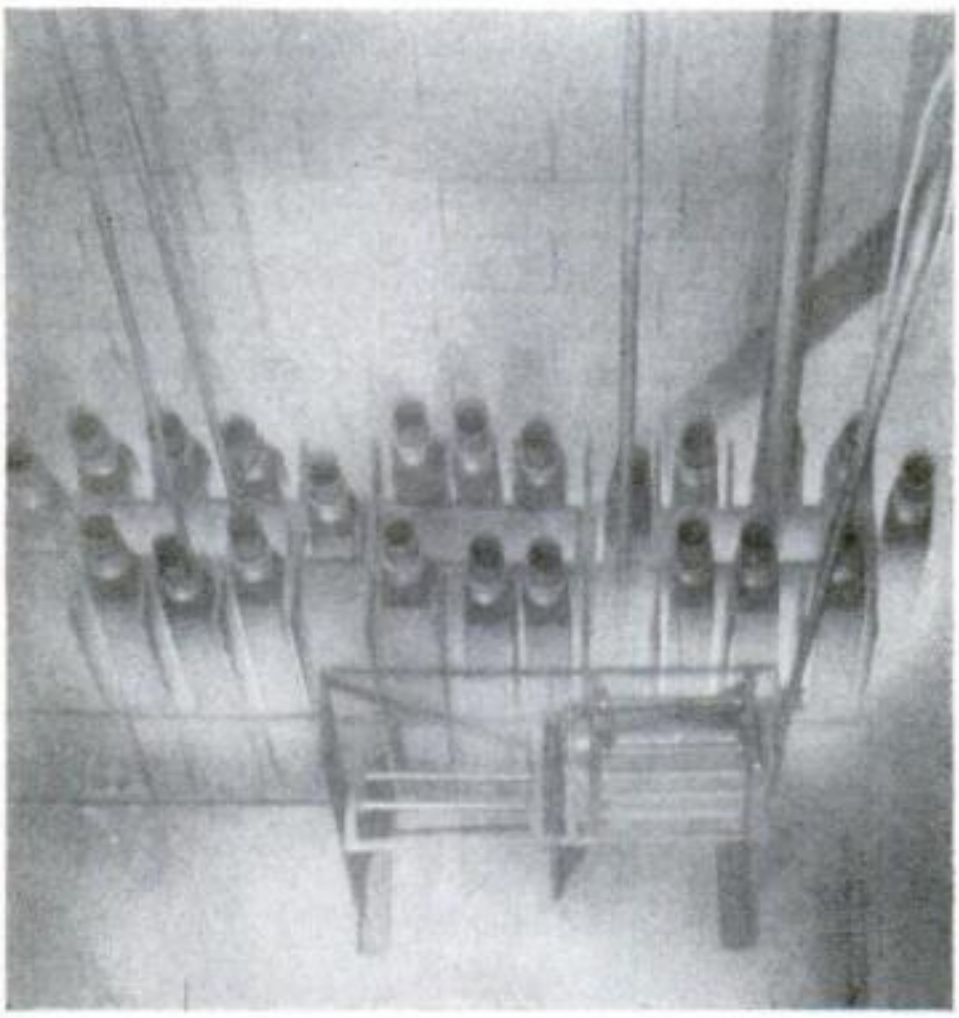

Atomic

$10,000,000 gamble backs a way to prevent spoilage without any refrigeration.


By Darrell Huff

"PUT that hamburger back in the refrigerator before it spoils," my wife advised. "What're you doing, dreaming?"

She had me there. After looking into something called radiation sterilization, I was absent-mindedly living in a world that we may all inhabit soon. It's one in which meat no longer spoils in a day or a week, bread won't mold, and fresh fruit and vegetables stay fresh.

That's what's coming in atomic

Copyrighted material

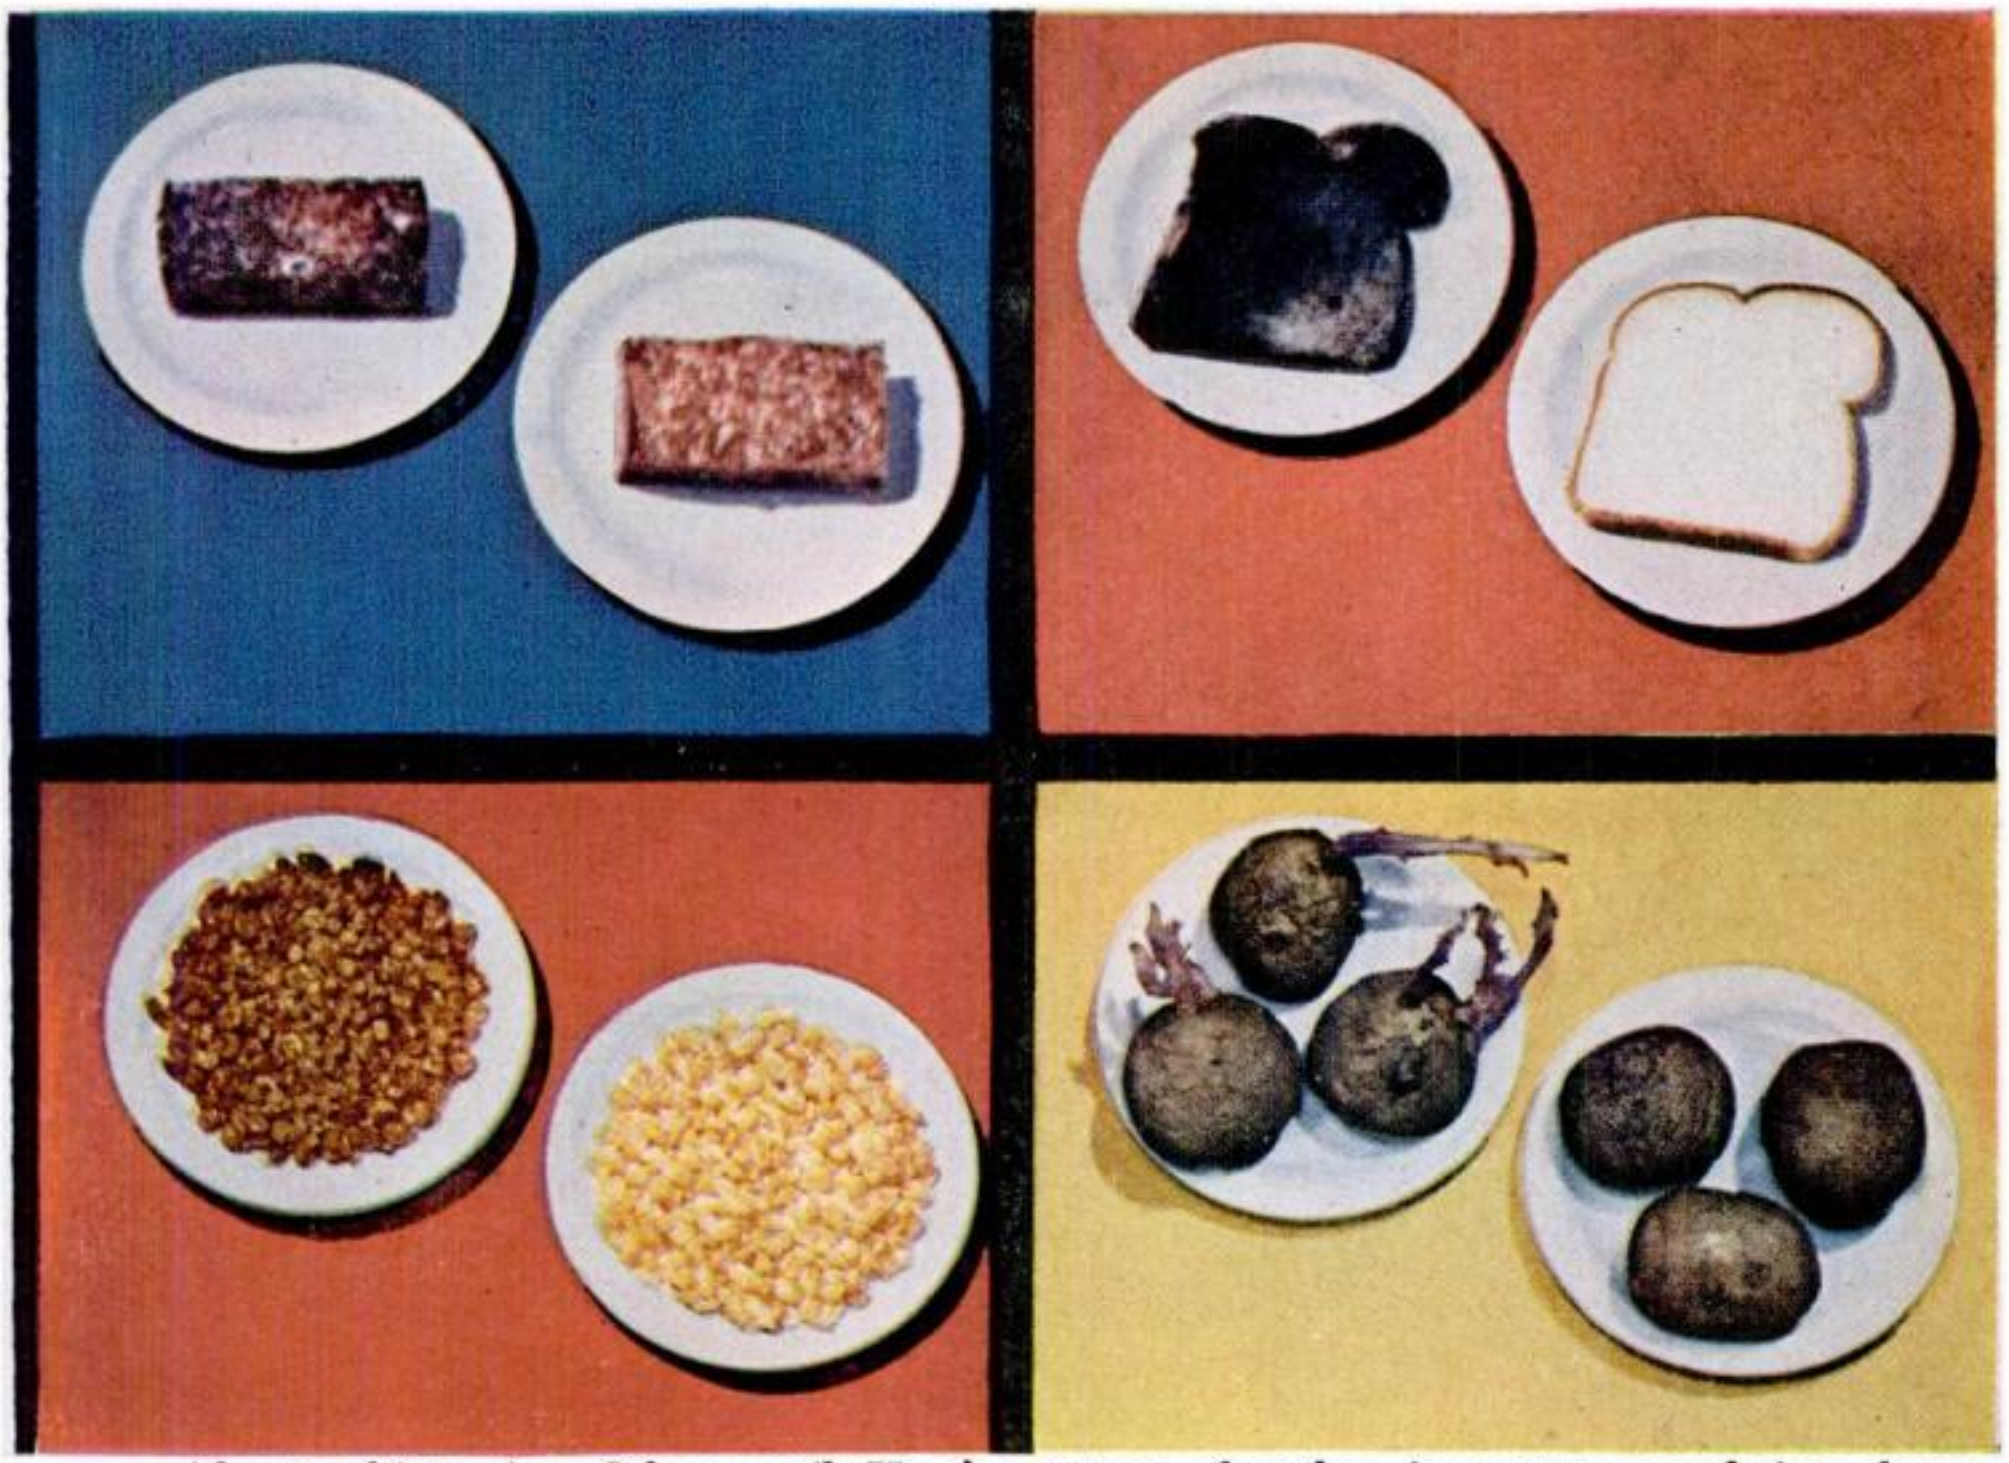

without refrigeration. Others spoil. Here's contrast, after dose in roentgens and time shown.

Rays Keep Food Fresh

energy, they tell me. You take a pork chop, or a bunch of asparagus, and expose it for a few minutes or seconds to atomic radiation. It could be gamma rays from a reactor's spent fuel rods, or an electron beam from a high-voltage machine. The rays kill bacteria, mold, every living thing that makes food decay. So then, I told the wife, your pork chop and asparagus don't spoil.

"Hey, that sounds handy," she said. "I could buy fresh meat and vegetables for weeks ahead and not worry about their keeping."

"Nice for camping trips, too," I added. "Take along steak and chicken for a week or two, and you won't need six iceboxes."

"Is this really going to happen, or is it just somebody's wild pipe dream?"

"Uncle Sam's betting $10,000,000 or more that it can be done. The Department of Defense is putting that much into the idea, currently at the rate of about $1,125,000 a year."

"What's this got to do with defense?"

"Suppose trouble starts, like Korea, and the GIs move in. Way it's been, they live for months on canned rations, until refrigeration ships catch up with them, and mobile refrigerators can be dragged ashore. This way they'll get fresh eats wherever they go.

"The Navy is for irradiated food because it will actually boost their warships' cruising range. Carriers and cruisers won't need to stop and take aboard perishable food so often. That will count

Copyrighted material

all the more with atomic-powered ships that would have practically unlimited range otherwise.

"The Armed Forces together buy nearly two billion dollars' worth of perishables a year, 2,750,000,000 pounds of fresh meat alone. Keeping just one fighting man's share of it refrigerated, they figure, costs $40 a year. If irradiated food can save as little as a fourth of that, it will cut the cost of feeding a 2,000,000-man army by a tidy $20,000,000 yearly. So, all 'round, it looks like a potent new atomic weapon."

"But will it all be a military secret, then, like atom bombs?"

"No, sirree. Everything about this irradiated-food business is absolutely *non*-secret. All the packers and canners, everybody who makes our eatables, will be encouraged to use the processes that they are working out."

"Who are 'they,' anyway?"


"The idea's being developed by the Army Quartermaster Corps' Food and Container Institute in Chicago. Teamed up with it is some of the top U. S. talent—about 40 groups of researchers in universities, foundations and private industry, plus key Government agencies like the Atomic Energy Commission."

Here are highlights of what they've done so far and with what success:

As Exhibit A you can see for yourself, in color photos, the results of some food-irradiating trials. Five different foods were kept for weeks or months at room temperature, without visible deterioration, after getting the doses of radiation shown. Irradiating potatoes, to keep them from sprouting while they are in storage, was another twist in the process.

The pictures don't mean that each and every one of these irradiated items would pass the dinner-table test.

"Cold sterilization" with radiation contrasts with cooking food an hour or more, at 240° F., in conventional canning. Eliminating this destructive heat sterilization should help preserve fresh foods' flavor and texture. However, radiation itself in large amounts can affect some foods' flavors.

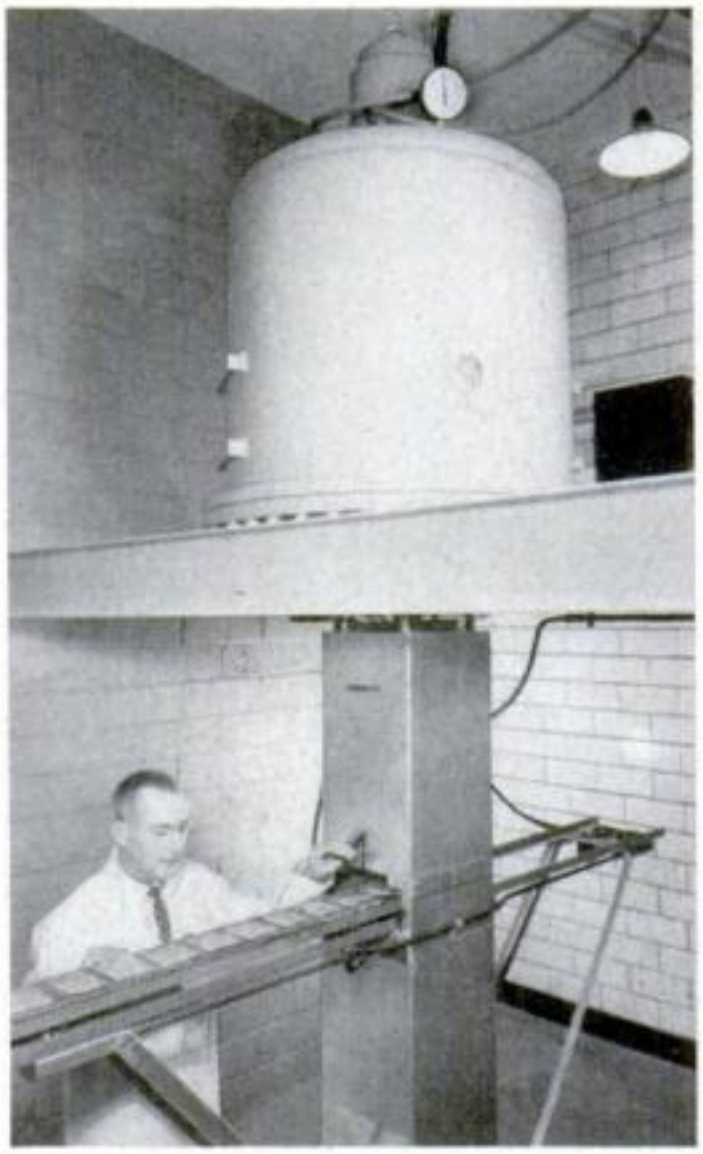

ELECTRON BEAM of million-volt GE machine sterilizes food in experimental setup, which might be model in miniature of a future production line.

The spectacular sort of thing, making "perishables" keep outside an icebox, calls for *total* sterilization – killing every last microorganism in the food. That takes a whammy of a couple of million roentgens of radiation. Since 400 to 500 roentgens kill an average man, you can see how tough those babies are.


Flavors of a lot of foods stand up nicely to even a two-million-roentgen jolt, the researchers find. On this list of most-promising items for irradiation they put bacon, chicken, pork, beef liver, codfish cakes, green beans, broccoli, asparagus, carrots, waffles; and there are several more.

Other foods, "radiation-sensitive," can't take all those roentgens. Milk, a horrible example, gets a burnt taste. "Off" flavors or odors likewise make cheese, frankfurters, and orange and lemon juice unsuitable for total sterilization.

In between these extremes there's a tantalizing group that almost makes the grade—including beefsteak, lamb chops, corn, peas, bread. Powerful radiation just slightly impairs flavor, odor, color or texture. Currently experimenters are trying to upgrade these in-between items,


[Continued on page 248]

Copyrighted material

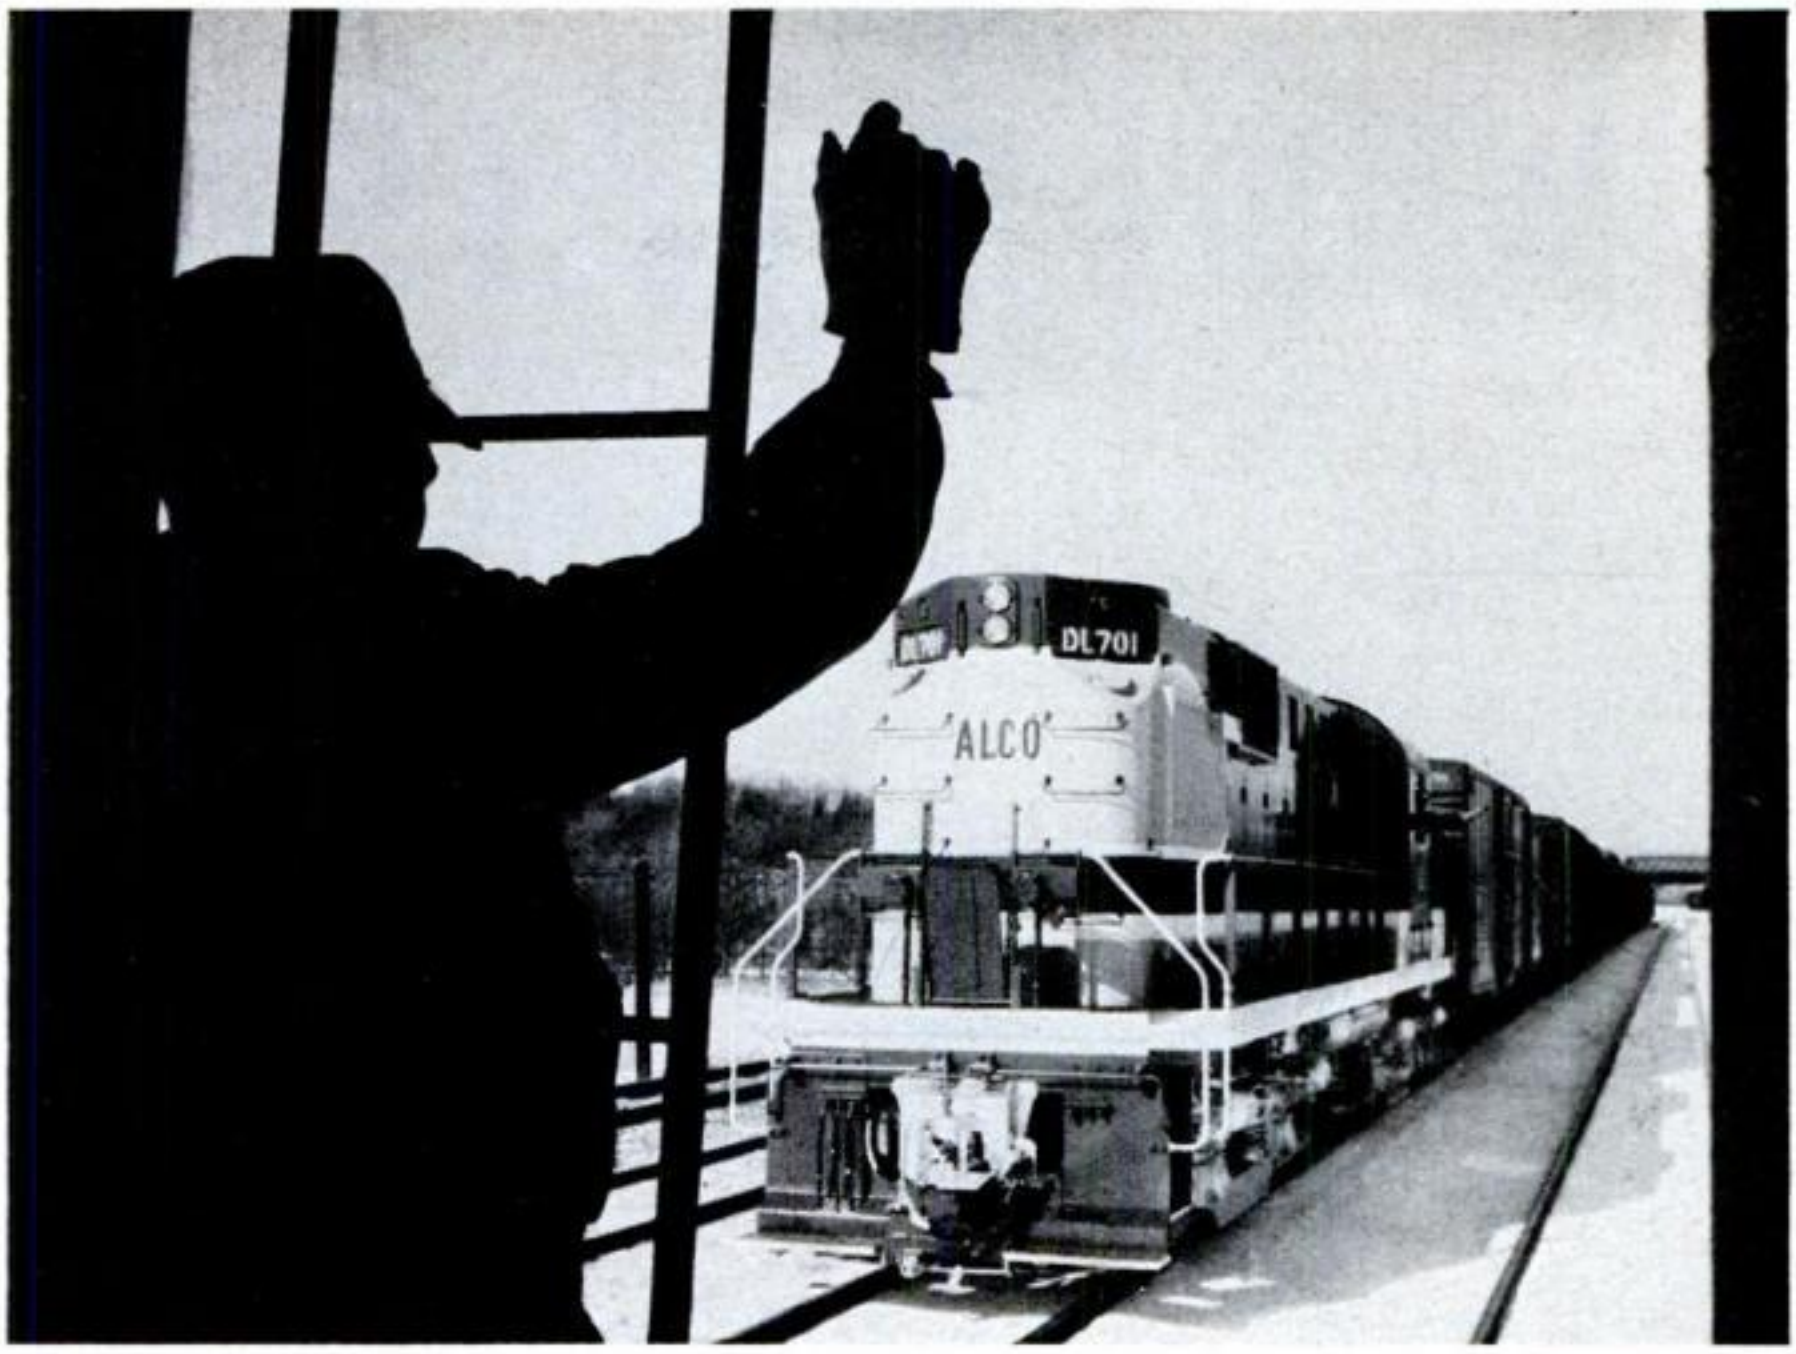

New 1,800-Horsepower Diesel Can Pull Heavier Freight Trains

REDESIGNED and souped up with a brand-new V-12 engine, the latest Alco road-switching locomotive can haul 12 percent more tonnage than the model it replaces. Officials of 25 railroads watched the 1,800-hp. diesel do its stuff in recent tests near Schenectady, N. Y., then placed orders for 100 similar engines.

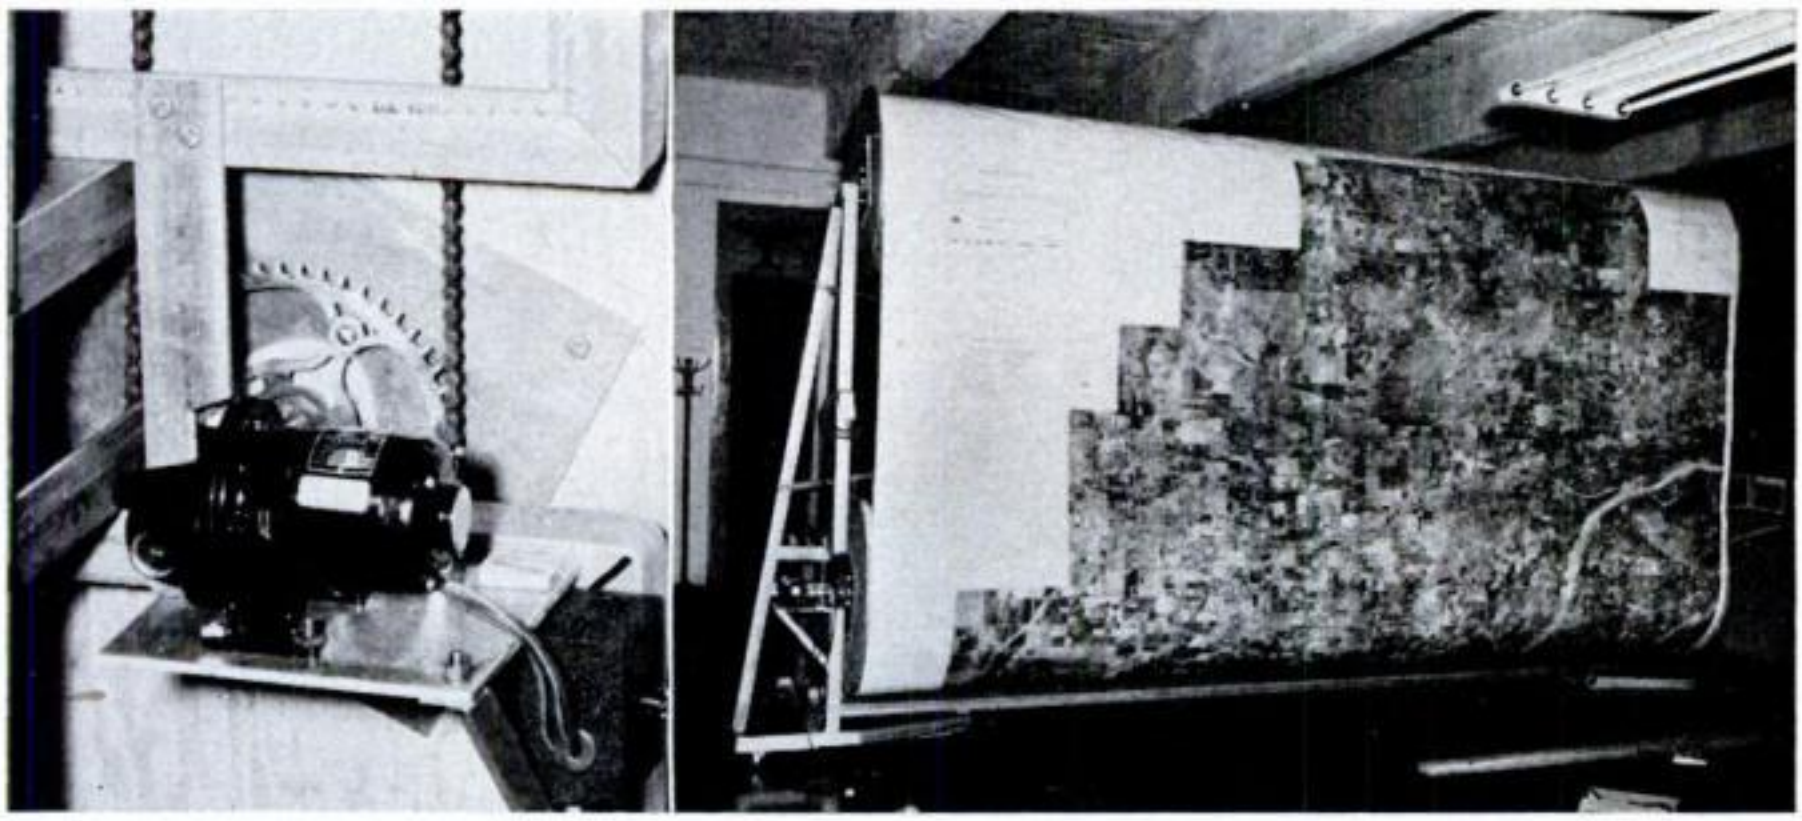


Motorized Rollers Unfurl 15-Foot-Wide Photo-Mosaic Map


THIS photographic map of Orange County, California, mounted on 15-foot drums, is made easy to read by the little motor shown at left. It turns the rollers to put any section at eye level. Some 400 prints 36 inches square were mosaicked into the map. It took Pacific Air Industries eight months to complete the job.

Copyrighted material

World's Biggest Shovel

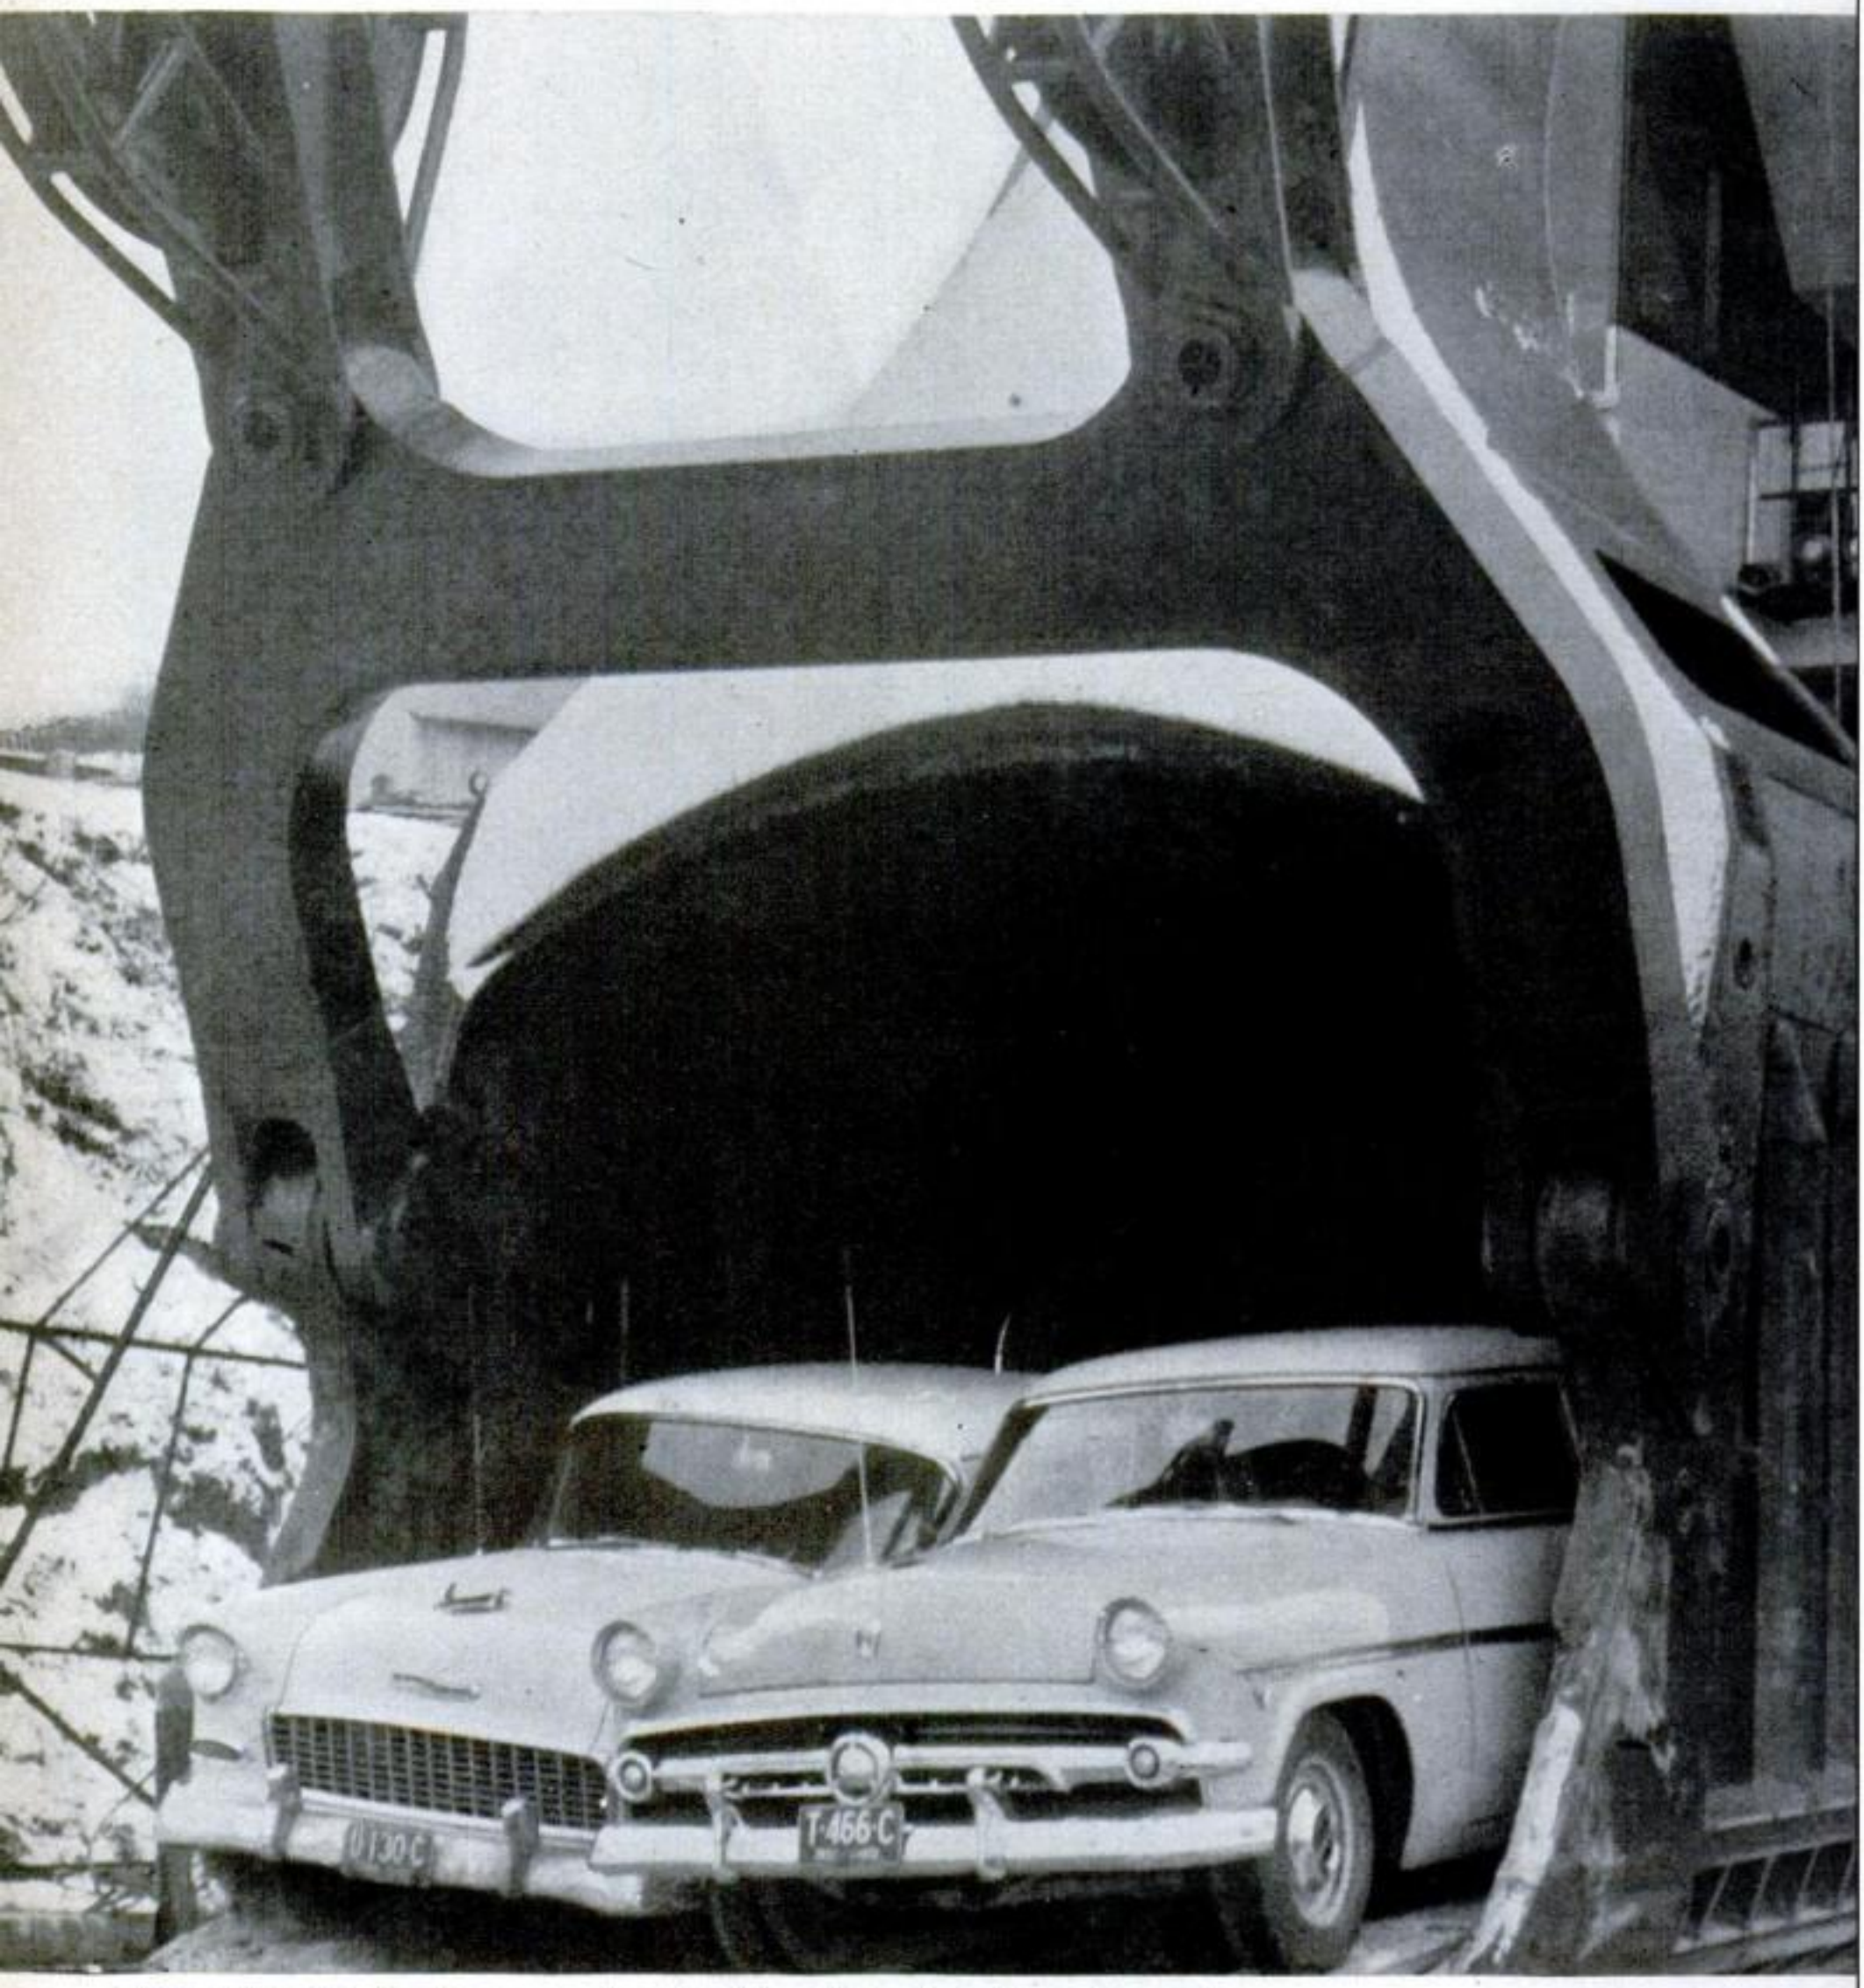


TOYLIKE LOAD for the super-shovel's 60-yard bucket, these two automobiles represent only 1.2 percent of its total lifting capacity. Made of lightweight but tough alloy steel, the big scoop and its 100-foot shovel arm are welded into a single unit, hoisted by twin cables.

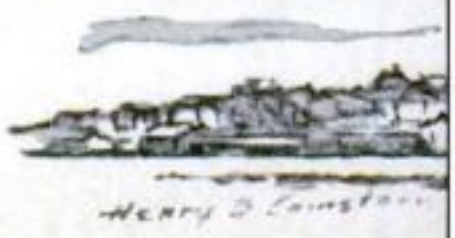

Copyrighted material

Digs 125 Tons a Minute

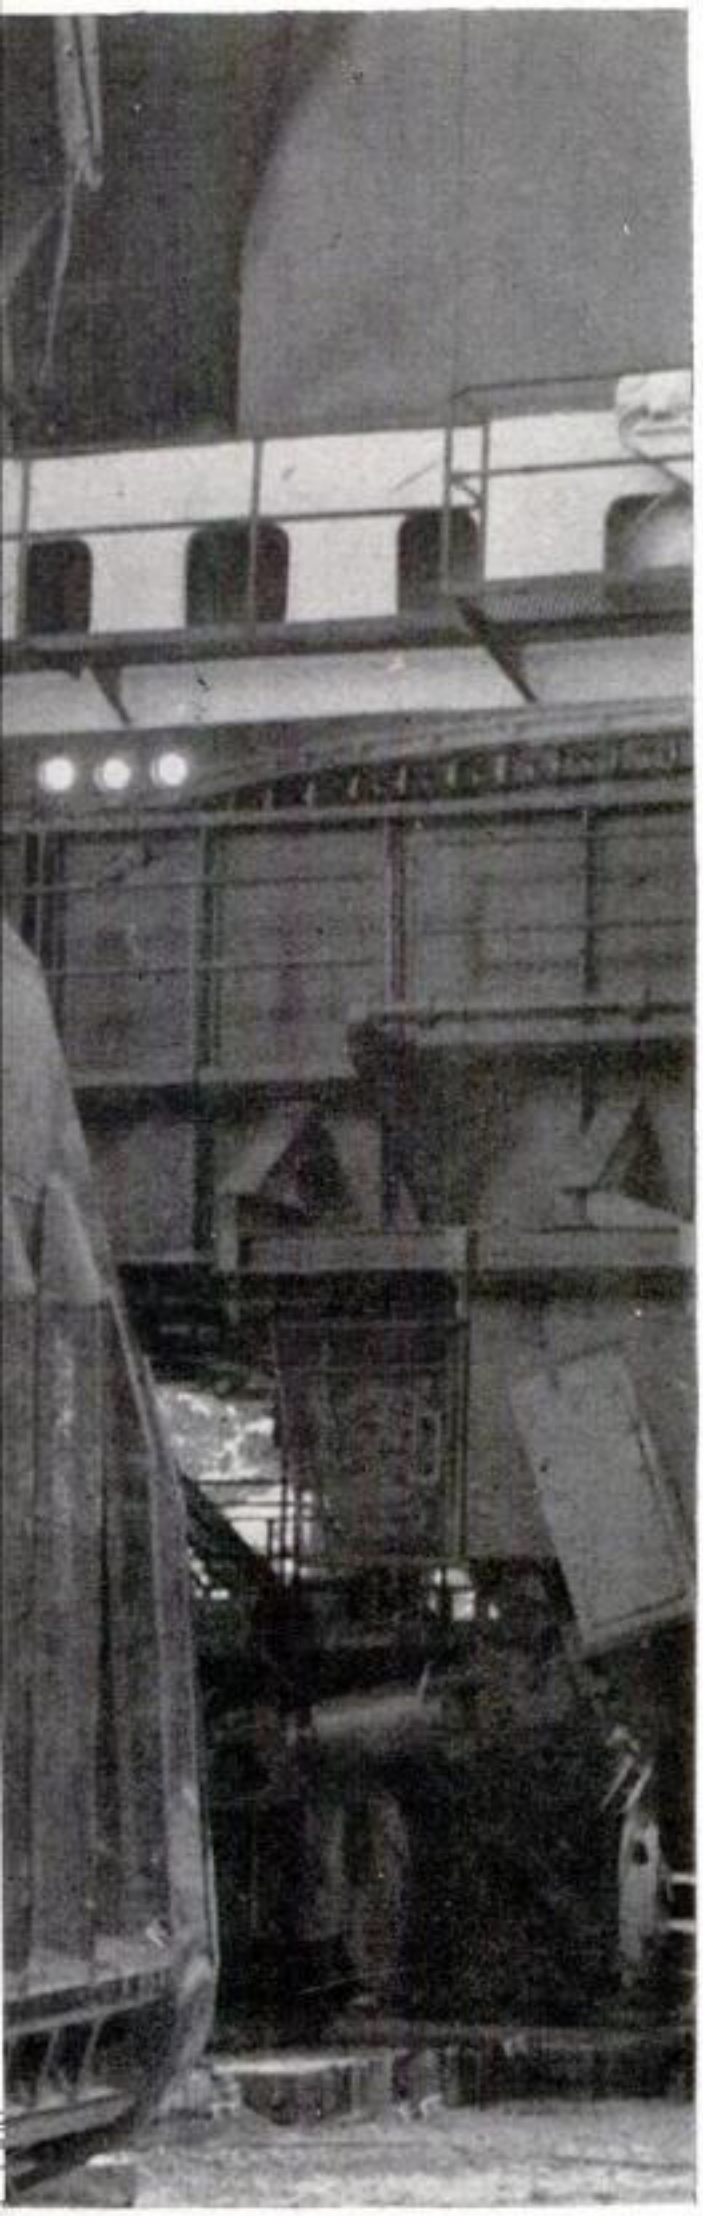

Largest self-propelled land machine ever built in the U. S., the Mountaineer lays bare coal seams 90 feet below the surface.

By Henry B. Comstock


A POWER SHOVEL so big that it has an electric elevator to hoist its crew to their stations inside the cab has just gone to work in the coal fields of southeastern Ohio. The huge earth eater weighs as much as 1,800 automobiles. The tip of its boom reaches as high as a 16-story building. Its winding machinery cab could hold two good-size houses. A single scoop of dirt dumped from its bucket could completely fill your living room.

The "Mountaineer"—that's what the Hanna Coal Co. calls its $2,600,000 super shovel—was built to these gargantuan proportions for a good reason.

Underlying the rolling hills on the west side of the Ohio River opposite Wheeling, W. Va., there is an almost horizontal vein of soft coal 4½ feet thick. Back in 1940, Hanna began strip-mining this coal, where it lay close to the surface in a valley near Cadiz, Ohio. The operation then, as now, called for a big shovel to

ALL-ELECTRIC "Mountaineer" uses as much juice as a town of 6,000 people. Power is fed to the giant shovel through a four-inch cable.


Copyrighted material

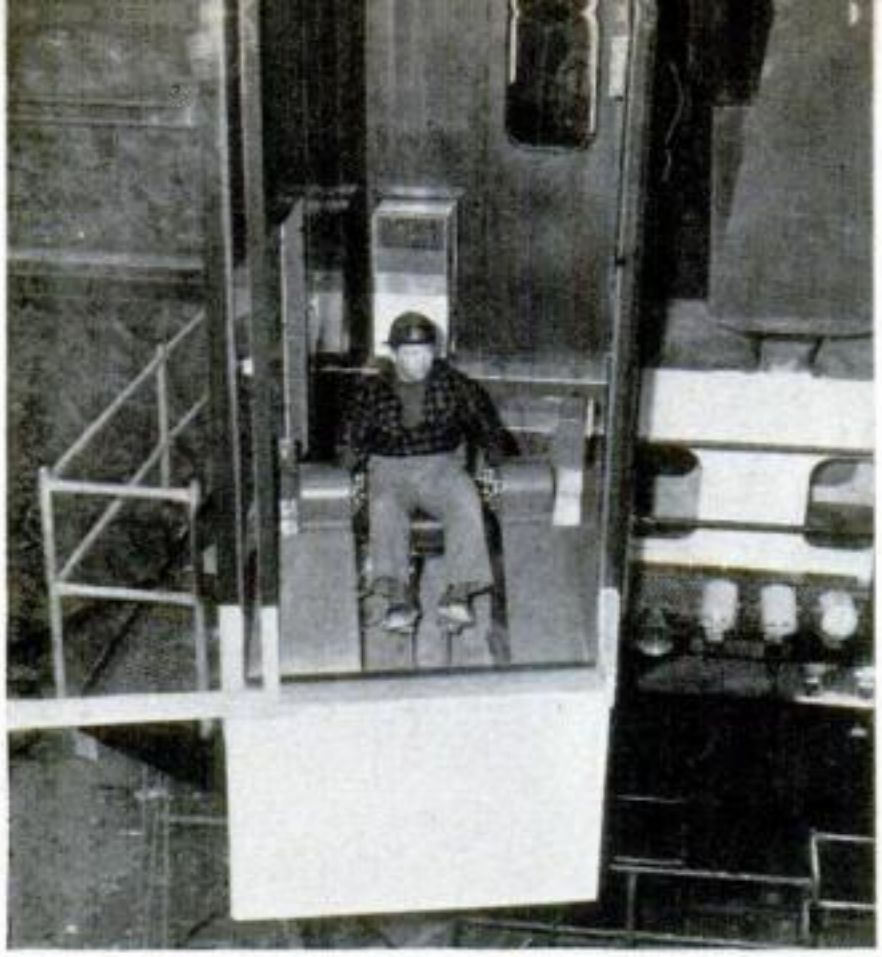

SHOVEL OPERATOR gets $13,000 a year, earns it by digging nearly 22 million tons of dirt and rock. His control compartment is electrically heated in winter, air-conditioned in summer.

remove the earth above the seam so that a smaller shovel could pick up the coal. Working back and forth along the base of the excavation, the big shovel swung each bucketload of dirt and rock through a half-circle across the exposed coal and dumped it into the mined-out area.

Bigger hills—bigger buckets. Hanna's first earth-stripping shovel at this Georgetown Mine had an eight-yard-capacity bucket. It chewed its way into the hills until the overburden (the soil rising above the coal) was 45 feet deep—the shovel's maximum working limit. Hanna bought another shovel more than twice as large. It, too, reached its limit, at a pit depth of 55 feet. Then four giants with 35-yard buckets were assem-

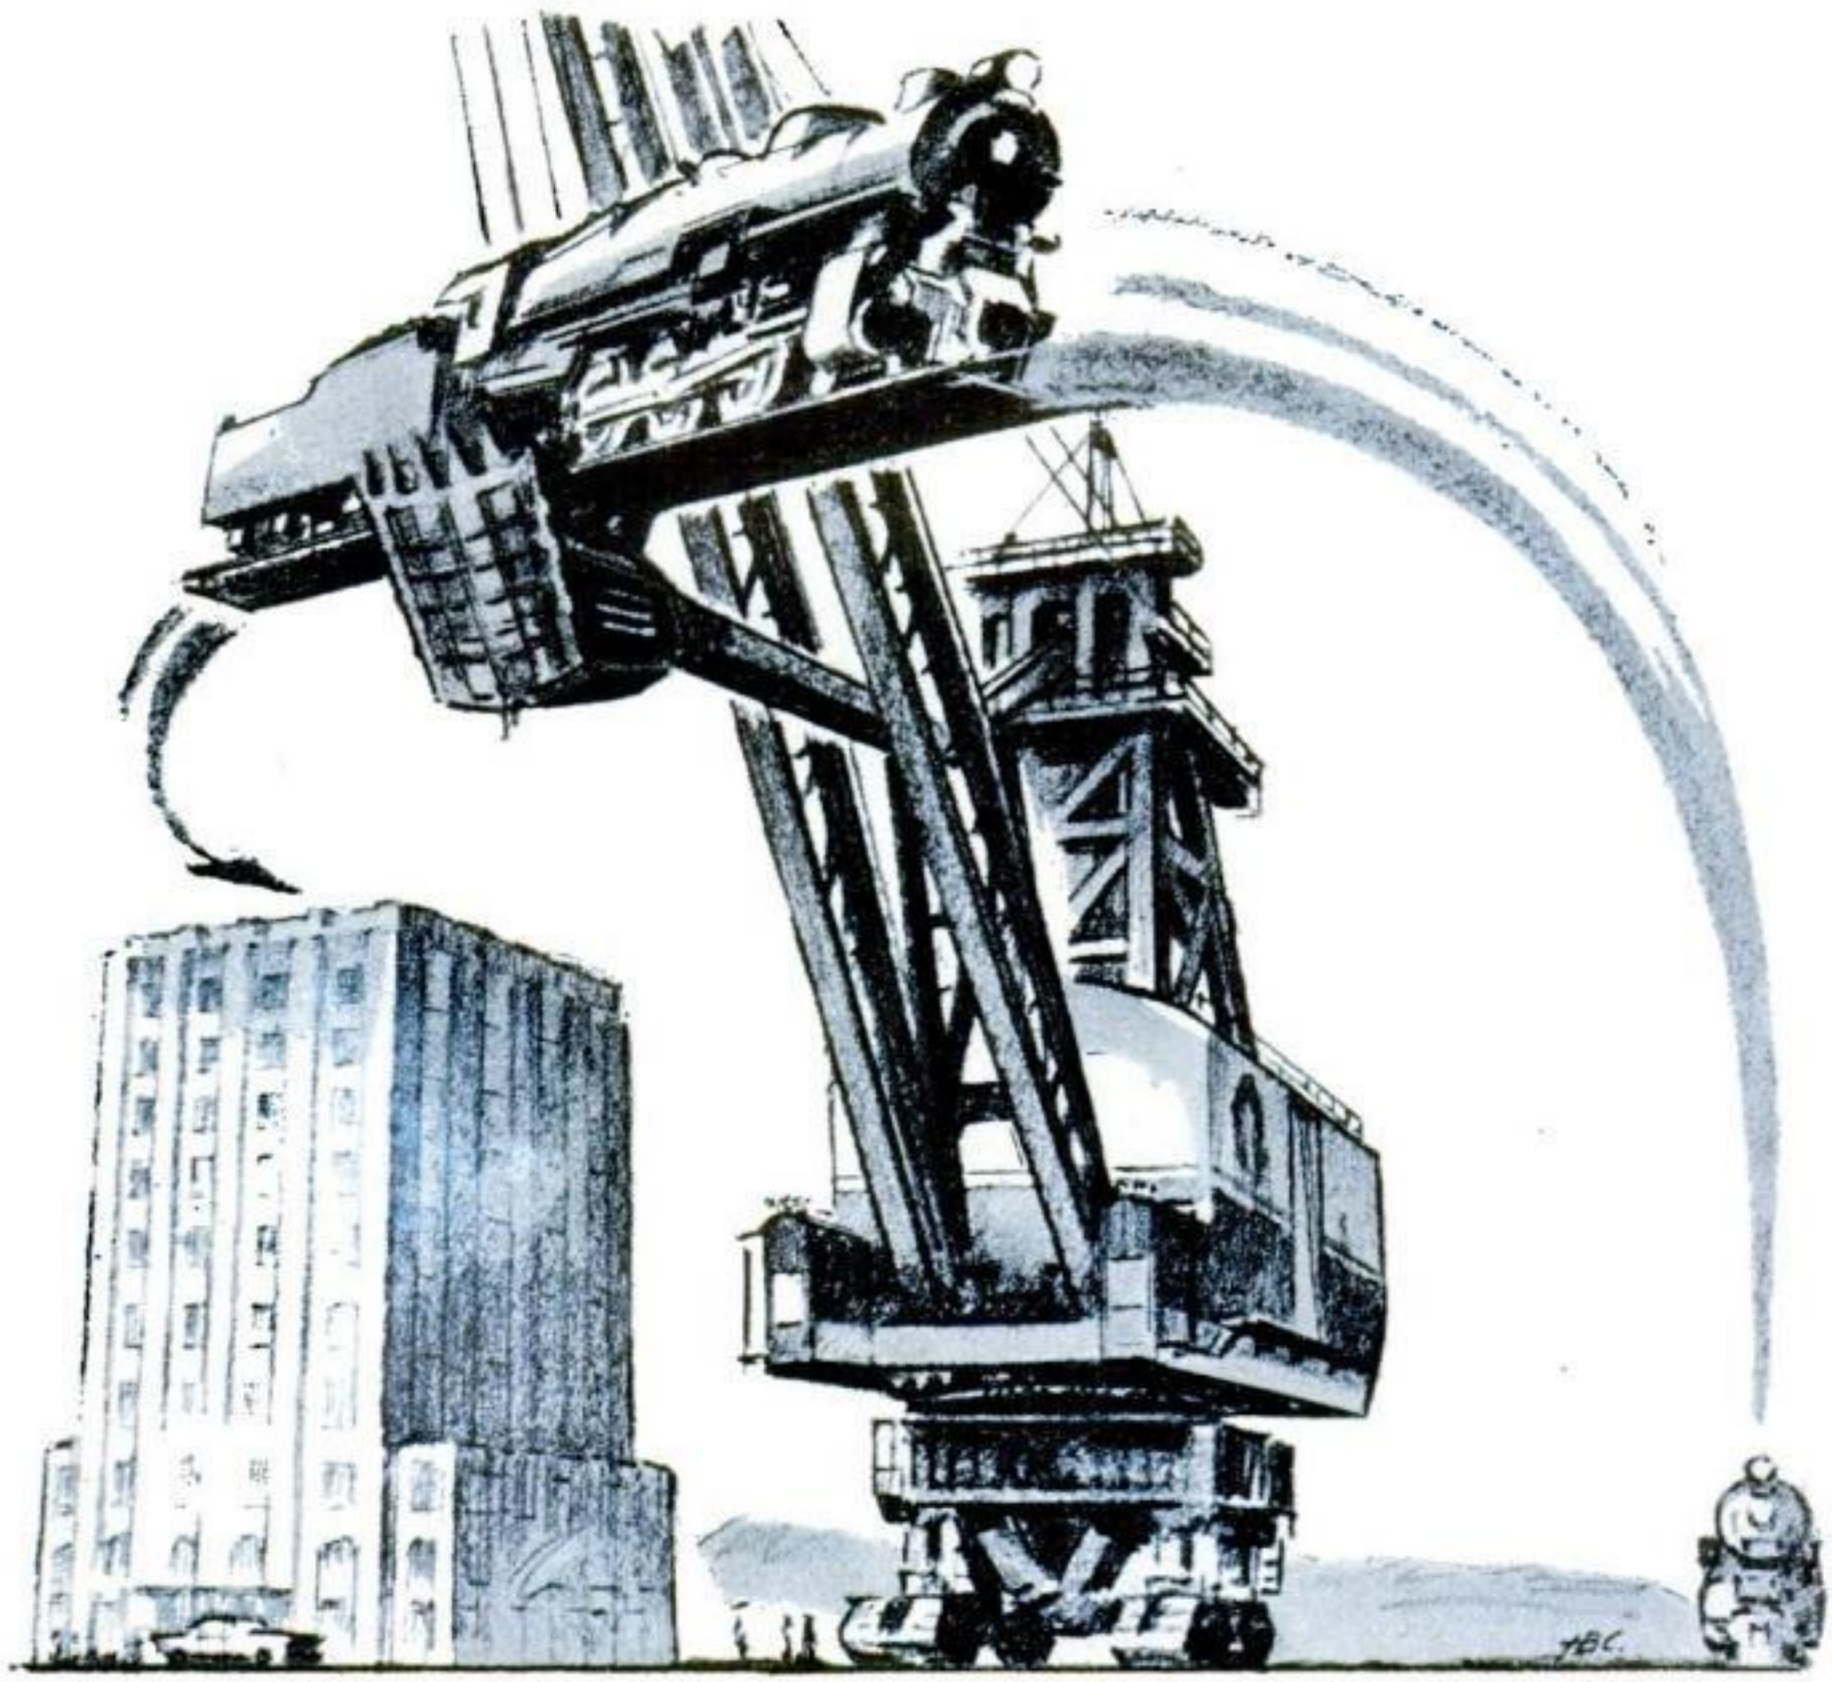


FORTY-FIVE SECONDS is all the Mountaineer would need to lift a 250-ton locomotive 100 feet in the air, swing it through a 300-foot arc and set it down on top of a 10-story building.

Copyrighted material

bled at Georgetown. Although they can handle up to 70 feet of overburden, Hanna engineers took a look at the still-uptilting countryside ahead and went into a huddle with the machinery designers of the Marion Power Shovel Co. and General Electric.

Last summer, the result of that conference began to roll into Georgetown in sections. It took 125 freight cars to handle the Mountaineer's parts. Among the more spectacular items were the eight crawlers upon which the monster now lumbers up and down the coal field as fast as a man can walk. Each of these crawlers weighs as much as a heavy Army tank.

Elevator service. Sixteen motors, with a combined horsepower equaling that of a Victory ship, went into the assembled cab. The kingpin upon which the cab pivots is so big around that a three-man

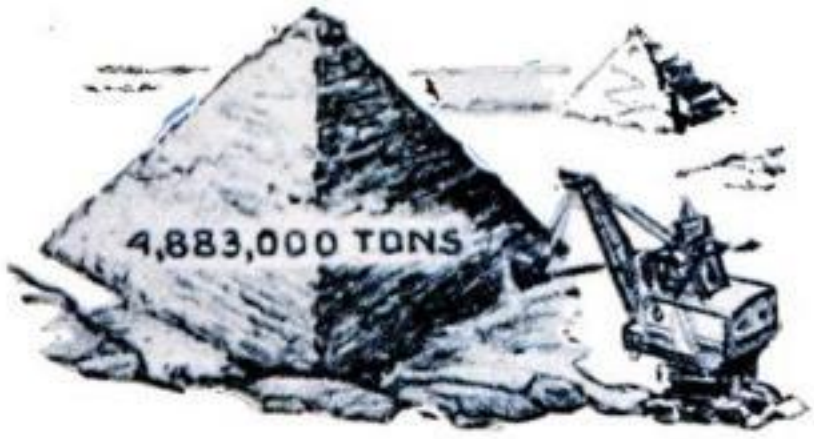


MOVING ALL OF THE STONES in the great pyramid of Cheops would be merely a 25-day job for the Mountaineer. It handles more than three times its own weight every hour.

elevator passes right up through it, making it safe to board the huge machine even when it is swinging through its arc.

When one of the Mountaineer's shovel operators takes over for an eight-hour shift, he looks out at the bucket ahead through a giant picture window three stories above the ground. There's a telephone, connected to stations on all of the cab decks, beside his heavily upholstered chair. He can also talk, by short-wave radio, with other shovels in the pit, the supervisors' cars and the mine office.

The shovel controls are no more complicated than those in your automobile—only two foot treadles and two hand levers. Through them the operator holds the reins on the 12,000 horsepower used

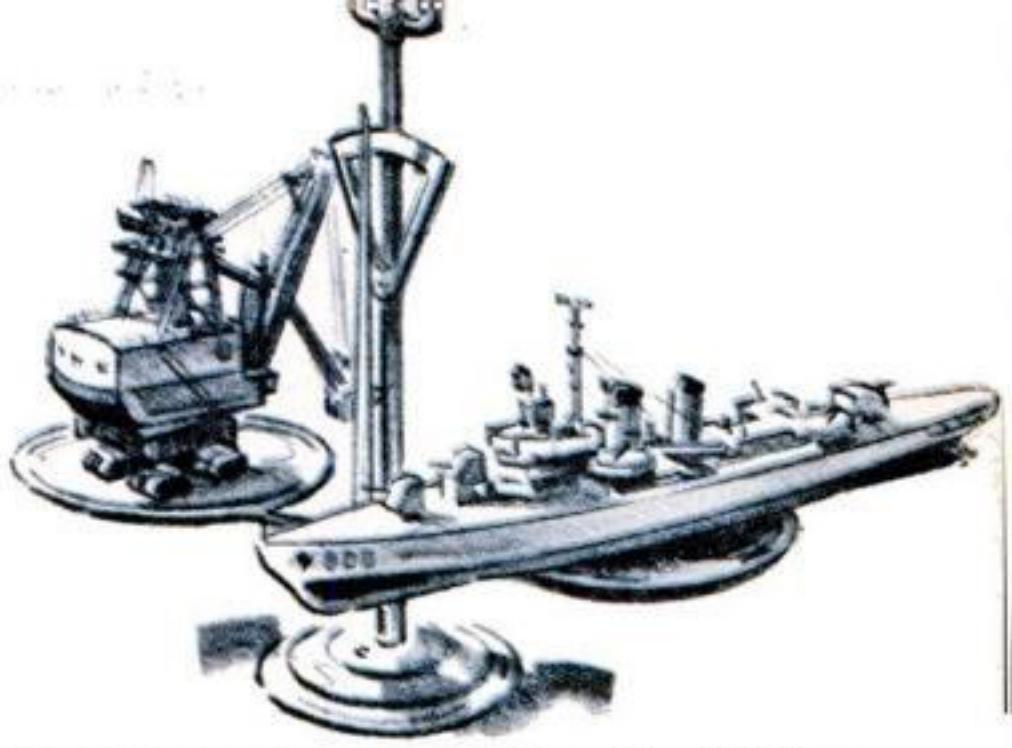

AS HEAVY AS A DESTROYER, the 2,750-ton Mountaineer cost plenty to build: nearly $1,000 a ton. It takes four motors totaling 1,000 horsepower, to drive its eight crawlers.


to drive the crawlers, rotate the cab and hoist the bucket and boom.

That boom presented a special problem. It couldn't be built of ordinary steel. Its weight and 150-foot length would have overbalanced the cab. So a light but exceptionally tough alloy steel was used. In addition to paring down weight, this alloy was particularly suited to welding —and all of the seams and joints on the Mountaineer are welded.

Thirty-year schedule. Hanna is already working its shiny new shovel around the clock. Only that way can it earn its keep: $1,000 a day in amortization and interest charges. Officials figure that there's enough coal left in "them thar hills" to keep the Mountaineer busy for the next 30 years. During that time she'll wear out nearly 82 miles of 2½- and 3⅝-inch wire rope (her hoisting cables have to be replaced every two months). At five dollars a foot, that item alone will come to about $2,160,000.


LOWER FRAME OF THE SHOVEL is shown here before the rotating cab frame was set on. Pockets at the corners are for hydraulic jacks that automatically hold the Mountaineer level. END




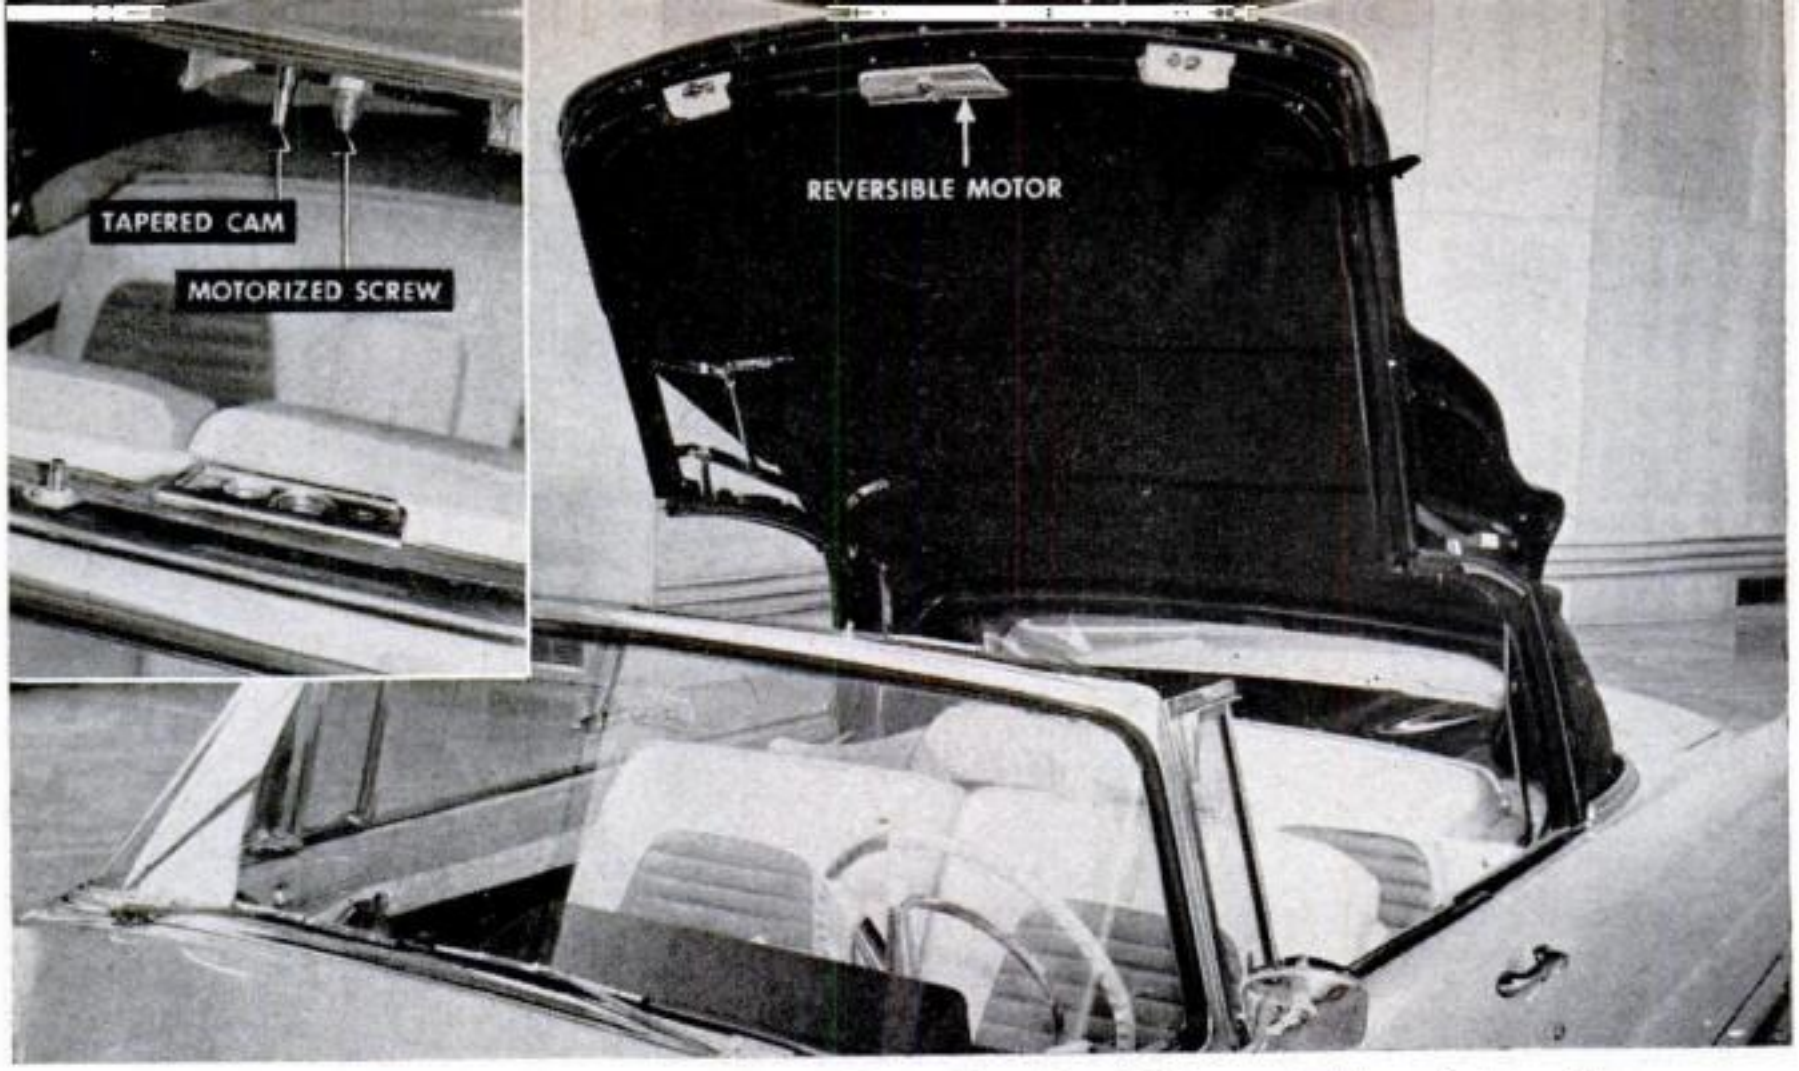

New Convertible Robot Top Locks in Place Electrically


HERE is another push button to make motoring easier: a self-locking top on all new Lincoln convertibles. Operated by a reversible electric motor, two motorized screws on the leading edge of the top, guided by tapered cams, clamp the top to, or release it from, a bar across the upper edge of the windshield.

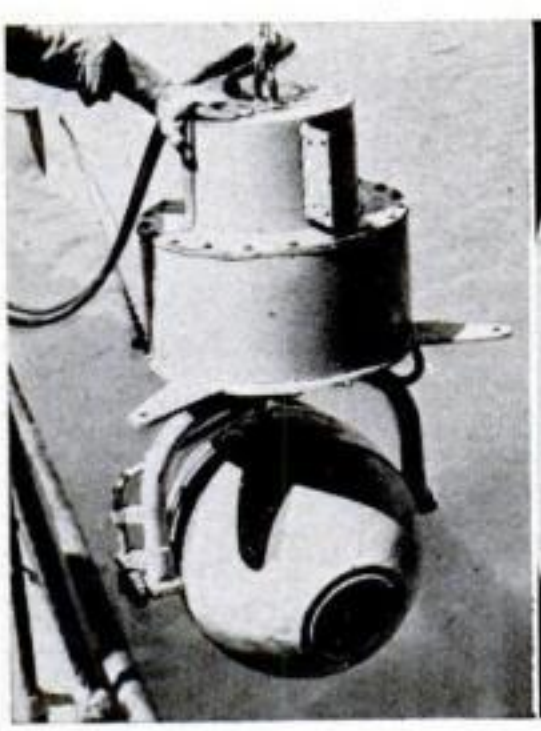

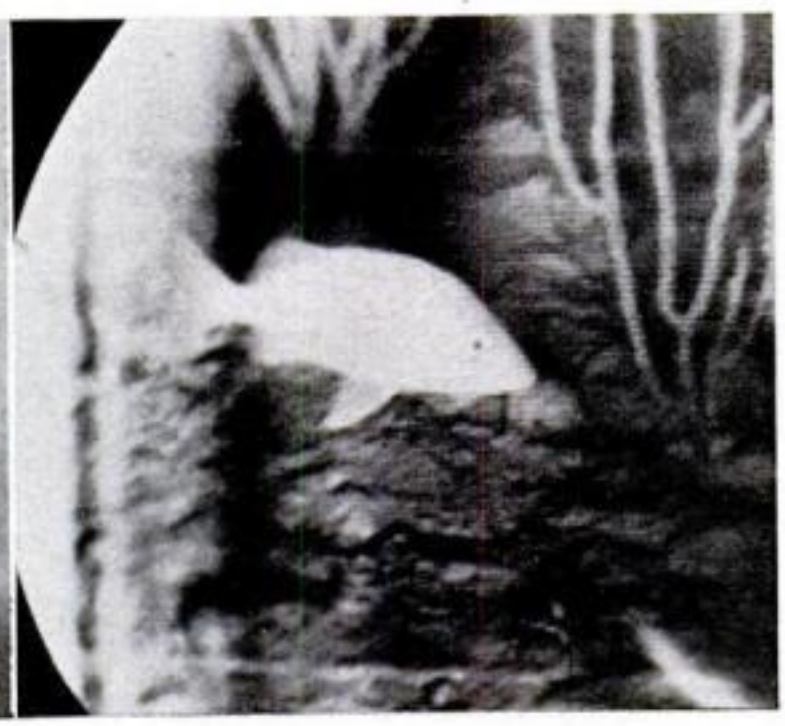

TV Puts Its Eye on Fish at Home


AN UNDERWATER TV camera, at far left, gives Fish and Wildlife Service aids a look at fish on the bottom. Practical purpose: study of fishing gear in use, its effect on habitat, and how some fish escape from nets.

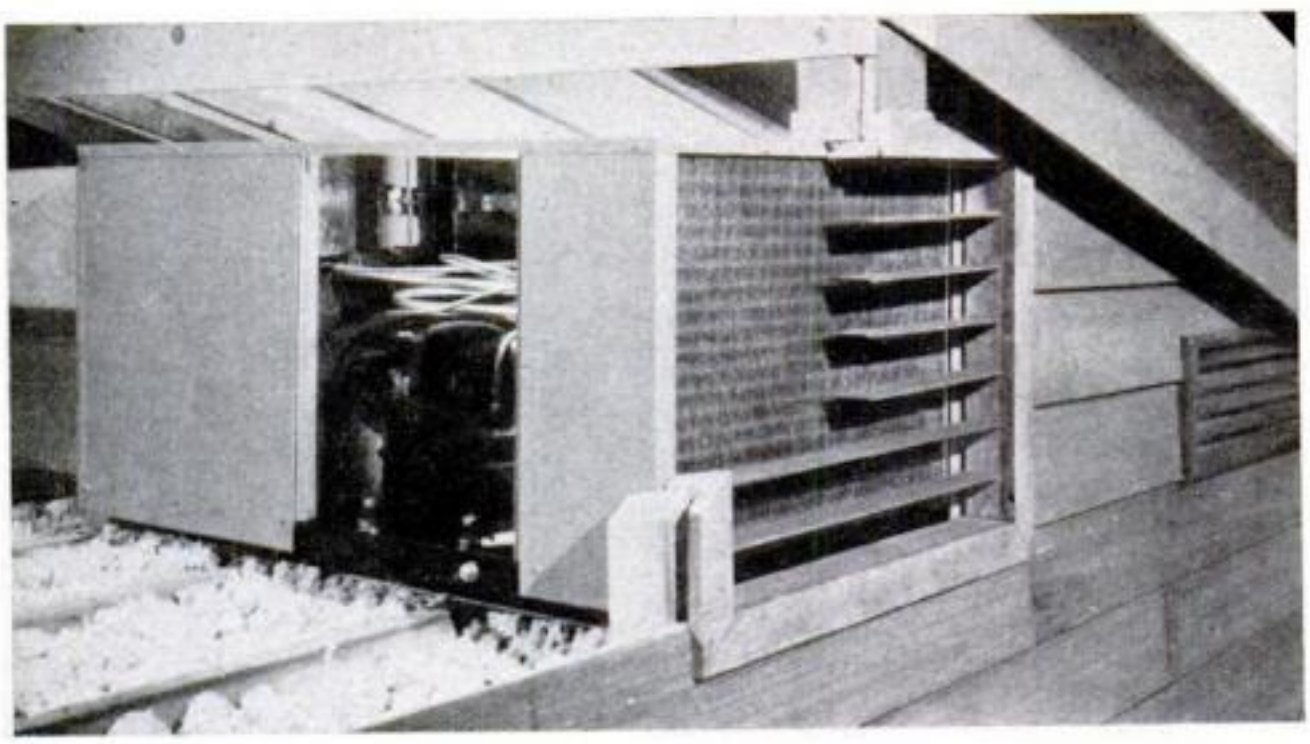

Central Cooling Installed in Attic

THIS unit can air-condition a house from the attic or basement. Made by Lennox Industries, Marshalltown, Iowa, it needs no plumbing. The fan draws air through the condenser, which doubles as a rain trap.

Copyrighted material

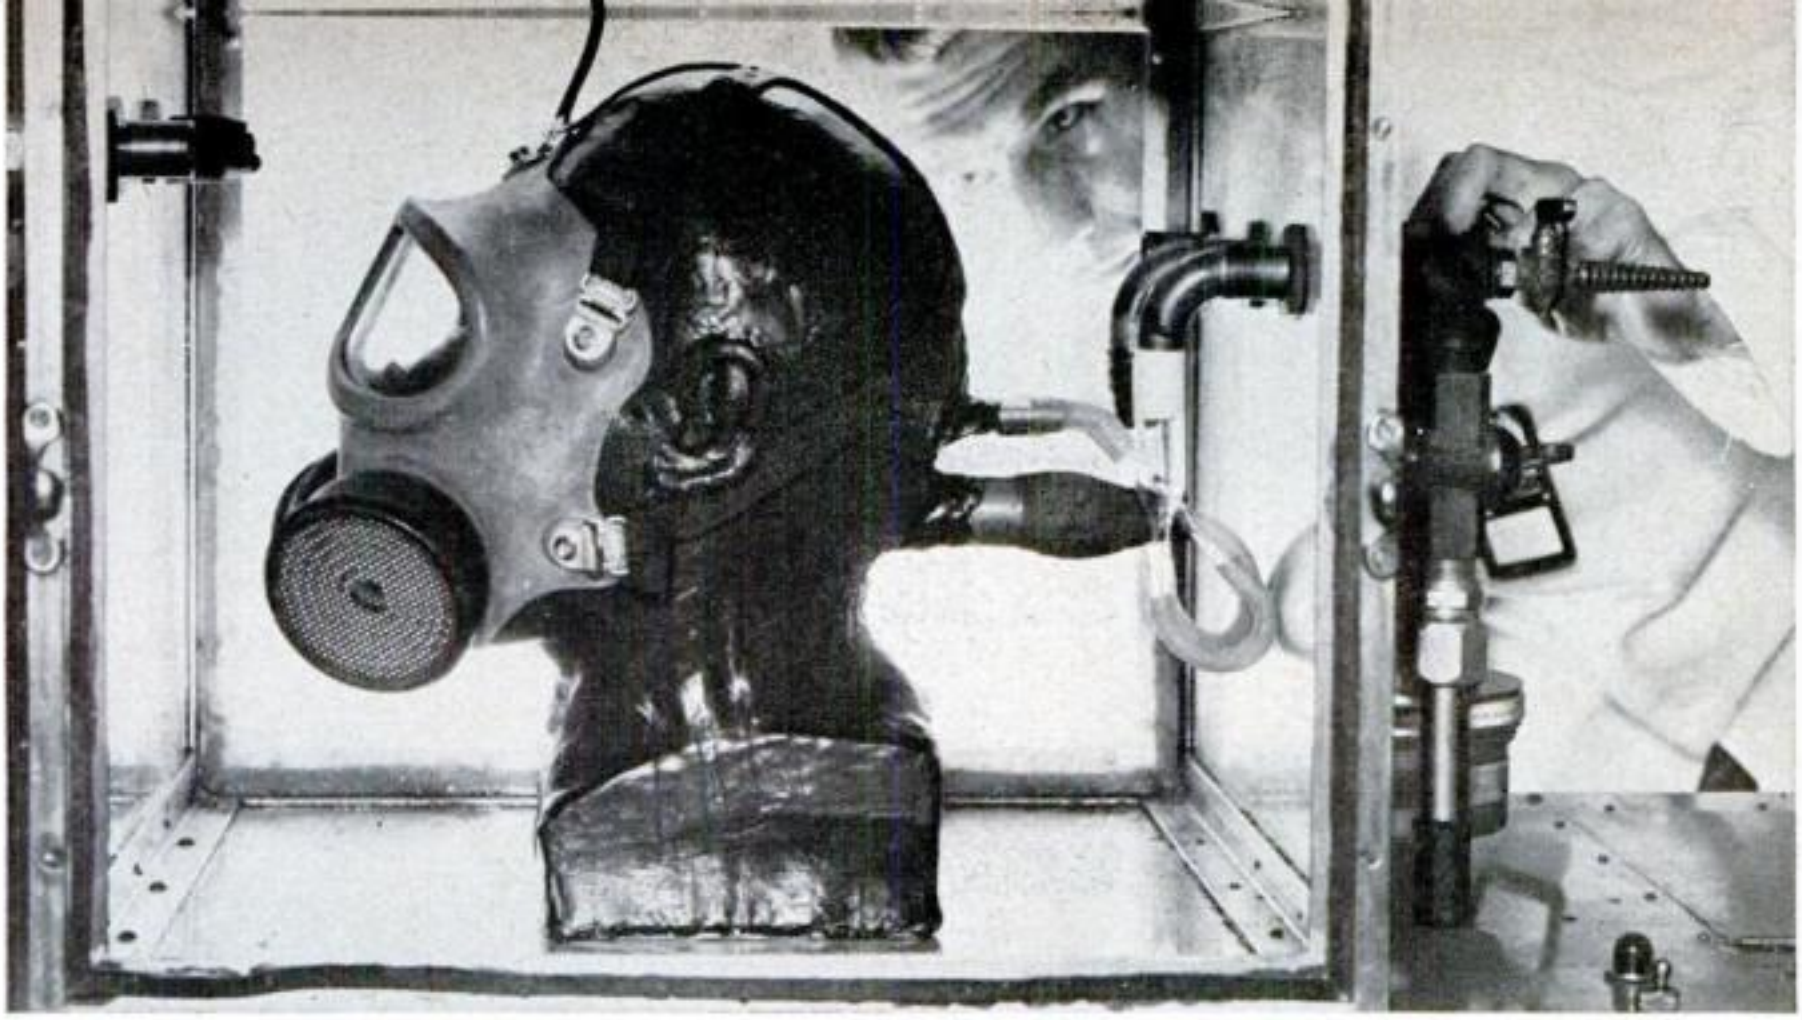

Rubber Head Helps Atomic Scientists Protect Workers

To TEST face masks that guard workers against radioactive contamination, scientists at the Hanford, Wash., plutonium plant devised this "hot" head. Pumps inside the rubber form make it "breathe." To gauge a mask's efficiency, a filter in the head's "windpipe" collects radioactive particles that seep through.



Foot Power Opens Mailbox

A BOON to people who mail letters while carrying bundles, a pedal-operated mailbox is being tested by the Post Office in Washington, D.C. If the device proves rugged under heavy feet, it will be installed gradually in other cities.



Army Shows New Atomic Rocket


THIS model, shown by Lt. Gen. J. M. Gavin, Army research chief, is the first made public of the atomic-armed Redstone rocket. Reported to be 60 feet long and to have a 300-mile range, it's a step toward a 1,500-mile guided missile.

Copyrighted material

Big Burning Glass Aids Air Force

TO LEARN how metals behave at ultra-high temperatures, and thus aid work on guided missiles, scientists have swung into action a goggle-eyed machine of glass and metal atop the California Institute of Technology's astrophysics building. This solar furnace, the biggest burning glass in the U. S., focuses the

Burning-glass furnace, balanced by counterweight, turns on its mount to follow the sun.

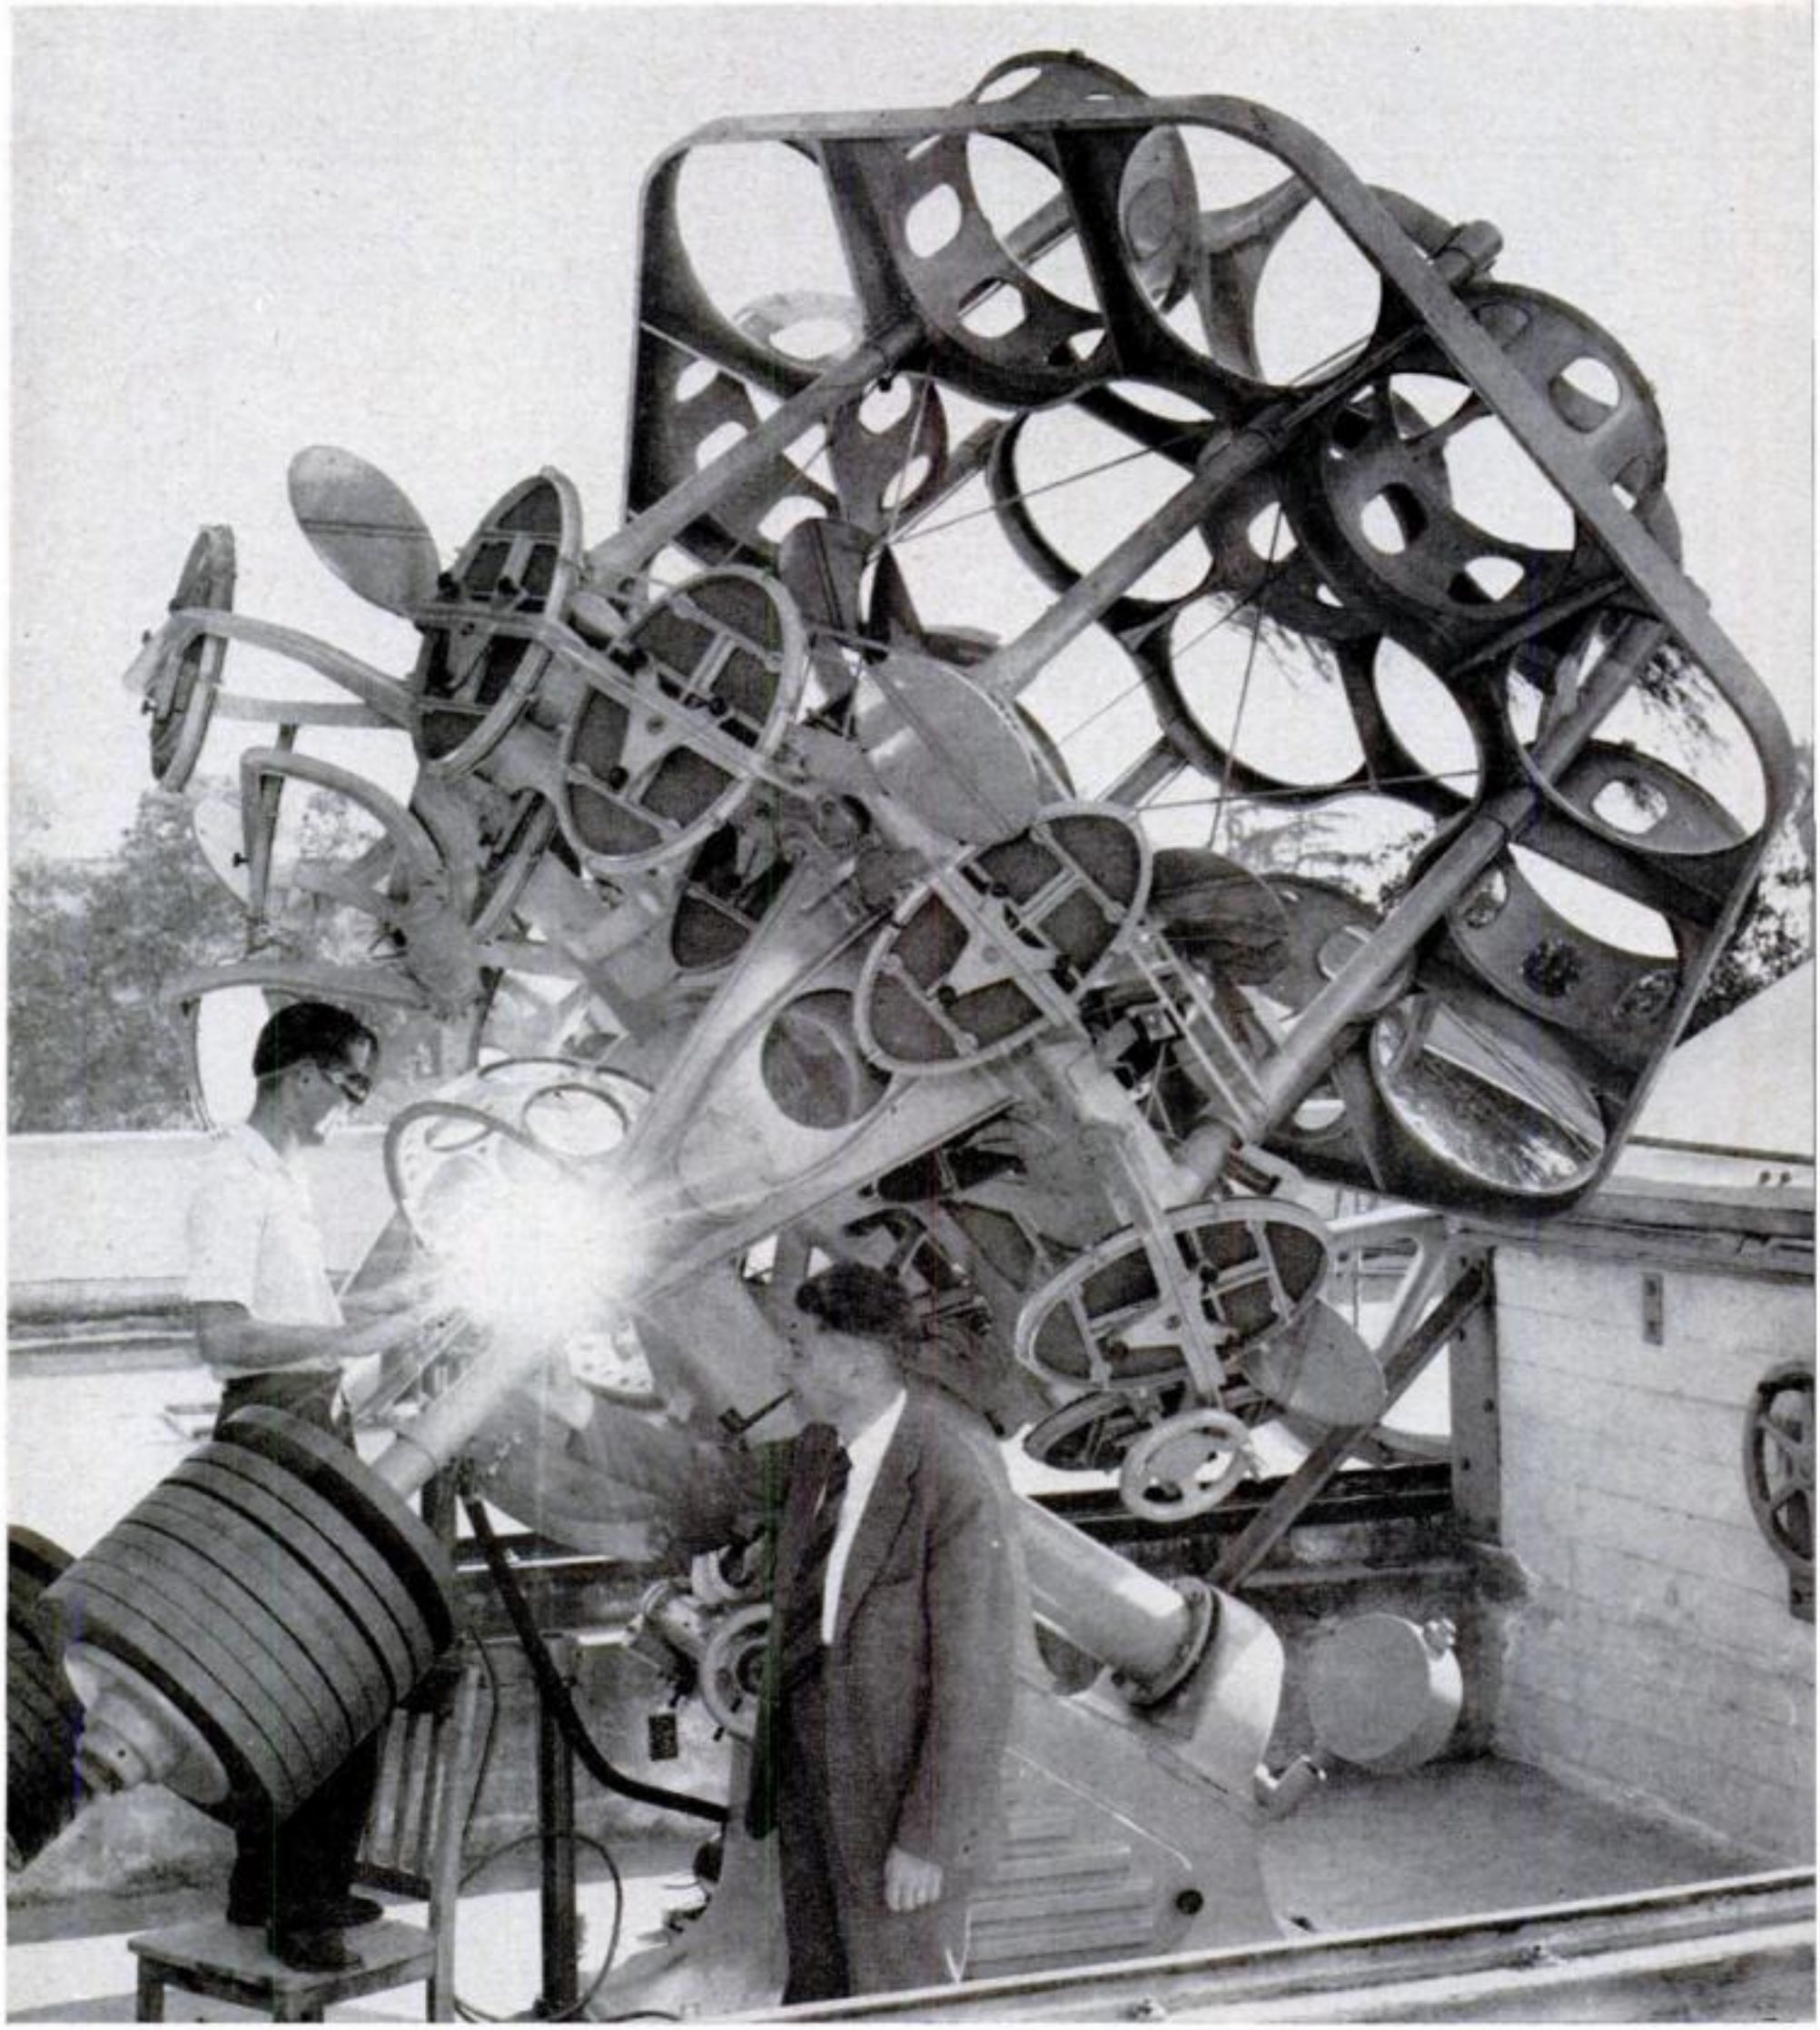


Copyrighted material



HOT SPOT of solar furnace instantly vaporizes wooden one-by-two thrust into it by Dr. Pol Duwez. Seven-inch lenses in the dome bring the sun's rays to final focus at its center.

sun's rays to form a 5,600-degree F. "hot spot," where a block of wood vaporizes instantly. A piece of firebrick or flue lining, previously doused with water, sizzles and turns to green glass.

A parabolic mirror usually is used in solar furnaces, but this one has lenses to concentrate the rays. Built in 1932 by Dr. George Ellery Hale, Mt. Wilson astronomer, it now is being operated under Air Force contract by Dr. Pol Duwez of Caltech and Dr. Eugene Loh of Stanford Research Institute.

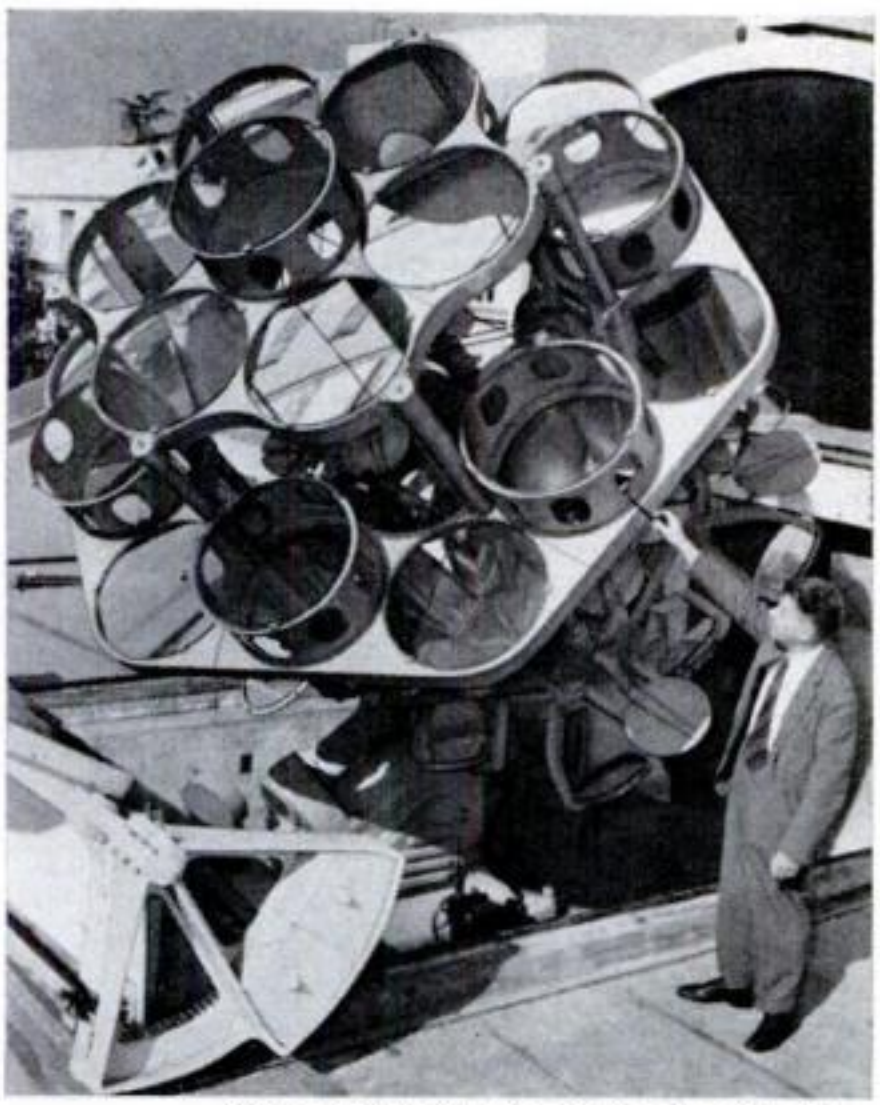

Photos by Ben Olender of Pasadena Star-News

RAYS OF SUN pass through 19 two-foot lenses, above. Then flat mirror disks direct them into smaller lenses shown in the top picture.



Rail Flaws Hunted by Ear

CARRYING electronic listening equipment in a knapsack, this trackwalker tests rail joints, switches and crossings for hidden defects that show up in off-pitch tones. The Erie Railroad uses these hand instruments on vital parts of its New York-Chicago rails to supplement annual inspection by car.



Plastic Car Makes Big Splash


EAST GERMANY's new plastic-bodied P70 is shown above getting a muddy bath. The four-seater is powered by a 22-hp. two-cylinder engine, with a top speed of 56 m.p.h. The Duroplast body is said to be light and flexible.

Copyrighted material

Rare New Yarn Spun from Wool Of Arctic Dogs

SHAGGY dogs, instead of sheep, provide the wool that Miss Dorothy Luke of Winscombe, Somerset, England, makes into fluffy garments like the one she is wearing. When her three champion Arctic Samoyeds shed (once every nine months), she collects the combings, washes the long hairs and spins them into yarn. Then she knits or weaves jumpers, jackets, scarves, even blankets, that she claims are warmer and longer wearing than ones made of ordinary wool.



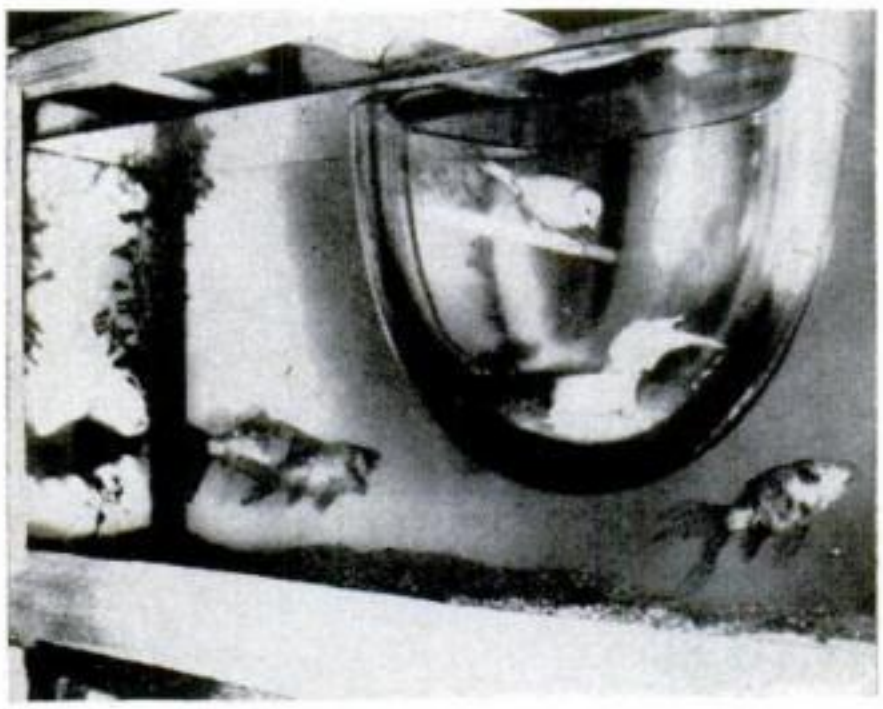

Birds Become Fish Watchers

AN INVERTED glass dome immersed in an aquarium at a recent London exhibit gave the canaries at left their novel point of view. On the other hand, it also gave the fish a chance at bird watching.

Basketball Hoop is Adjustable

SHORTIES now can enjoy this sport as much as their string-bean brothers at Midland, Mich., public schools. A hand-cranked device allows the basket to be lowered or raised to the desired height.

Fuel Tank Rolls Like a Tire

THE watermelon-shaped "tire" below is a 250-gallon container for hauling and storing fuels or other liquids. The Rolli-Tanker, developed by Goodyear, can be pulled over land, floated on water, or dropped without danger of bursting.






Copyrighted material

What's Coming in 1957 Cars

There'll be major style changes. Wheels will be smaller, tires bigger, bodies lower, horsepowers higher. And the big push for safety is still on.

ASK a Detroit chief engineer about his '57 car before the details are "frozen" and about all that he'll admit to is that it has wheels, an engine, and virtues beyond belief. But if you keep asking, especially what he knows about his competitors, you'll emerge with some definite information about the 1957 auto crop:

- It'll be a big year for changes. Unlike 1956, face-lifts will be rare—probably just Lincoln and Rambler.
- Lowness will be the big styling pitch. Present hardtops will look gawky alongside many '57 jobs. Look for some reductions in roof heights of three to five inches.
- Smaller wheels and new tires will be used. Virtually all makers plan to go from 15-inch to 14-inch wheels. Wheel flanges will be farther apart, giving a broader base for the tire and better cornering. The new tires will run at about 22 pounds' pressure.
- Fuel injection is being polished up by several makers, including Packard and Ford. The cost problem remains difficult; at present it is most likely that injection will bow as an extra-price option on limited-production prestige jobs, not on run-of-the-plant cars.
- Suspensions will be extensively revised on new chassis for better ride and handling. Several engineering departments admit that they are running "crash programs" on air-bellows and torsion-bar suspensions; none is certain that they will be ready in time for Car 1 in '57.
- Engines will have more horsepower (surprise!) but this will be achieved more by increases in displacement and compression than by radical change. Both Cadillac and Packard may go to 11:1 compression. American Motors expects to jump the gun with its own economy V-8 in a few weeks.
- Some "two-speed" automatic transmissions will give way to new ones calculated to be more competitive with the three- and four-speed ones. Incidentally, several makers are working on the idea of physically separating the transmission from the engine, as part of an independent rear-wheel suspension system. Development is reportedly not far enough along to make 1957.
- Windshields having already been wrapped to the limit at the sides, are going to begin wrapping *upward*, over the top. Expect them to creep upward and backward about 2 or 3 inches in '57. Baldheaded guys may scorch their pates but the new glass will give a feeling of "airiness."

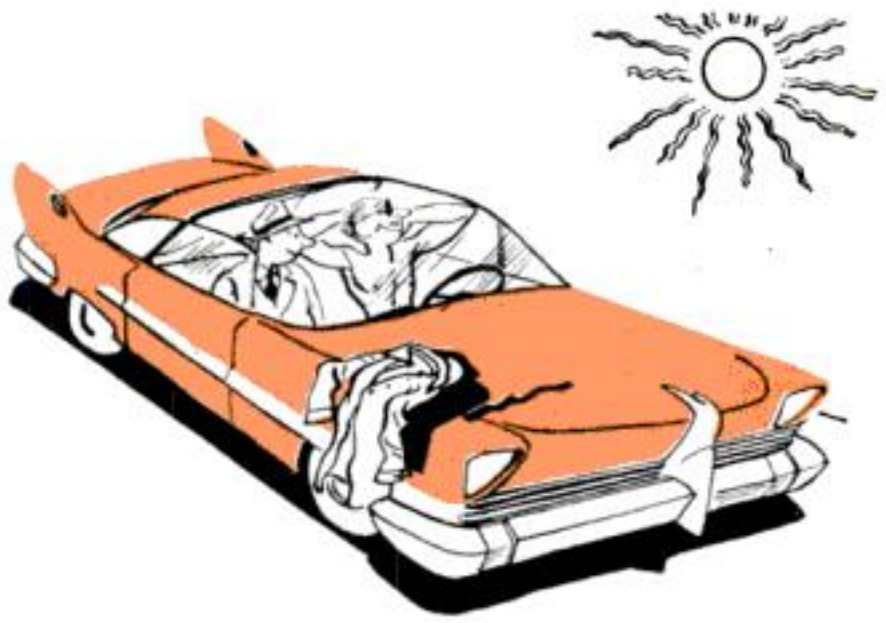

- Gadgets intended to loosen up pocketbooks include transistor radios; new gasoline-fired heaters; magnetic-recording machines to keep you company on

Copyrighted material

long drives; electric door and trunk latches; that long-predicted metal-top Ford convertible; and recessed exterior door handles.

• Biggest technical development on the horizon is the first appearance of centralized auxiliary power systems, to handle the load of numerous power assists and accessories. Olds is reportedly polishing up a hydraulic pressure accumulator; Lincoln and Mercury are working on vacuum systems.

More details on some of the foregoing:

Height shrinking. Very little of the new lowness comes from the smaller wheels: their theoretical rolling radius is only half an inch less, and part of that is taken back by the new tires. Instead, most of the lowering comes from other sources:

1. On new frames, the box members are reshaped to be wider and flatter;

2. Drive-shaft tunnels hug the shaft more closely because of increased attention to something called "carrier nose control"—changes in rear suspension so that the front of the differential carrier won't tilt up so high on a bump; and

3. Abandonment of the old dream of "chair-height" seats. On the 1957 cars the altitude difference between your seat and your feet will be slightly less.


Once inside the new cars, you'll have about the same headroom as at present.



Getting in or out will take more hunching. One promising sign: back-seat riders in '57 will have more knee room.

The new wheels, for reasons listed above, will make only a slight difference in the effective ratio between drive-shaft turns and car travel—about four or five percent. Thus rear-axle ratios won't *have* to be modified. But the wheel-change effect is in the wrong direction, however, according to the present fashion of pairing big engines with numerically low axle ratios. Accordingly, many of the new cars may have back gears that come closer to (or even below, like Packard) a 3:1 ratio.

Fuel injection. With engineering departments working hard on this, there is much backstage discussion of the merits of the three systems that are chief

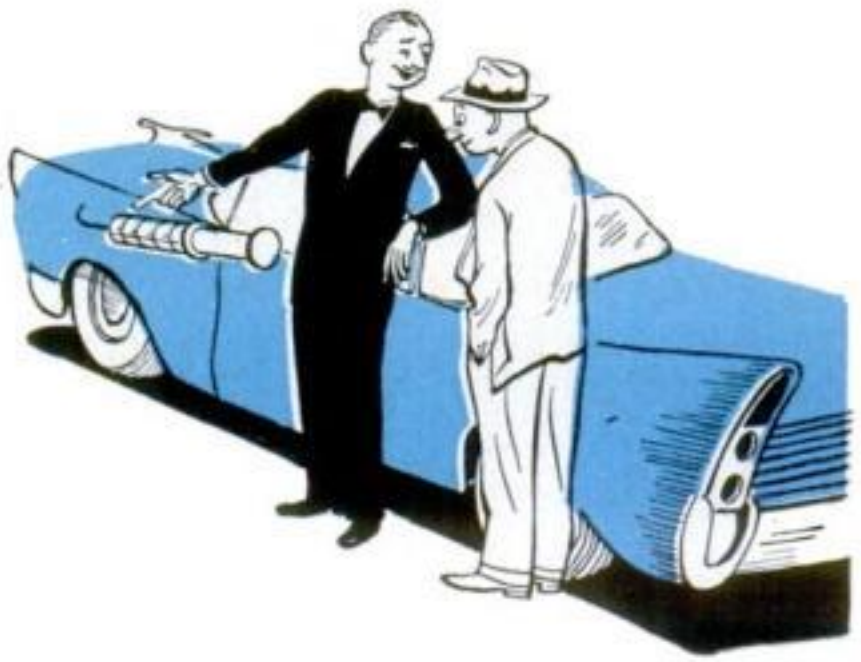

contenders (timed injection, continuous injection, and injection carburetors). High costs rule out direct, into-the-cylinder systems.

The advantages are impressive—more output, better economy, and fewer headaches with icing, vapor lock, and half-warm starts. There's evidence, however, that injection may not replace all carburetors for some time yet. To explain this, engineers list two main reasons:

1. The cost of even a cheaper system stays stubbornly above that of *two* four-barrel carburetors; and

2. There is still a few years of "growing room" in existing methods of achieving similar output and economy. Boosting compression and adding displacement will still provide equivalent gains.

"We can give them fuel injection next year, if management wants it," said one chief engineer. "But I hope we're not forced into it for another year."

Copyrighted material



Centralized auxiliary power. This is an idea that has been predicted by Detroit seers for a long time. Why have one oil pump for power steering, one vacuum servo for power braking, a couple of internal oil pumps in the transmission, and a whole slew of separate electric motors for seat adjustment, windshield wiping, window lifting, and antenna erecting? Why not have a central power source *and reservoir*, with inexpensive servos spotted about to do the chores?

A few unenthusiastic critics of the systems now in development have asked biliously what's wrong with a storage battery as an auxiliary power reservoir. The answer is twofold. The new systems are being created in part to take some of the load from hard-worked electrical systems. And there are inconvenient cost and torque limitations on electric motors on some types of duty.

Vacuum or oil pressure? This promises to be a battleground, for there are cogent arguments each way. Being virtually incompressible, oil pressure can be stored only in aircraft-type hydraulic accumulators. (These are high-pressure containers with an inert gas stored in a bag inside; the oil doesn't compress but the gas does.) Oil under high pressure is smooth, quiet, precisely controllable, and very powerful. The main difficulty: almost everything in such a system has to be manufactured to close tolerances, so costs are high.

Vacuum power seems cheaper — the parts aren't as exacting, and there is already a source of vacuum in the intake manifold. At the same time there are drawbacks:

1. It would probably not be practical to eliminate a mechanical vacuum pump entirely. Moreover, bleeding too much vacuum off the manifold, from the wrong place, roughens engine performance.

2. Vacuum power, being not as compactly muscular as hydraulic pressure, would take more space and more linkage mechanisms. It would also be unsuited for existing power-steering units, now highly developed.

In summary, centralized auxiliary systems are almost certainly due to bow in 1957. What *kind* will ultimately prevail may not be evident for some years yet.

Day of the transistor. This wonder-working gadget promises a lot for auto radios. A completely "transistorized" receiver will last very nearly the life of the car; will take up much less space in the instrument panel; and will draw only trivial current from the battery. Tube radios can discharge a battery in a few hours of engine-off playing; transistor radios can run for *three or four days and*




nights before draining the battery. They'll sound better, too: there will be no hum from a vibrator power supply.

The big drawback is cost. Fully "transistorized" radios will be very expensive in 1957. For price-sensitive markets there will be compromise circuits, using both vacuum tubes and transistors. Improved

[Continued on page 302]

Copyrighted material

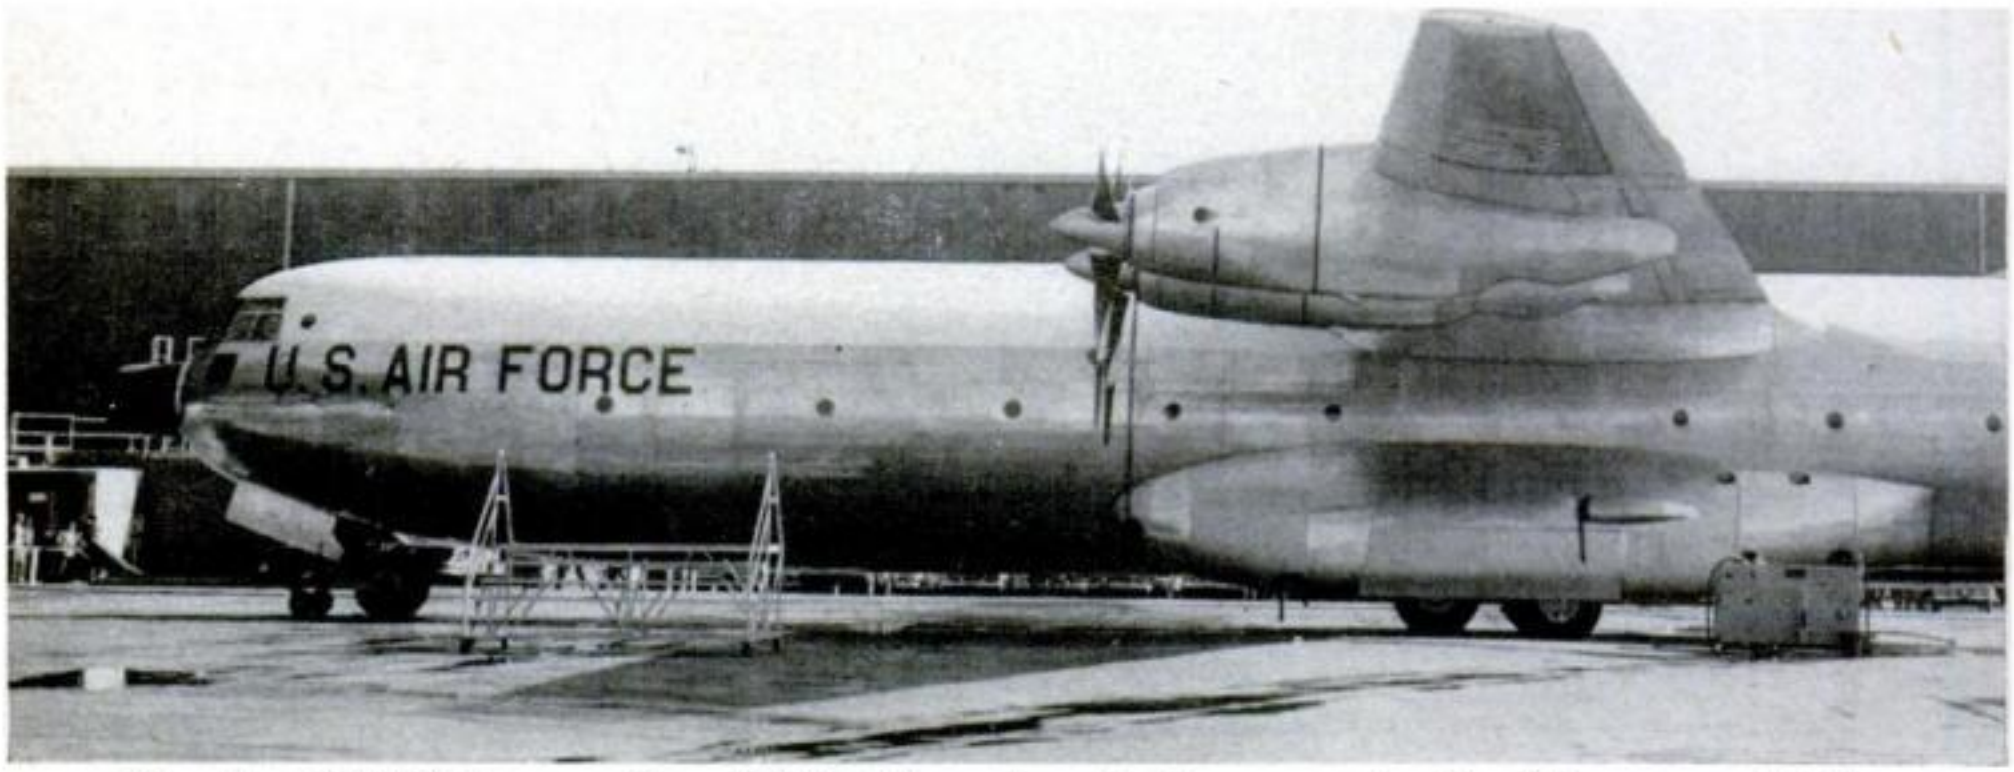


Douglas C-133A is more than 152 feet long from bulbous nose to tip of its upswept tail.

Fast New Workhorse Joins

THE Air Force's ability to pick 'em up and set 'em down hundreds of miles away in a hurry—guns, troops, jeeps, ammunition, spare engines, or whatever a military crisis demands—got a big boost recently when a giant new turboprop cargo plane, the C-133A, rolled off the Douglas production line.

Capable of hauling twice the payload of its fat-bellied predecessor, the C-124—previously the largest cargo-carrying plane in operation—the C-133A at the same time has slimmer, cleaner lines than that earlier aerial workhorse. Its lean look is deceptive, for the new plane's gross weight is 255,000 pounds, compared to the C-124's 185,000. The C-133A is also considerably faster than the C-124, whose

TUNNEL-LIKE CABIN, 90 feet long, is more than 16 feet in diameter and big enough to accommodate nearly every type of military vehicle. In view below, you are looking toward the tail.

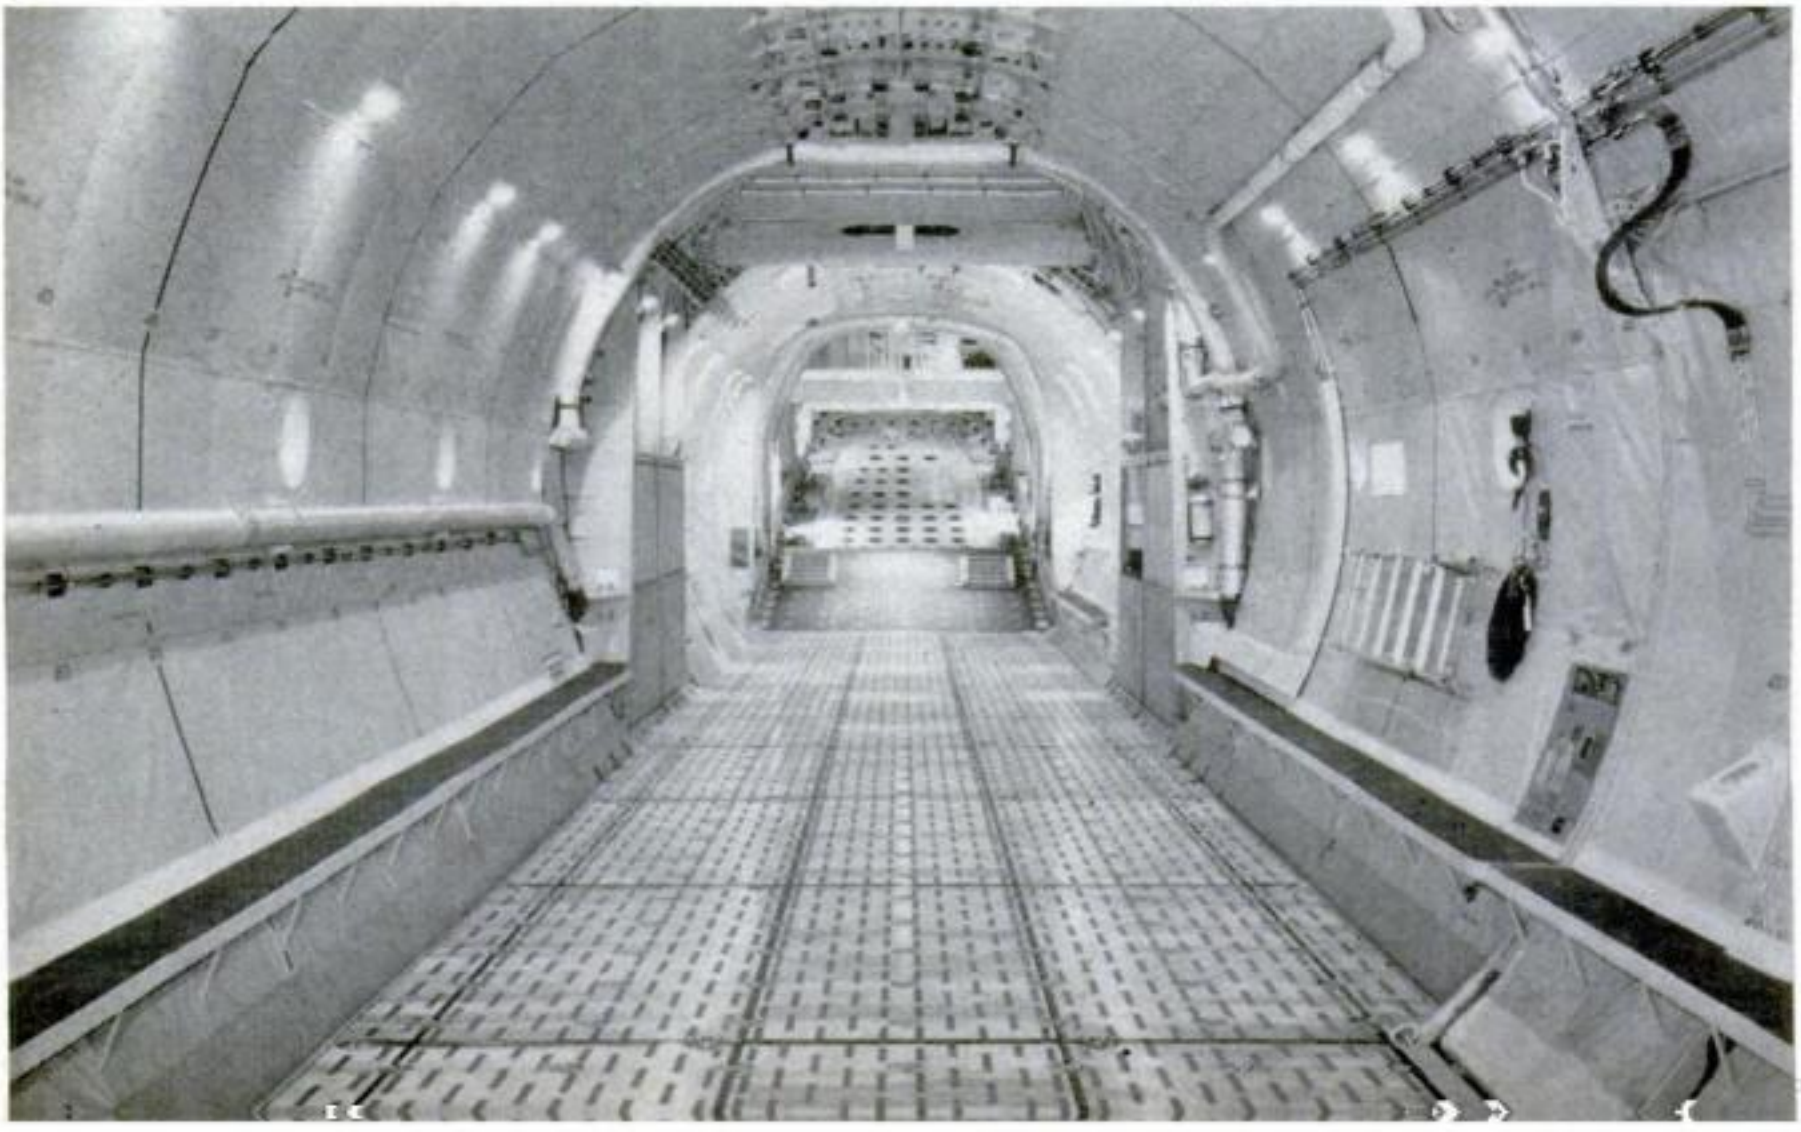

Copyrighted material



Wing span of the new transport is 180 feet.

the Air Force

top speed was 319 m.p.h., and has a higher service ceiling, estimated to be between 25,000 and 30,000 feet.

In a single load, the giant plane can carry more than 200 troops, or 16 loaded jeeps, or 20 jet engines, or many combinations of vehicles and heavy ordnance. It is independent of ground-starting equipment in any climate.




A 40,000-POUND PRIME MOVER backs into the cavernous body of the C-133A. The giant cargo plane is capable of transporting two of these, or many other combinations of vital freight.



Portable Pillbox to Shield Cop

THIS Detroit policeman is trying on a mock-up for a coat of armor to be worn when shooting it out with barricaded gunmen. In steel plate, the portable pillbox will weigh 65 lb. It has a spotlight on top, bulletproof glass visor, pistol port at hip height.

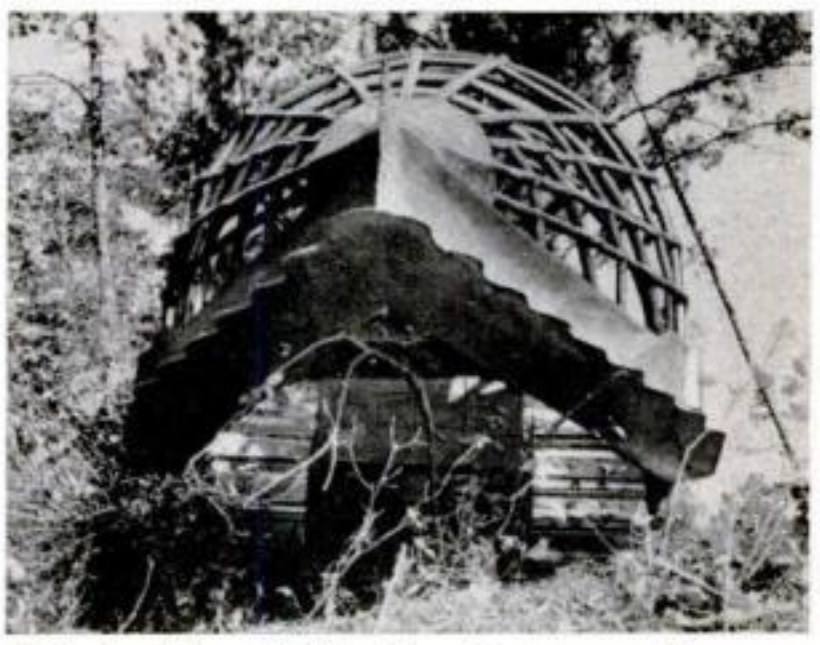


Motorized Mole Downs Trees

AN OUTSIZE mask of 2½-inch pipe protects the driver of this tractor from falling timber when he lowers the saw-toothed nose and rams through underbrush. Motorized by a 200-hp. International diesel crawler, the rig is clearing land for a Georgia reservoir.

Copyrighted material

How They Exposed the

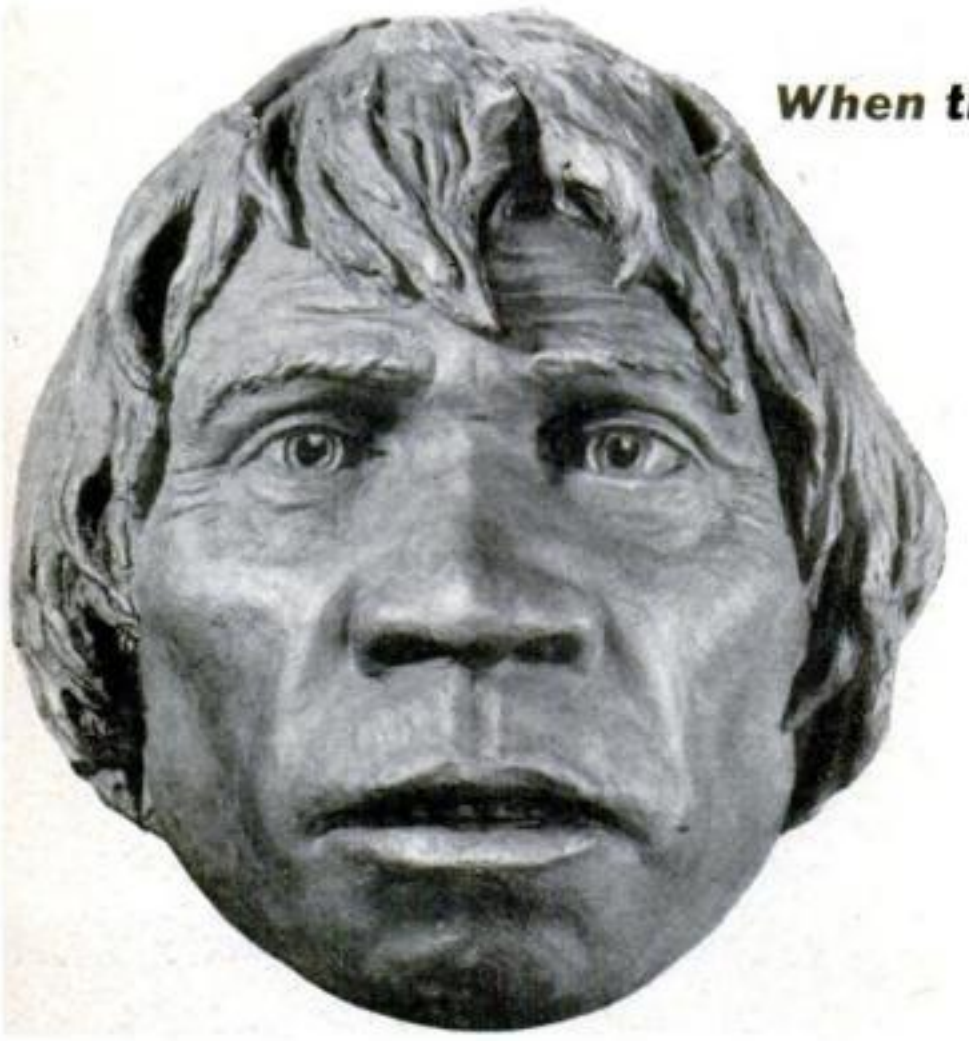

PILTDOWN MAN was visualized as above, before he turned out to be a brazen fake, in American Museum of Natural History restoration. The museum's famed paleontologist, the late Prof. Henry Fairfield Osborn, long was a skeptic but finally joined Piltdown's supporters after examining the finds. Now museum's Piltdown Man exhibit has vanished, won't be back.



PICNICKERS SWARMED over Piltdown diggings (between farm road and hedge at far left) during a Geologists' Association excursion there in 1913. Site is viewed from farmhouse side.

When the riddle of Dawson's Dawn Man led a scientist to play detective,

By Alden P. Armagnac

FOR more than 40 years Piltdown Man was a member in more or less good standing of the society of "earliest humans," rubbing mandibles with such distinguished, if lowbrow, company as Peking Man, Heidelberg Man and Neanderthal Man. The startling discovery that he was an out-and-out humbug abruptly terminated his membership, in December 1953. But only now has the whole story of the fantastic hoax been told.

Principally responsible for unmasking it is Dr. J. S. Weiner, Oxford University anthropologist. In the British Museum's latest bulletin on the Piltdown exposures, last year, Weiner promised more details in a book to come. His promise has been kept with the publication by Oxford University Press of his true detective story, *The Piltdown Forgery*—a fascinating 214-page, real-life "whodunit."


An amateur fossil hunter, Charles Dawson, brought the first of the Piltdown finds to the British Museum. He said he'd found them in a gravel pit near Piltdown Common, Sussex, in southern England. Dr. Arthur Smith Woodward, eminent paleontologist of the British Museum, took part in later diggings at the site. All told, the finds consisted of more than 20 remarkable brown fragments of bones, teeth and flint.

Outstanding among these was a truly amazing piece of jaw, whose original

Copyrighted material

Piltdown Hoax


a fabulous tale of faking came to light.

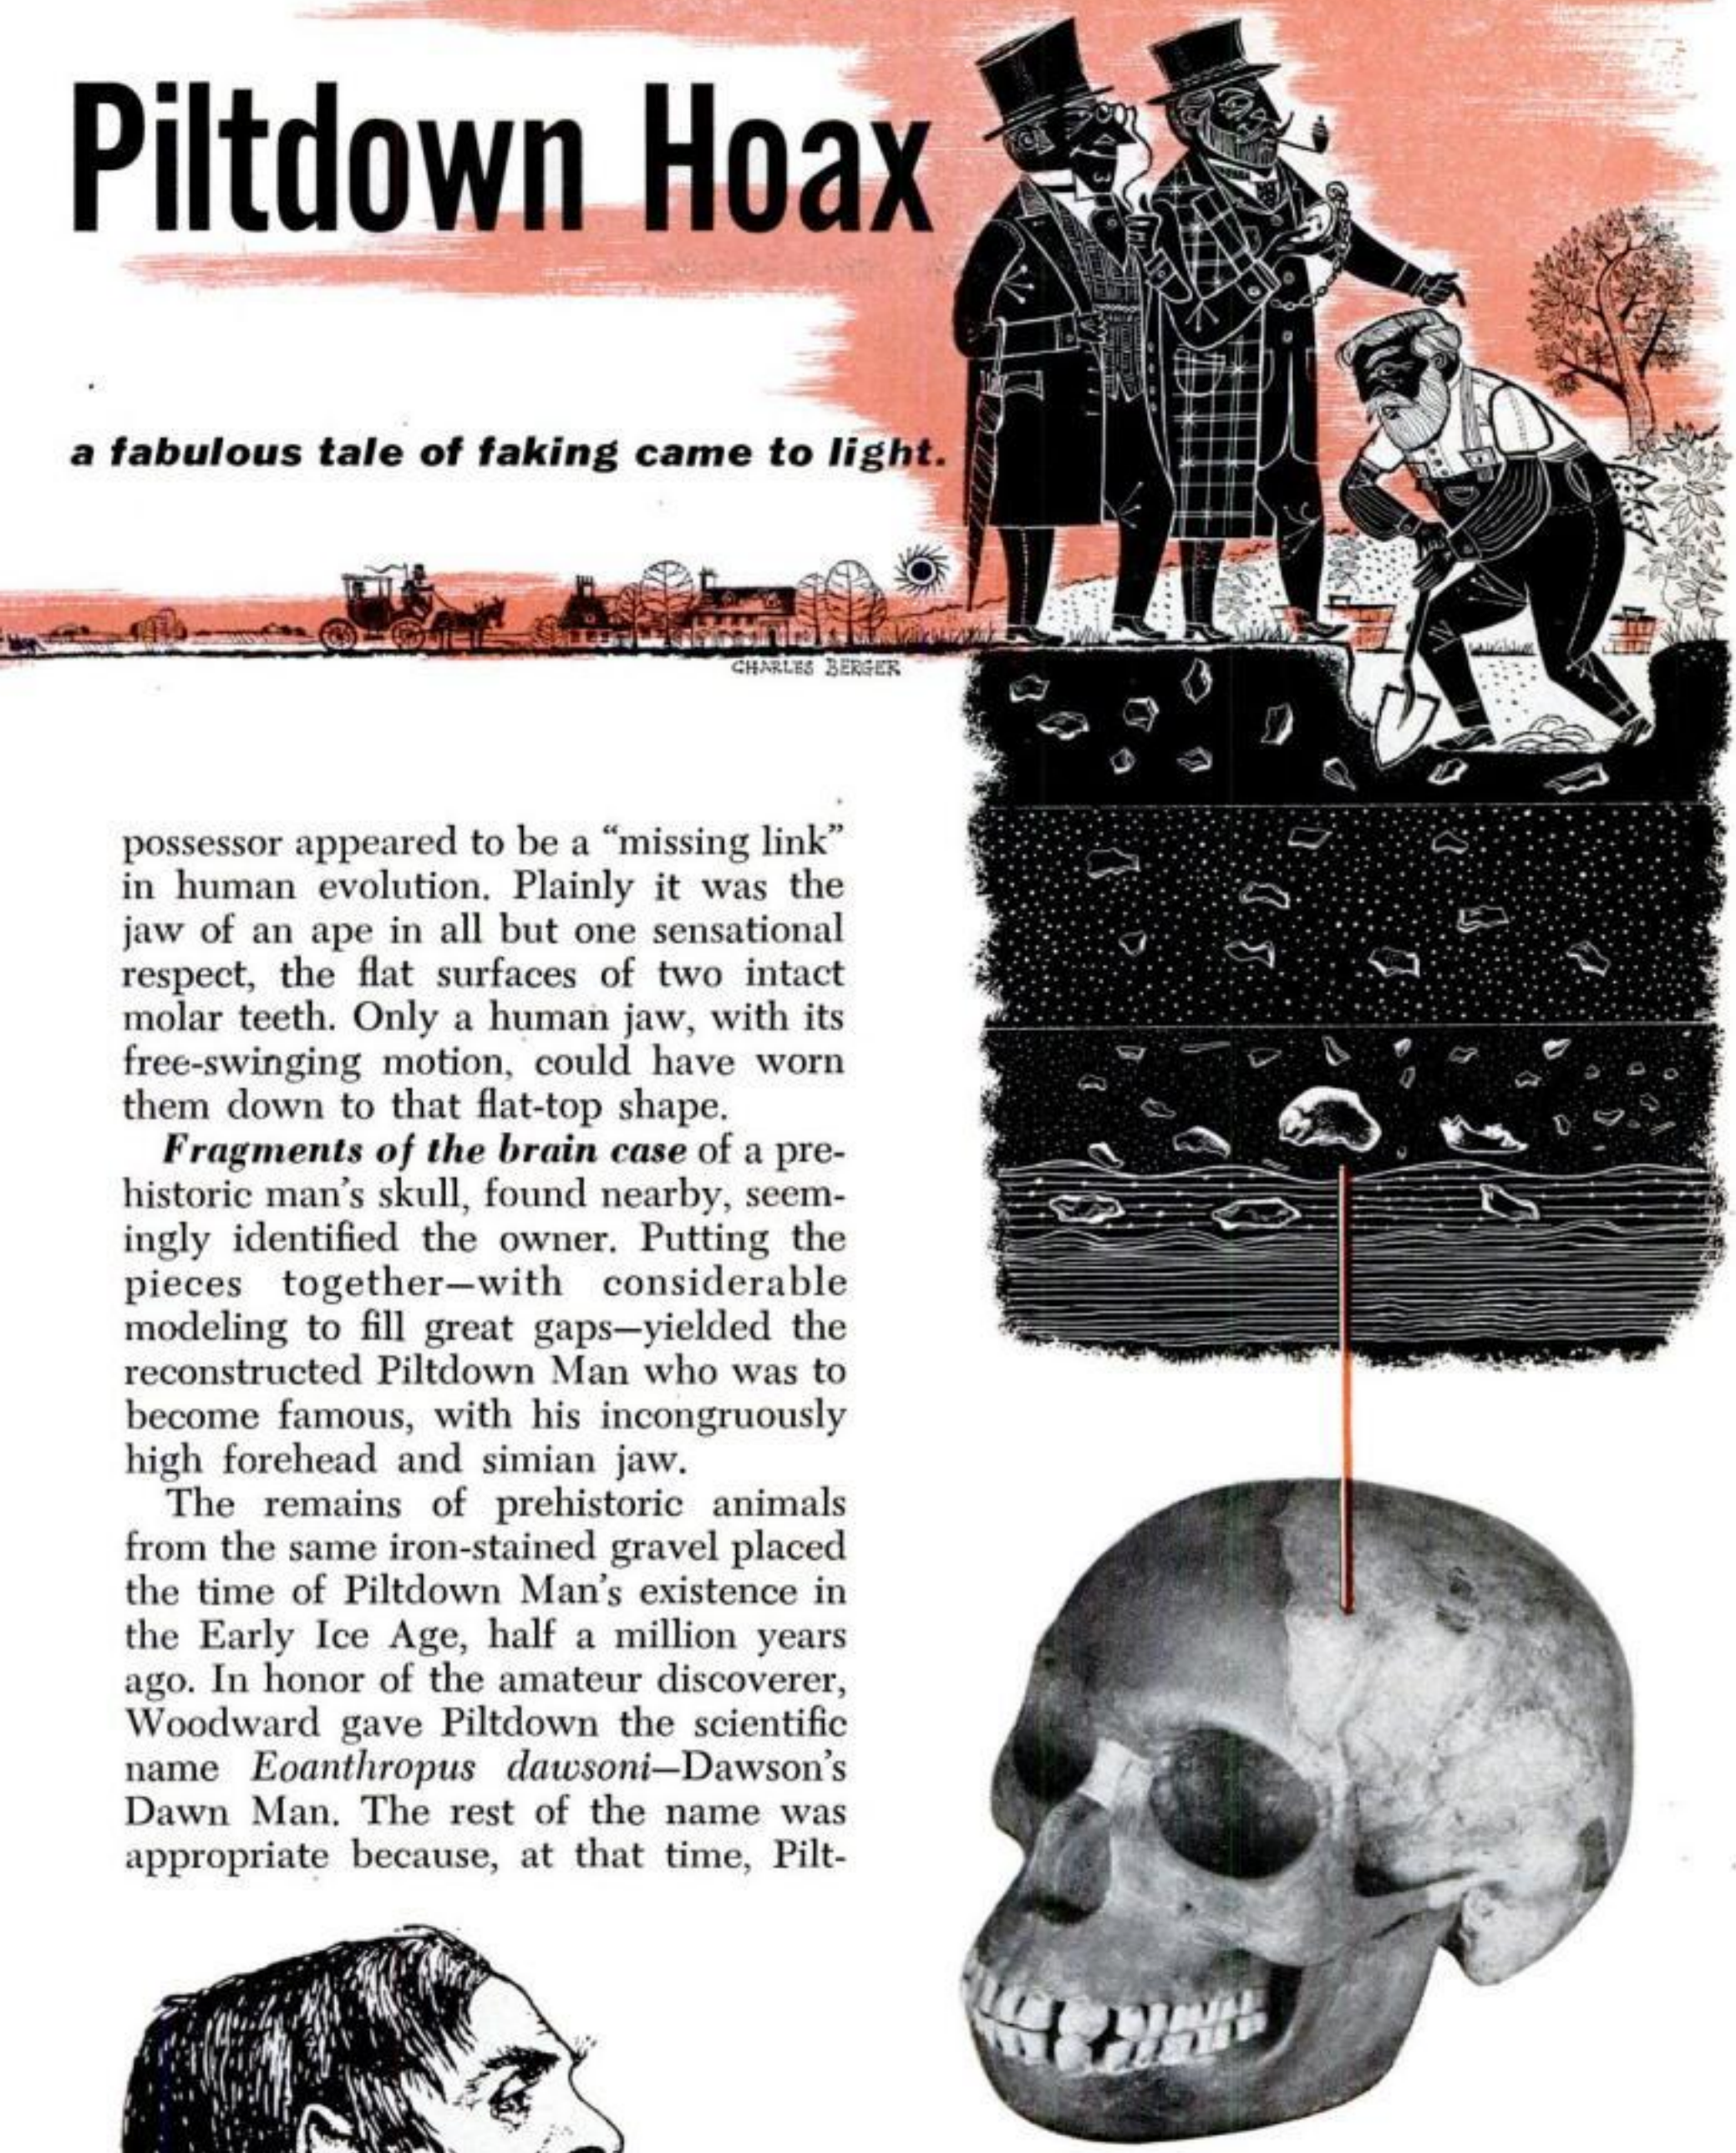

possessor appeared to be a "missing link" in human evolution. Plainly it was the jaw of an ape in all but one sensational respect, the flat surfaces of two intact molar teeth. Only a human jaw, with its free-swinging motion, could have worn them down to that flat-top shape.

Fragments of the brain case of a prehistoric man's skull, found nearby, seemingly identified the owner. Putting the pieces together—with considerable modeling to fill great gaps—yielded the reconstructed Piltdown Man who was to become famous, with his incongruously high forehead and simian jaw.

The remains of prehistoric animals from the same iron-stained gravel placed the time of Piltdown Man's existence in the Early Ice Age, half a million years ago. In honor of the amateur discoverer, Woodward gave Piltdown the scientific name *Eoanthropus dawsoni*—Dawson's Dawn Man. The rest of the name was appropriate because, at that time, Pilt-

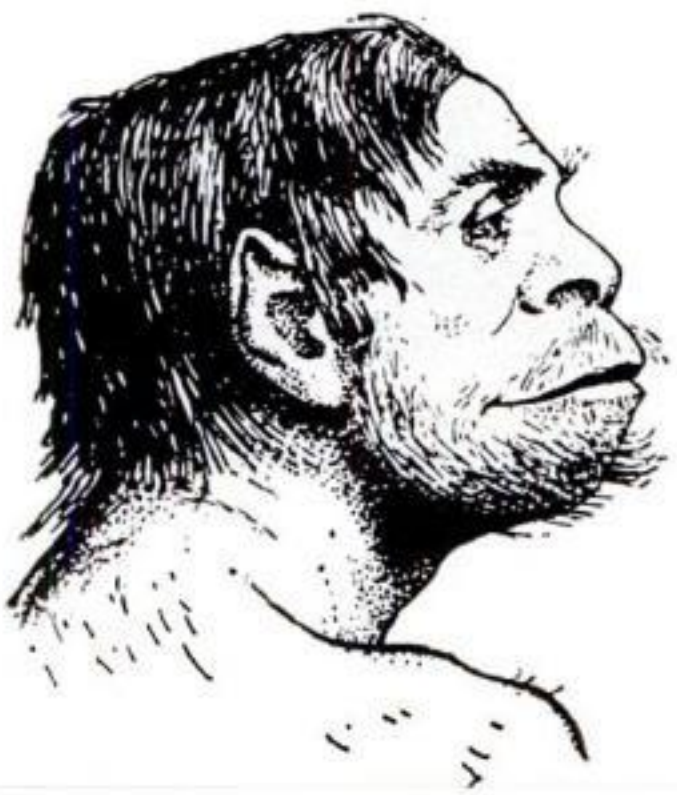


FAKE TOOK SHAPE as "planted" pieces (top view), found and fitted together, yielded the reconstructed skull above. Missing parts were filled in. In book on the finds that A. S. Woodward later wrote, *The Earliest Englishman*, he pictured "Piltdown Man" as at left. An innocent victim of the hoax, he vainly continued digging in the pit for years.

Copyrighted material



SEEKING FOSSILS, Charles Dawson (left) and Woodward screen and wash gravel from pit where hired man is standing, in 1912 photo at the Piltdown site. House is behind distant trees.

Faked "fossils," plus real

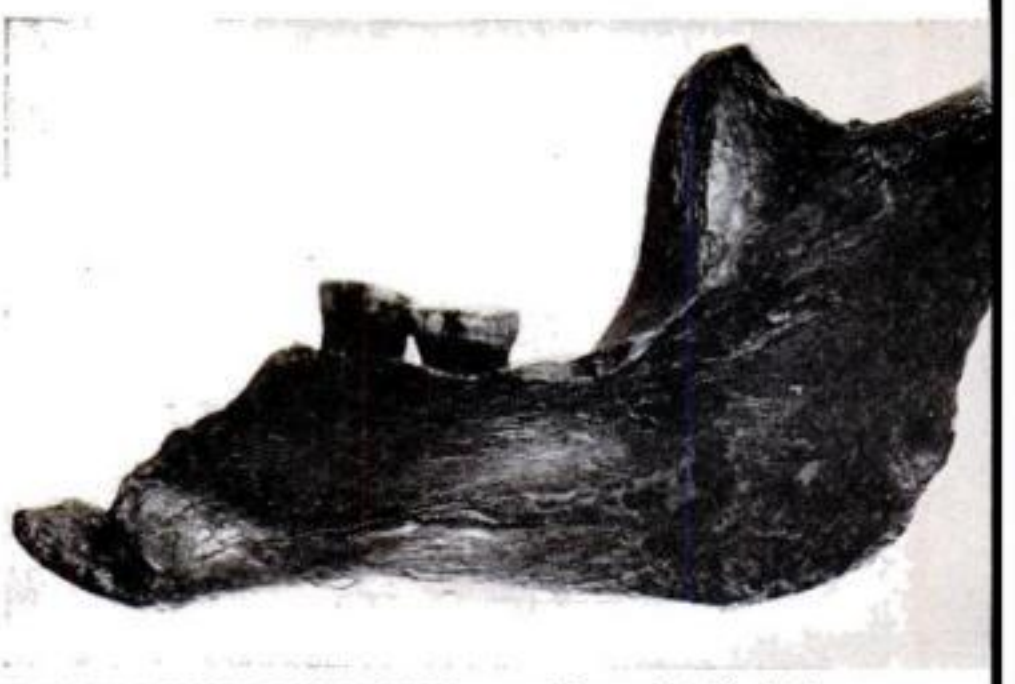

FAMOUS PILTDOWN JAW was thought "missing link's" because of flat "human" teeth, now known to have been deliberately filed. Jaw actually is a modern ape's, stained to look old.

down was believed to be the earliest known human.

For decades his rebuilt skull was a storm center of controversy. Many agreed from the first that cranium and jaw belonged together, and subsequent finds convinced others of it; but there were heated opposite views.

Piltdown began to hit the skids in 1950 when a chemical dating test convinced Dr. Kenneth Oakley, British Museum geologist, that the remains were only 50,000 years old instead of a half-million. The longer bones lie buried, the more fluorine they absorb from ground water; and so the relative age of fossils from the same site can be told by their fluorine content. Oakley used this fact. What he didn't know was that his tests were invalidated by his innocently—and mistakenly—assuming that all the fragments had genuinely originated at the Piltdown site. By accident his estimate happened to be right, for the age of the cranial fragments. (He was wrong in calling the jaw as old.)

By deposing Piltdown Man from the "earliest" group, Oakley's widely accepted redating made him more of a riddle than ever. A half-million-year-old missing link had been conceivable. A missing link as recent as the Magdalenian men who produced Europe's finest cave paintings was an utterly incredible throwback. Embarrassed experts wished Piltdown would go away.

So went the table talk, one summer evening in 1953, when Weiner dined with Oakley in London. Home in Oxford that night, in the small hours, Weiner once more revolved in his mind everything that made Piltdown such an impossible misfit. Above all, those "human" teeth in an apish jaw, worn as flat as by a file . . . A thought struck him like a blow: *Could* they have been deliberately filed flat? He recalled Sherlock Holmes' words: "When you have eliminated the impossible, whatever remains, *however improbable,* must be the truth."

With a colleague, Prof. W. E. Le Gros Clark, Weiner next day checked Oxford's plaster copy of the Piltdown skull, which heightened his suspicion. He secured a chimpanzee's molar tooth, filed and stained it, and had a good likeness of a Piltdown molar. Next stop was the British Museum, where Weiner and Clark enlisted Oakley's aid.


Out of a locked, fireproof steel safe came the hallowed Piltdown fragments for the most searching anatomical, chemical and physical examination they had ever received. Instruments as modern as X-ray spectrograph and Geiger counter came into play. An accurate, improved chemical dating test measured the bones' loss of nitrogen with passing time.

Copyrighted material

ones from elsewhere planted at site, built up hoax



"OLDEST TOOL," right, was believed carved by Piltdown Man from fossil-elephant bone with a flint knife. Trials proved it impossible. Making a duplicate (left) required a steel knife.

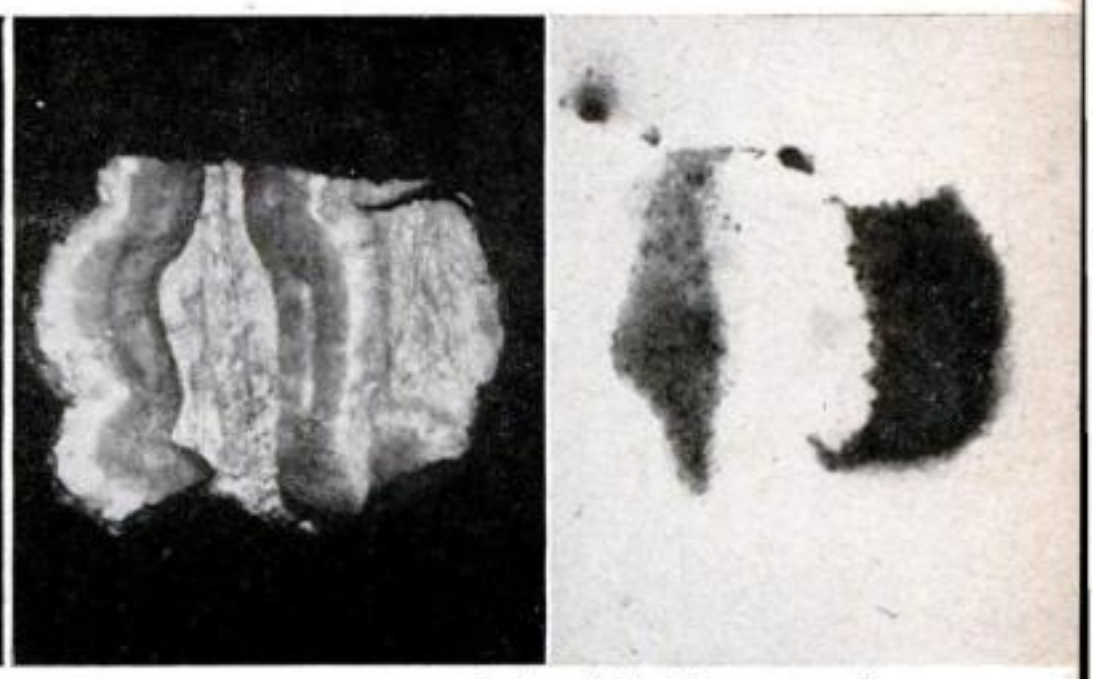

HIGH RADIOACTIVITY of fossil-elephant tooth, shown by radioautograph (right), contradicts claim it came from Piltdown pit. Likeliest source: Tunisia, where similar specimens occur.

Telltale scratches on the molars, and on a separate canine tooth, showed beyond doubt that the teeth had been artificially filed. And they were unnaturally sharp-edged, just as a file would leave them. Lost in the plaster casts studied the world over, these details were clear in the original specimens.

For the chemical tests the museum authorized far more generous samples than Oakley had been permitted to take, in 1950, by gingerly applying a dental drill to worn or broken surfaces. When Oakley now drilled the jaw, he noticed an acrid smell of burning horn and obtained tiny shavings, as with fresh bone.


The jaw turned out to be from an ape, and a modern one at that—probably an orangutan. Cunningly the faker had "fossilized" it by staining it a mahogany color, with an iron salt and bichromate. The puzzle was solved of how the jaw could be an ape's—as some Piltdown skeptics had always insisted that it was—despite the fact that there were no apes in England in the Ice Age.

The separate canine tooth's dark-brown coating, always thought a natural iron stain, turned out to have the composition of Vandyke brown paint. An oil paint, probably red sienna, stained the chewing surfaces of all the teeth.

At this stage, when the three investigators reported in 1953 that jaw and teeth were bogus, they pictured the hoax as a fairly simple one. Seemingly the diggers, all innocent victims, combined with genuine relics a skillfully faked jaw and canine tooth that some prankster had planted in their diggings.

So when the three later came to testing the cranial pieces, and other Piltdown trophies, they were astounded by what they found. Every important piece proved a forgery. Piltdown Man was a fraud from start to finish!

[Continued on page 272]

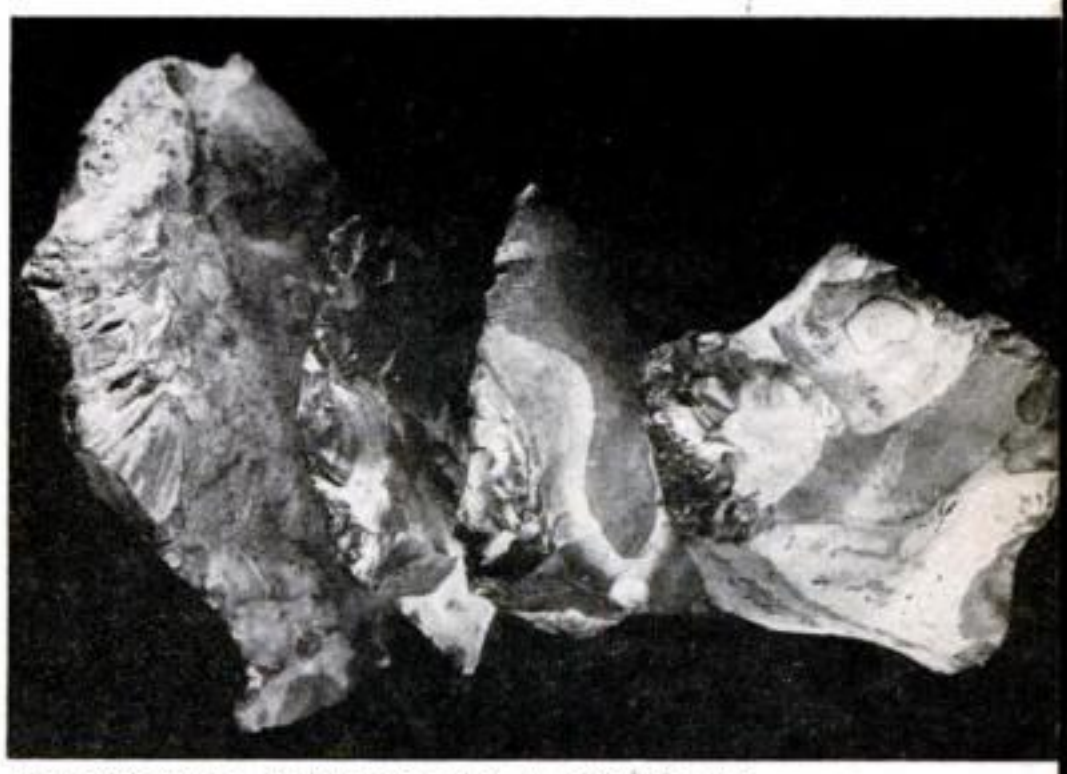

"PILTDOWN" FLINT TOOLS at British Museum include new-found Morris flint, far right, still bearing former owner's inscription accusing Dawson of fraudulently staining it. Photos of picnic, skull, jaw, "tool," tooth and flints are from new book *The Piltdown Forgery*, by J. S. Weiner, published by Oxford University Press.

Copyrighted material


Auto News from Europe

Roomier than it looks, this new Italian Fiat 600, posed against a background of Rome's ancient Colosseum, seats six passengers. Fold down the back seats and it can be used as a utility truck. The car has four speeds, hydraulic brakes on all four wheels, and a four-cylinder power plant that is located in the rear.


Hill-climbing ability of the little two-cylinder, 17-hp. car at right has been shown in Alpine rallies and reliability trials. Known as the Goggomobil and made in Dingolfing, Bavaria, it accommodates two adults and two children (as in the phantom view at far right). It has an all-steel body, a rear-mounted engine and a front luggage compartment. Center photo shows how the two-stroke, fan-cooled engine is constructed as a unit with the gearbox and differential.




Copyrighted material

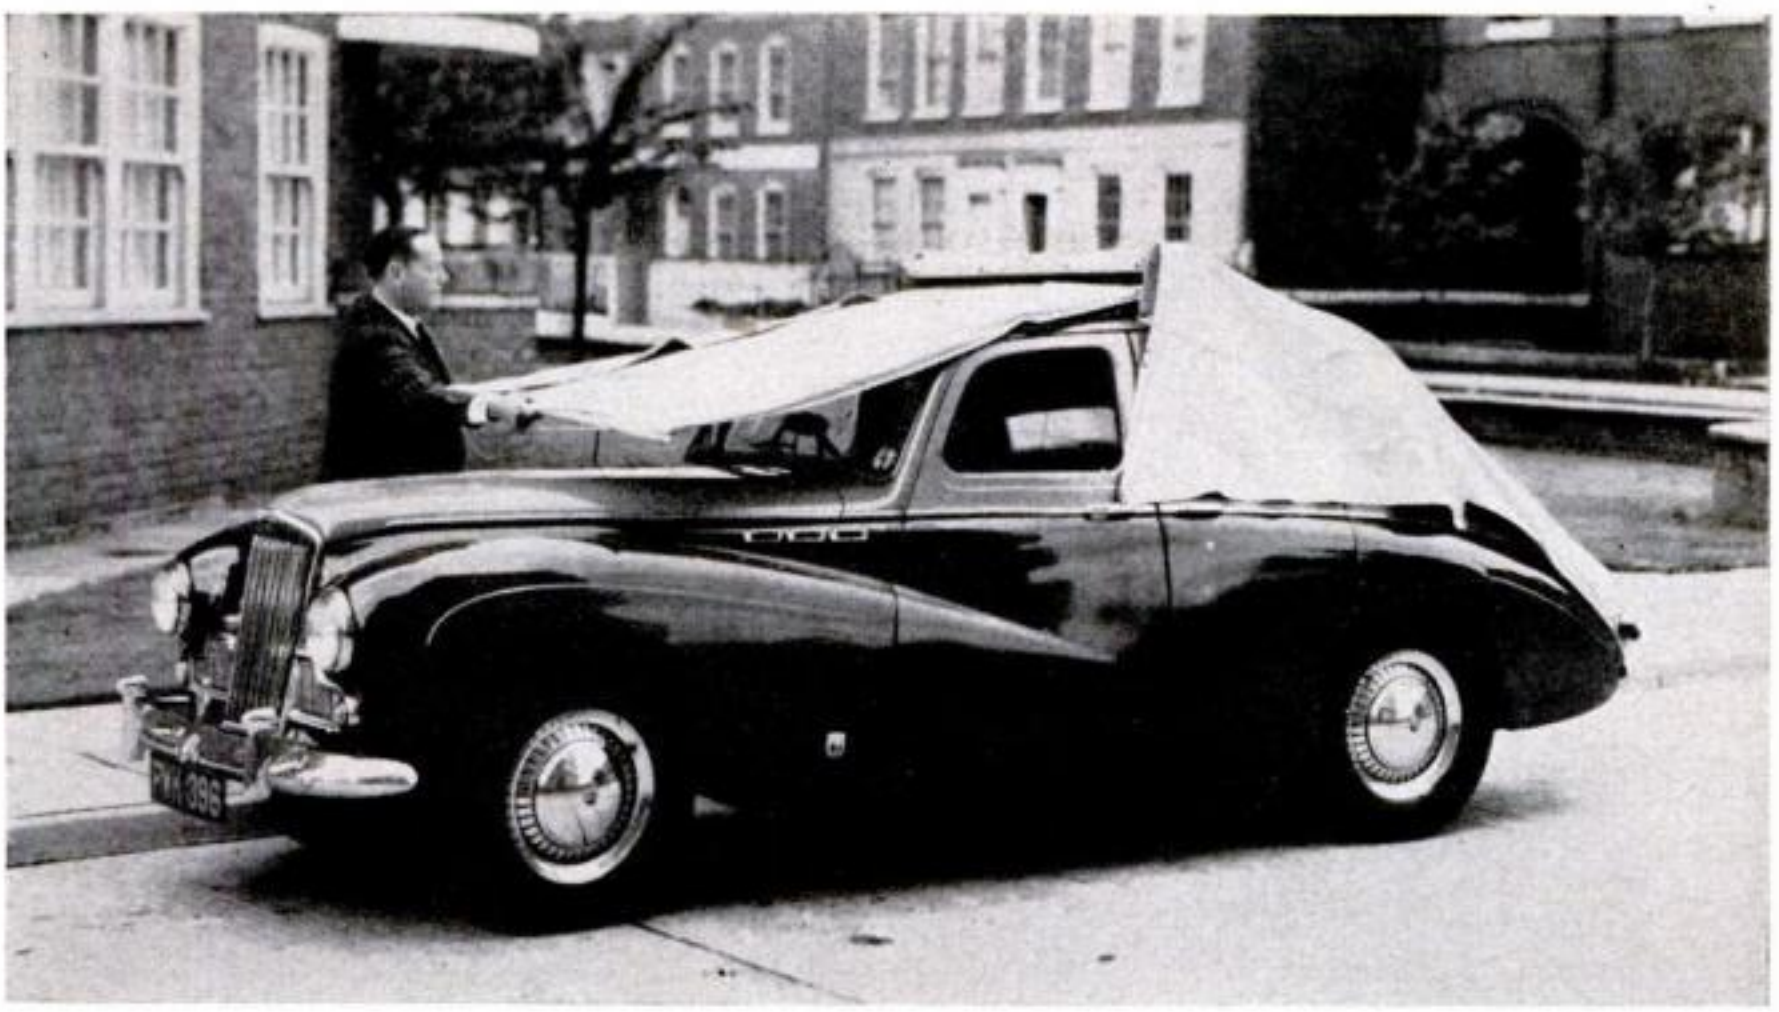



A garage wherever he goes is provided by the lightweight canvas this gentleman is unrolling. It's a British car umbrella to protect the vehicle from the elements. When not in use, the Carbrella rolls up into a neat package that is held to the top of the car (like a luggage rack) by metal clamps and suction cups.

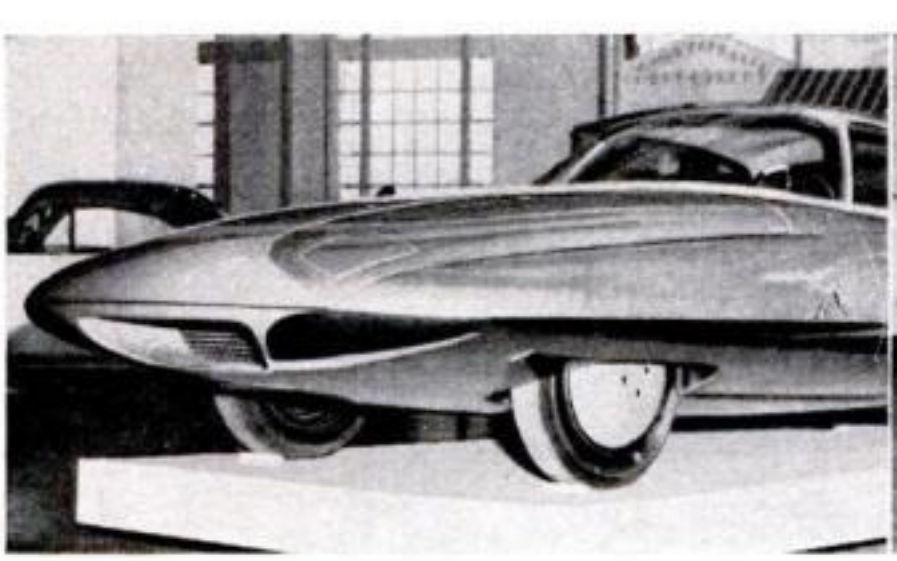

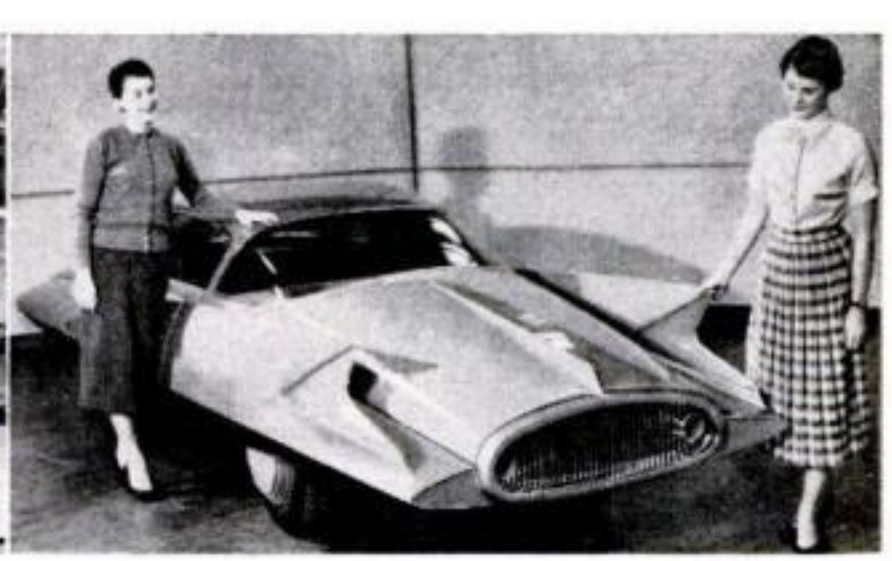

Star of the auto show at Turin, Italy, the Ghia Gilda (front view, above left) is a superstreamlined car of tomorrow. Its long, low body ends in two sweeping tails (above right). The engine, to be mounted in the rear, may be a gas turbine. Wind-tunnel tests indicate that it might hit a speed of 225 miles an hour.

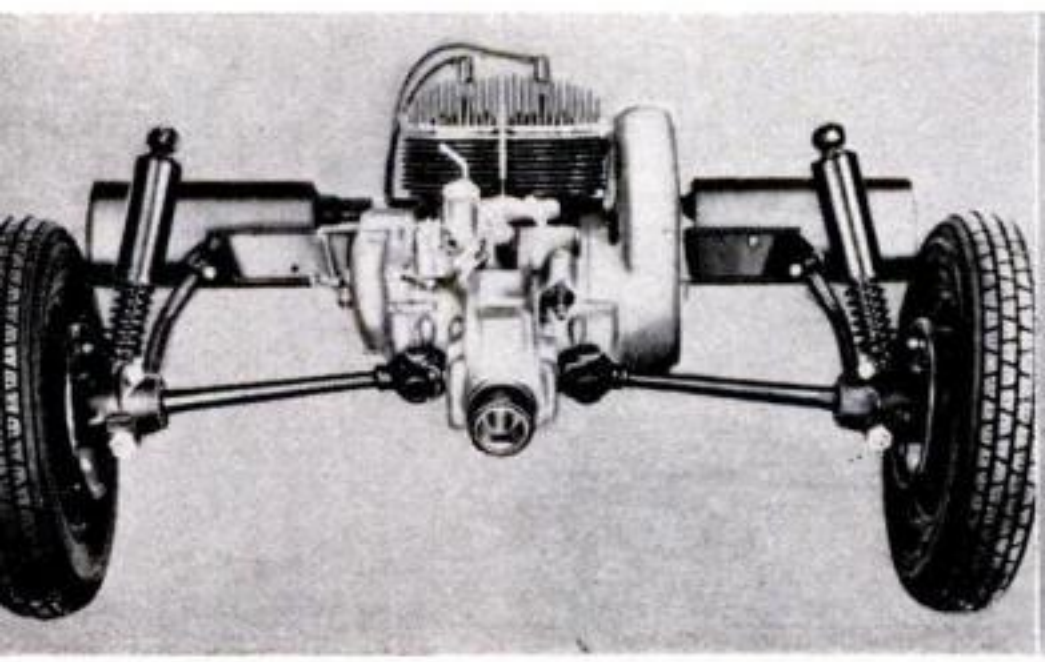

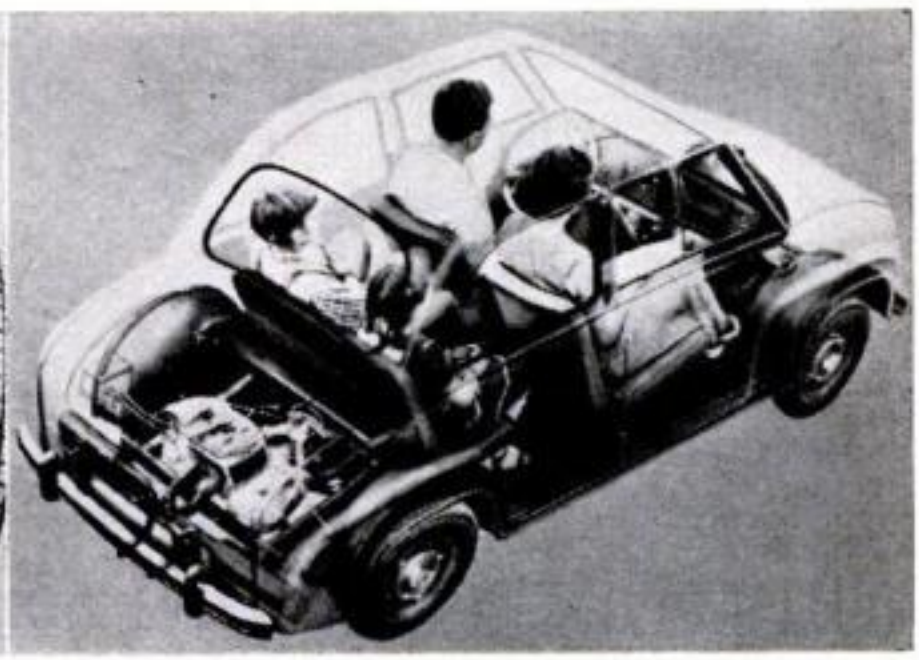


Please turn the page for more auto news from Europe

Copyrighted material

French Sports Car Is Fast, Smooth



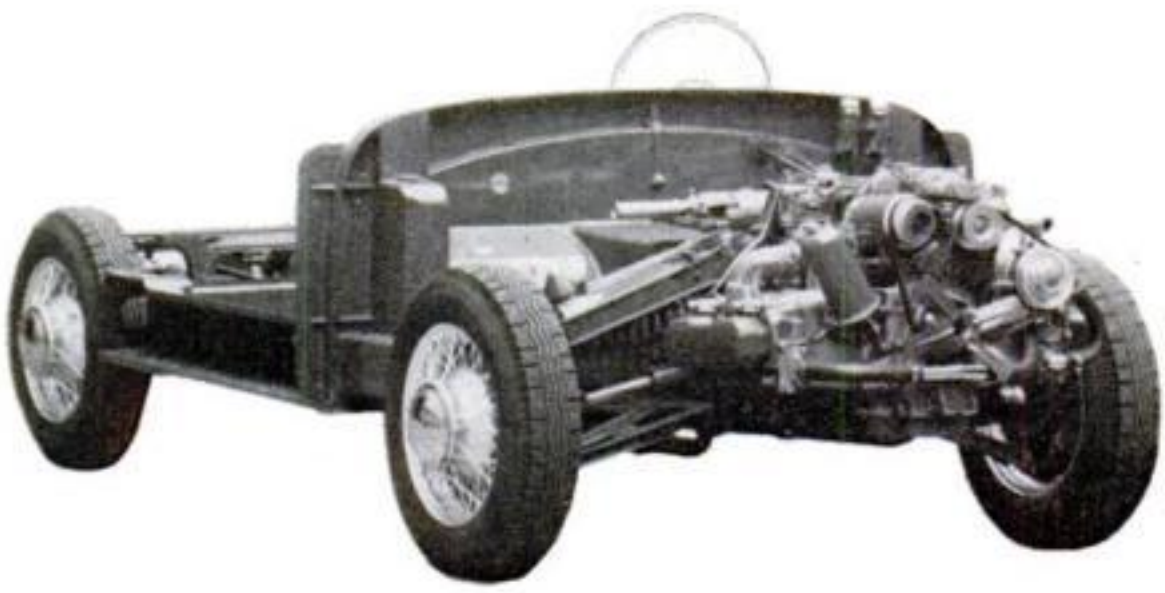

IN MANY sports cars speed and road holding are gained at the sacrifice of comfort. To overcome this, J.A. Gregoire, French automobile designer, developed a suspension in which the rate of springing varies automatically with the load of his 135-hp. two-seater.

Road holding, too, is increased by placing most of the 2,200-pound weight on the front axle. A four-cylinder, flat engine (shown at left) can deliver a top speed of 125 miles an hour.






Rear-Engine Czech Car Has Wrap-Around Windows

THE wrap-around rear window in the Tatra T 603 is made possible by placing the eight-cylinder, air-cooled rear engine low in the frame. A roomy six-seater, made in Czechoslovakia, the car is said to have a speed of more than 100 m.p.h. The lid of the forward trunk has an air duct for interior ventilation.

Copyrighted material

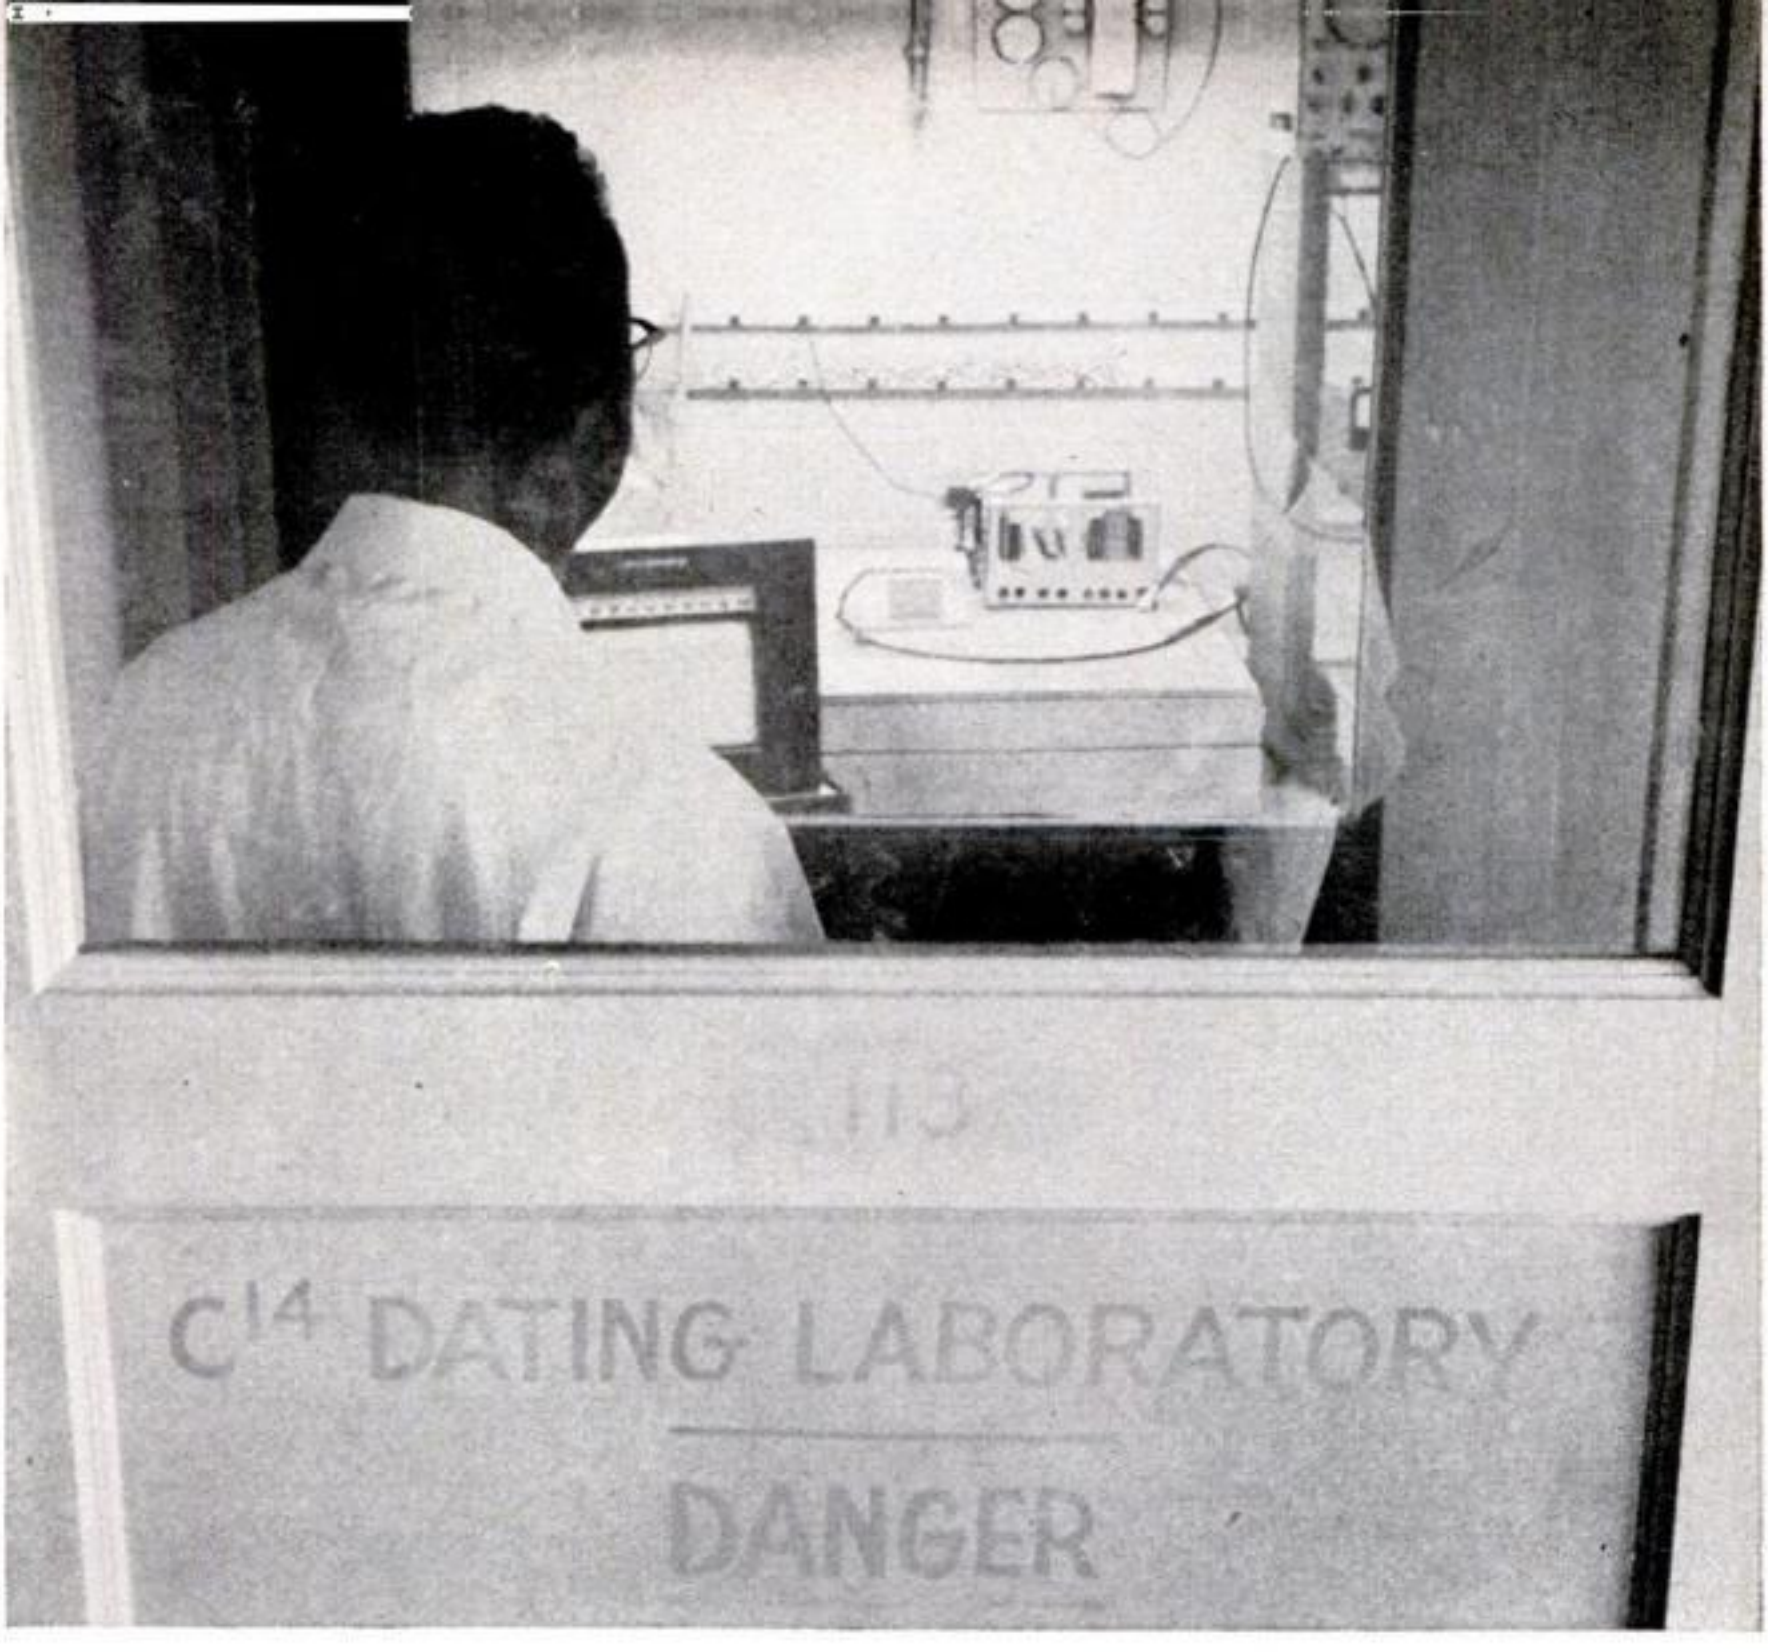


Fallout-Proof Lab Keeps Atomic Clock on Time

A SEALED room, fed with air that has been filtered five times and washed, keeps A-bomb dust out of the machinery which dates ancient relics by measuring the radioactivity of their carbon content. A speck of additional radioactivity from bomb-test fallout would throw off completely the carbon-14 dating process.

A special air conditioner (right) supplies the University of Colorado lab with super-clean air, which may be 40,000 times less radioactive than outside air.



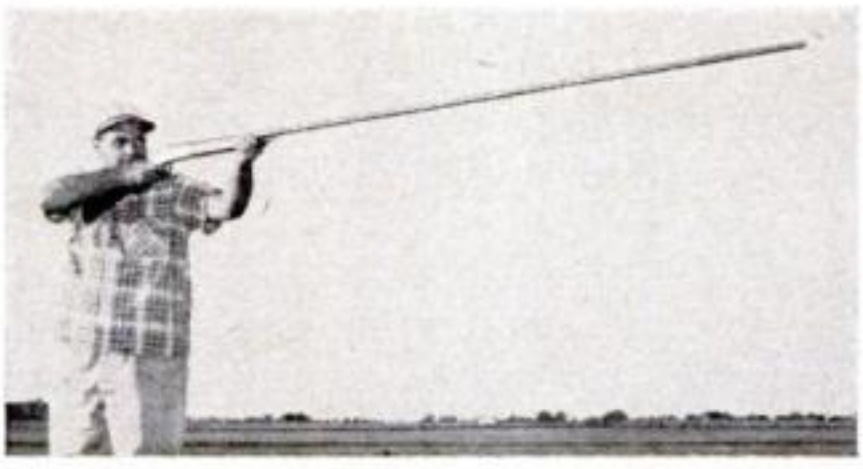

Long Gun Aims at High Squirrels

A SQUIRREL couldn't find a tree tall enough to get out of range of this gun. Julius Petty of Stuttgart, Ark., national clay-target champion in 1954, believes that the shotgun he is aiming in the photo at left has the longest barrel in the world. It measures six feet 11½ inches.

Copyrighted material



Corvette, John Fitch driving, averaged 145 to take production sports-car title at Daytona.



Fastest big car was Chrysler 300B—139 m.p.h.



Dodge 500 topped its class with 130 m.p.h.

Chevrolets Take

INVIGORATED by its new V-8 engine after more than a year of eating Thunderbird dust, the Chevrolet Corvette showed a dazzling turn of speed at Daytona Beach, Fla., in the first competitive running of 1956 cars. Corvettes driven by John Fitch and Betty Skelton flashed through the flying-mile time traps at two-way averages of 145 and 137 m.p.h. A non-stock Corvette, with a slightly increased compression ratio and a tail fin hit a theatrical 154 m.p.h. on one run. The best that the Thunderbird could do in the stock sports-car category was third place, with 134-m.p.h. average.

Among the "strictly-stock" passenger cars, one big surprise was in the class having engines of 305 to 350 cubic inch displacement, a group that included Pontiac, Buick, Mercury and Chrysler Windsor. Here a clean win was scored by a Dodge 500 piloted by Danny Eames at 130, six m.p.h. faster than the Merc.

In the big-engine class, the top four places were taken as expected by Chrysler 300B's. The quickest of these was driven by Tim Flock at an average of 139 m.p.h. A Studebaker Golden Hawk managed to take fifth place with a 122-m.p.h. average. The only 1956 Cadillac among the front runners came in ninth with a speed of 113 m.p.h.


In the tensely contested big-three class, Chevrolet took the first two places at 121 and 119 m.p.h. to top Ford's 118.

Speeds were even showier among the "prototypes"—cars classified as not strictly stock. A Plymouth Fury was clocked at a blistering 143 m.p.h., and a special Mercury with fuel injection at 152 m.p.h.

On acceleration runs in the big-engine class, two 300B's led a third-place Lincoln, with a Golden Hawk fourth. In the medium-engine group, a Dodge took a Mercury by a few hundredths of a second. Chevvy led Ford in passenger-car acceleration. But two T-birds led Corvette among production sports cars.

Intense Detroit participation was evident at this year's run. At least six manufacturers worked on the preparation of their cars; and both Ford and Chevrolet sent virtual task forces to the beach—racing managers, expert mechanics, and spare parts by the truck load. Although the speeds achieved were obtained within the letter of stock regulations, they bore only a remote relationship to what a man might expect from a 1956 car purchased at random.

Copyrighted material

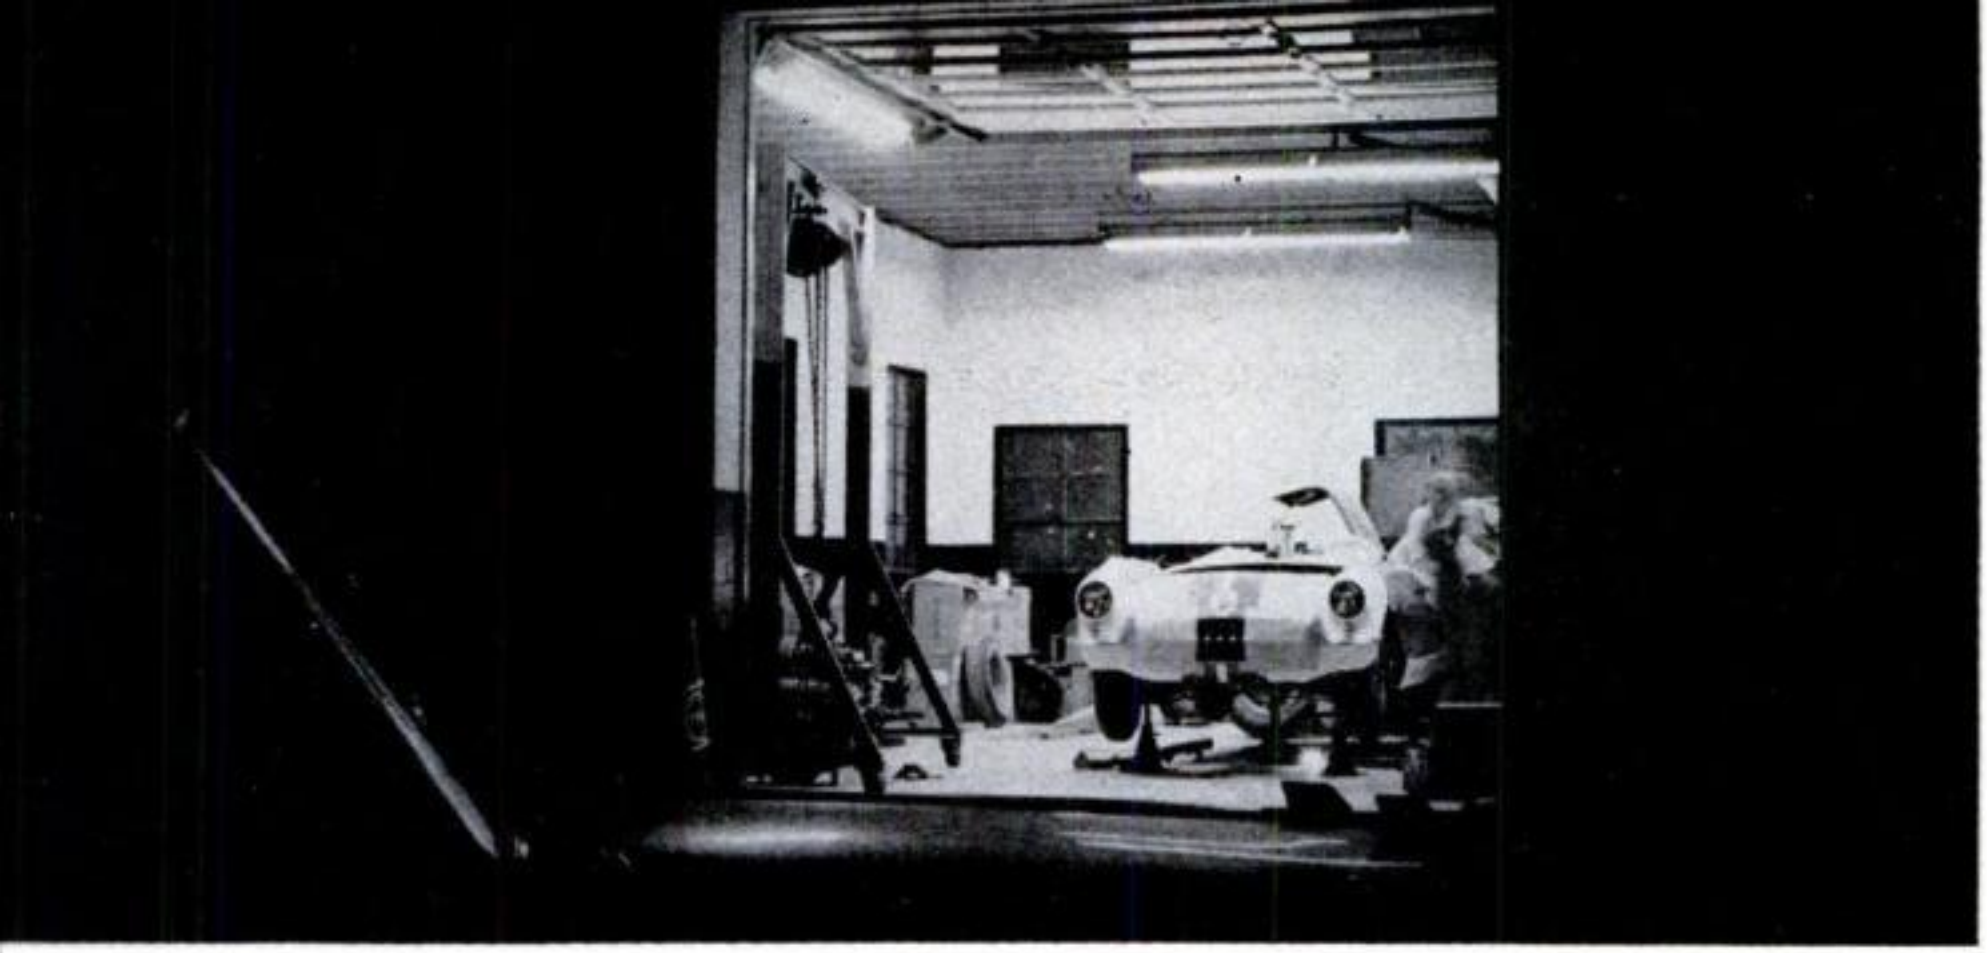

Late at night Chevvy crew was busy taking car apart and putting it together again for trials.

'56 Speed Honors




FACTORY CREW, including Ford chief engineer Bill Burnett (left), checks disqualified T-bird.



AMATEUR DRIVERS used impromptu facilities outside garage to tune cars for Nascar races.



DELEGATIONS of executives, photographers and walkie-talkie operators attended factory entries.

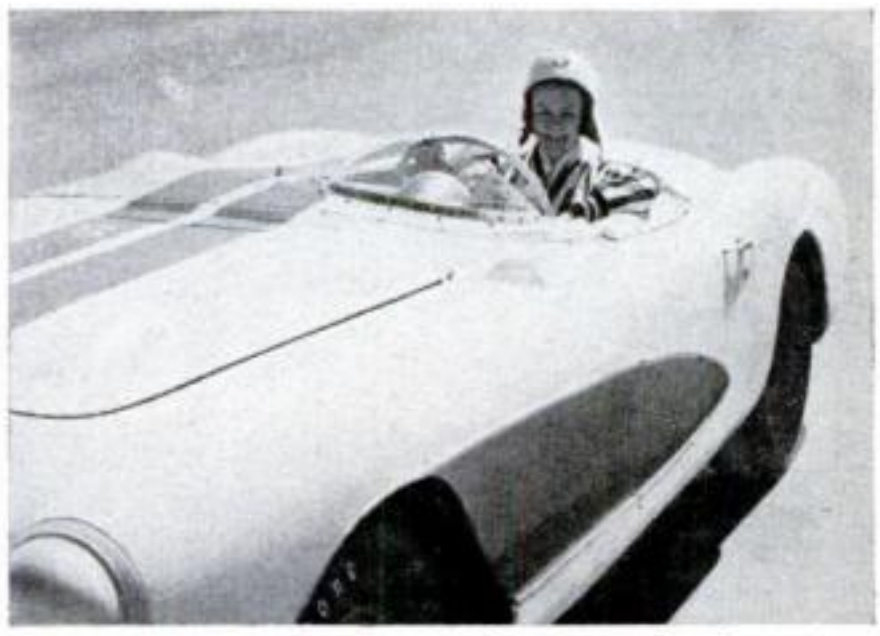

WOMAN DRIVER Betty Skelton wasn't there just for looks. She piloted second-place Corvette.


Copyrighted material

New in Aviation




Copter perch With only inches to spare, this Piasecki H-21 flew in and landed on top of a small platform used for making radio-antenna measurements. Other types of aircraft have to be hoisted up.



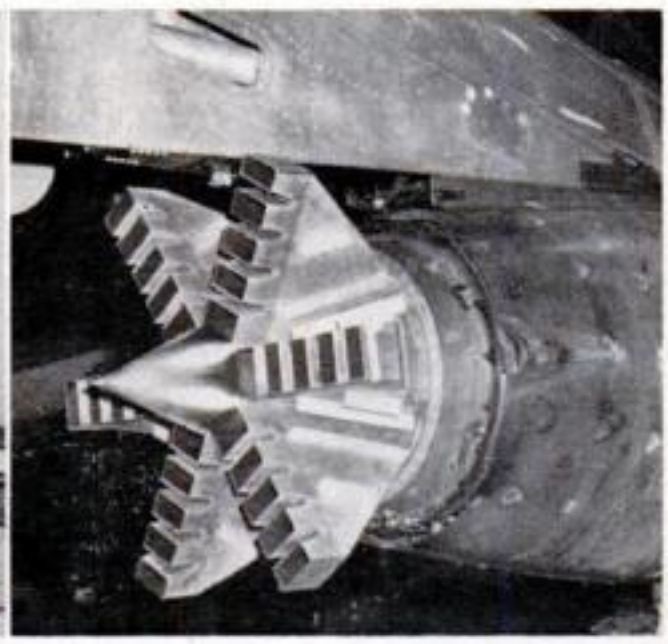


Hush-ups Mufflers for jets must be perfected before passenger versions go into general service. The tank-like contraption at left above is being tested by Republic Aviation to quiet the roar of its Thunderstreaks during ground run-ups. The device at right, developed by Boeing, breaks up the jet-exhaust stream and is said to bring flight noise down to that of a propellered airliner.

Copyrighted material

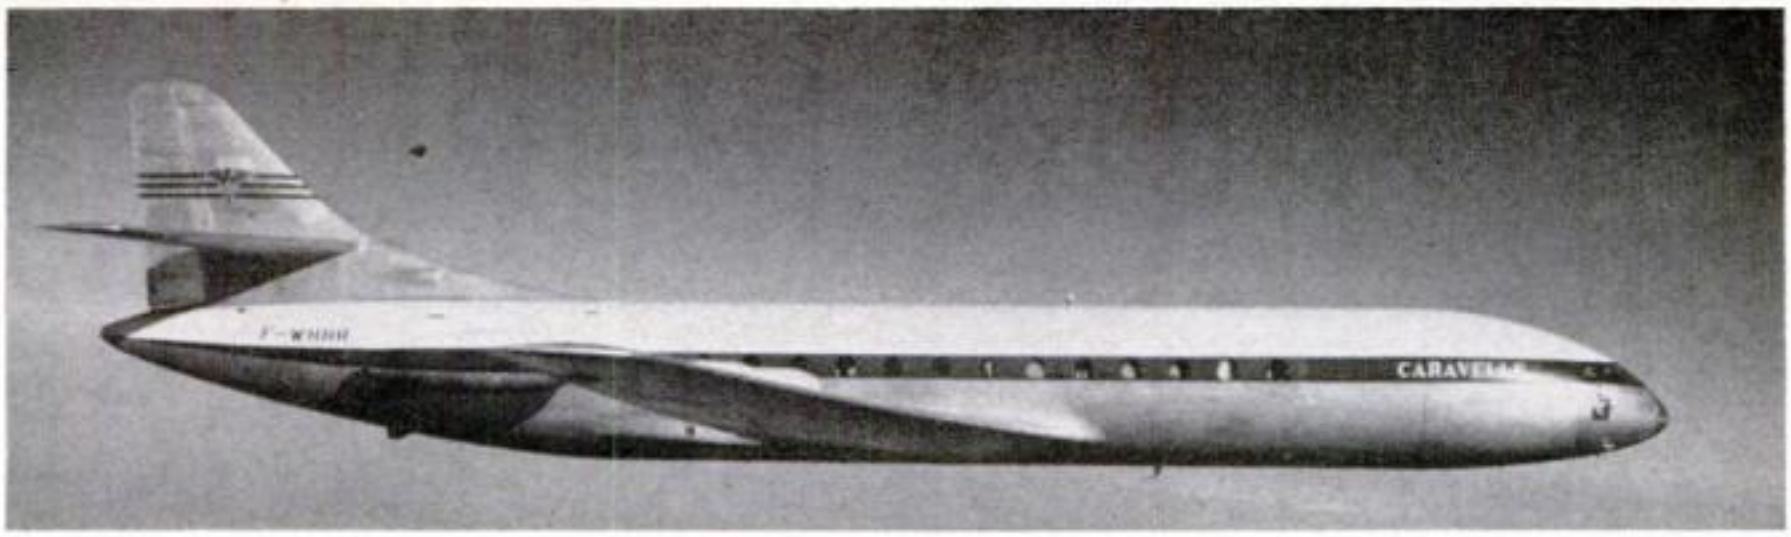

Pushers Twin jet pods of the French Caravelle airliner, now shown in flight, are located on either side of the rear fuselage, behind the wings. The planes, ordered by Air France, will carry 70 passengers at 475 miles per hour.

Landing arrow Flashing lights of 30,000,000 candlepower, which resemble tracer bullets speeding at 2,700 miles an hour towards the centerline of a runway, now guide pilots into N.Y. International Airport when visibility is poor. Each of 20 Sylvania Stratobeacon units flashes twice a second.

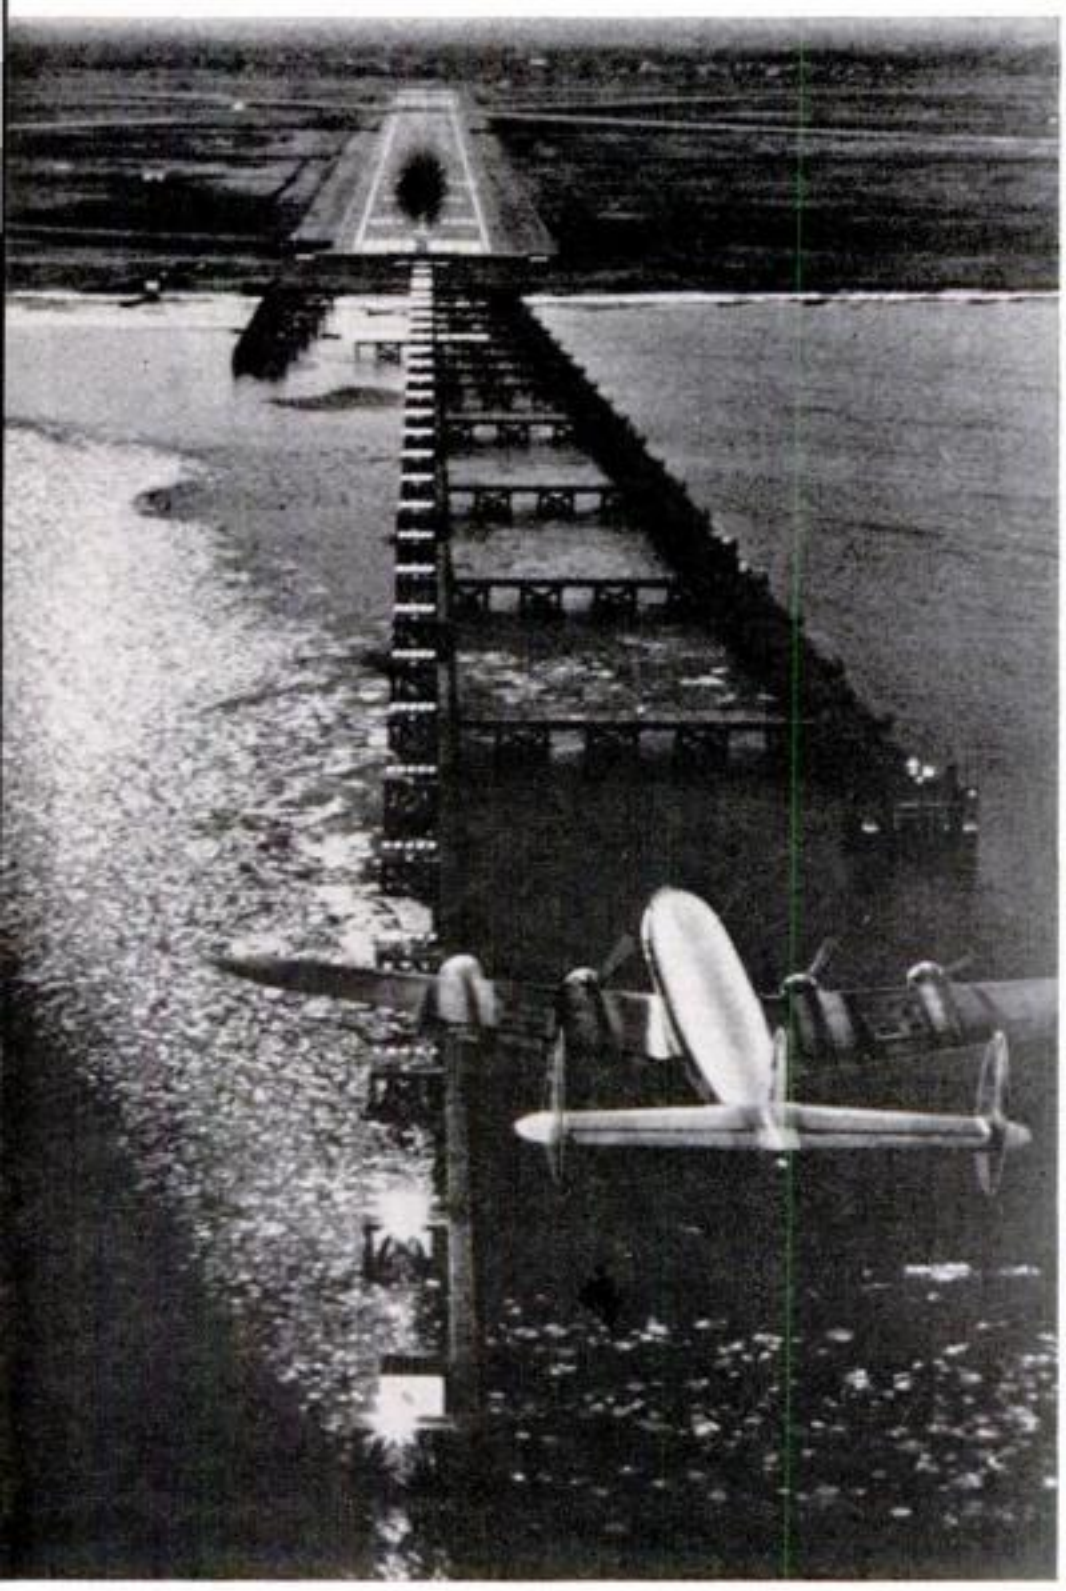






Flying cigar The model at top is being remote-controlled by its German-born designer, Dr. A. M. Lippisch, to test a new internal lift-propulsion system that may power a wingless Aerodyne of tomorrow (artist's drawing above). Principle combines a gas turbine with ducted fans for control.

Copyrighted material

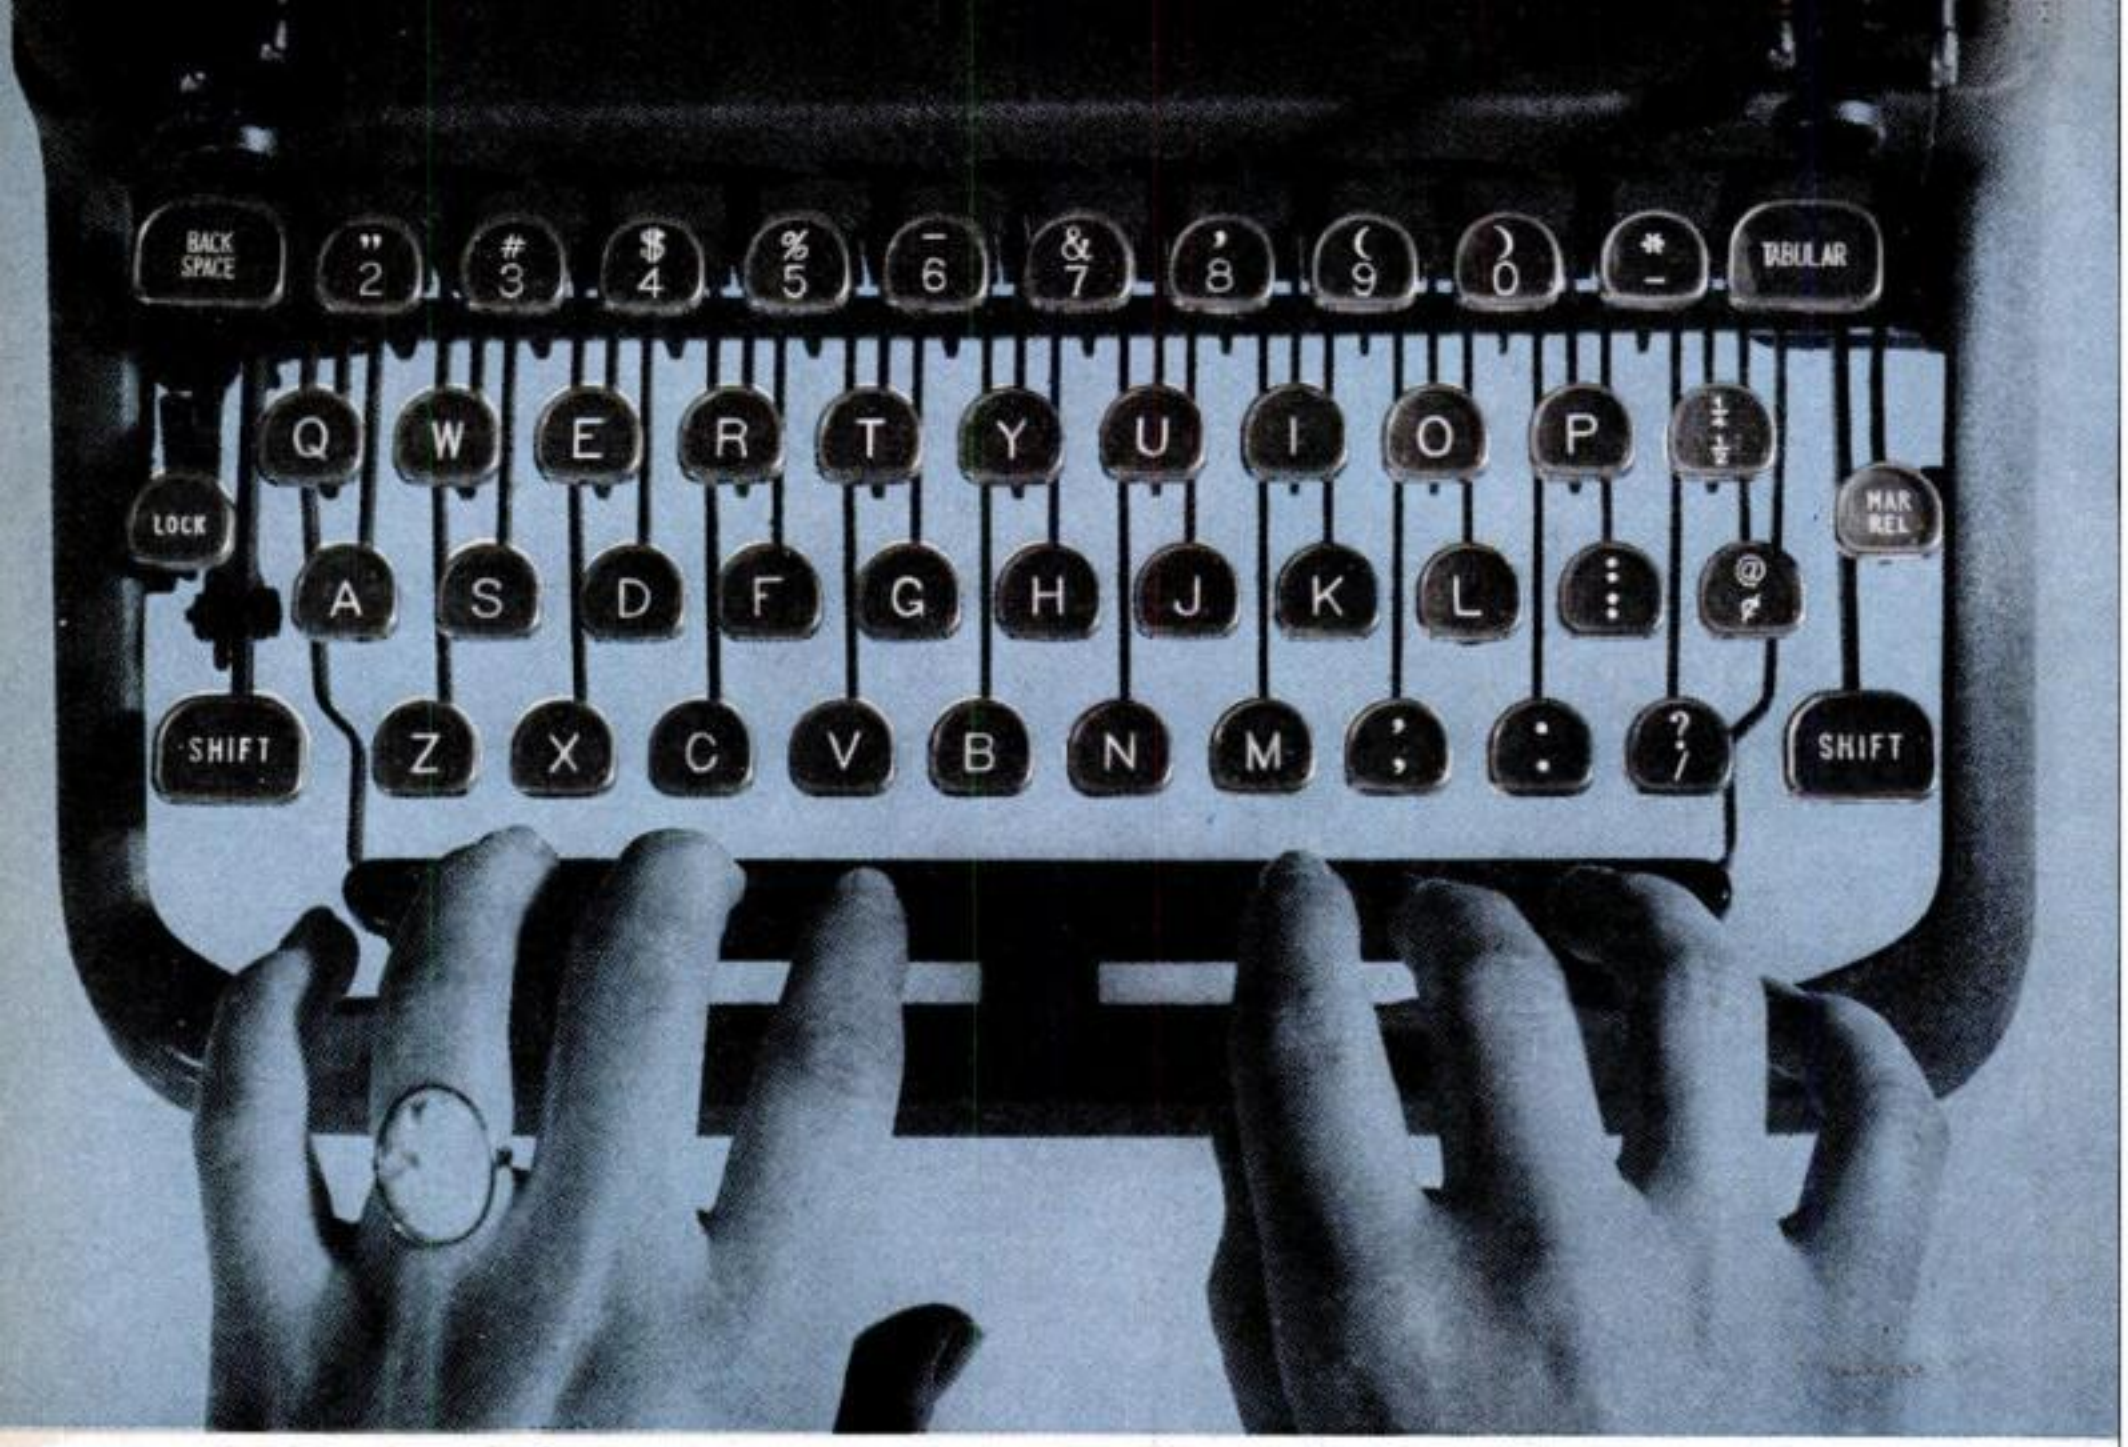

Standard keyboard, designed 83 years ago, makes fingers jump all over to type simple words.

Why They Want to Shift


PYFGCRL or QWERTYUIOP? Advocates of the former claim that it speeds typing, cuts errors and fatigue.

ONE day last August Tom Booz of Boston started to learn the hunt-and-peck system on the strange keyboard of a newly designed typewriter. "I laughed," he says now, "when I sat down at the machine."


By December, after no formal instruction, and only odd moments for practice, Booz was typing—not hunt-and-peck—with a fairly rapid eight-finger system. And now Thomas Spencer Booz Jr., a 44-year-old businessman, not only is typing his own letters at a speed rivaling that of a secretary, but also is a super-enthusiastic salesman for the Dvorak simplified keyboard.

This keyboard consists of an arrange-

ON STANDARD, left hand does more work (bad except for southpaws). Fingers have unequal loads.

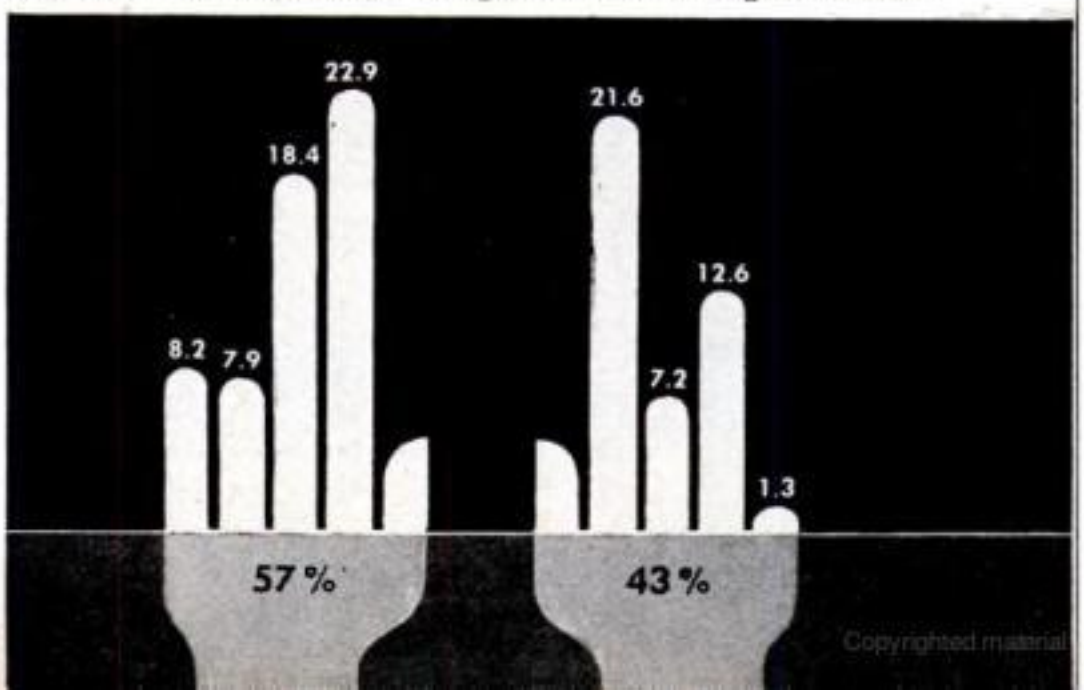

Copyrighted material

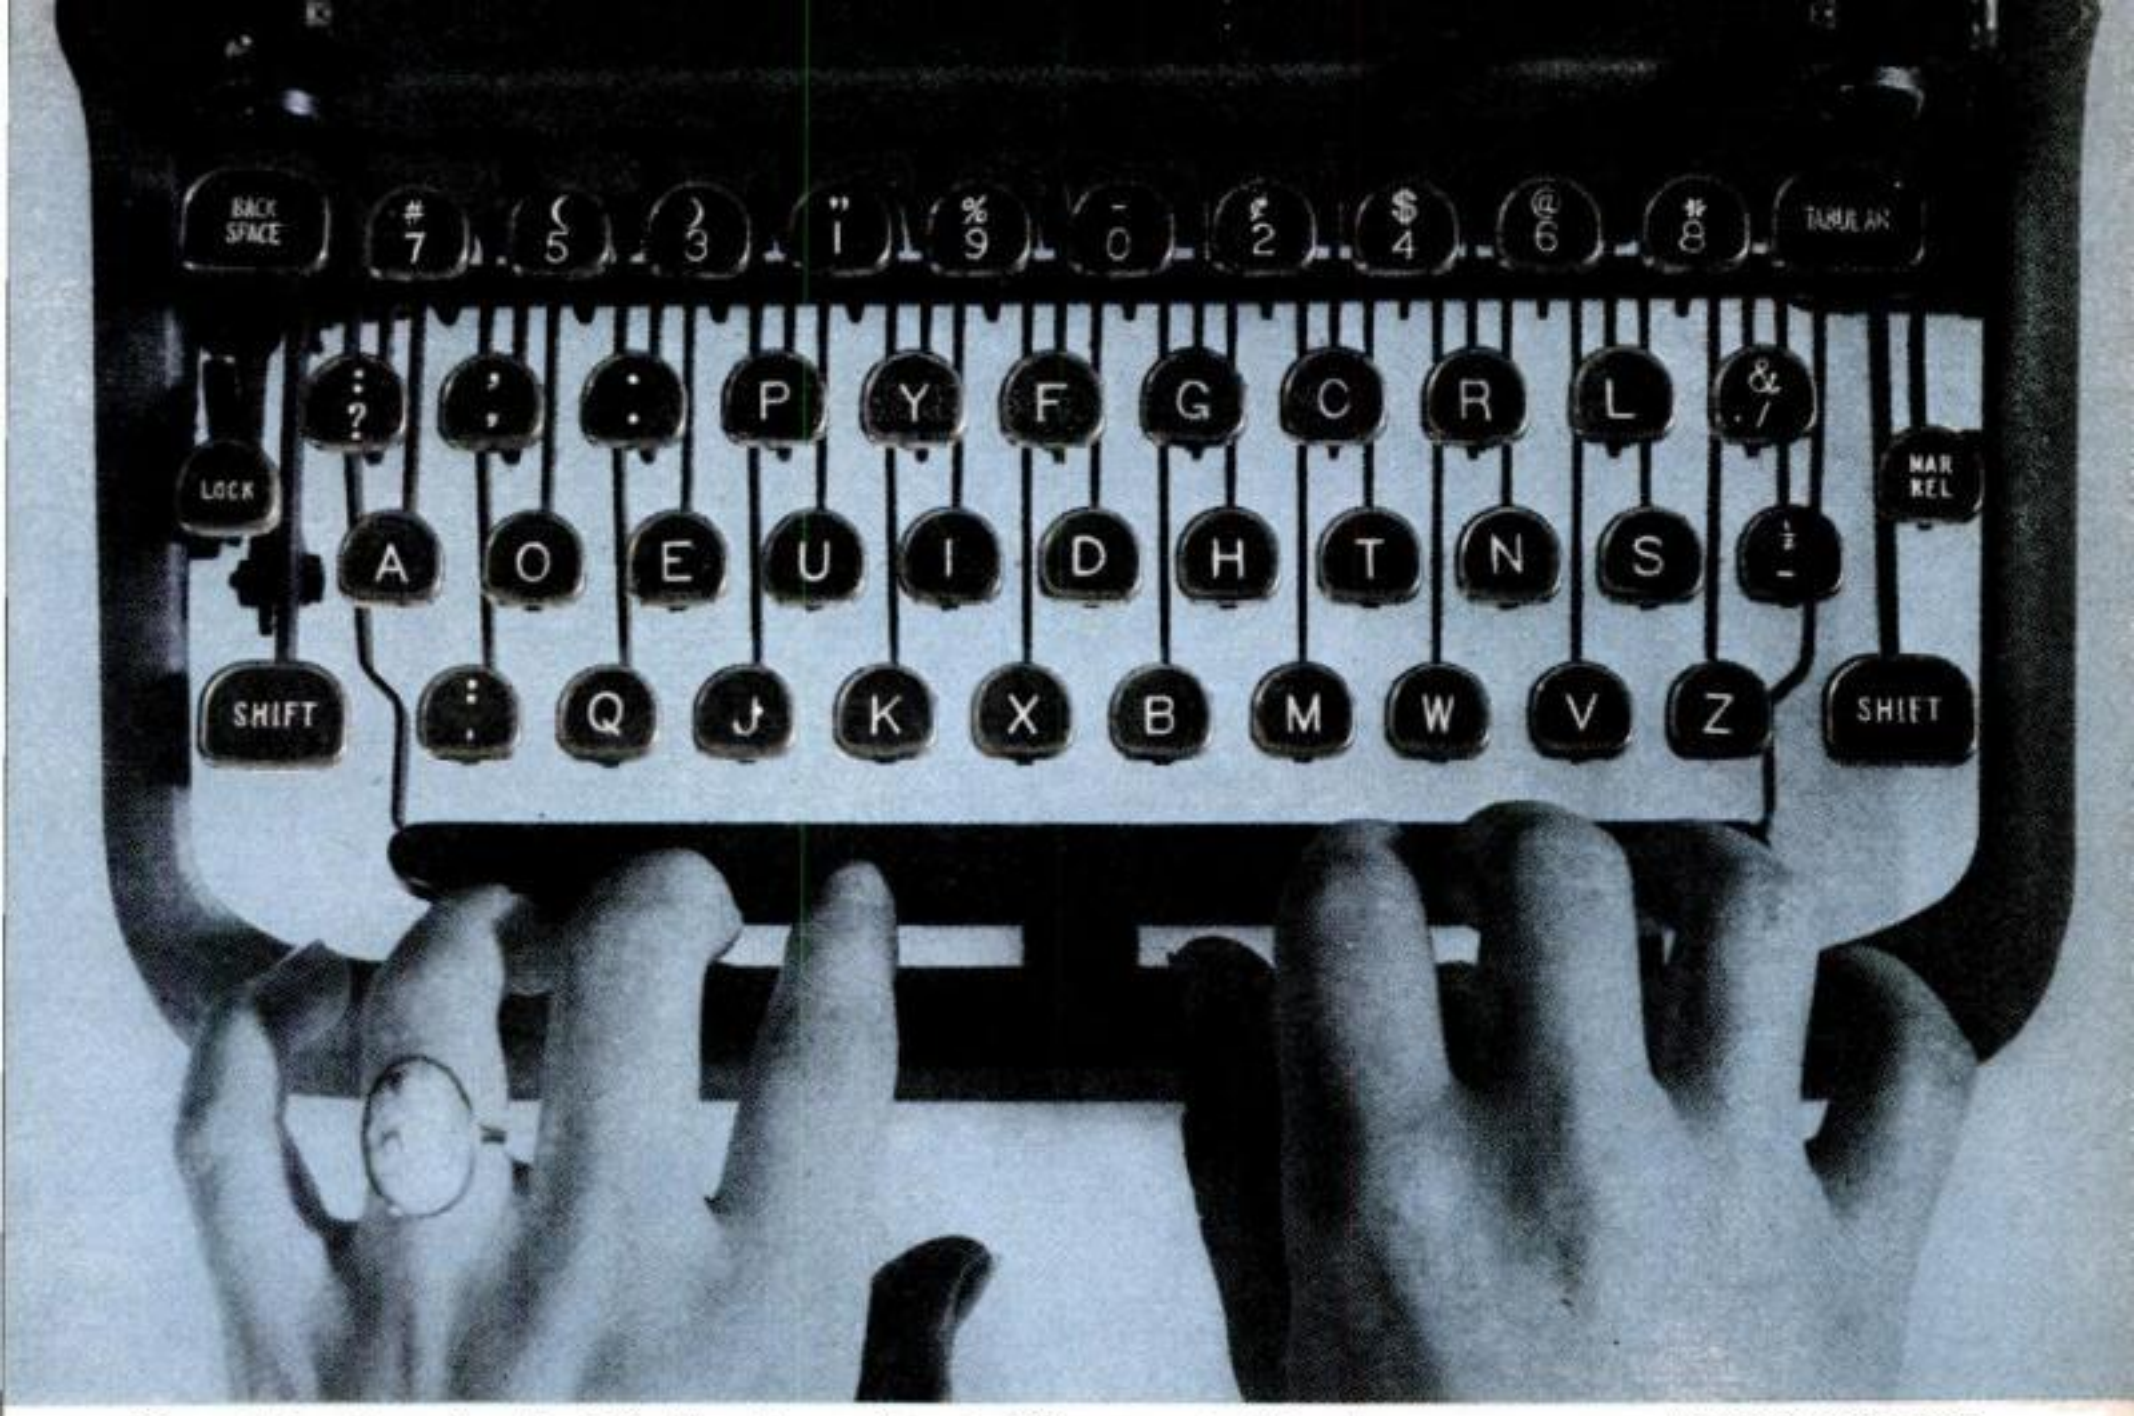

Dvorak keyboard, scientifically planned, puts 90 percent of typing on one row: AOEUIDHTNS.

the Typewriter Keys


ment of letters entirely different from that on any standard typewriter. It is intended to make typewriting (1) easy to learn, and (2) easy to do.

The new arrangement was worked out, and patented, by August Dvorak, Ph.D., professor of education at the University of Washington, after more than 600 experiments.

Right now, the Federal government, which runs 800,000 typewriters—and therefore could save millions of dollars if they were easier to learn and use—is testing Dvorak's product. The General Services Administration (GSA) is comparing the results of both men and women using the Dvorak keyboard with the results of other typists on standard keyboards. The outcome is expected to be announced next month.

Meantime, Dr. Dvorak and Tom Booz believe that they have the best chance in


ON DVORAK, right hand works harder; each finger does its share. Result: more speed, less fatigue.

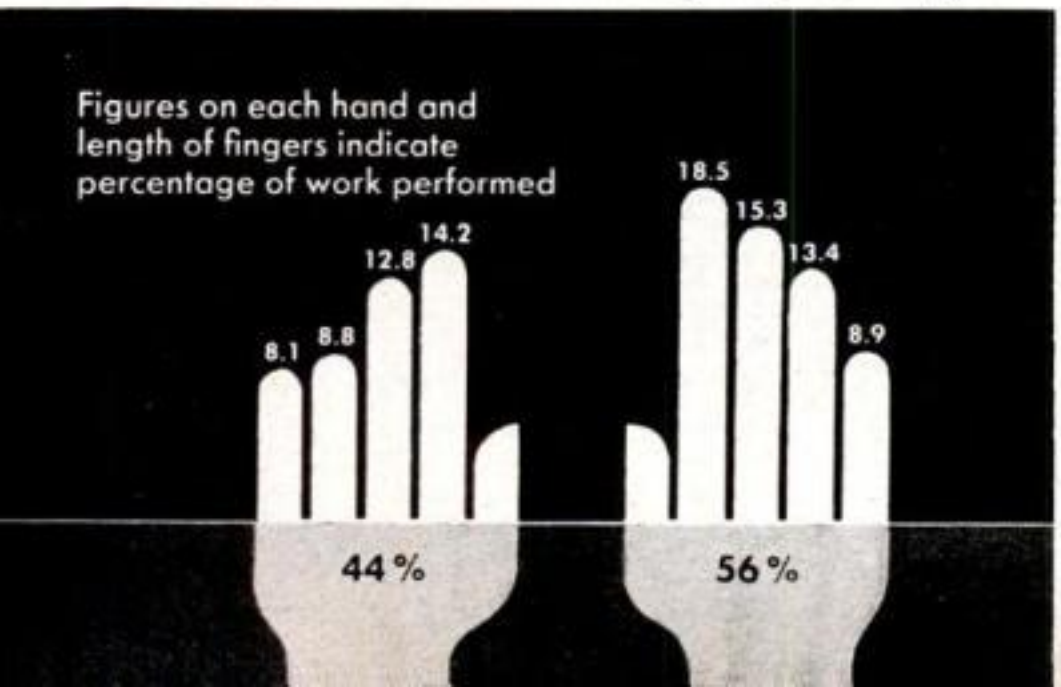

Copyrighted material

history to change the typewriter keyboard—something that many have tried but no one has succeeded in doing. They launch into a sales talk whenever they find a listener: man, woman or child.

Many keyboards have been tried

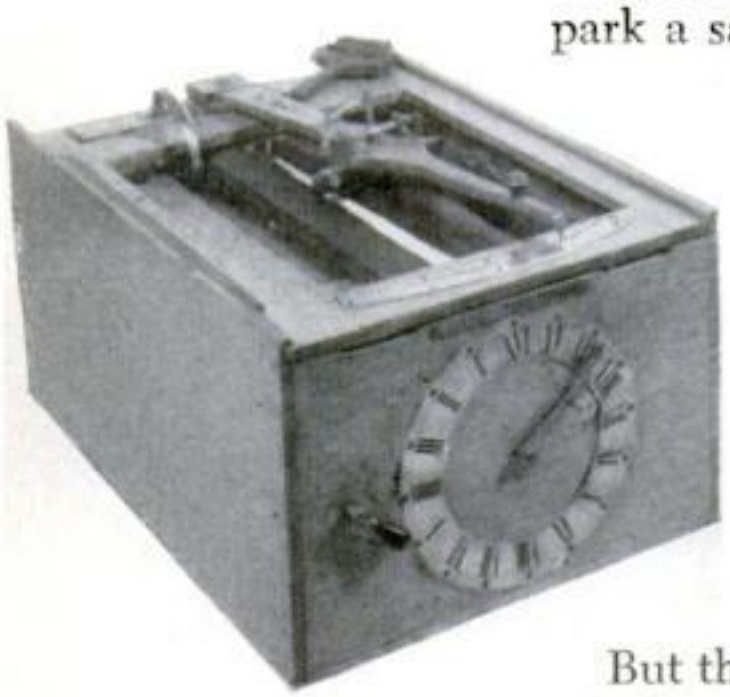

Burt Typographer (1829) had key on top to rotate type into place. Dial showed when paper was full.

Unlike ordinary typewriter salesmen, Tom Booz does not park a sample machine with you for several days' trial. He has none for the purpose. Instead, he tells you that all typewriter companies, for $10 to $25 extra, will provide a Dvorak keyboard on a new machine instead of the old standard.

The letters on the principal line of the standard keyboard are ASDFGHJKL. On the Dvorak keyboard they are AOEUIDHTNS.

This means that, using letters on only this one line, you can write 3,000 words—instead of the 57 words you can scrounge out of ASDFGHJKL. But that's only the beginning.

When you get set to type, your eight fingers, resting on this main line (or home row) of letters, are in place on eight of the letters you'll use most. All you have to do to strike any of these common letters is push down the finger resting upon it—not hunt over the keyboard for the letter. That's why people learning the Dvorak keyboard quickly slide into a touch system.



Crandall machine (1881) had 26 keys that turned cylinders, pressed type to paper.

The keyboard also makes typing errors difficult instead of easy. Among the most common mistakes in typing today, Booz explains, are ones like these:

The spelled as *hte.*
Of spelled as *fo.*
And spelled as *nad.*

These commonest errors are all of one kind: The letters as typed by standard machines appear on the paper in the wrong order. This is because all of these words involve, on the standard keyboard, the moving of fingers from one line to the next. On the simplified keyboard, because the most commonly used letters are on one line, such inversions will happen less frequently. "The" and "and," for instance, are on the same line. And even "of" is made easier because "o" is right under a finger and you're more likely to punch it before you reach for the "f."



Dr. Samuel Francis' patented "Literary Piano" (1857) typed with piano keys.


Take something harder. Tom Booz suggests that you type—or try to type—on a standard the phrase "minimum pumpkin." (I just tried to type it myself and made two errors.)

"Minimum pumpkin" (one error this time) is not a phrase that you will commonly use. But it is a phrase that shows clearly how the standard keyboard makes your fingers

Copyrighted material

jump from the bottom line of letters, right over the middle line, and up to the top line for the next key. This jumping, Booz says, causes lots of the other mistakes in typing.

Besides, on standard machines, he points out, you have to type "minimum pumpkin" (one error again) entirely with your right hand. This, he says, is awful. Because vowels and consonants often alternate in normal English, he explains, a keyboard should have vowels struck by one hand, consonants by the other. The keyboard planned this way, of course, is the Dvorak.

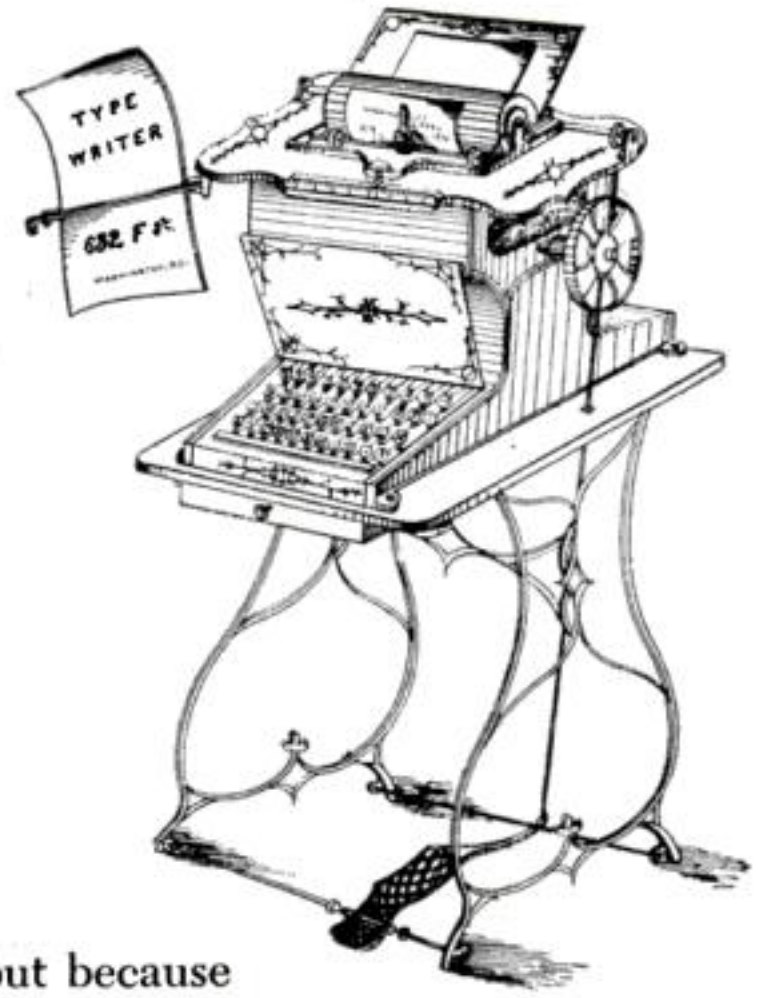


1875 Remington, from Christopher Sholes' design, had today's standard keyboard, launched typewriter boom that has lasted ever since. A foot treadle to return the carriage and stenciled front and side markings were added by a sewing-machine man, William Jenne.

The standard typewriter keyboard was put together in 1873—not because the letters were convenient for typists (there were none then) but because of mechanical difficulties (long since overcome). The history of the typewriter ever since has been a history of reform keyboards. Dozens have been tried. None has been accepted. People—including the nation's 2,500,000 female secretaries—who have learned one system of typing don't want to learn another keyboard.

"The big thing that scares all the little girls," Booz says, "is the idea that they have to relearn—they visualize another couple of years. The fact is that they can learn the Dvorak keyboard quickly, whether or not they already know the standard.

"Besides, if a girl knows both keyboards, she can use them interchangeably. You don't have to forget the standard keyboard to know the new one. Not at all. Many people know two keyboards now." Many linotype operators also run typewriters, and many secretaries who run typewriters also take notes on stenotype machines.

Though Booz knows there is resistance, he believes that the simplified keyboard will in the long run reform the nation's secretaries. Polls show, however, that most girls think that the bosses are the ones who need remodeling. (They think that bosses would be more understanding and thoughtful if they knew how to type.)

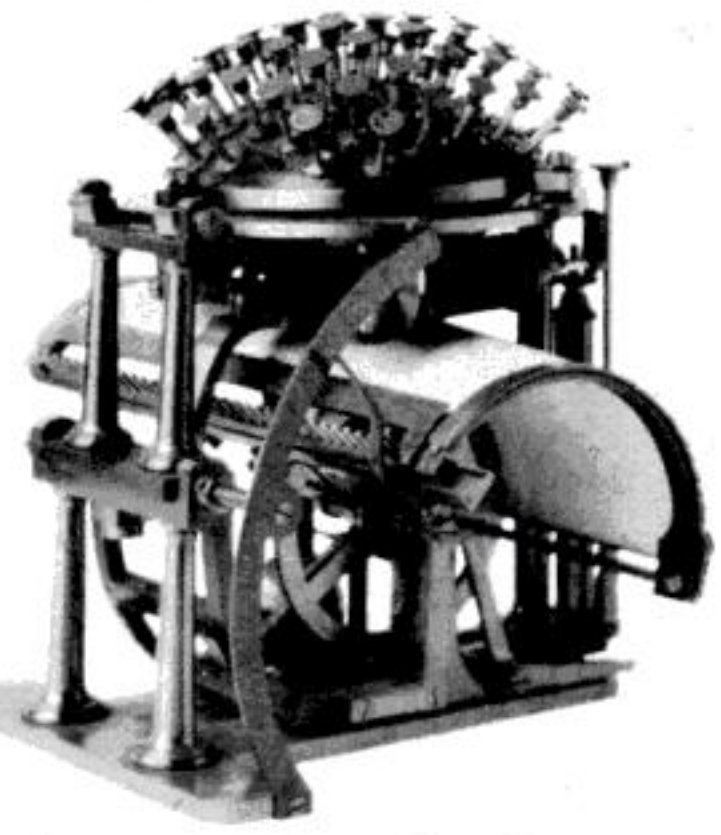


The Malling-Henson (about 1850) had keys on top. Pressing these down imprinted letters on paper on cylinder beneath them.

As Booz breezes along with his sales pitch, he tells why, for secretaries, the Dvorak keyboard is ideal:

Mileage. The fingers of a secretary today, he says, have to hop-skip-and-jump a total distance of 12 to 20 miles a day on the standard keyboard. The Dvorak keyboard, with the commonest letters on that single home row, cuts the same typist's finger travel to about one mile—a reduction of as

[*Continued on page 280*]

Copyrighted material

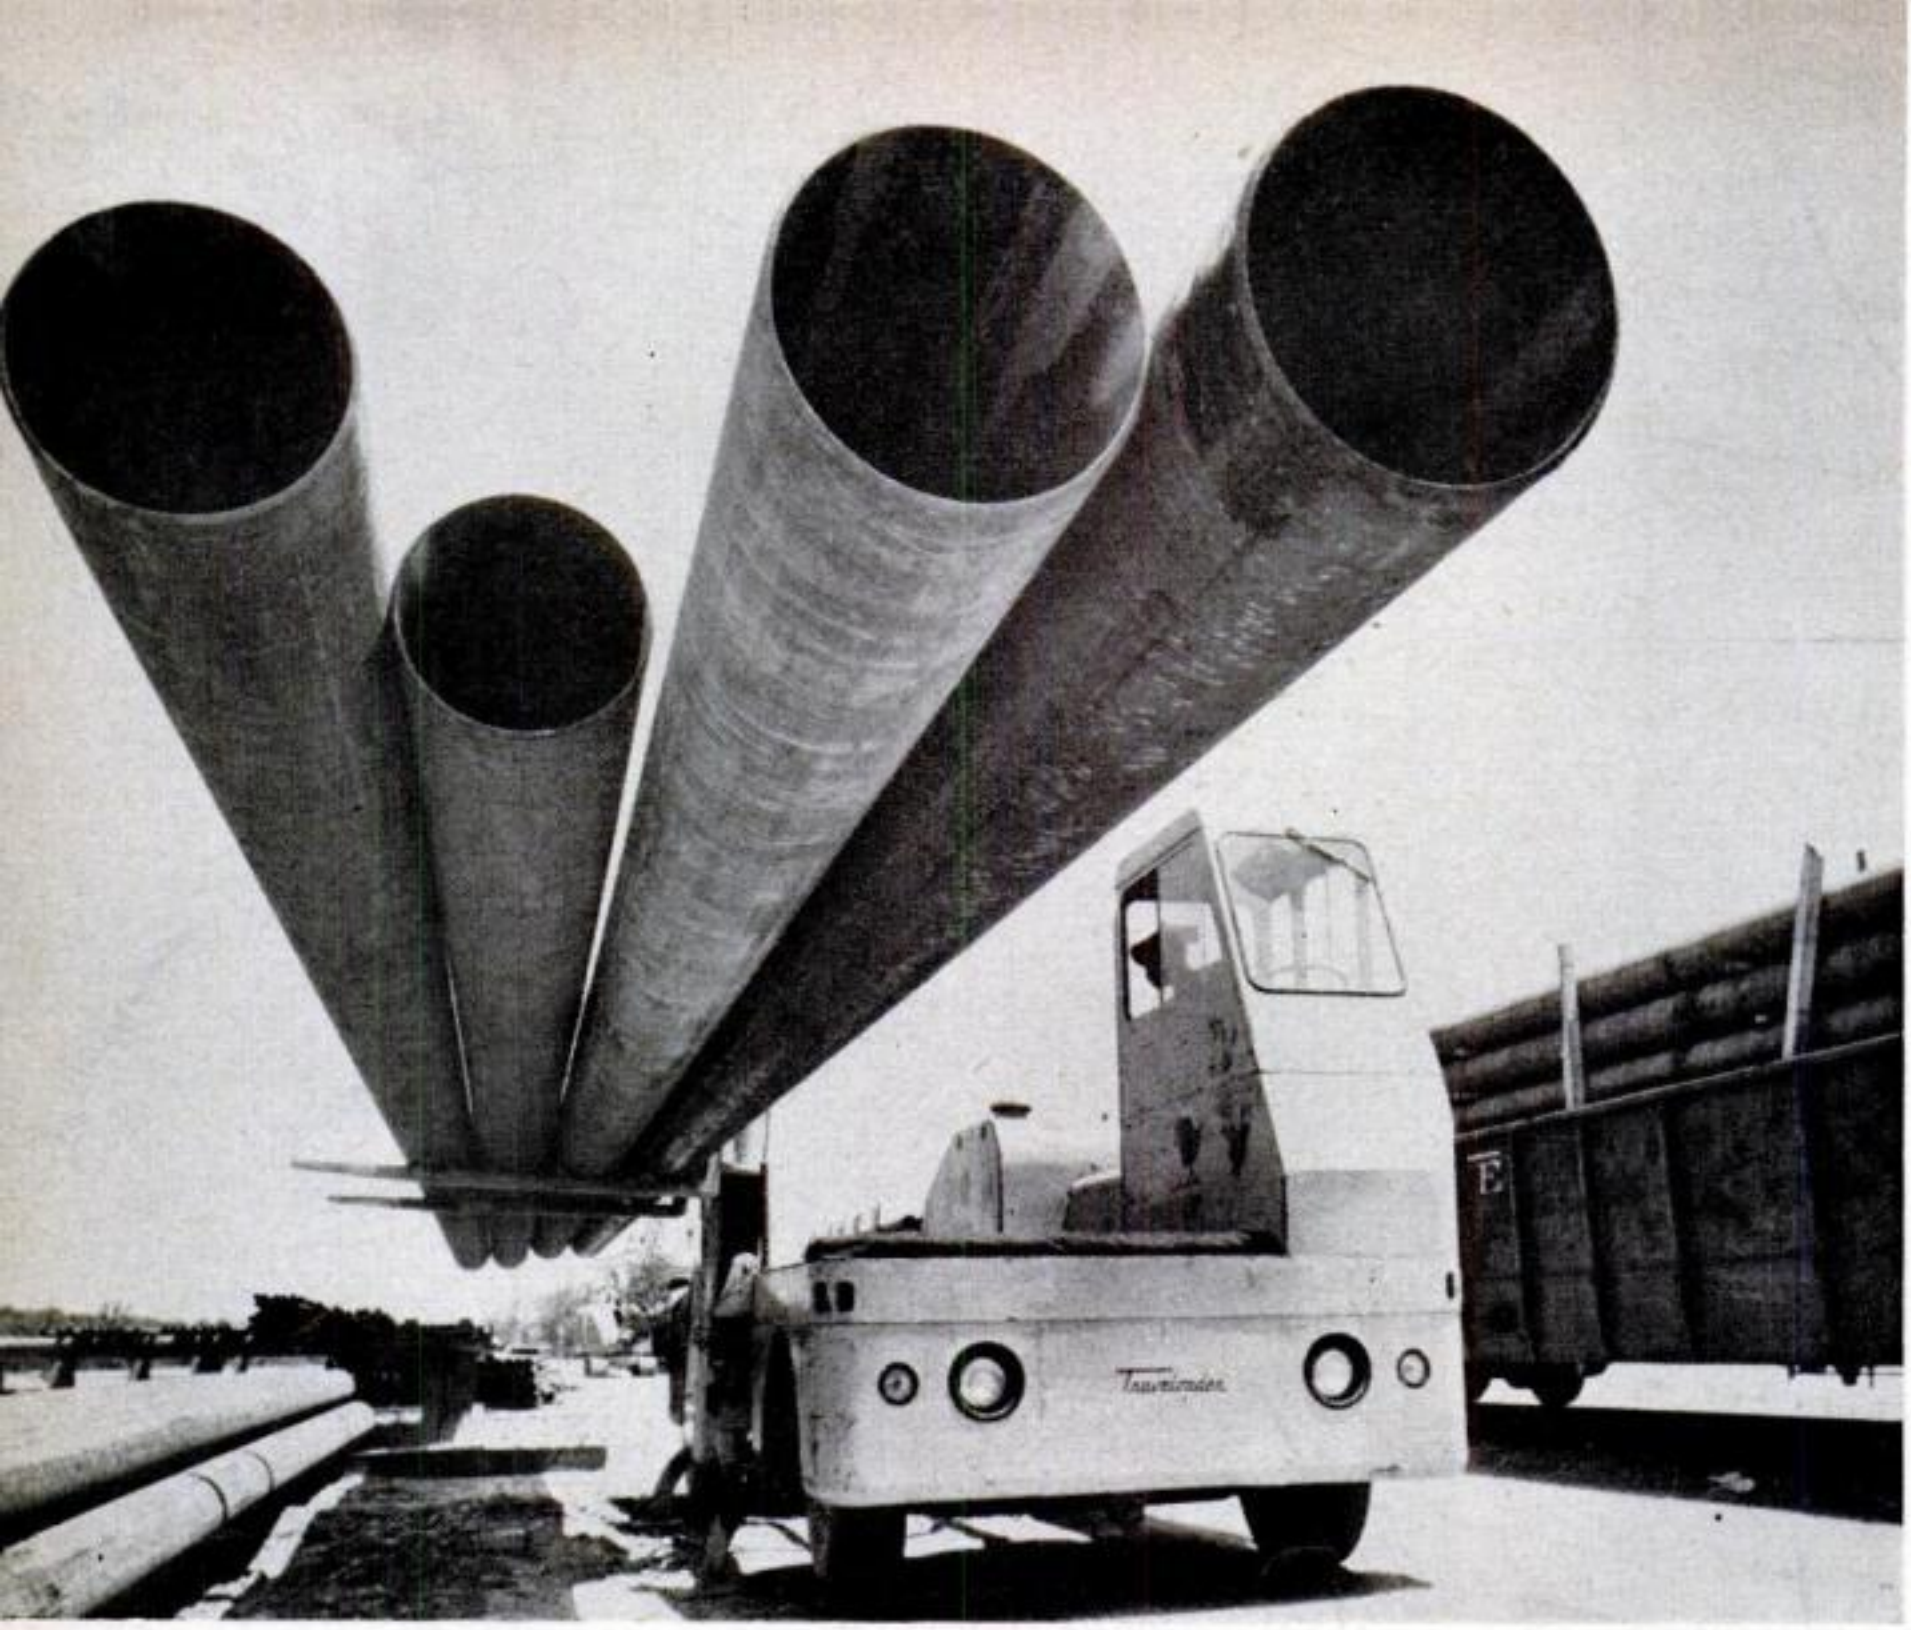

Truck with Side Cab Lifts and Carries Long Loads

THIS odd-looking truck not only hauls extra-long loads along ordinary highways at 30 m.p.h., but can load and unload itself. Here it's taking on 40-foot lengths of 30-inch pipe on hydraulic forks controlled from the offset cab. It is built by Baker-Raulang Co. of Cleveland as a lumber, pipe and structural-steel carrier. The arms can hoist a weight of six tons as high as 12 feet from the ground.

They Say Now . . .

DR. JOHN T. RETTALIATA, PRESIDENT, ILLINOIS INSTITUTE OF TECHNOLOGY: *"In the industrial world of the future, brains will be in much greater demand than brawn, and the jobs more rewarding."*

FRANK H. BOWLES, DIRECTOR, COLLEGE ENTRANCE EXAMINATION BOARD: *"There is a direct relationship between expansion of education and expansion of the economy."*

SHERMAN M. FAIRCHILD, CHAIRMAN, FAIRCHILD CAMERA & INSTRUMENT CORP.: *"If we continue the advances in technology at the same rate as we have in the past, no nation will ever again be able to build up secret arsenals or military strength without being detected . . . The eye in the sky—whether it be photographic, electronic or a combination of many sensers—will be virtually all-seeing."*

ADMIRAL DEWITT C. RAMSEY, PRESIDENT, AIRCRAFT INDUSTRIES ASSOCIATION: *"To have better combat aircraft we must have more power. To have more power we must have more noise."*


TRUE D. MORSE, UNDERSECRETARY OF AGRICULTURE: *"Great cities . . . look to farms as a source of produce, as a market for industrial goods, and for youth with which to maintain their population."*

Copyrighted material


SCIENCE
REG. U. S. PAT. OFF. Monthly

1956 Home Show

The following 48 pages are devoted to your house—the house you have, the house you could have, the better-yet house that your children may have.

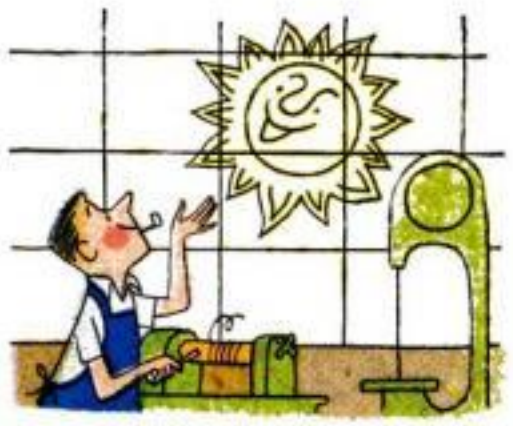

FOR TODAY, here is a house plan designed with you, the handy-man-of-the-house, in mind. It has a workshop, no dark and dreary afterthought, but a bright, airy and spacious room that is organized as carefully for efficiency as the rest of the house is for pleasant living. Actual building plans are available.

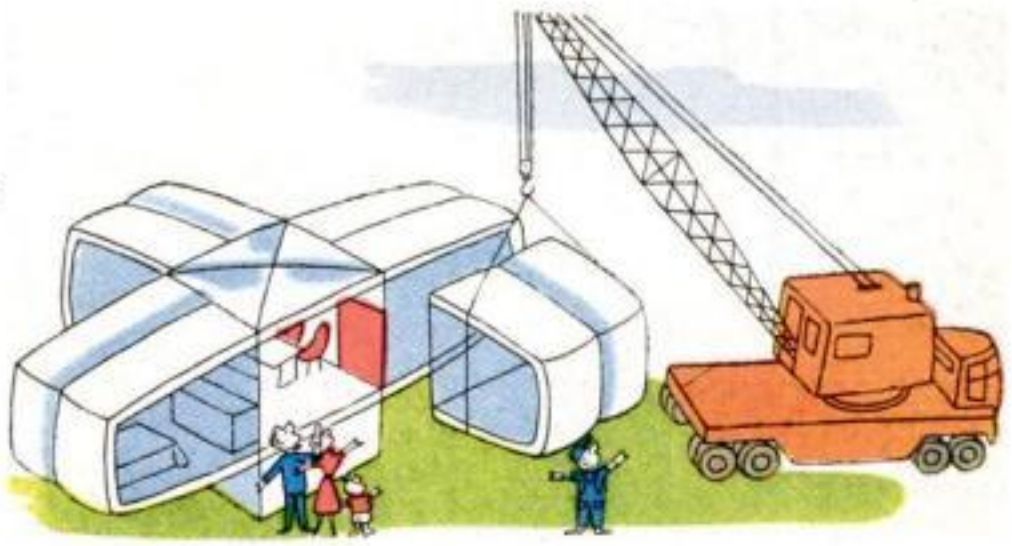

FOR TOMORROW: plastics. Scientists forecast unique plastic-shell rooms hanging on a small utility-core foundation. You could even add on or take off plastic room units as your family needs changed.

FOR RIGHT NOW, here are 39 pages that show you how to modernize the place you are living in. Even if it is venerable Victorian, a screened terrace, a patio, new appliances or just a wallpapering job can bring it up to 1956. Turn the pages and see.




Copyrighted material

Low lines, a gently sloping roof and big windows mark this

1956 Home Show

Workshop

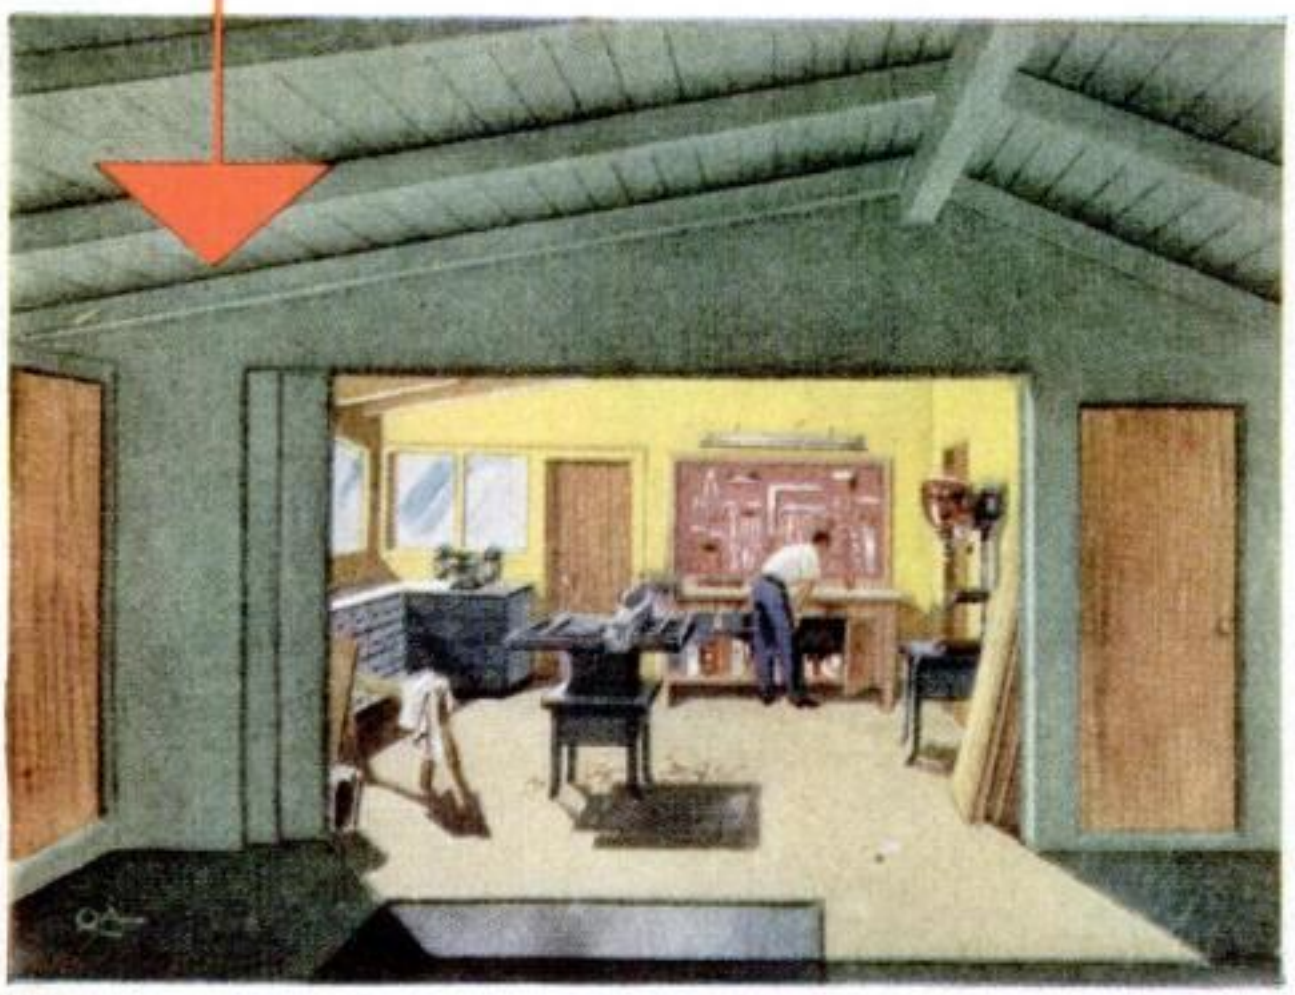

SLIDING DOORS between the do-it-yourself room and garage disappear into the walls, more than doubling your work space for big projects. With the garage door open in summer, you are practically working outdoors. Corner windows to the left of your PSM workbench provide cross-ventilation and plenty of light. And while you're just a step away from the family during the day, you're the width of the house removed from the bedroom area to dampen sound.

Copyrighted material



as a home of distinction. Outdoor-living area (porch, terraces, pool) are away from street.

House *gives Dad a do-it-yourself room of the kind that all craftsmen dream about. It's planned as carefully as Mom's kitchen.*

By GARDNER SOULE

THE modern home needs a do-it-yourself room, a place designed for the handyman. Yet few houses being built now have any sort of workroom.


"It's the greatest unfilled need in American homes today," says Rudolph A. Matern, one of the country's foremost house designers.

To meet this need, POPULAR SCIENCE MONTHLY asked Matern to prepare plans for a house that would be specifically tailored to the handyman's requirements. You see the result on these pages: architect's sketches and blueprints for the PSM Workshop House.

The shop is a vital part of the PSM House, as carefully planned as the mechanized kitchen. It has big windows for light and air. It is close to the living quarters and a washroom. It is efficiently planned for convenient working. And it can borrow space from the adjoining garage to make room for a big job.

Rudy Matern is an expert on home buyers' needs and preferences. Since World War II he has probably helped to house more families than any other architect. In addition to turning out designs

Copyrighted material

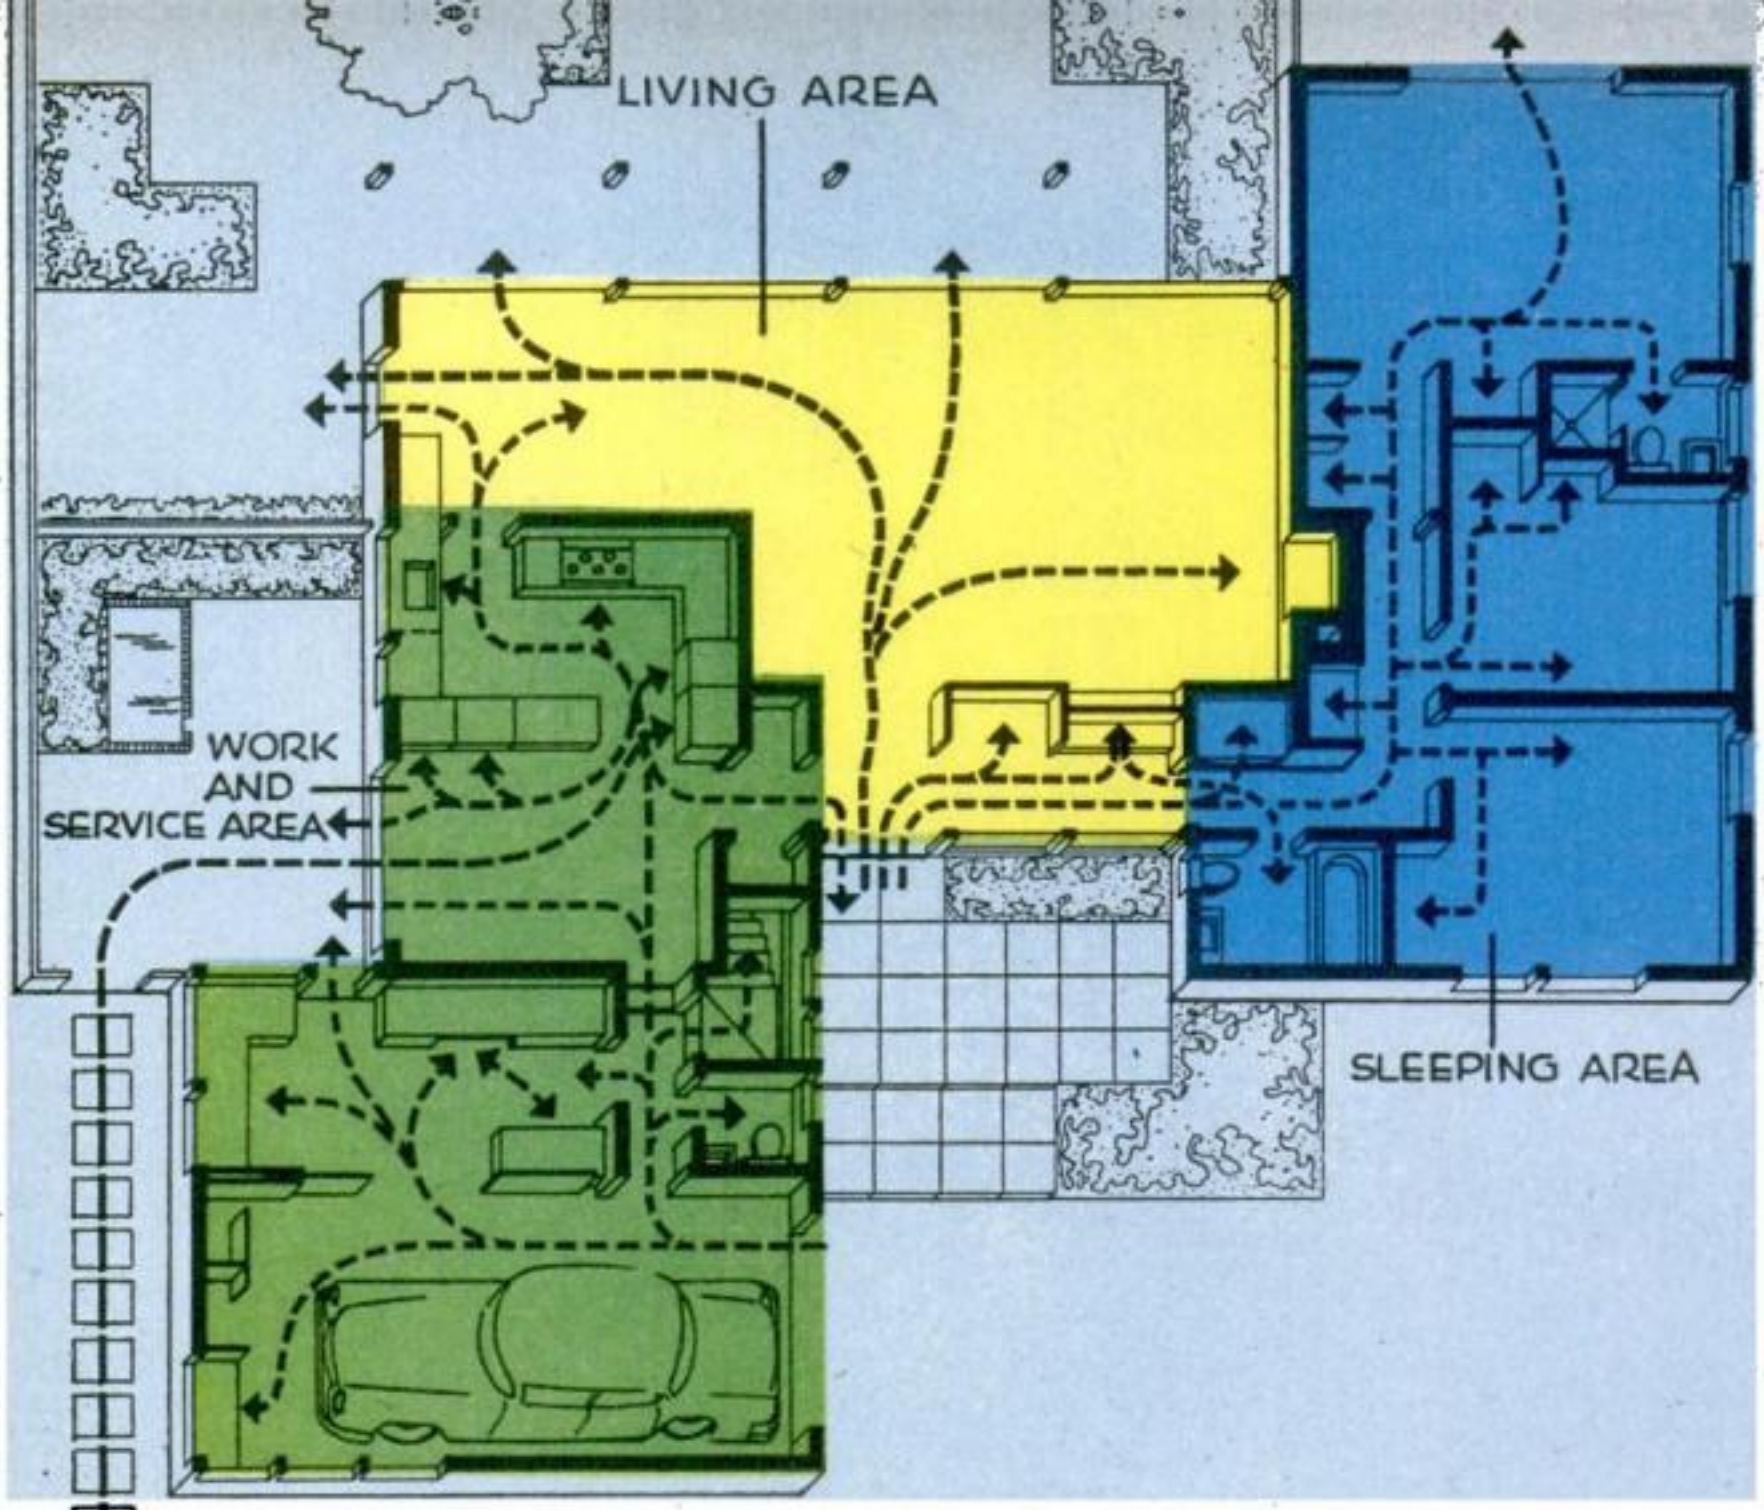

Traffic pattern (dashed lines) shows how plan provides easy movement among house areas.

for many new developments, he sells thousands of copies of his plans by mail. He has learned from the ones that sold fastest how Americans want to live. In this, his latest house plan, he has used all of this know-how.


Near the family. This do-it-yourself room is not down in a corner of the basement away from the rest of your family. It is right next to the family room, where Mom and the kids will often be.

"It has," Matern says, "the circulation of air so important when spraying paint. The windows provide both cross-ventilation and an unusual amount of light."

All cabinets are strategically placed. A board to hang tools on is set above the PSM workbench (Sept. '55, p. 116).

Glass wall brings all outdoors, with back-yard privacy, into the living and dining rooms.


Copyrighted material

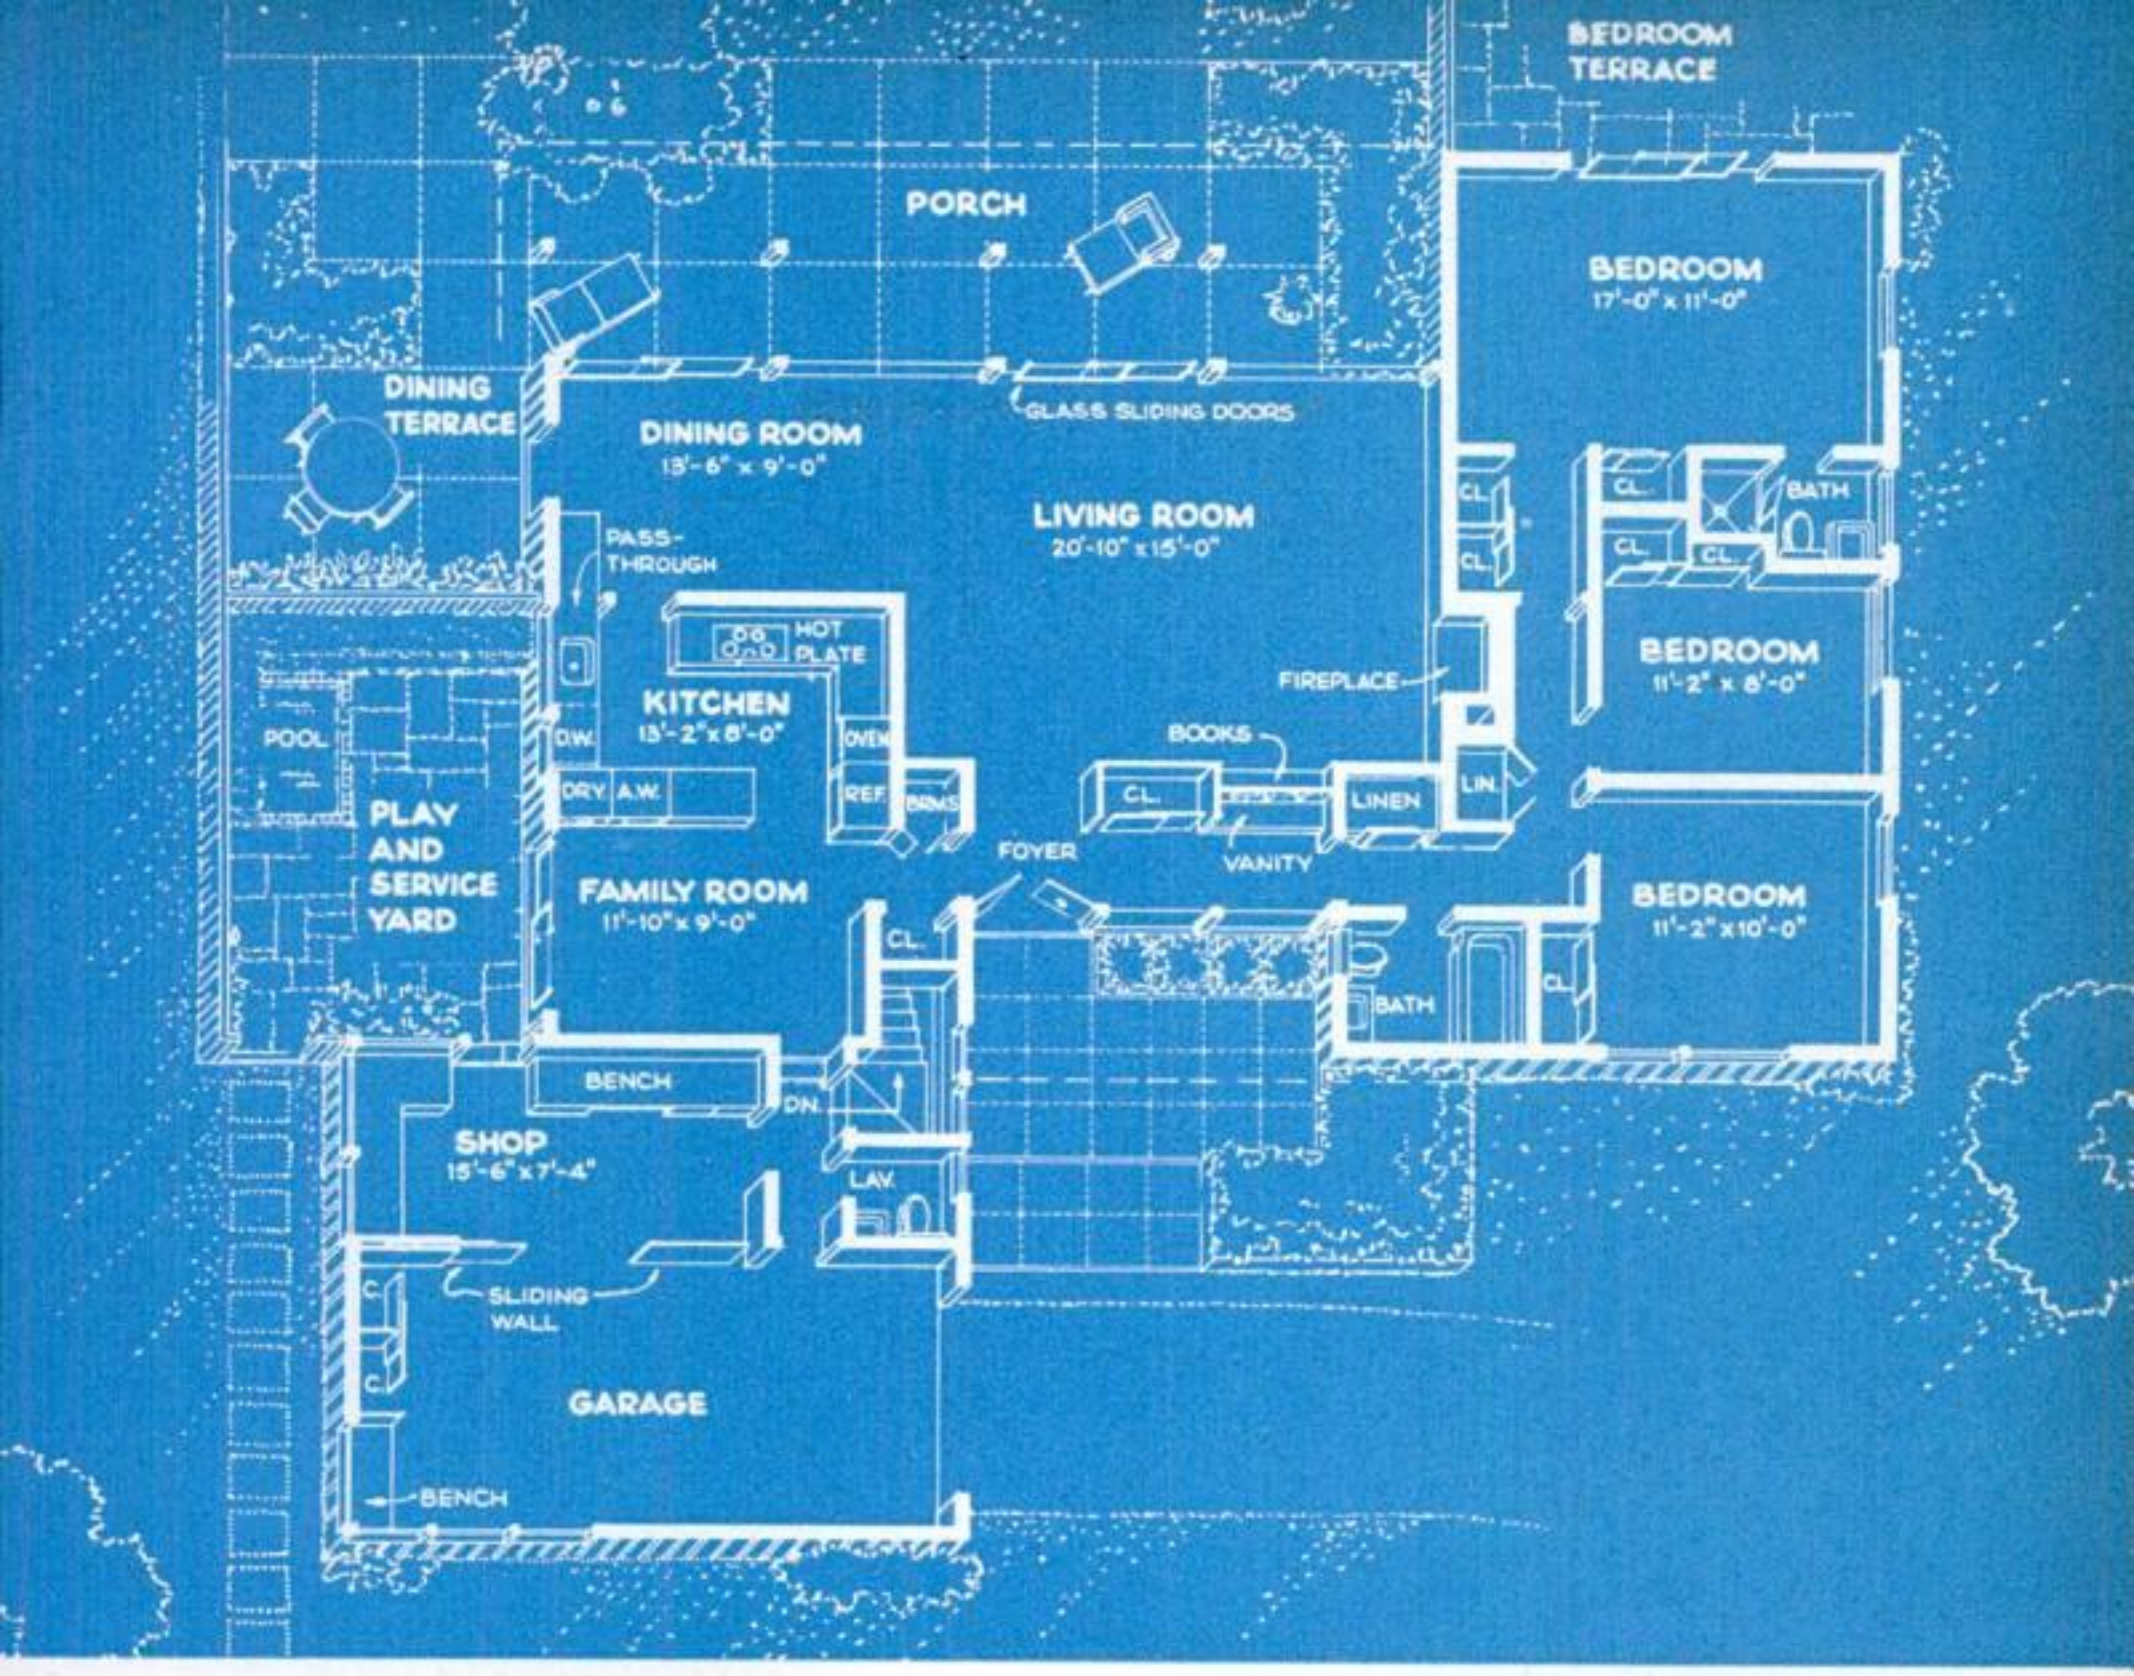

Floor plan points up isolation of work and sleeping areas from "showpiece" living area.

A few steps away is a lavatory where you can wash up after work.

Sliding doors. While laying out the room, architect Matern came up with a real masterpiece of planning—the use of sliding doors between the workshop and the garage.

"Every square foot of a house," he says, "costs money. You want to use this footage in as many ways as you can. With the sliding doors, you can borrow space from the garage and more than double the area of the workshop."

Sliding doors also give you quick access to shop tools that are so close to your car. And they have another advantage. In summer you can shut the doors into the rest of the house to keep out insects, open the garage door and enjoy the weather. Matern has used similar sliding doors to give access to the porch, yard and garden from the family room, the dining and living rooms and the master bedroom.

The PSM home is planned to meet all of today's trends:

Family room. This is a distaff version of the do-it-yourself room—a pleasant place to do ironing and sewing. It doubles as a music and recreation room.

Easy housekeeping. With so many

[Continued on page 260]

You can get all data needed to build the PSM Workshop House for yourself. For four sets of blueprinted working drawings, plus specifications, a lumber list, and estimating and building-procedure data, send a check or money order for $35 (add $1 for air mail) to Rudolph A. Matern, Architect, 90-04 161st St., Jamaica 32, N. Y.

Copyrighted material

New Aids For Your Kitchen



1 Retractable cords pull out from spools in this appliance center. Part of a packaged kitchen unit including sink, range and other facilities, the panel also has two regular outlets. A built-in radio is mounted above.



2 Inside door opener on this Admiral refrigerator is one of two new safety devices designed to prevent children from being accidentally locked inside. A few pounds' pressure on the large plate will open the door. Magnetic catches on new General Electric models also permit doors to be opened by applying light pressure from inside.



3 Sliding shelves in the oven of the electric range at left automatically move out when the double doors open. A tug on either door opens both at the same time. A rotisserie can be installed in oven as optional equipment.

4 Removable griddle at right has no heating elements inside to interfere with washing. It rests on two of the range's electrical units and has a special plug that interconnects them for simultaneous automatic operation.



Copyrighted material




5 Smokeless oven has this wire filter, coated with a chemical catalyst, that heats to 650°. At this temperature, the catalyst converts smoke into harmless amounts of carbon dioxide and water that evaporate.



6 Vegetable bin swings out on this refrigerator door to save reaching inside. You can also remove the bin and use the 1½-foot-deep rack to store milk cartons and soft drinks. Bin holds two-thirds of a bushel.



7 Built-in blender mounts flush in any counter top, is motor-driven from below. Interchangeable attachments include an electric mixer, knife sharpener and fruit juicer. Control gives six speeds for different jobs.

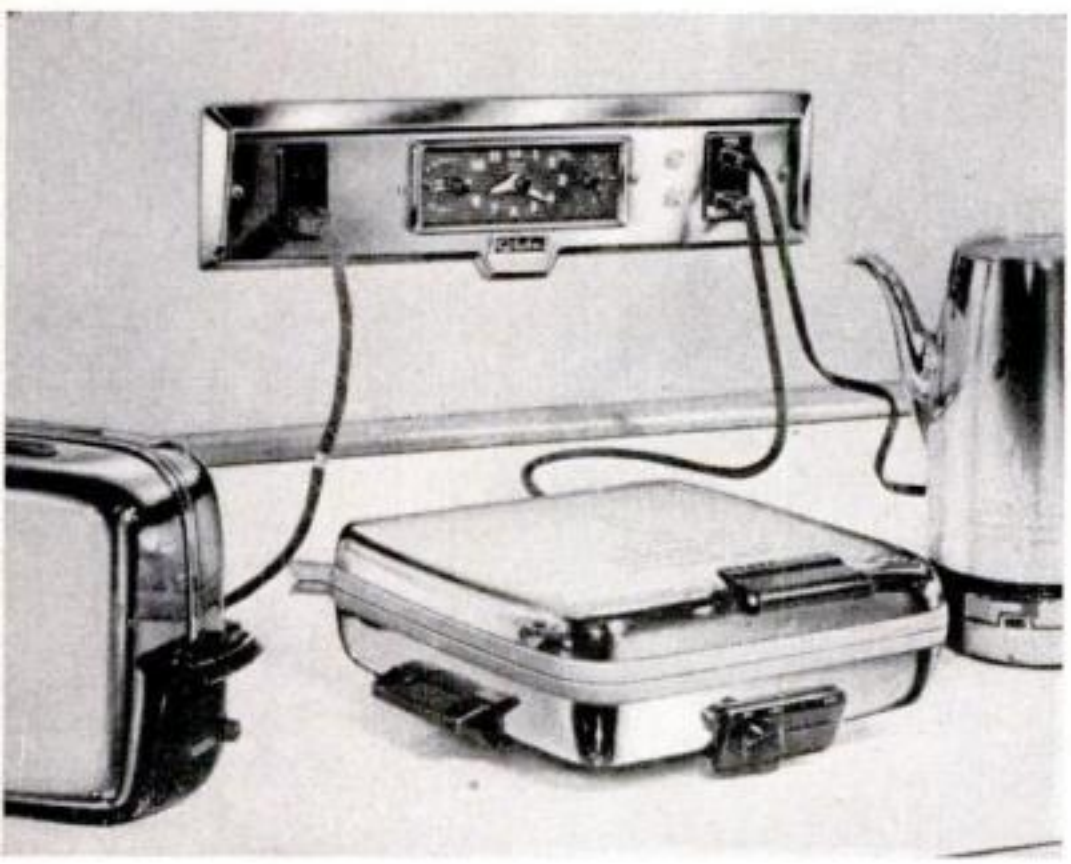

8 Extra outlet panel gives you everything that you need to operate up to four electrical appliances at one time without danger of overloading. It has an electric clock and timer, one timer-controlled outlet, and three regular outlets. The 115-volt panel is wired to a separate circuit to provide safe current capacity.




9 Side-opening freezer is just short enough to slide under a standard counter, or it can be used free-standing as a work top itself. The five-cubic-foot compartment is 34⅜″ high, 30½″ wide, and holds 173 pounds. It has a nine-position temperature control, four ice-cube trays, a roll-out door, and comes in six colors.

Further information about the products shown on this and the preceding page can be obtained from: 1. General Electric Co., Appliance Park, Louisville 1, Ky.; 2. Admiral Corp., 3800 Cortland St., Chicago 47; 3. Frigidaire Division of General Motors, 300 Markham St., Dayton 1, Ohio; 4. General Electric Co., Appliance Park, Louisville 1, Ky.; 5. Frigidaire Division of General Motors, 300 Markham St., Dayton 1, Ohio; 6. Hotpoint Co., 5600 W. Taylor St., Chicago 44; 7. Nutone, Inc., Madison and Red Bank Roads, Cincinnati 27, Ohio; 8. Globe American Corp., Kokomo, Ind.; 9. General Electric Co., Appliance Park, Louisville 1, Ky.


Copyrighted material

Plastic House

of the future may come in mass-produced, no-upkeep parts that you arrange to suit the whole family.

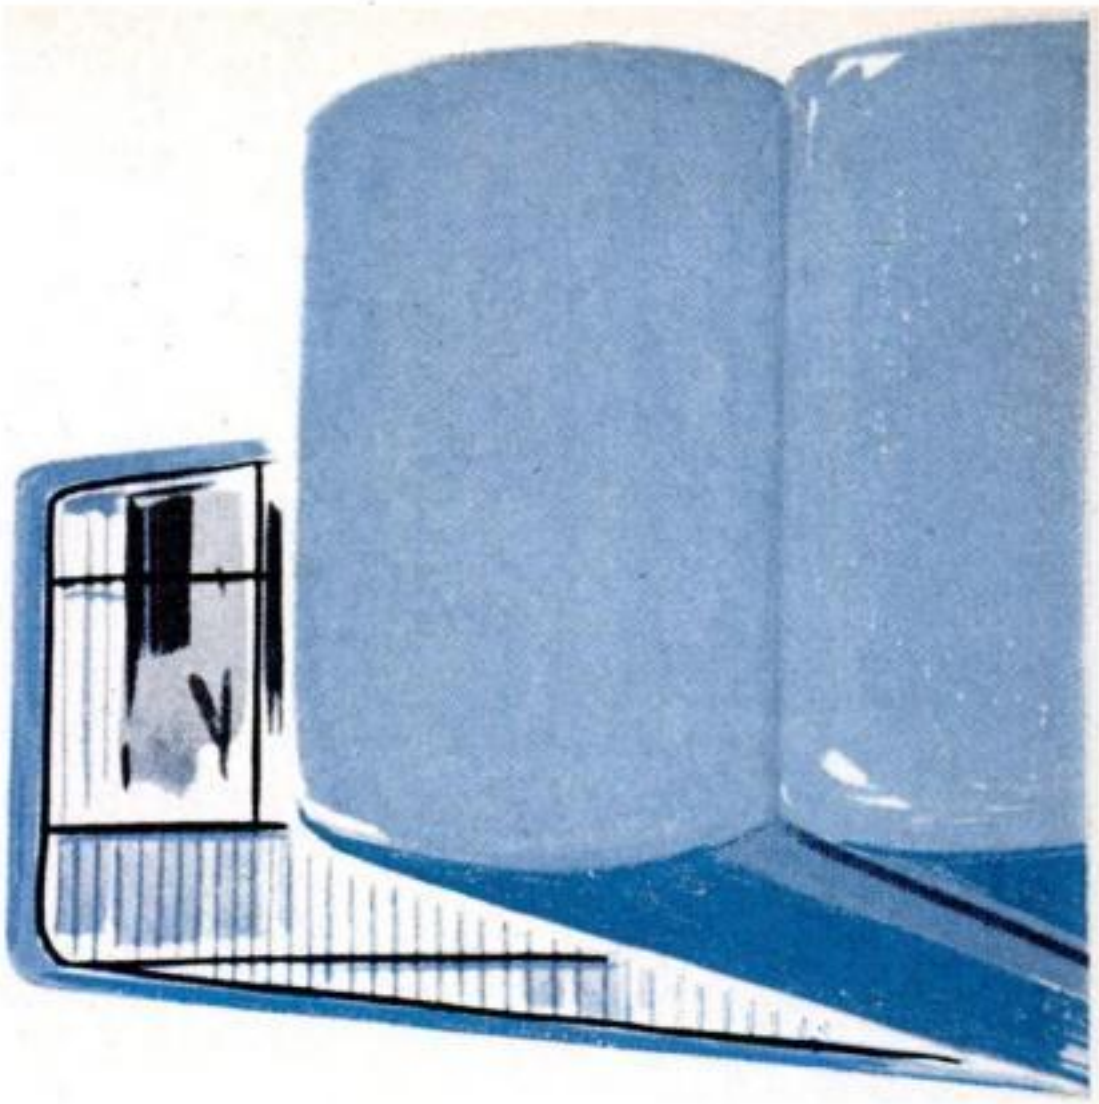

By ERNST BEHRENDT

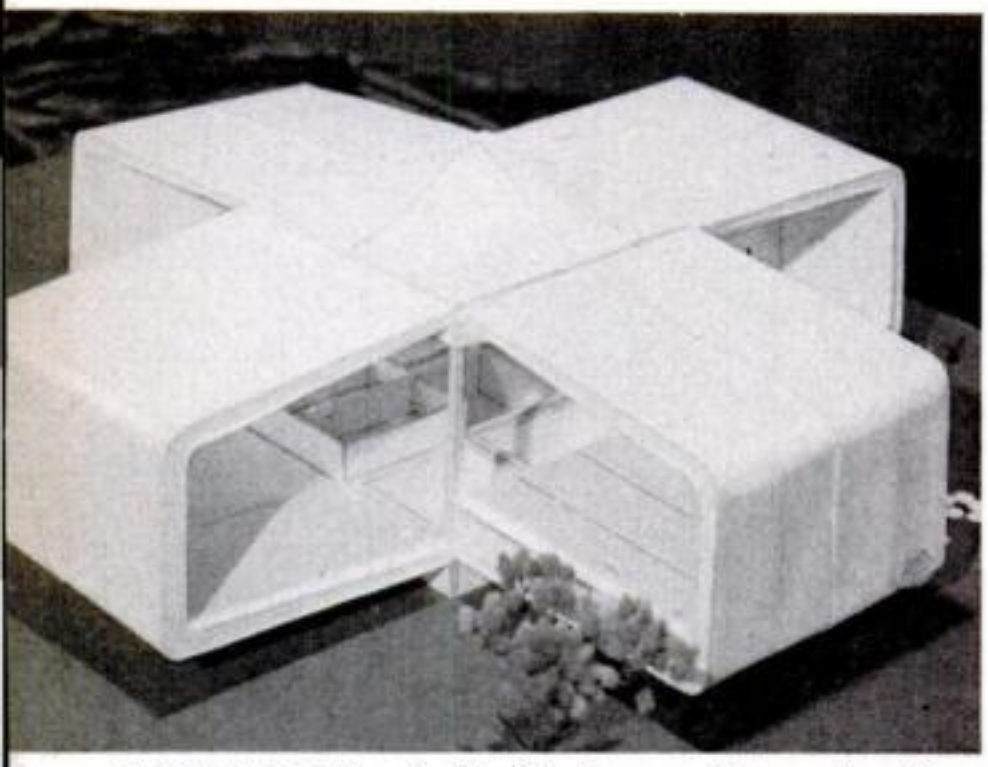

FIRST MODEL of plastic house shows the four U-shaped wings cantilevered out from a small central foundation. Actual test house, scheduled for '57, will follow a similar design.

MIT ARCHITECTS Marvin Goody (second from left) and Richard Hamilton (center) plan "House of Tomorrow" with Monsanto plastic experts Gigliotti, Whittier and Hansen.



THIS is the schedule for the plastic house in which you may live a few years from now:

- The preliminary design has been completed at the Massachusetts Institute of Technology.
- A scale model will go up some time this spring.
- A life-size test house may be ready in a year.

What will happen after that is anybody's guess; but a brand-new multi-million-dollar industry could result.

There will be a lot of concrete and maybe wood and steel in the house—where concrete, wood and steel can be used more advantageously than plastics. But plastics will be the very backbone of the structure. They will be used for its floors, walls and ceilings; they will line the bathroom, decorate the living room and support the roof.

The project began in 1953 when the Monsanto Chemical Company, one of the largest producers of plastics, offered to sponsor research. Work has been going on ever since under the direction of Richard W. Hamilton of MIT's Depart-

Copyrighted material



ment of Architecture. The preliminary design was completed in 1954 by architect Marvin Goody with the help of Ernest Kirwan.

What will the plastic house look like? Imagine a big chunk of concrete, 16 feet square. This is the central utility core of the house, and its anchor to the ground as well. It contains baths, kitchen and laundry; the heating plant will probably be underground. From this core four lightweight plastic wings are cantilevered. Each of these, too, is 16 feet square. Seen from above, the four

Copyrighted material

wings form a cross with the utility core at its center.


This floor plan affords some unusual advantages: In spite of the relatively large size of even the simplest plastic house model—1,280 square feet—only an area 16 feet square has to be excavated for the foundation. The cantilevered wings, floating in mid-air, can be suspended over almost any kind of surface, sloping or level. You can turn the space under each wing into a carport, a patio, a tool shed or a sheltered playground. You would get an extra 1,024 square feet of usable area "free."

The wings are the most remarkable feature of the plastic house. These are not just the familiar plastic panels, but the closest approach yet to prefabricated rooms. Big sheets of plastic, approximately three inches thick, are molded to a U shape that is eight feet wide and 16 feet long. Lay the U on its side and you have a floor, wall and ceiling—all in one piece. Take two of these plastic U's and join them side by side, and you have the large wing, 16 by 16.

The wing's floor and ceiling flare toward the central core. This flared construction makes the unit much stronger. It also permits the units to nest, and all eight units for the MIT house could probably be stacked like baskets on one truck trailer.

Angled ceilings are popular nowadays, but nobody wants slanted floors. So a 16-foot-square wedge—thin end pointing away from the central core—gives a level floor. It also increases rigidity, so that the wing will not bounce as you walk on it.

Molded in the plastic wedge are deep grooves for all the ducts and pipes that your house is likely to need. A later model may have continuous wiring strips in the walls, luminous panels in the ceilings and other refinements.

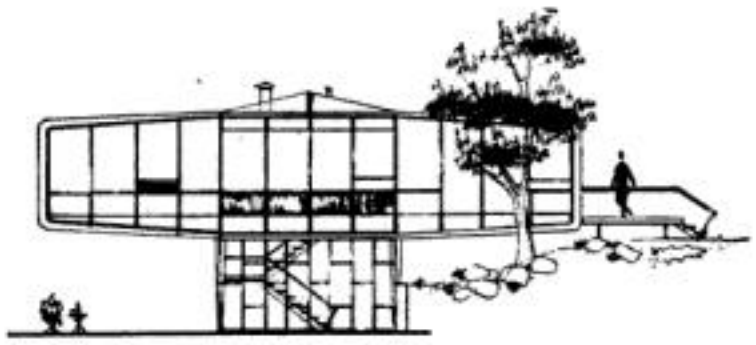

SUPPORTING PEDESTAL adapts plastic house to any terrain, sloping or flat, without changing design. Utilities, in core, can be above or below ground.

Will your plastic house look exactly like a hundred others? Not at all, say the planners. The plastic house will be one of the most flexible structures ever designed. Remember that the wings are made with two sides wide open, supporting no weight. You can make them of any material that suits your taste: asphalt shingles, plywood panels, picture windows—even plastics.

Adding a room or two or four is a simple operation once you build a second core some distance from the first. You can then cantilever new wings without further excavating. You can even join a third half-wing to a unit of two and have a 16-by-24-foot room.

It is just as easy to remove a wing when you no longer need it. A market for used wings may develop eventually. You may one day go to a secondhand-wing lot and pick out a well-preserved room formerly owned by an elderly schoolteacher who occupied it only on Sundays.

The plastic house is just as flexible inside. You can leave a 16-by-16 room as it is or divide it with partitions. You can paint the house inside or out, wallpaper, or leave the plastic's own color.

Insulating the house will probably be a cinch. Termite-proofing it will be still easier—termites don't eat plastics. Fungus-proofing won't be necessary at all. Fire-proofing is a different problem. Some plastics are fire-retardant; others, including some foamed plastics, are not.


Ease of maintenance may turn out to be one of the greatest assets of the plastic house. The walls can be washed or even hosed down. Some plastics will hold nails for hanging pictures or shelves. For those that do not, wooden nailing strips may be molded into the surface.

In the plastic house a tube of cement may replace the handy man's hammer. You will use it to fill nail holes, seal


[Continued on page 262]

Copyrighted material

Futuristic models sprout wings where you need them

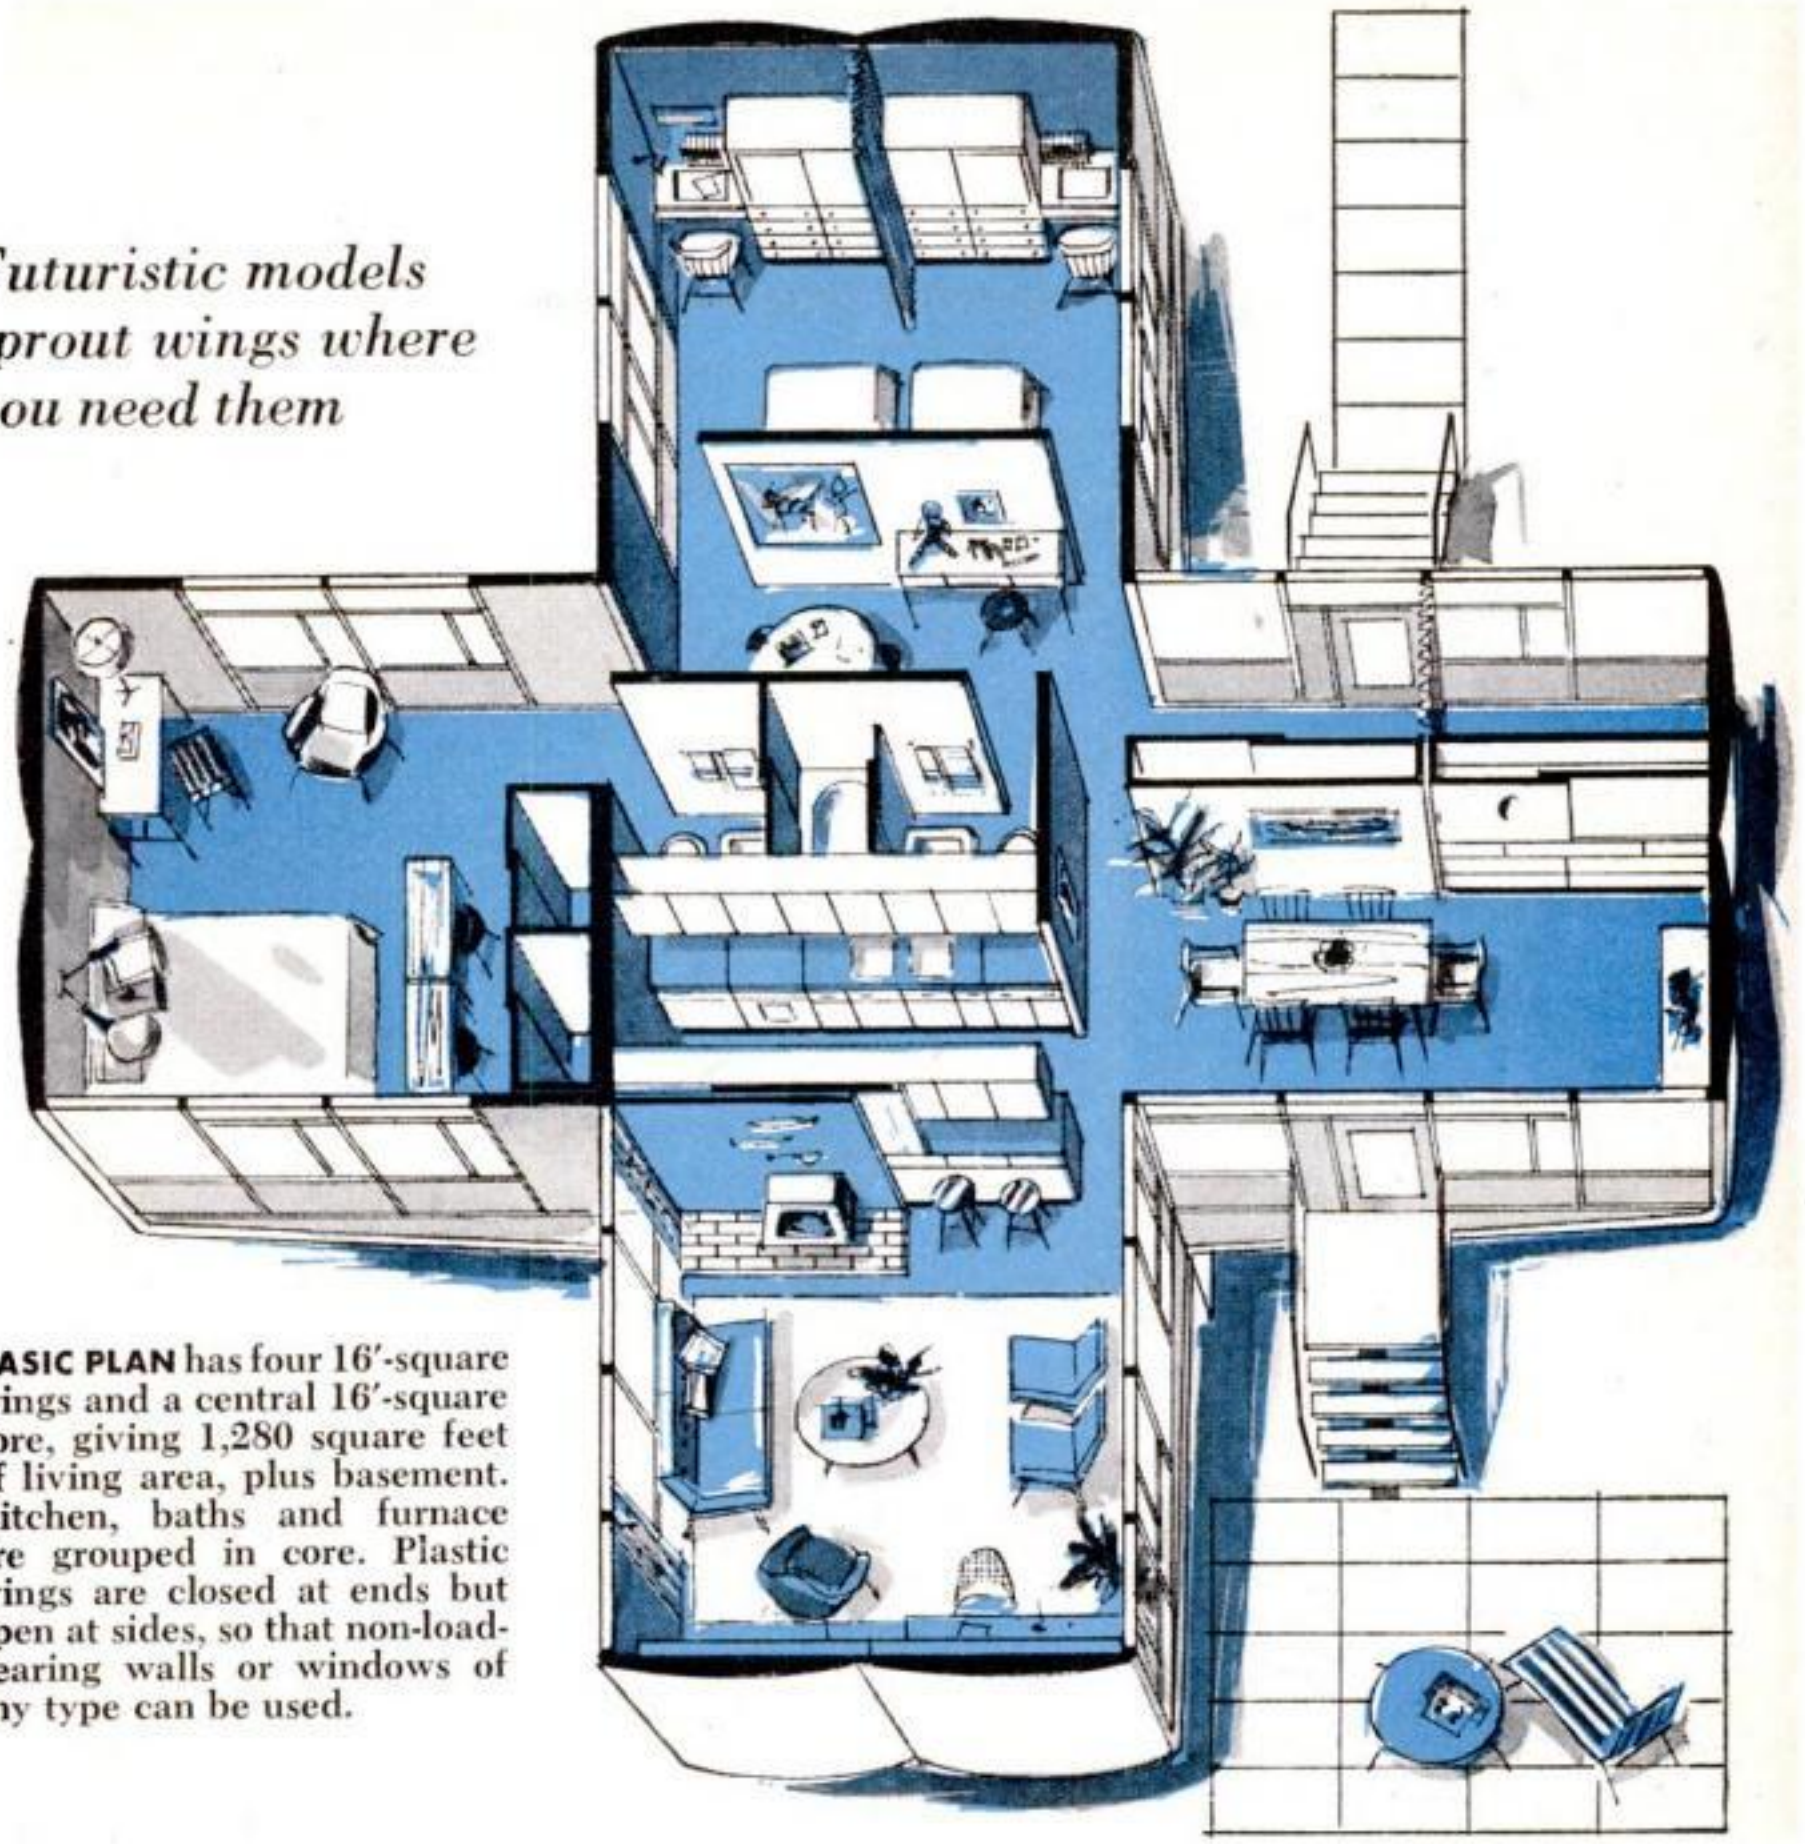

BASIC PLAN has four 16′-square wings and a central 16′-square core, giving 1,280 square feet of living area, plus basement. Kitchen, baths and furnace are grouped in core. Plastic wings are closed at ends but open at sides, so that non-load-bearing walls or windows of any type can be used.

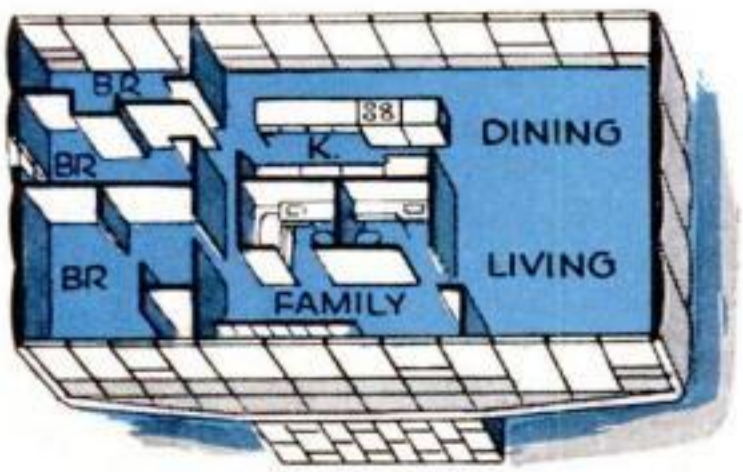


"Conventional" plan is a T shape

RECTANGULAR HOUSE (left), arranged much like present ones, could be made by attaching doubled wings to each side of a doubled core. This gives 1,536 square feet of living area, plus large 16′-by-32′ cellar above or below ground.

"Mansion" may look like this

TWO OR MORE CORES, connected by "bridges," make any size house. Here, 2,560 square feet of area are supported on only 512 square feet of foundation.

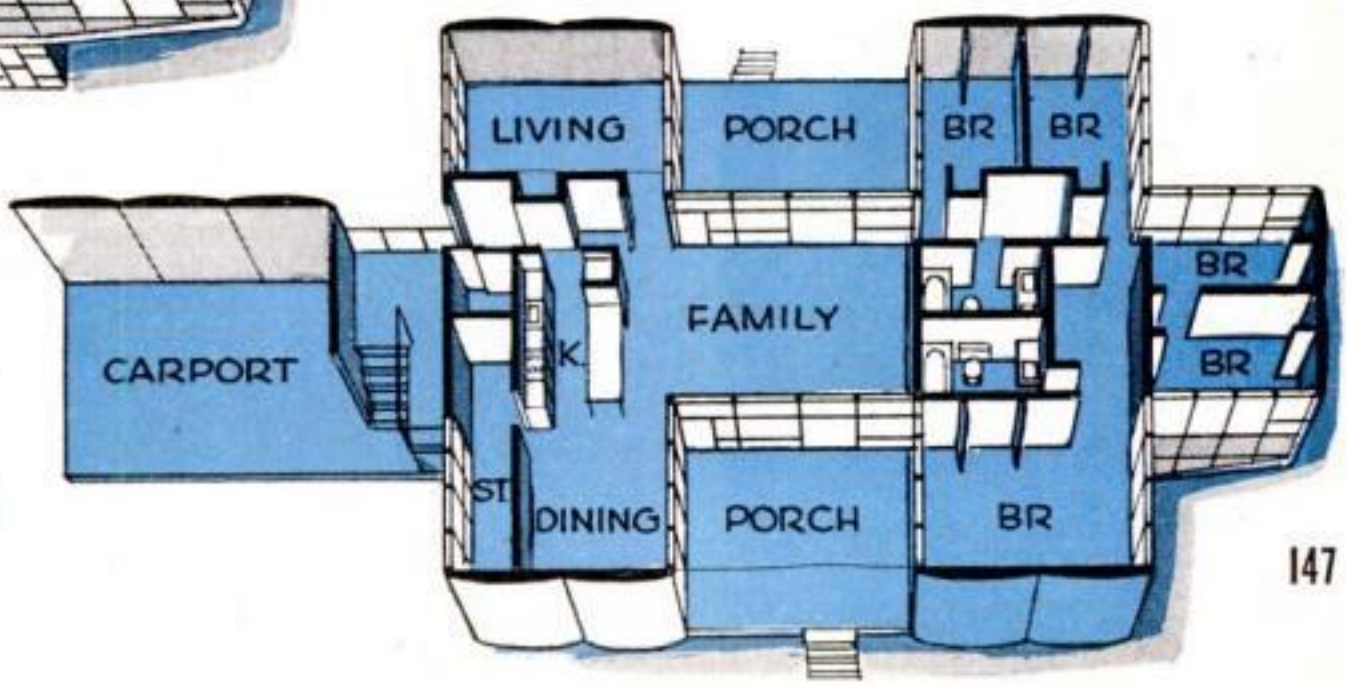

Copyrighted material

HALF-ROOF keeps off rain

SIMPLE FRAMING goes up fast

SPECIAL SCREENING for shade, privacy

A summertime haven, this

Screened Terrace *banishes sun glare by day, bugs at night. It uses a special kind of screening to give a one-way window on the garden.*

BY JERRY PARKER

EVEN in California we have bugs. But I escape them now in a new kind of summertime retreat that is better than the old screened porch.

This half-roofed, screened terrace takes advantage of recently developed materials and ideas to:

- Keep the bugs out, but let every delicate breeze in.
- Block hot, glaring sun rays, but pass cheerful, indirect light.
- Allow a clear view of the garden, without letting neighbors see that I am stretched out in my undershirt.
- Protect the furniture from rain.

The half-roof is a smart idea that is gaining wide popularity. I used corrugated aluminum to cover the terrace near the house. The other half of the terrace is covered with the same screening that encloses the sides. More breeze gets in and I can even stargaze in comfort on pleasant summer nights.

The screening is a special kind called Shade Screening. It looks like a miniaturized venetian blind, with tiny horizontal aluminum strips tilted at an angle.

The angled strips give the screen its special advantages. Direct sunlight is blocked, but not soft, reflected light. And you have privacy. Standing a little distance outside the screen, you see the flat sides of the strips—which effectively curtain the terrace. From inside, the strips appear edge-on and you get a clear view when looking out.

Shade Screening comes in rolls of various widths (from 18″ to 24″) and can be stapled or tacked to simple wood frames, just like ordinary screening. It is sold by most building-supply dealers at about the same price as other quality screening.*

My terrace uses the house for one wall and a big chimney for part of another. An open, concrete terrace was already there, so I had no floor to make.

The 12-by-15-foot area was framed over with redwood two-by-fours (redwood is cheap here). Simple screen frames were made of one-by-two and one-by-four redwood. The whole job took three weekends and cost $125.

**Shade Screening is manufactured by Kaiser Aluminum and Chemical Corp., Oakland, Calif.*

Pages 150-151 show how you can build the screened terrace


Copyrighted material


Cool light filters onto the terrace through Shade Screening. And you can still see out.

Like a one-way window, special screening reflects most outside light, assuring privacy.



How to build the screened terrace

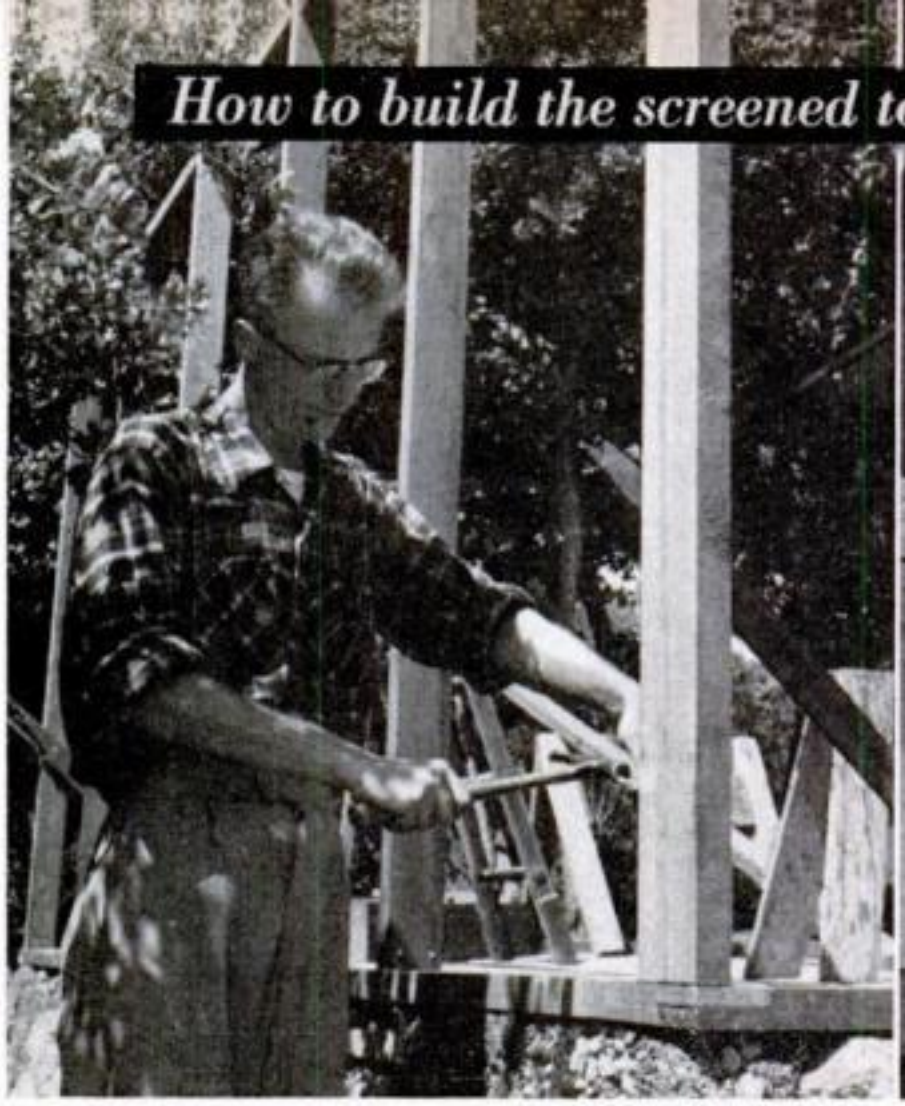

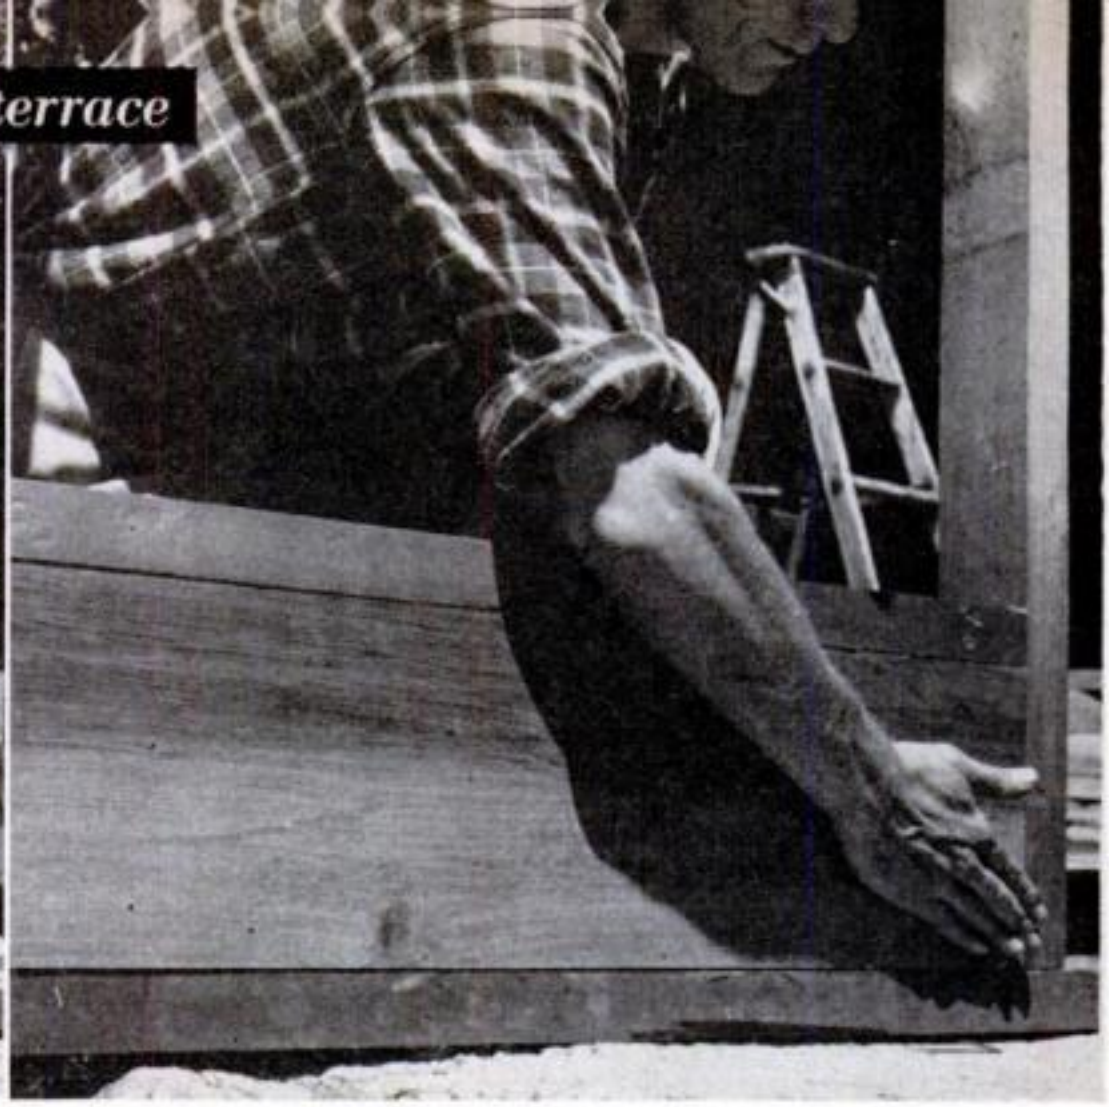

1 STUD SPACING was worked out so that all screens would be same size. Front wall went up first, on top of sill nailed to foundation.

2 KICKBOARDS are essential if you have small children. These one-by-tens were nailed to wood cleats that had been fastened to studs.



5 HALF-ROOF was made of 4'-by-6' corrugated aluminum sheets. Aluminum nails fastened them to two-by-four purlins laid on top of the rafters. The remaining roof openings (left in photo above) were filled in with the same screening used for the sides of the terrace.

Copyrighted material



3 **ANCHOR RAIL**—a two-by-four nailed to the house studs—supports the roof at the house. The house forms the back wall of the terrace.




4 **RAFTERS** are two-by-fours, spaced to match screening width and toenailed to plate. Another two-by-four closes in rafter front ends.




6 **TRIM** of ½"-by-2⅞" stock was nailed to the sides of each stud. The screen frames fit snugly against the trim when put in place.



7 **SCREEN FRAMES** were painted before screening was attached. Frames are one-by-twos (one-by-four at bottom) butted, glued, fastened.

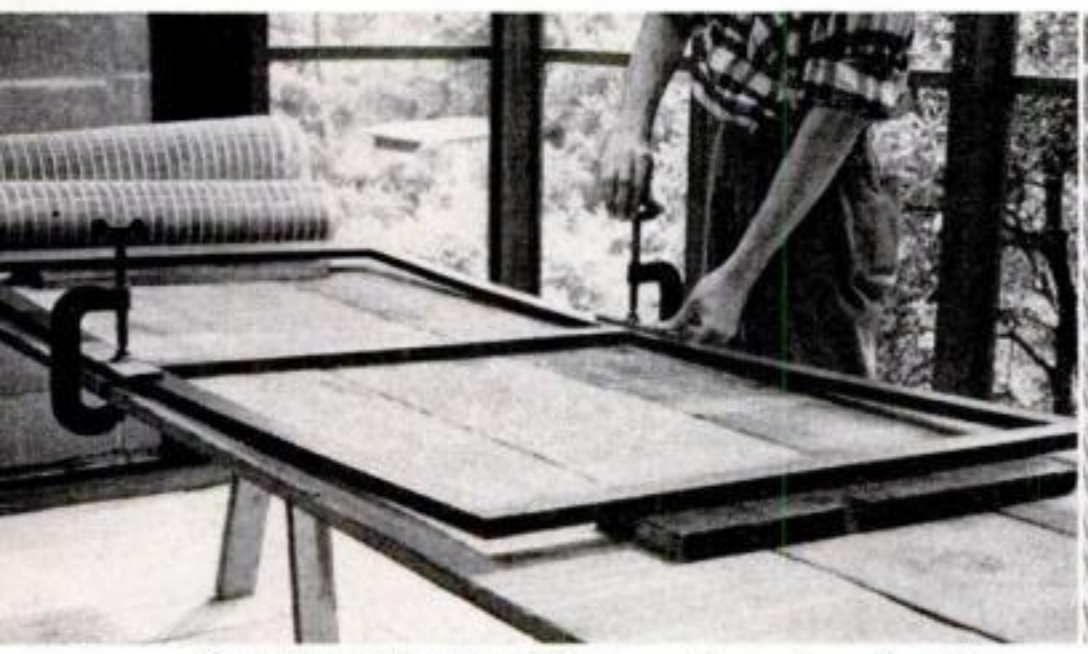

8 **TIGHT SCREENING** came from bowing frame lengthwise, with blocks under ends, clamps in middle. Only vertical tightening is possible.

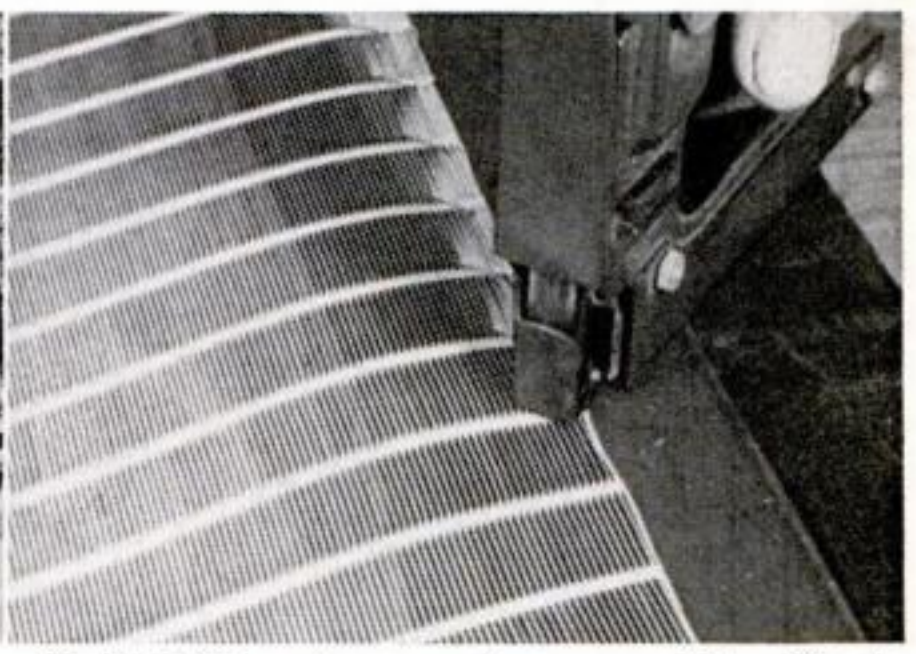

9 **STAPLER** puts screening on quickly. Staple each vertical strip to the frame at top and bottom, holding stapler at a 45° angle. **END**

Copyrighted material



Window

Installing them is a job

YOU can update a dark and dingy room, or turn an open porch into a real working part of your house, with picture windows or window walls. Big glass areas like the one below will frame a favorite outdoor view, brighten

Copyrighted material

Walls *make any house look up to date. that you can do. Here's how in step-by-step photos.*

the house interior and give you controlled ventilation. If the window faces south you'll get another dividend—solar heat.

The simplest way to build a window wall is to frame an opening and install a number of factory-made window units as shown below. These units come all ready to install in a variety of sizes. For a big expanse of glass that exactly suits your house, however, you may prefer to build your own window units. The following four pages show you how.




TO ENCLOSE A PORCH with stock units,* frame openings with two-by-fours. Spread calking underneath and fasten to stonework with masonry nails or screws and expansion shields. Shim frame where necessary to get it square.



NAIL FIRST UNIT in a bottom corner of the frame after prime-painting all units (keep paint off weatherstripping). Toenail other bottom units in place and join the units with corrugated fasteners at 8" intervals, inside and out.

CENTER AND UPPER UNITS in this installation were placed so that the sashes swing out at the bottom. The bottom units were reversed so that the sashes swing inward at the top.

**Flexivent units here made by Andersen Corp., Bayport, Minn.*

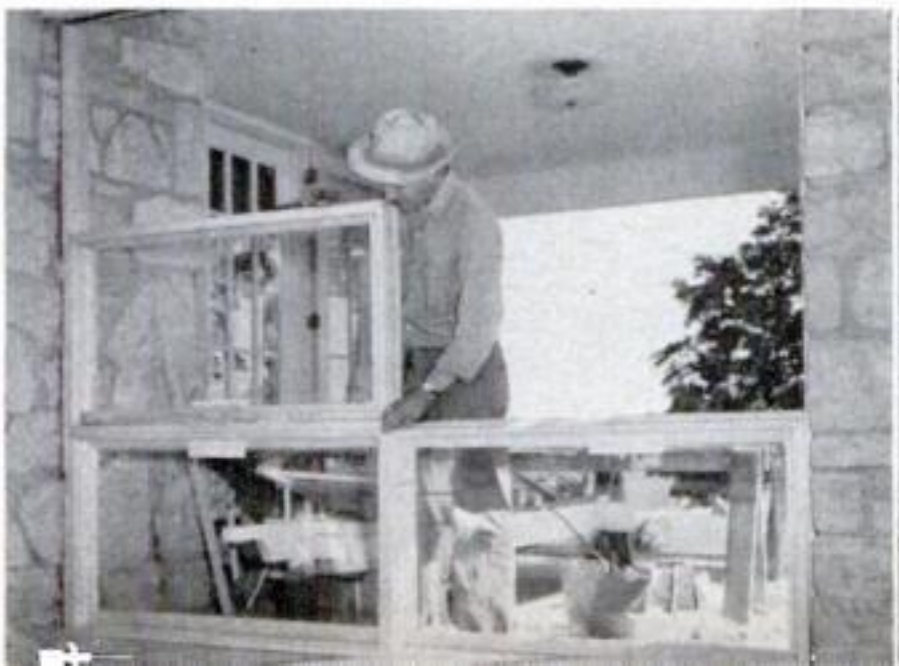


COVER JOINTS between the window units with simple batten trim inside and out. Besides making the joints weathertight and hiding them, this trim covers the corrugated fasteners. Cut side trim to fit stone or siding closely.



How to build your own modern window



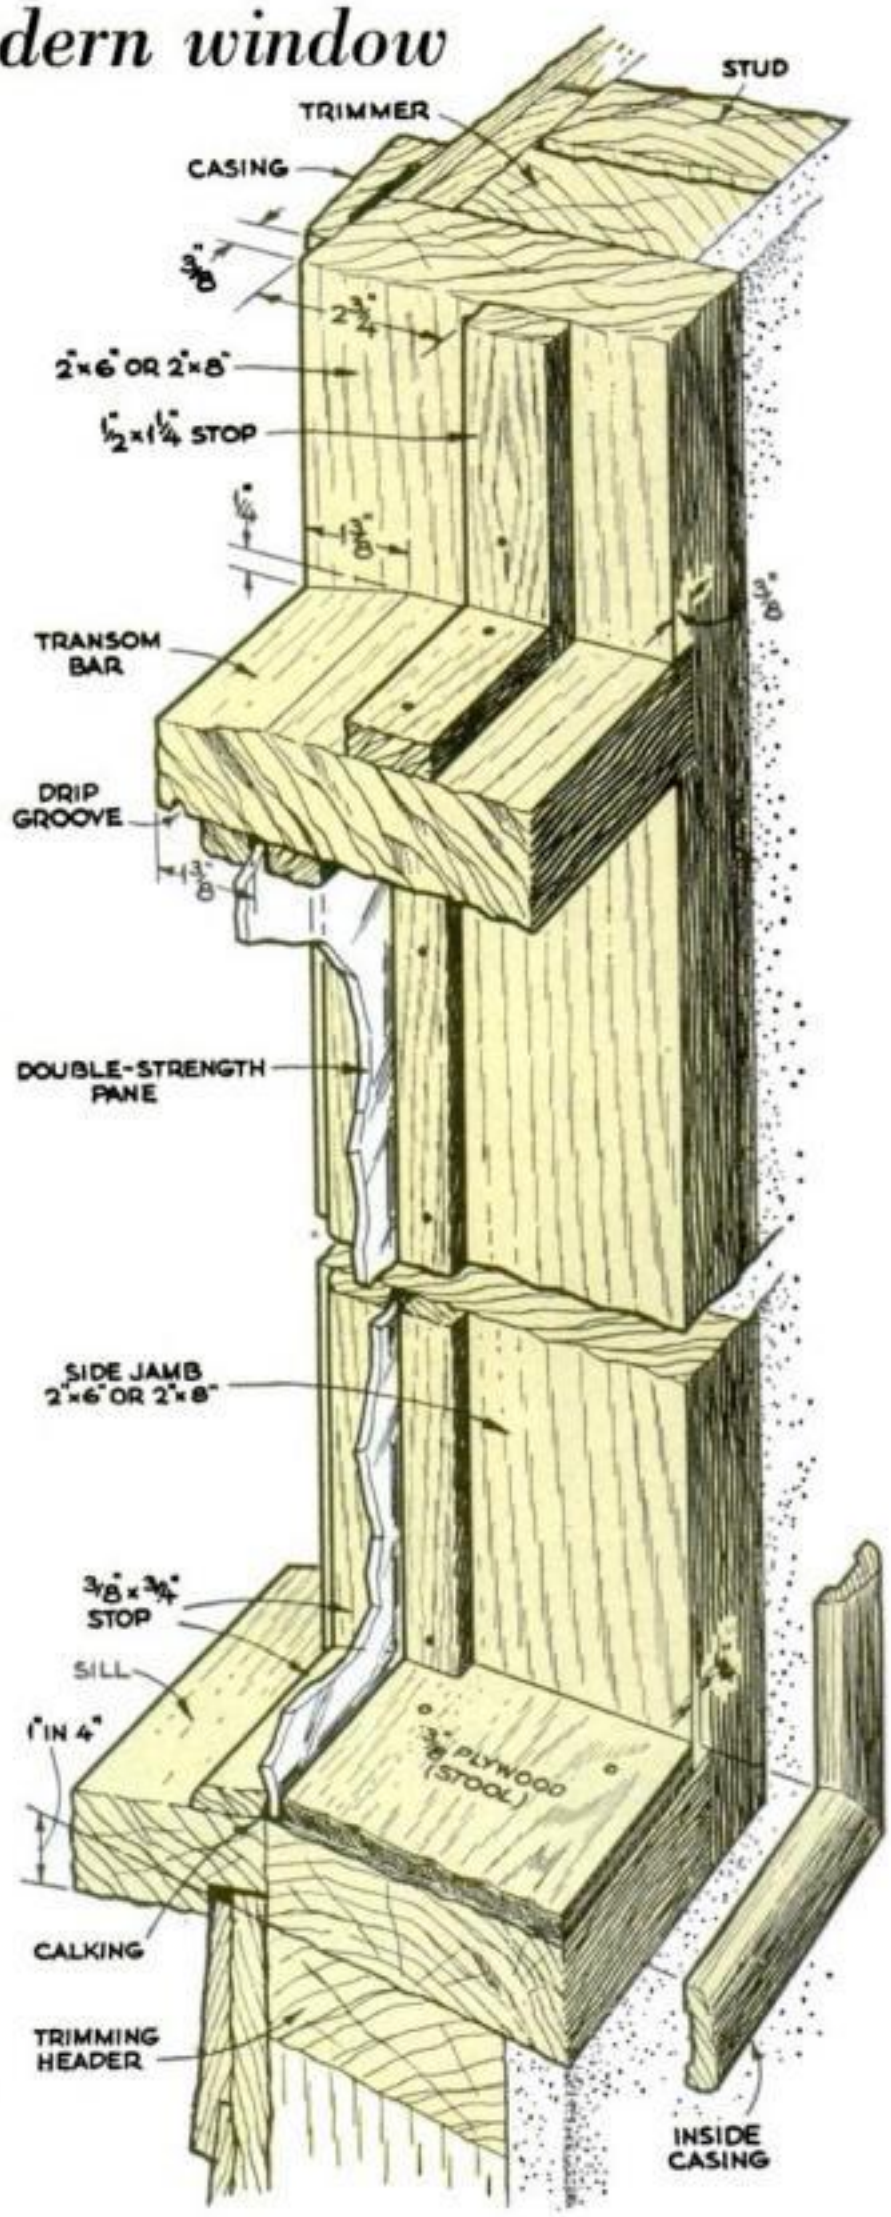

THIS custom-built window combines large fixed panes with transoms for plenty of ventilation and the modern big-view look.

Use the assembly drawing above to identify the parts. Dimension the window to suit yourself, keeping the following facts in mind:

1. The width of each window-and-transom unit—you combine two or three units in a single frame—should not exceed three feet.


2. The crossbar that separates the fixed panes from the transoms looks best if set above eye level. Six feet above the floor is a good height, though many housewives would prefer it a little lower, to put the transoms within easier reach.


3. Size the transom openings to take stock-size sash. They'll save you money.


Copyrighted material


Make the window frame first

CUT FRAME MEMBERS from 2" stock. All of the parts except the sill should be as wide as the wall is thick. Dab the joint areas with heavy paint before nailing them together. Use 16-penny nails and drive them in from the sides. Do not attach the sloping sill section yet.

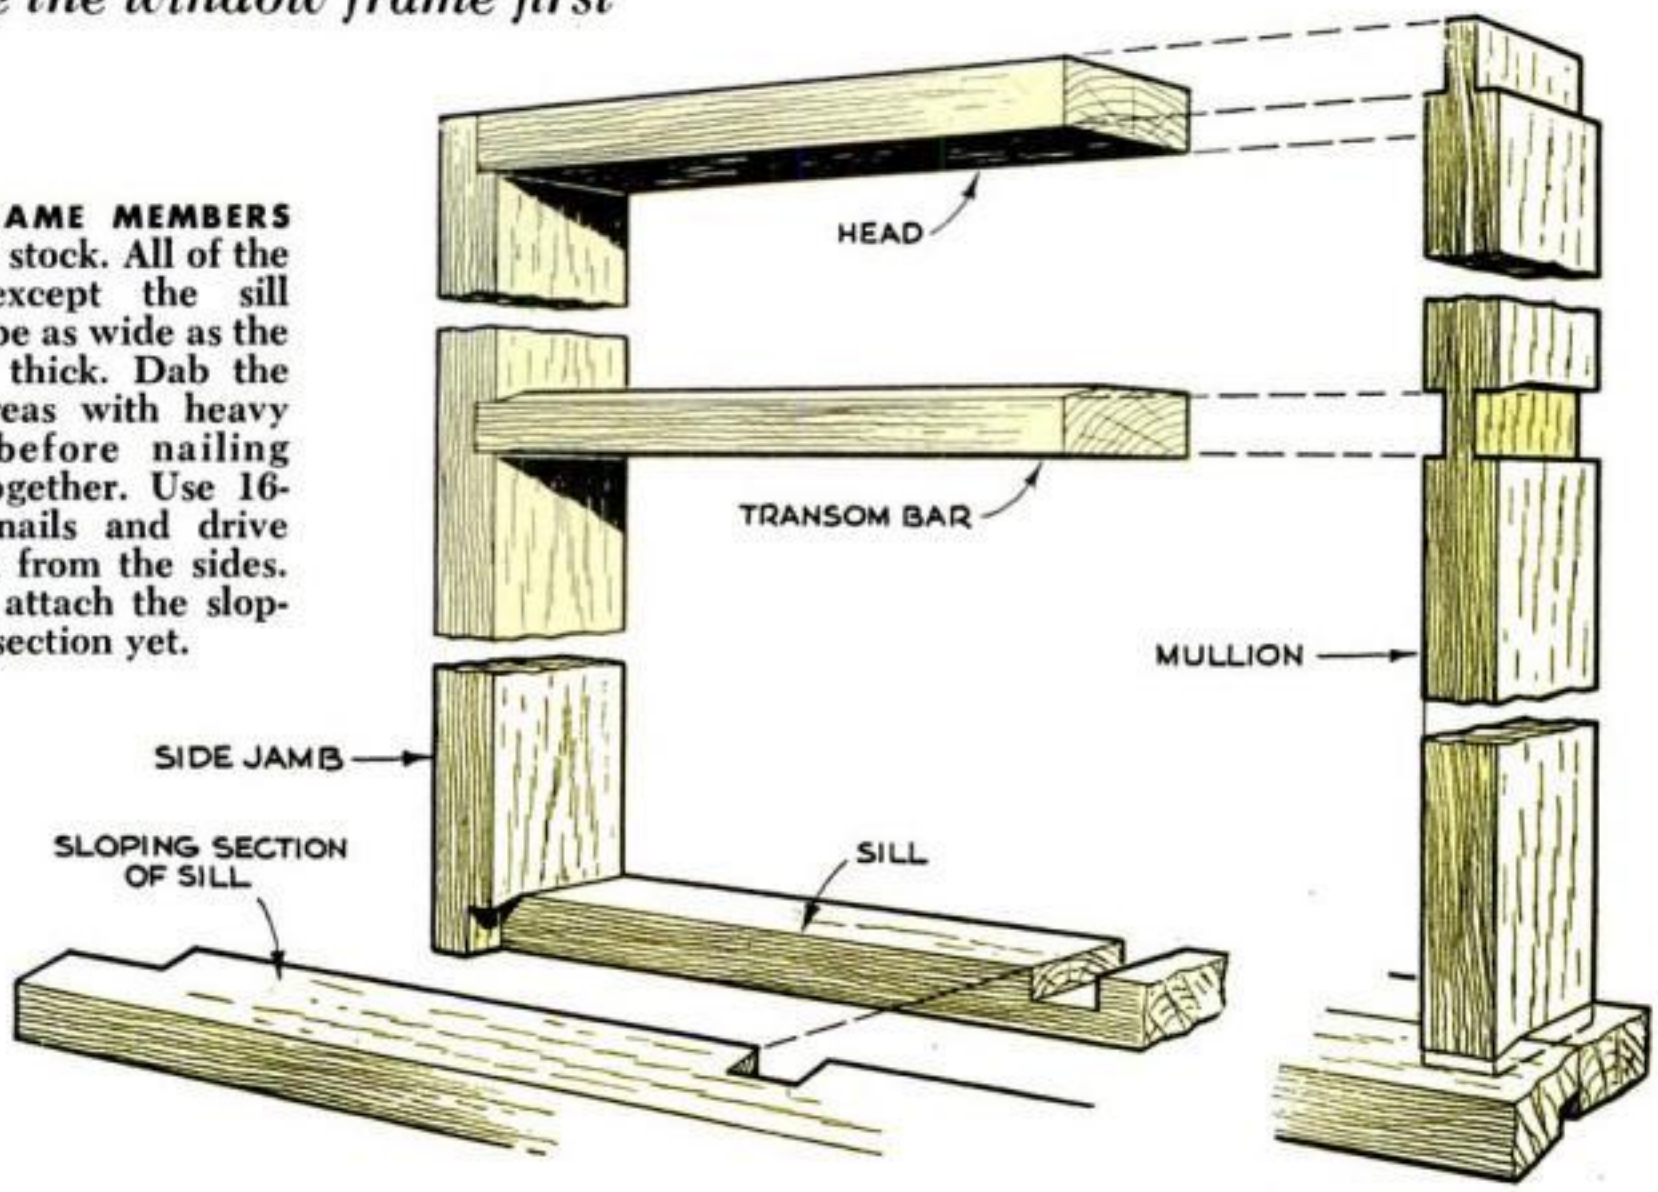


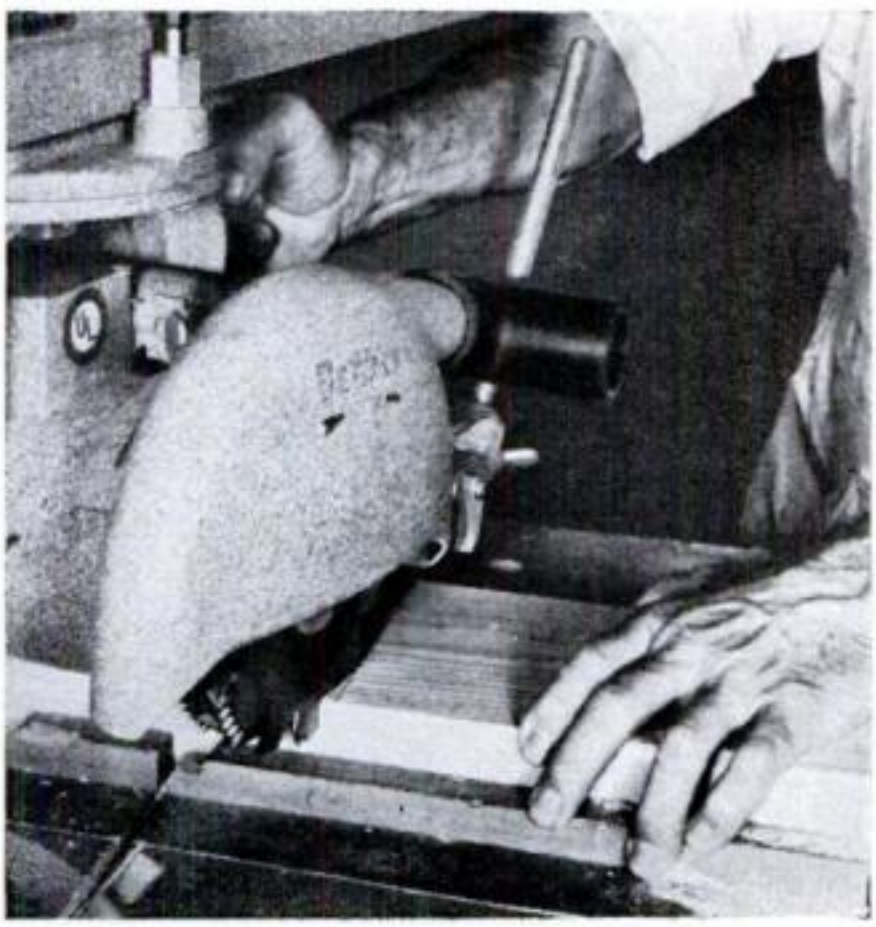

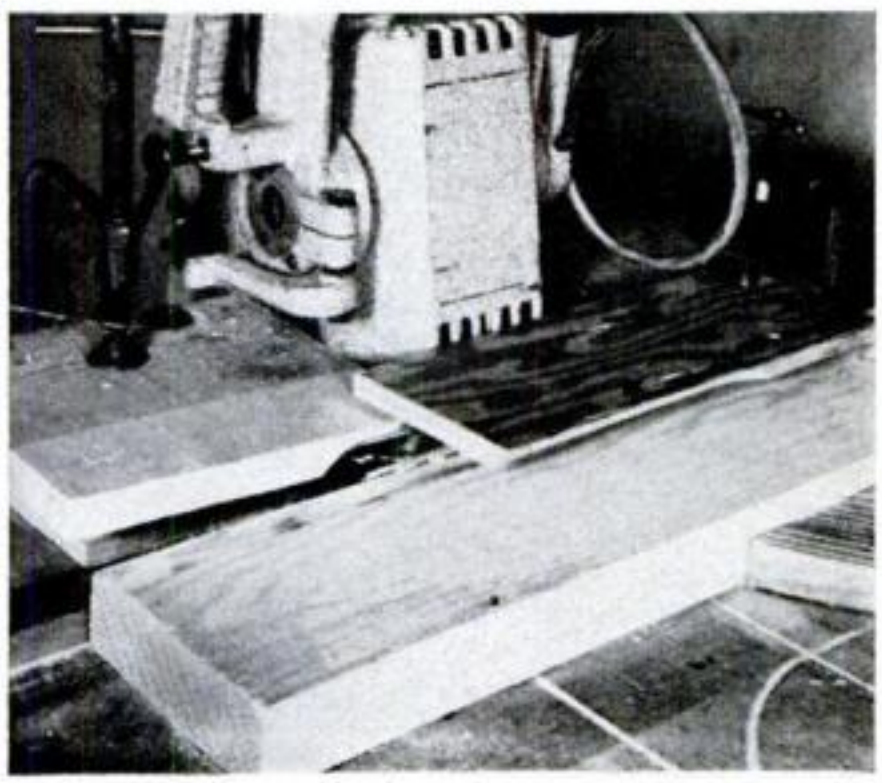

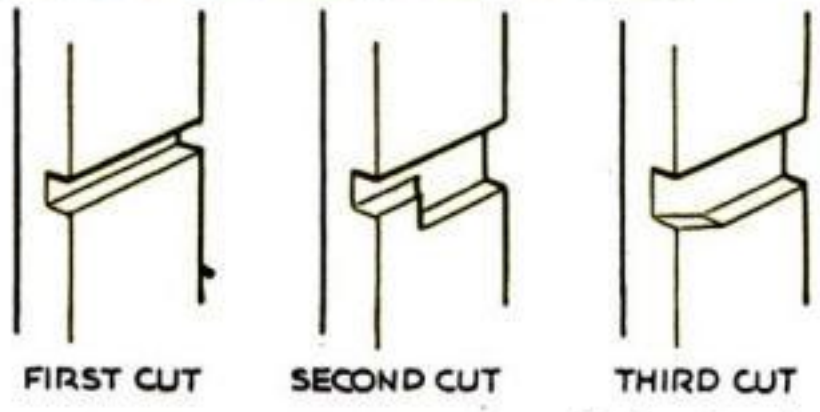

RADIAL OR CIRCULAR SAW speeds the framing. Slots for transom bars and rabbets for the sill shoulders can be cut in the jambs with three passes of a dado head (sketch). If you use hand tools, make the sloping cuts with a chisel.

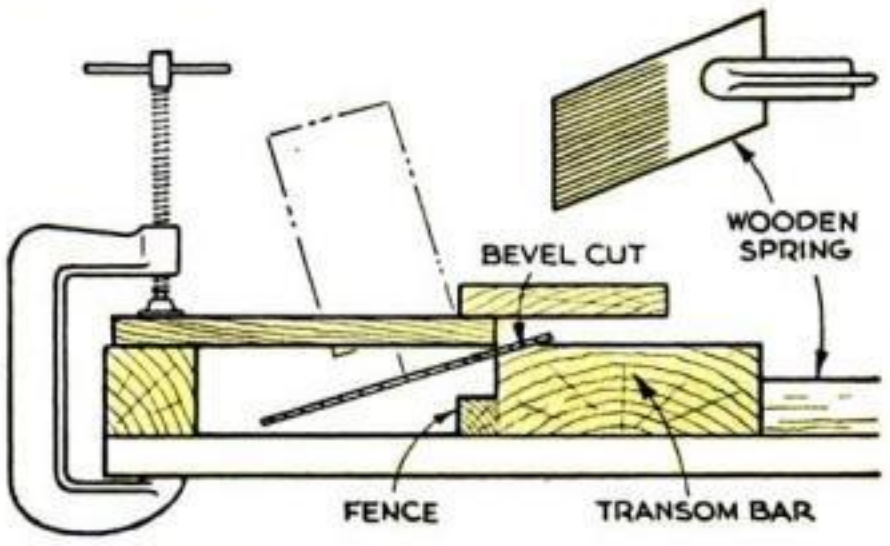

THIS IS THE SAFE WAY to cut a bevel on a transom bar with a radial saw. Blocked-up scraps of wood clamped to the table cover the blade. A wooden spring holds the work firmly against the fence, offsetting the saw thrust.


Please turn the page for more on fixed windows

Copyrighted material


Cutting safely through a wall

WHEN you break through the frame wall for your window, you weaken the wall by removing load-bearing studs. Once you have boxed in the opening properly, however, the wall will be as strong as it was originally. But during the hour or less it takes to do this job you must leave the sheathing and siding intact to reinforce the opening temporarily.


On a two-story house, or the gable end of a one-story house, the sheathing offers plenty of support for a three-unit window opening. But the sheathing on the side walls of a one-story house gives

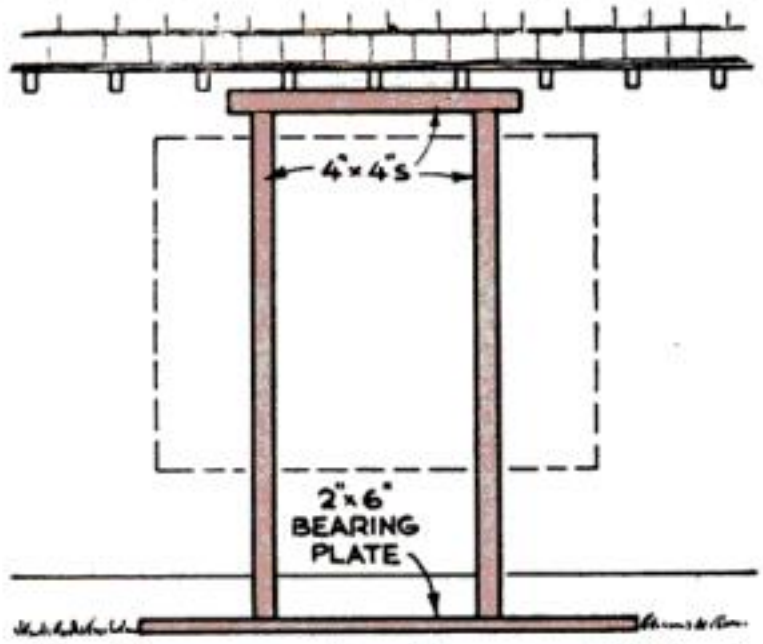


practically no overhead support. To play safe, prop four-by-fours under the rafter ends outside a one-story house before removing the studs in the window opening. Use a two-by-six under the props for a bearing plate, as shown in drawing above.

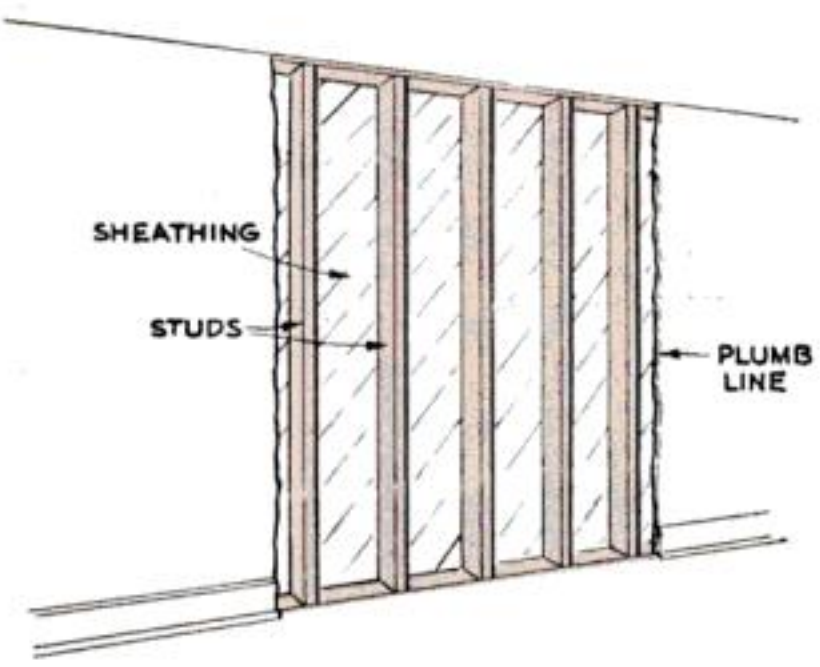

SCRIBE VERTICALS from the ceiling to floor on the inside plaster wall where the window sides will fall. Spread cloth on floor to catch debris. Cut plaster with an old compass saw, then tear it all off. A drill helps to cut out studs (right). Bore 1" holes just inside wall opening and saw through remaining stud sides. Pry out the section of studs between the cuts. Splinter the remaining stud ends with a chisel and pry out fragments.

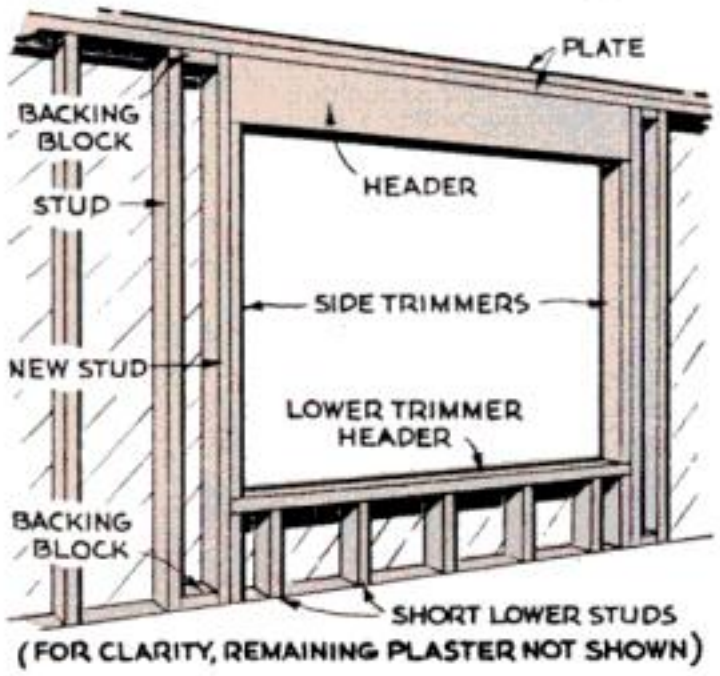


BOXING SCHEME: Backing blocks space new studs correctly for the opening. The side trimmers support the ends of the header. The lower trimmer header and the cripples take the downward thrust of the jambs and mullions, once the window frame has been put in place.

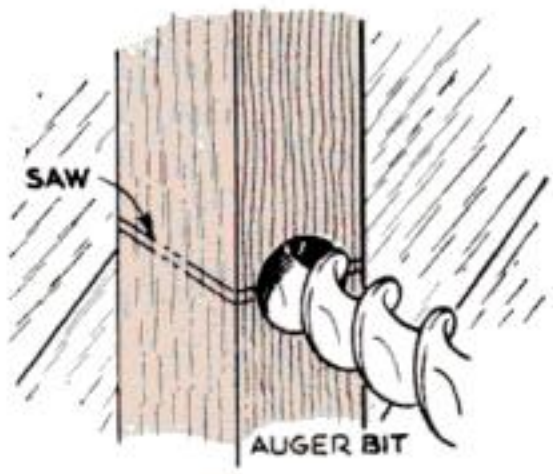

BACKING BLOCKS should be as long as the distance between the stud nearest the window opening and the edge of the opening, minus 3½" (the thickness of a new side stud and a side trimmer). Nail the backing blocks between the inner and outer wall areas, as shown below.

FORCE NEW STUDS between the inner and outer walls, placing their ends against the backing blocks. Toenail in place. After the other members are installed, the wall area above and below the window must be covered over with plasterboard, or lathed and re-plastered.

USE DOUBLED TWO-BY-SIXES for a header. Force it between studs. Install the cripples and nail the lower header in place. Then drive the side trimmers home between the headers. Finally, saw out the sheathing and siding. Leave a ⅜" projection above the lower header.

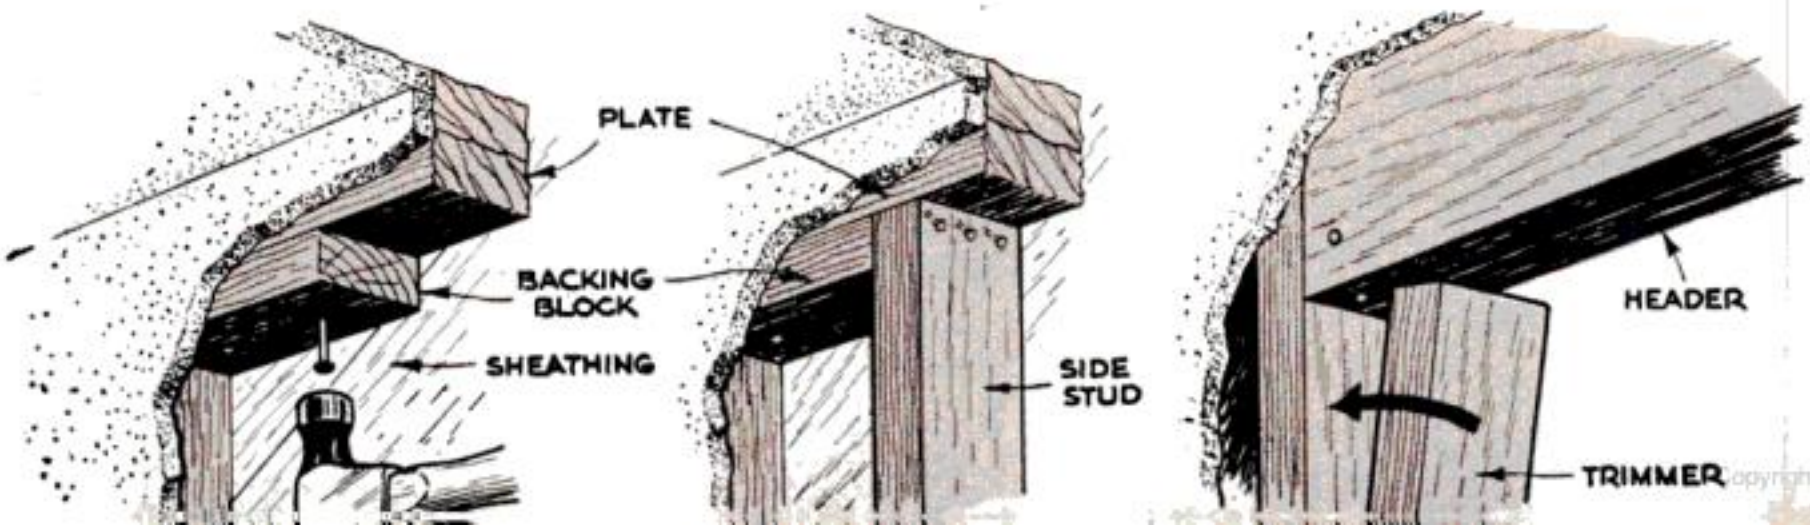


copyrighted material

Truing up the frame

IF YOU have done a good job of building the frame and reinforcing the wall opening, everything will be plumb and you should have no trouble inserting the frame in the opening.

Set the frame flush with the wall edges and, if the jambs are plumb, nail one jamb against its trimmer, placing nails where the stops will cover their heads. Check the sill with a level, then wedge the opposite jamb in place with shingle points and nail it to the trimmers. If the framing isn't plumb with the trimmers, adjust with wedges on both sides. Fit the rabbet in the underside of the sloping sill section over the ⅜″ lip that you left projecting over the lower trimmer header. Then nail the sill section in position. Finally, nail the siding ends to the trimmers.

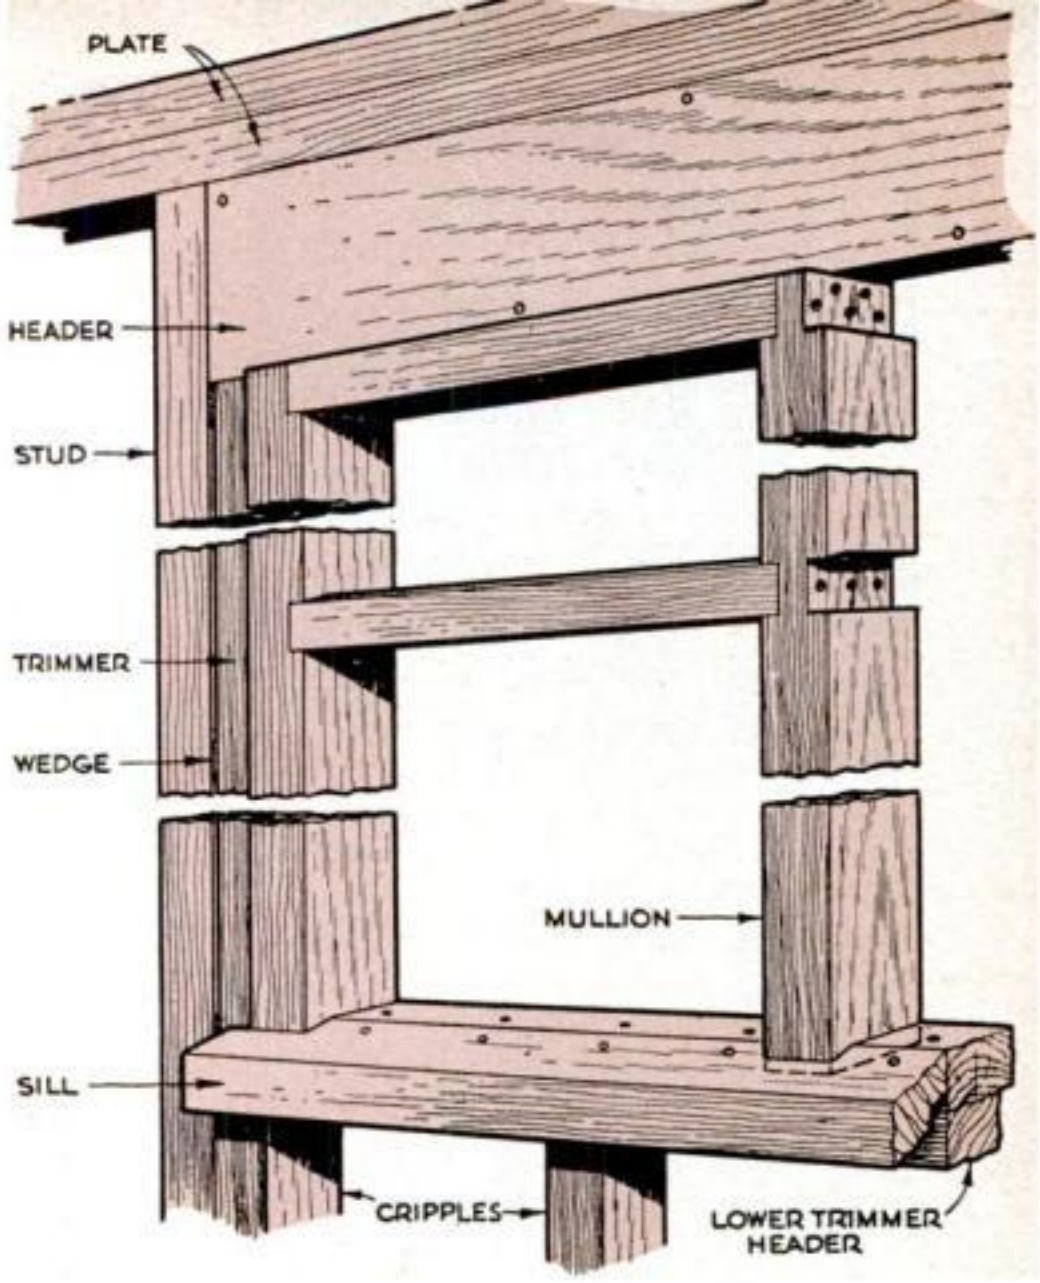


For a weather-tight window, use this glazing method

CUT stripping for the outside and inside stops from one-by-twos. Bevel one edge to form V-shaped pockets for calking mastic. Use ¾″ exterior plywood for the stool that forms the lower stop. Cut this member slightly longer than the frame opening, so that it can be trimmed to a snug fit when it is installed, as described below. Prime the stop strips and the stool. Just before installing each stop member, paint its frame-contacting surface again.

GAUGE PENCIL LINES on the frame for outside stops. Place the horizontal stops first, using fourpenny nails about eight inches apart. Cut the vertical stops a trifle long and spring them into place (left). Nailing them flat will bring them to a snug fit. Run mastic around edges of the stops. Lay two cardboard shims on sill. Rest glass on the shims and against the bottom stop. Swing it into place and seat the pane by squeezing it against the stops with a softwood stick. Next, trim the stool for an exact fit, scribing for saw cuts (center). Bevel the bottom edge of the stool where it butts against glass. Apply mastic to the bottom edge of the windowpane, press the stool in place and nail down. Then squeeze mastic around the rest of the pane (right) and secure by positioning the inside stops.

(Please turn the page)



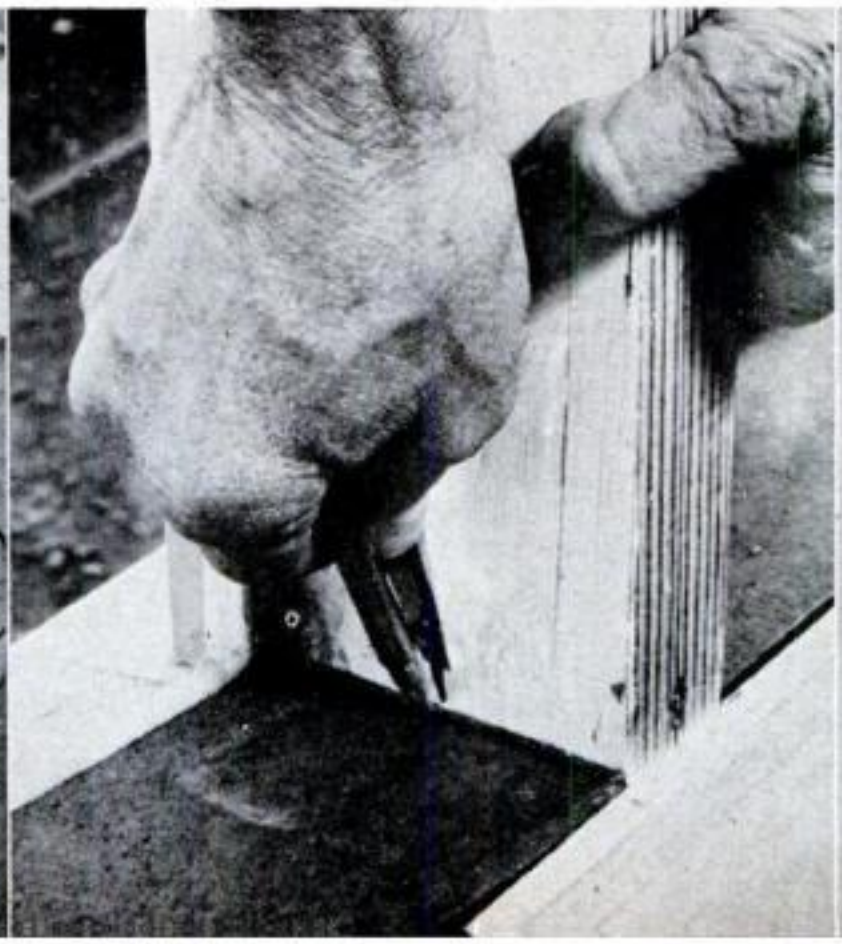




Copyrighted material



Transom-hanging tips

STOCK sash used for the transoms should be trimmed to give 1/16" clearance all around. Drive nails in the frame for temporary stops so that you can check the transom clearance. When transoms fit, install permanent stops. The standard 8" hangers shown here use friction to hold the transom open. Paint the transoms before applying the hangers.

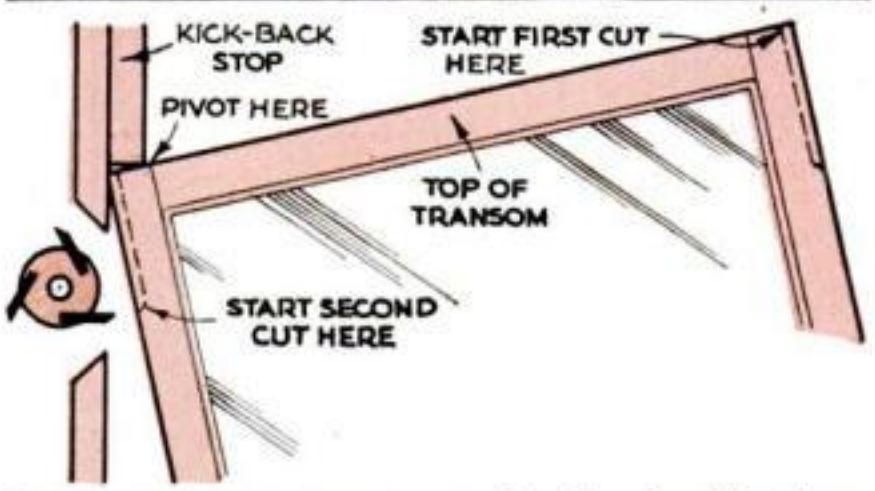


BLIND RABBETS at upper ends of sash sides form pockets for hanger arms. If you use a shaper, make one cut from a top corner. For the other rabbet, use the setup shown above and start the cut at the blind end of the rabbet. Then backcut to the corner of the transom.




WITH HANGERS SCREWED TO THE SASH, open them equally and enter the sash from the outside. Mount one hanger. Swing the other end in and attach the second hanger. If the sash binds slightly, hold a block against the rubbing corner and rap sharply with a hammer.

The final step—applying the trim

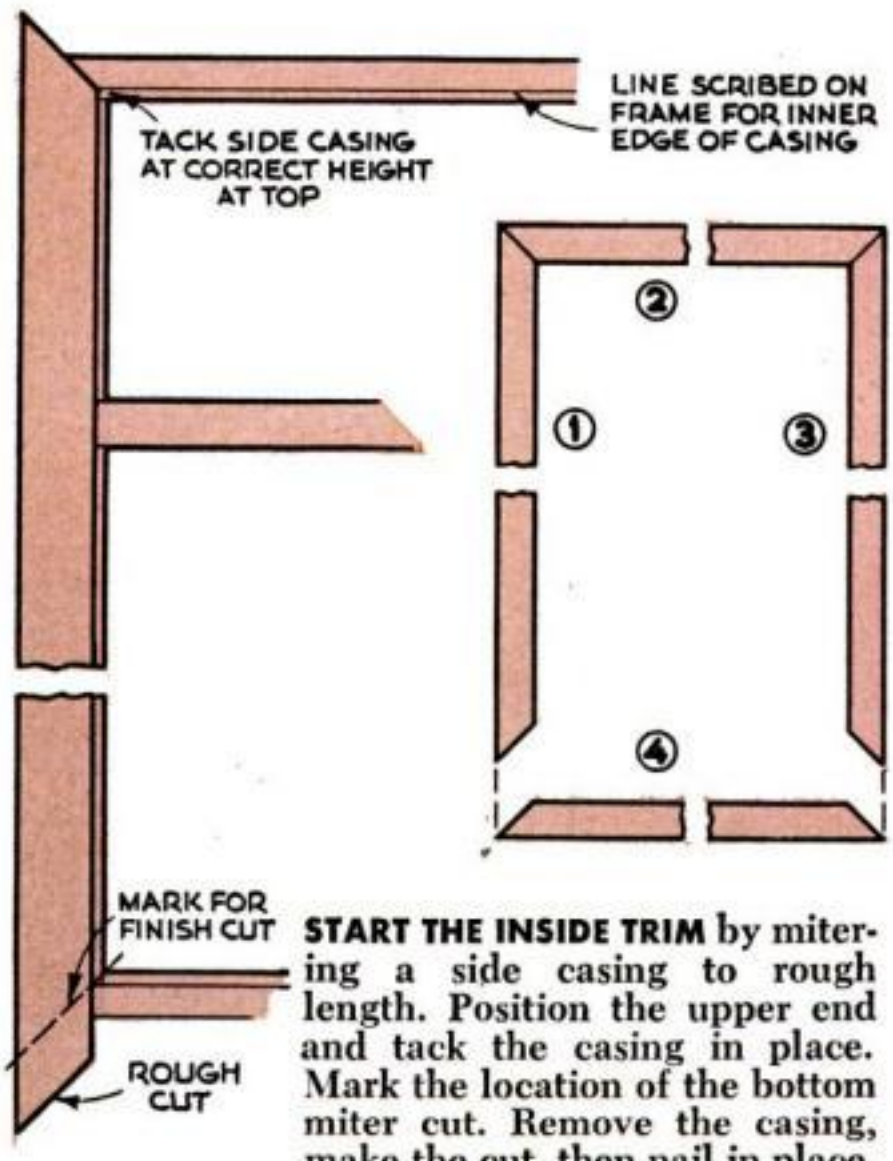

START THE INSIDE TRIM by mitering a side casing to rough length. Position the upper end and tack the casing in place. Mark the location of the bottom miter cut. Remove the casing, make the cut, then nail in place. Fit the head casing next, and so on around the opening.

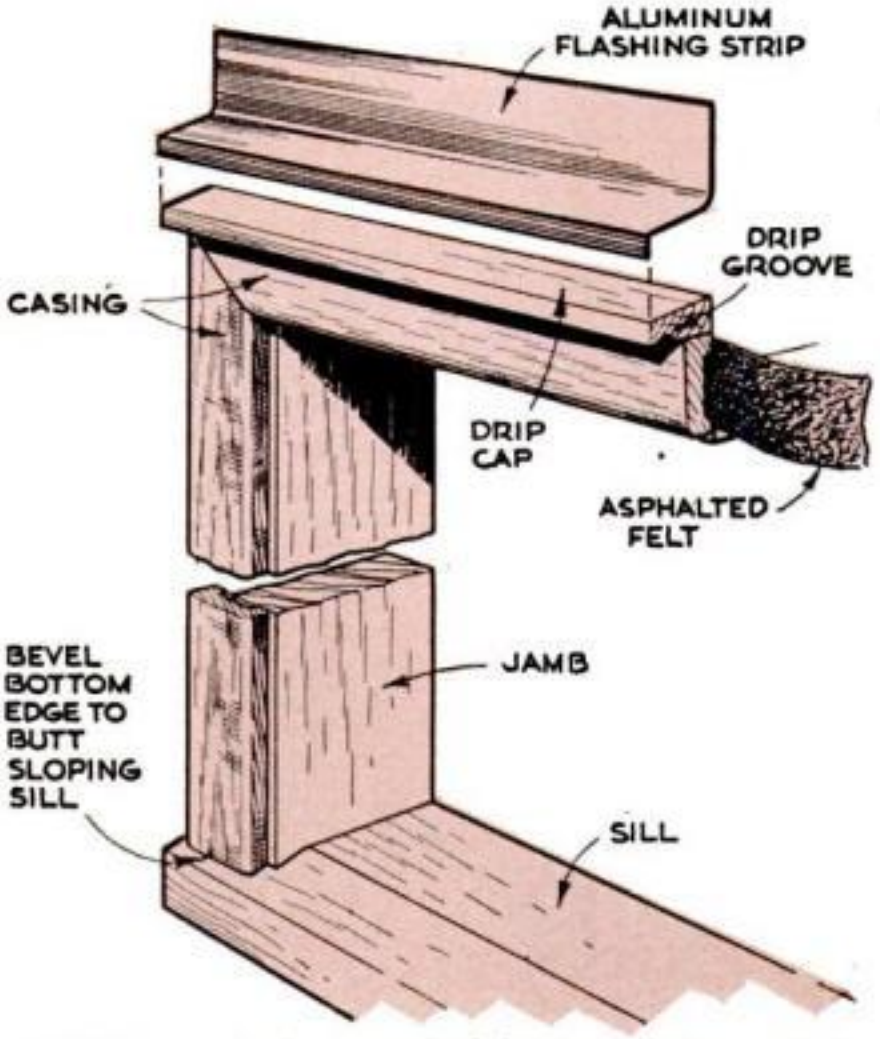

OUTSIDE, cut the beveled bottom edges of the side casings first. Tack and mark for miter cuts. Sandwich strips of felt between the frame and casings. Work flashing under the nearest siding board before placing the window cap. Screwnail the flashing to the cap.

Copyrighted material

Installing New Appliances

is the quick way to modernize your home. Here's what it takes in time, money and skill.

By EDWARD D. FALES JR.


THE mark of a 1956-model house is not its size or shape or color, but how much up-to-date machinery it has to make living easier.

The '56 machines that wash the cups and cool the people are markedly different from their counterparts of only a few years ago. They do a better job. And all are often built in as parts of the house.

How many you can have depends mainly on your pocketbook. A man of average skill can cut the cost substantially by putting them in himself.

It costs $35 in some cities to have someone install a garbage disposer, $50 to $75 for a dishwasher installation, $35 or $40 to have an air conditioner put in your window. You should be able to save much of that.

Installation cost depends partly on

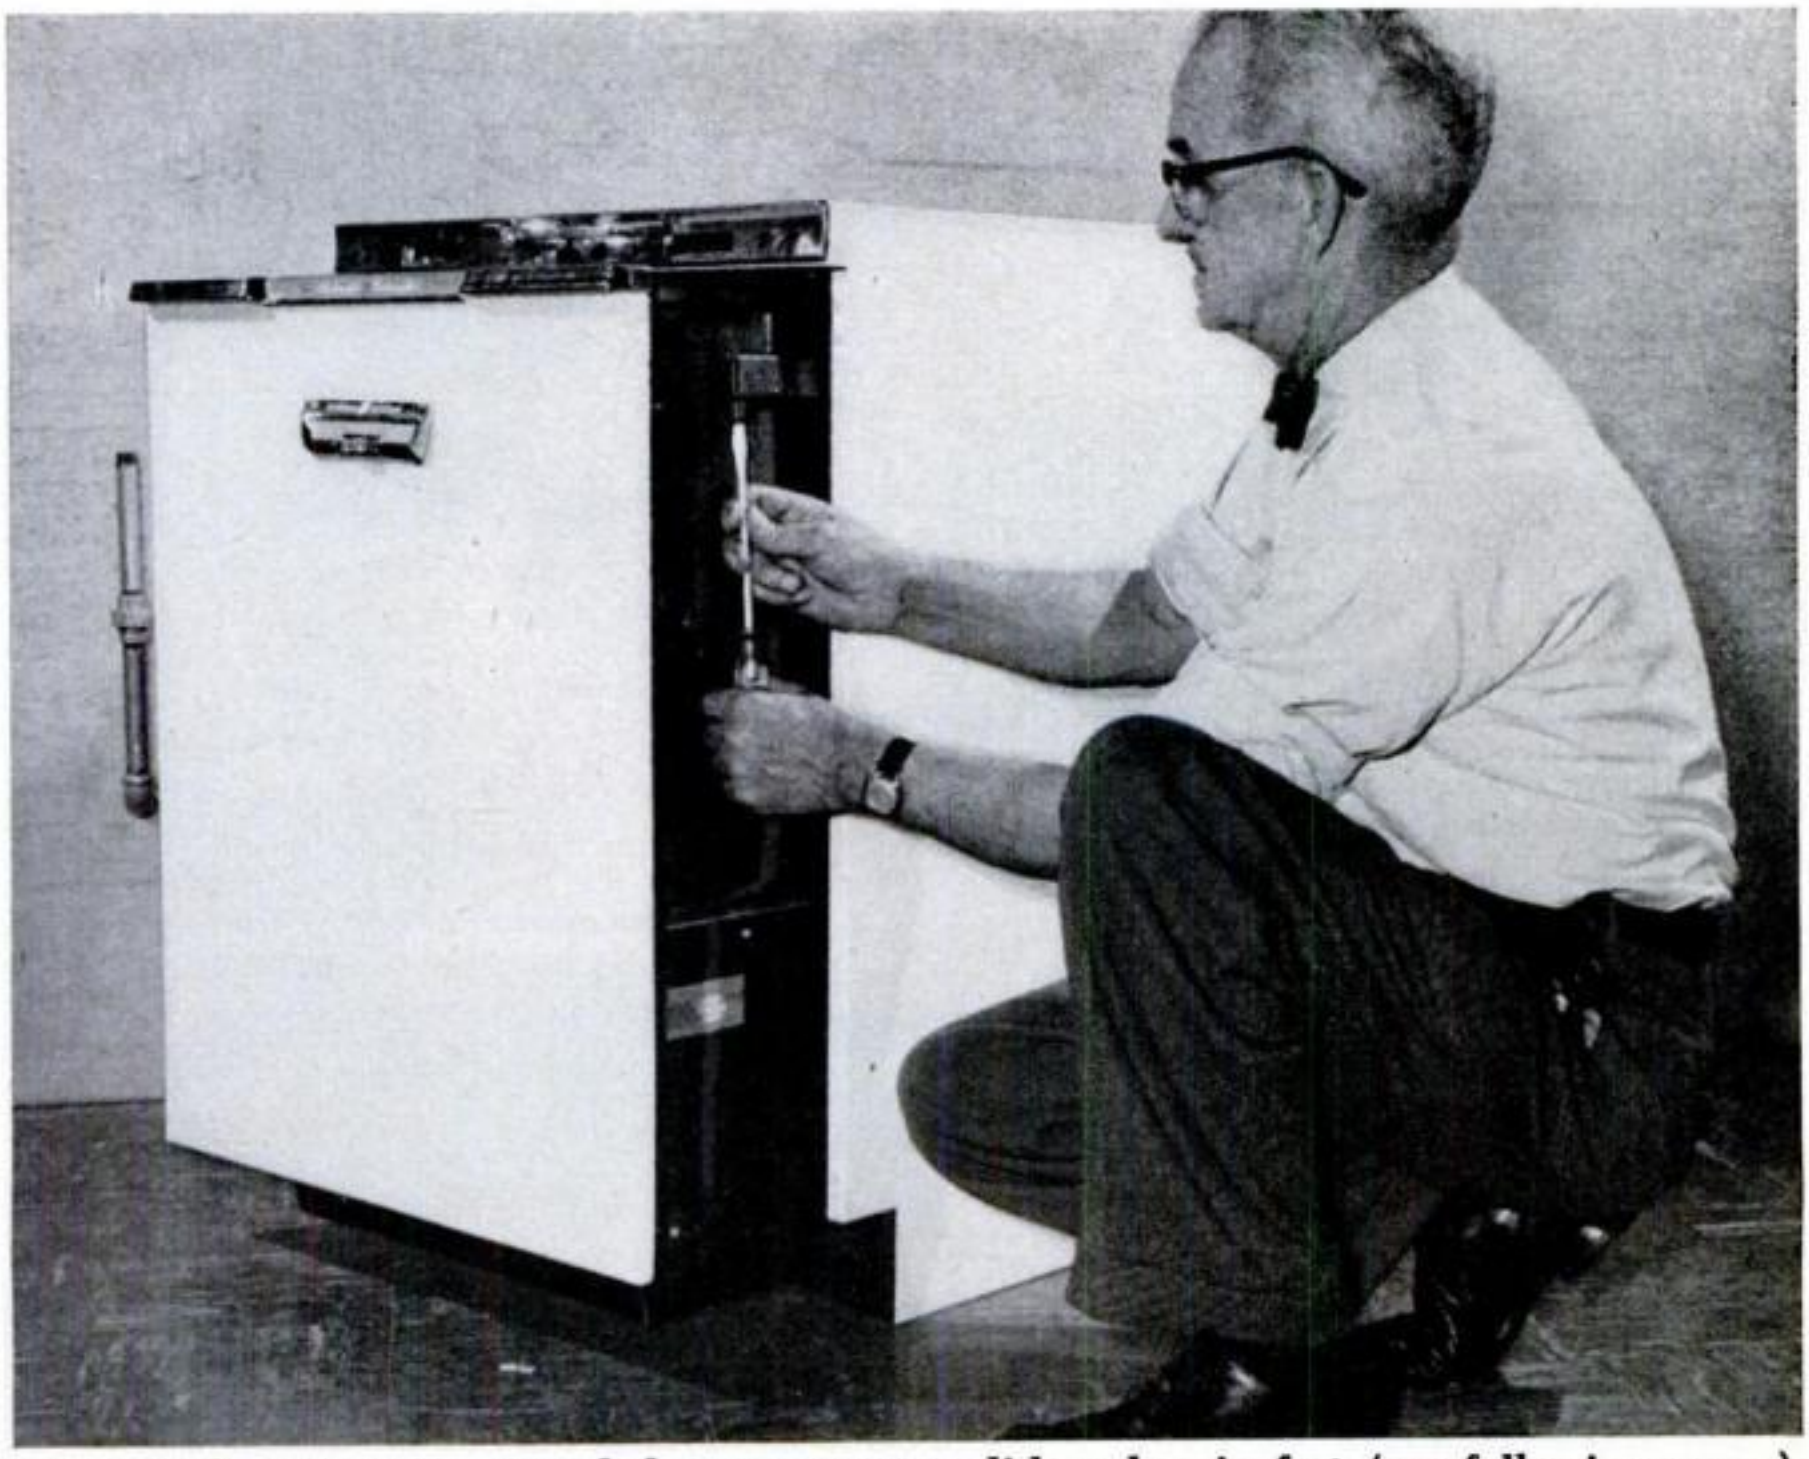

John Blank, GE expert, reveals how pros put a dishwasher in fast (see following pages).

Copyrighted material

Nine steps install a dishwasher alongside the kitchen sink

where you locate your appliance. The closer it is to plumbing and electrical lines, the less you will spend for connections.

You may also save on the prices of appliances themselves by shrewd shopping.

Skill and tools. Reasonable competence at simple electrical work and carpentry will see you through. Such tools as electrician's snakes and pipe-threading dies are rarely called for. With many water-using appliances these days, synthetic-rubber hose is used; and those that are permanently set in can be connected with seamless copper tubing, with soldered joints or compression fittings.

Here are some general points:


•Circuits. Most appliances need plenty of juice. You may have to give some of them a private line to the fuse box. If you don't have spare circuits, it may pay you to have them put in.

•Grounding. The housings of *all* home appliances should be grounded for safety. Where this is not done automatically via metallic plumbing or BX armor, be sure to add a reliable, permanent connection to ground.


•Voltages. Appliances drawing heavy current—ranges and ovens, electric clothes dryers and water heaters, and larger air conditioners—are not always standardized at 220 volts. And depending on where you live, you may have from 208 to 240 volts. Since a stove built for 230 volts will work about 10 percent slower on 208 volts, you should order a stove rated for your voltage.

Here's a report on new appliances, and on the carpentry, wiring and plumbing that they involve.

Air conditioning. Most window units need no plumbing. The new models in the smaller sizes (⅓ and ½ horsepower) draw only about eight amperes. They can be plugged into any 110-volt outlet, as long as the circuit is not already heavily used. Installation is mainly a matter of mounting the housing in the window and

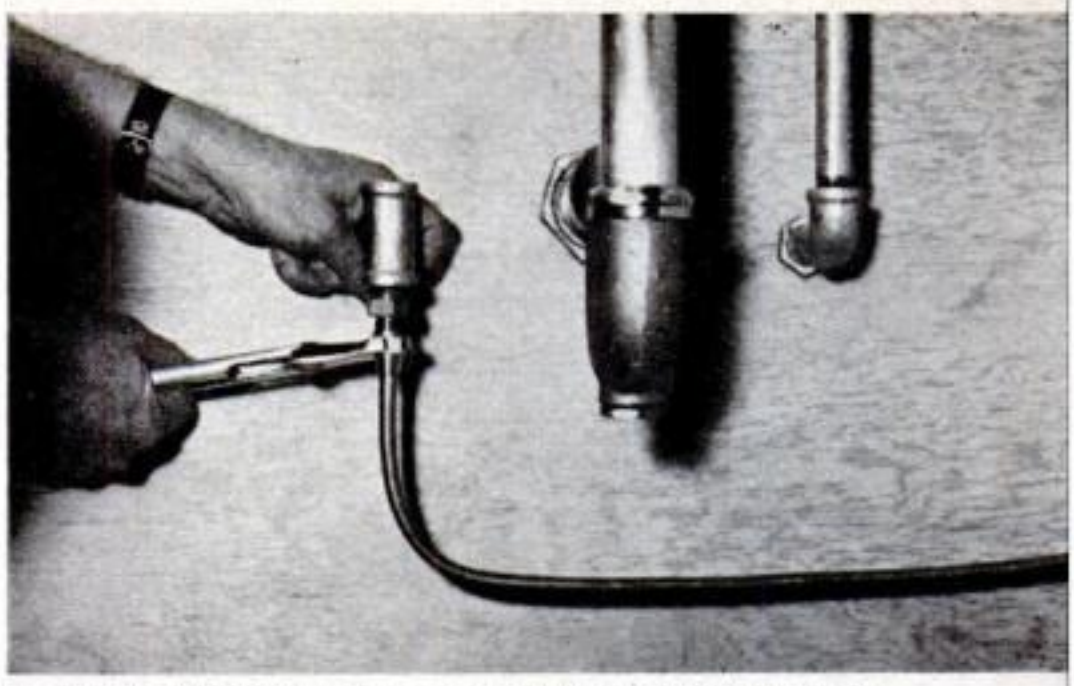



1 HOT-WATER SUPPLY comes from kitchen-sink pipe. Elbow is replaced with tee, into which compression fitting for copper tubing is screwed. The pipe to the sink can then be replaced.

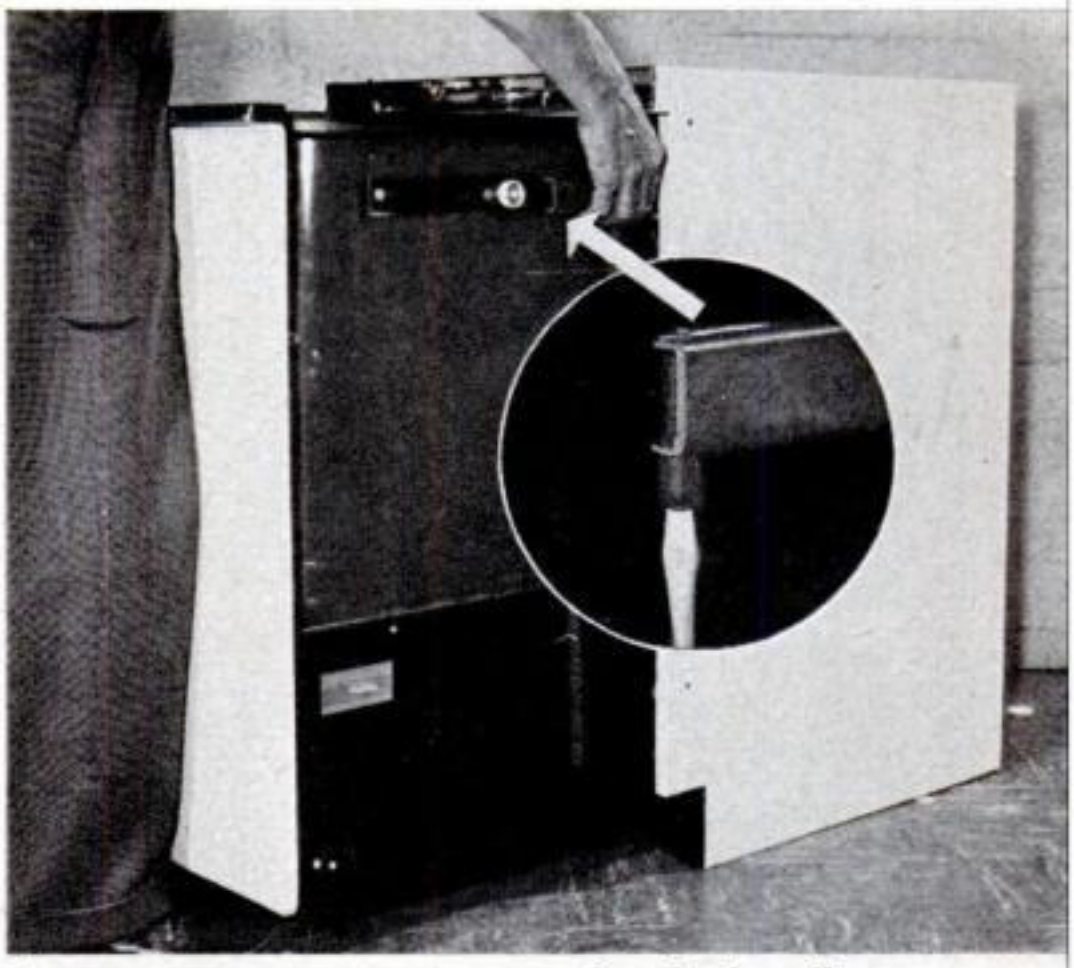


4 WASHER TUB COMES OUT after both roller bumpers are removed (inset). When front rollers clear slides, front of tub is lowered to floor. Then slides go back, rear is lowered.

7 ELECTRICAL CONNECTIONS: Water-inlet leads are plugged into automatic valve (below). Cable from house wiring is brought to box and connected, white wires to white, black to black.

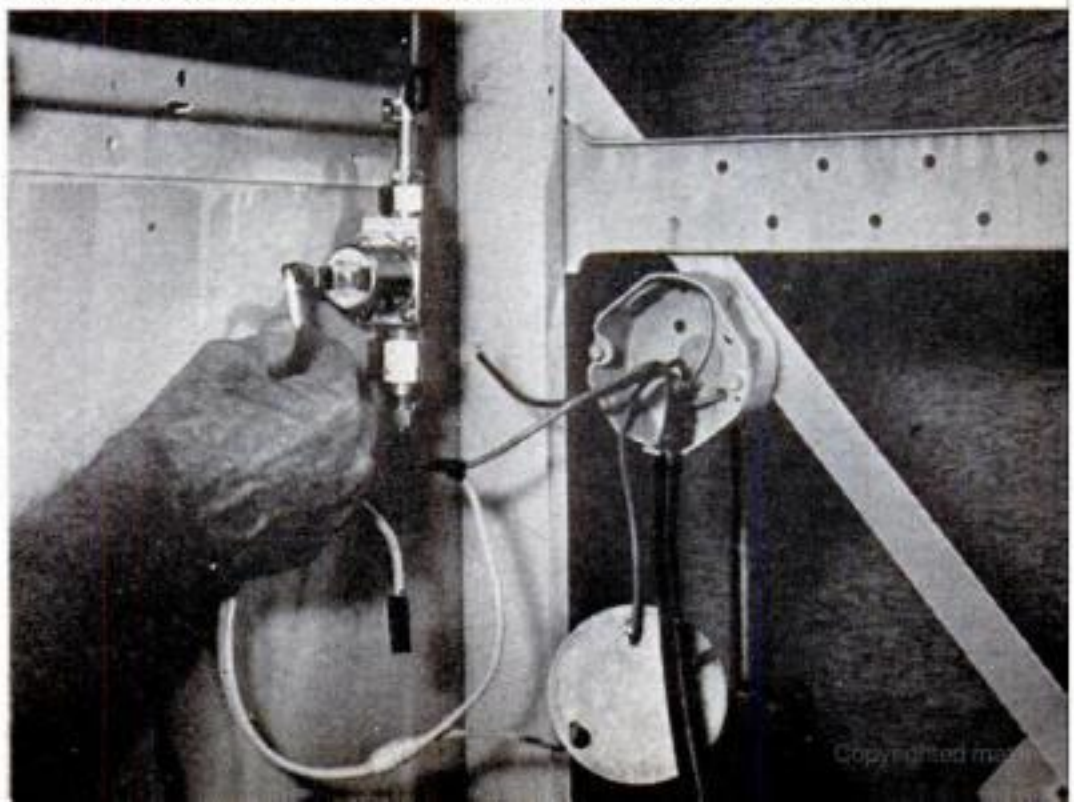


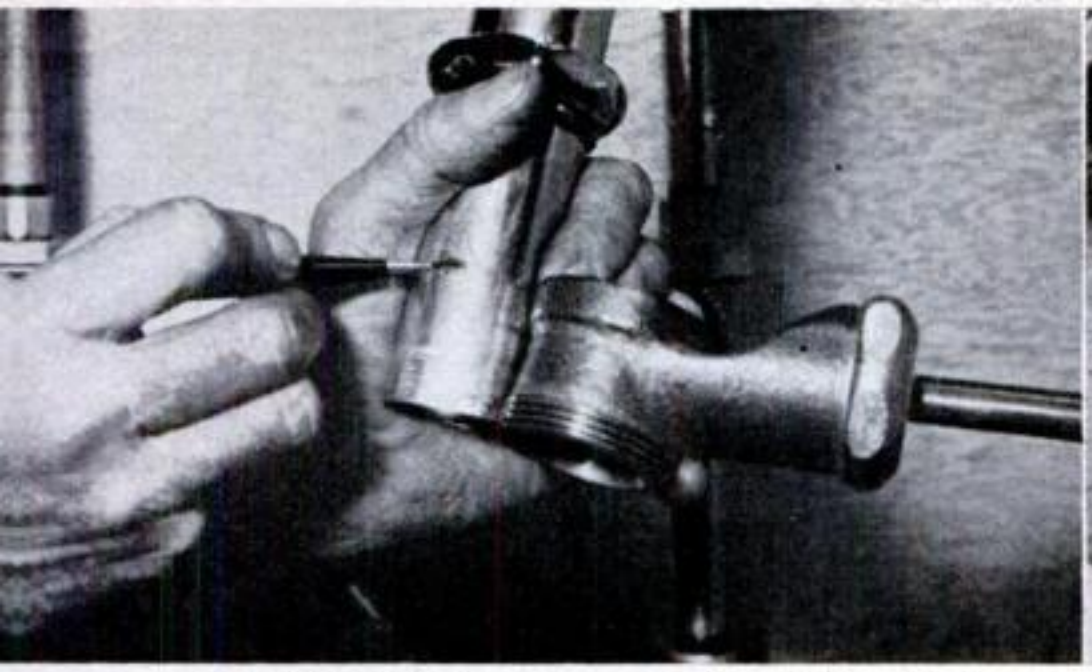


2 SINK DRAIN serves washer. Pipe that connects sink to trap is removed and marked for shortening (above). It will be cut just enough to accommodate a special connector.

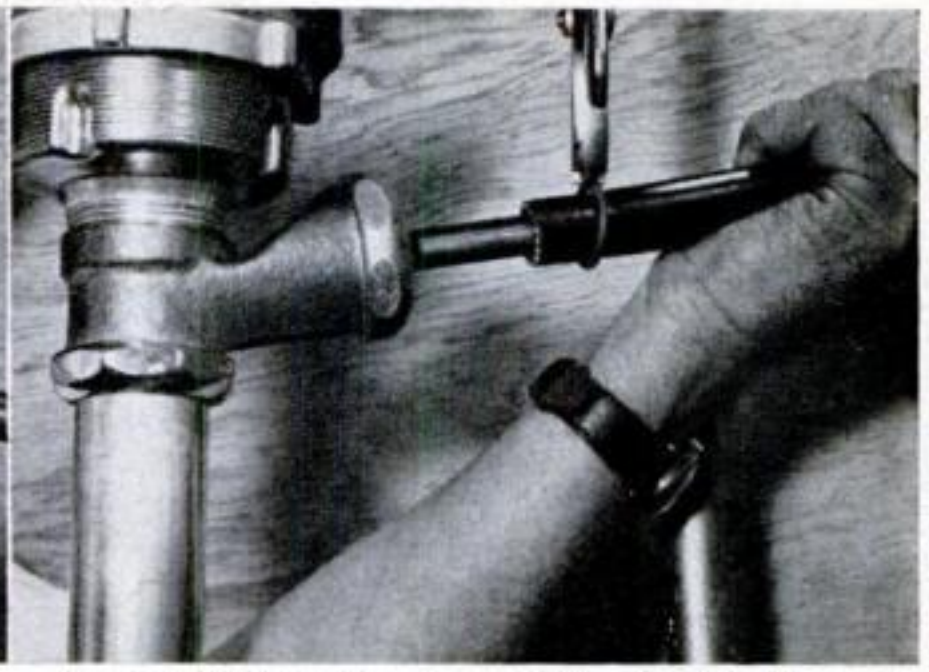

3 DRAIN HOSE is clamped to short tubing soldered into connector. Neither hose nor supply line is yet connected to washer, so that there is plenty of room to work on plumbing.

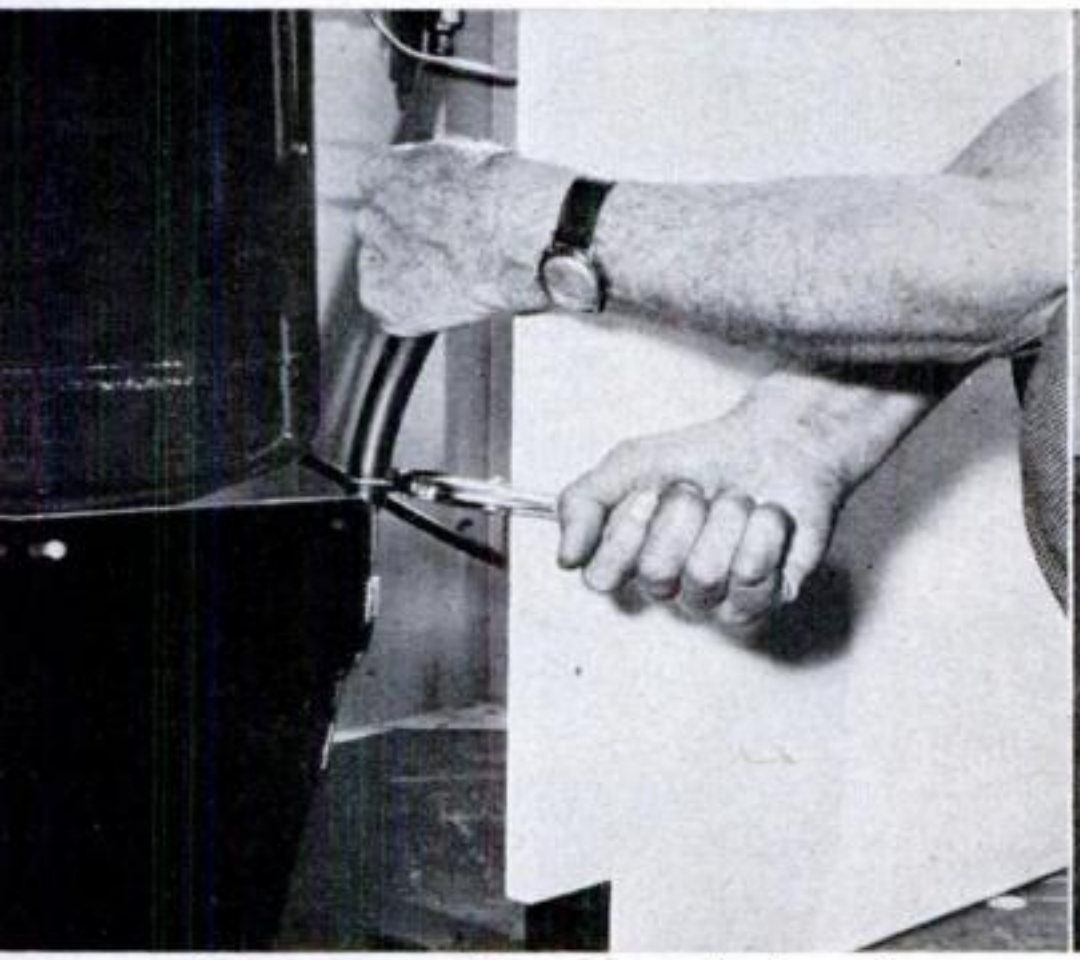


5 TUB DRAIN is unclamped after tub rests on floor. This hose is not the other end of hose hooked to sink drain (photo 3), but a separate one attached to copper tubing in the cabinet.

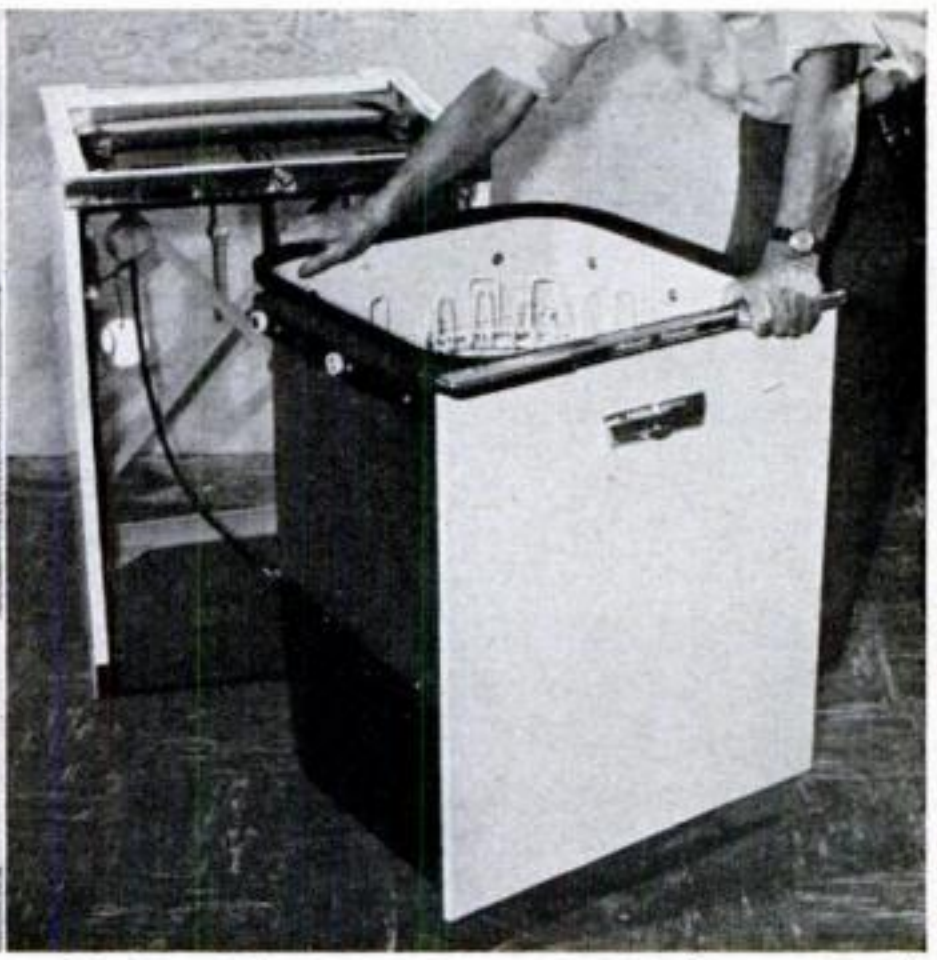


6 TUB CAN BE MOVED AWAY after cover is taken off electrical junction box (inside cabinet). This makes room to screw the cabinet to wall and connect electricity and plumbing.


8 DRAIN HOSE from sink pipe is clamped to drain tubing inside cabinet. Hose at other end of this tubing is reattached to washer tub when the tub is to be replaced in the cabinet.

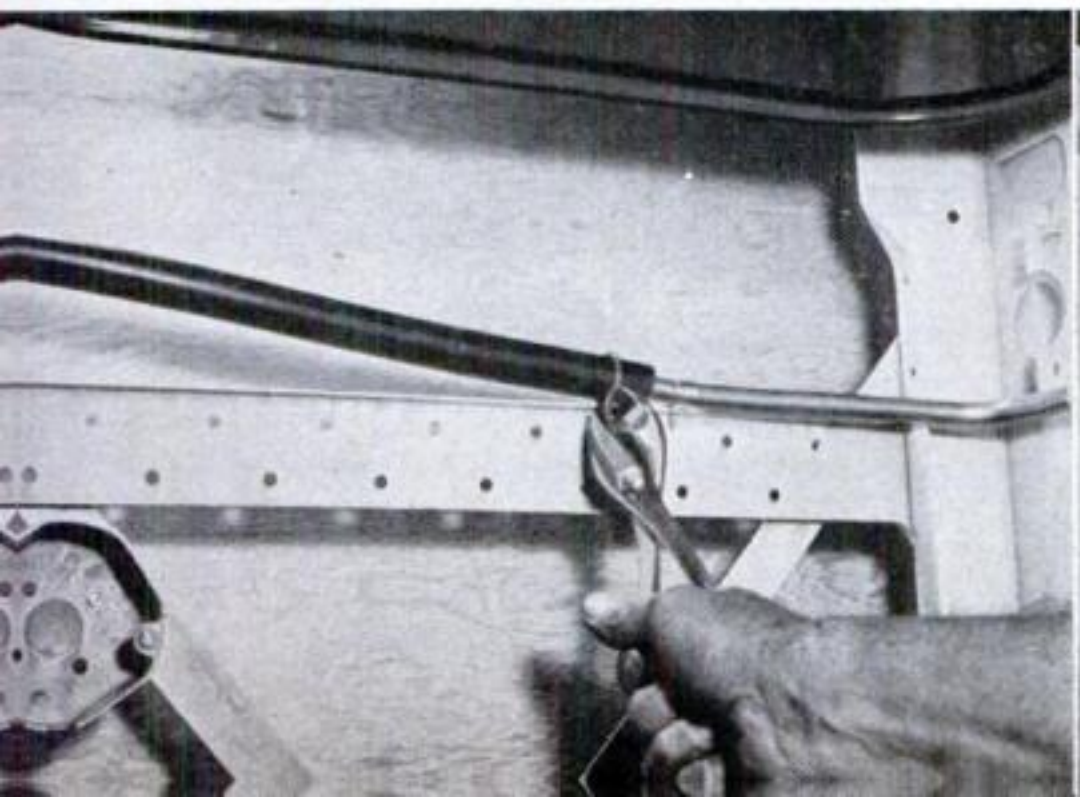

9 WATER-SUPPLY TUBING comes up to connect to automatic valve with compression fitting. Now tub drain hose can be attached, tub put back in the cabinet and the bumpers replaced.

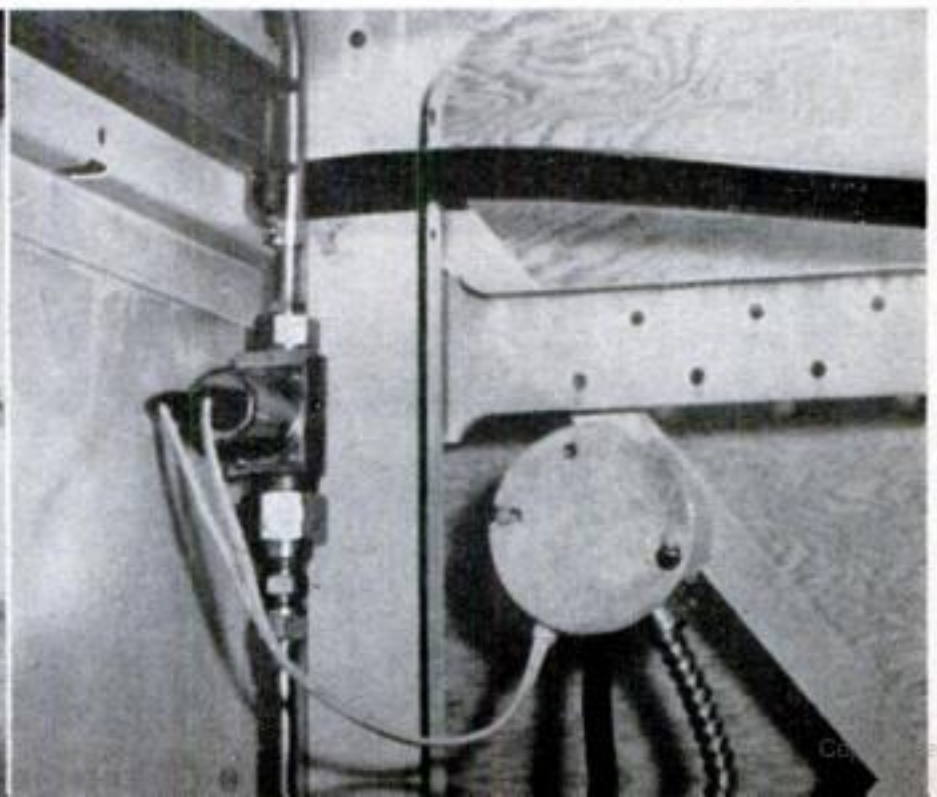



*The right accessories speed installation**

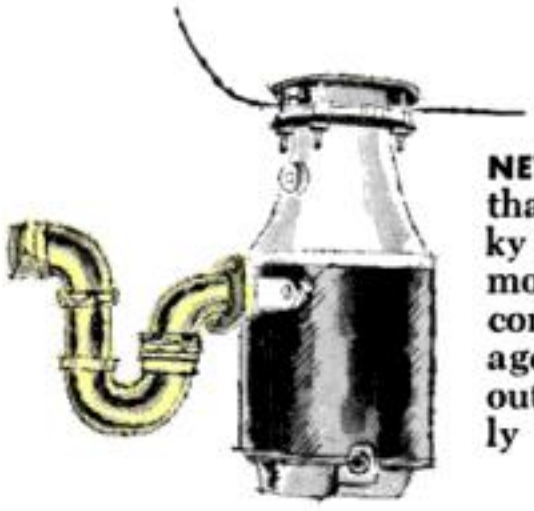

NEW SINK TRAPS that replace bulky old-fashioned models help you connect the garbage disposer without making costly pipe changes.

VENT PIPE for clothes dryer is flexible, easy to cut and fit. It comes with a weatherproof cap that protects outside wall opening.

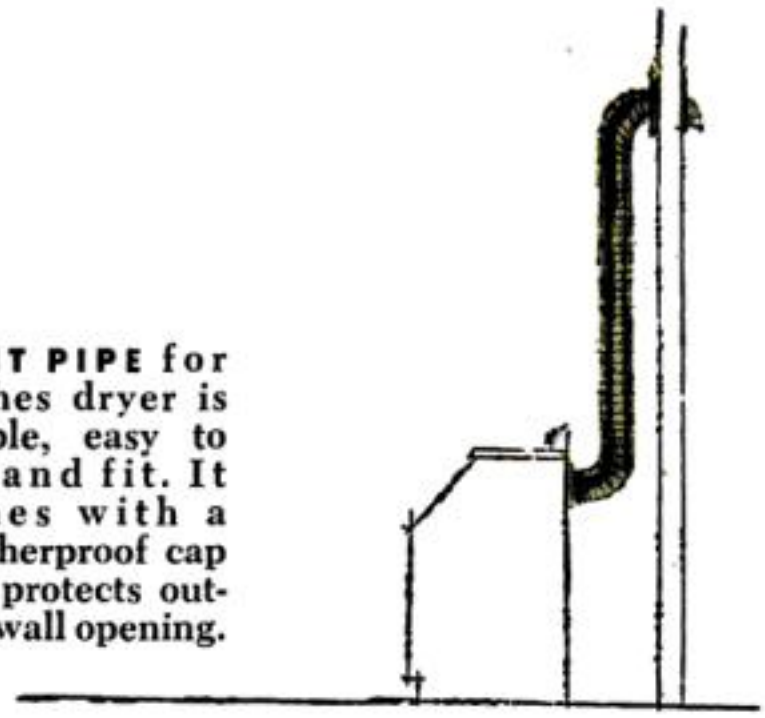


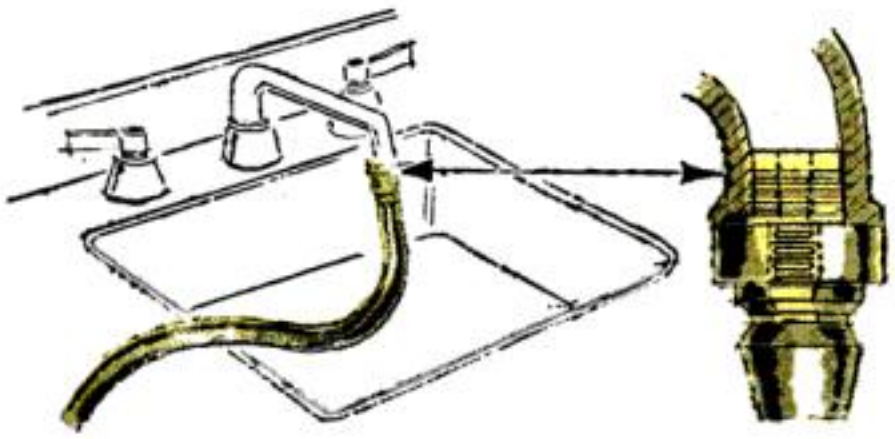

HOSE ADAPTER lets you fill washing machine from kitchen-sink faucet. Self-tapping adapter screws into faucet. Some kinds have a quick-connect fitting that lets hose snap on and off.



WITH LONG HOSE you can locate washing machine where you want it and still hook it to existing plumbing. The hose comes in almost any length.

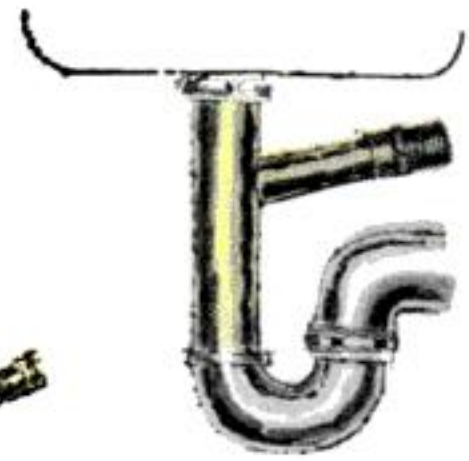

READY-MADE TEE, which fits in place of the pipe connecting the sink to the trap, provides an easy way to hook a pump-type dishwasher to a drain.

blanking off the sides of the opening. The job may take two to four hours. You will want a husky friend around to help horse the heavy unit into place.

Whole-house conditioning is easier and cheaper ($600-$1,000) now with prefab plastic ducting that you can put in the attic (see page 164). There is no sheet-metal work, but you have to chop several holes in ceilings. You also need a 220-volt line to operate the cooling unit, and some way to hoist it to the attic.

If you already have ducts, for warm-air heating, you can hook any one of many types of units right to them. This also takes 220-volt electricity, and for water-cooled outfits, plumbing.

Whatever system you plan, here are good points to keep in mind:

• It may be better for several reasons, engineers say, to buy a unit a little too small rather than one that is too big. You can get good results from a small unit by letting it run longer hours—so the heat load doesn't build up.

• It will be extra-costly to air-condition your kitchen. It throws off far too much heat.


• A water-cooled unit may be more reliable on very hot, muggy days, but it needs plumbing. And it uses a good deal of water—unless you install an outdoor cooling tower.

The newest kitchens have ovens, ranges, refrigerators and freezers that look like part of the cabinetry. One expensive refrigerator-freezer (General Electric) resembles a ready-made cupboard—you just hang it from a steel angle lag-screwed to wall studs.


Built-in refrigerators and freezers, which cost about the same as de luxe free-standing models, fit into enclosures that you make: "boxes." These are actu-

**Further information about accessories shown here can be obtained from: General Electric Co., Appliance Park, Louisville 1, Ky. (waste connectors for disposers and dishwashers); Flexible Tubing Corp., Guilford, Conn. (dryer vent); P-G Products Mfg. Co., 1455 Boston Rd., New York 60, N.Y. (all others shown).*


Copyrighted material

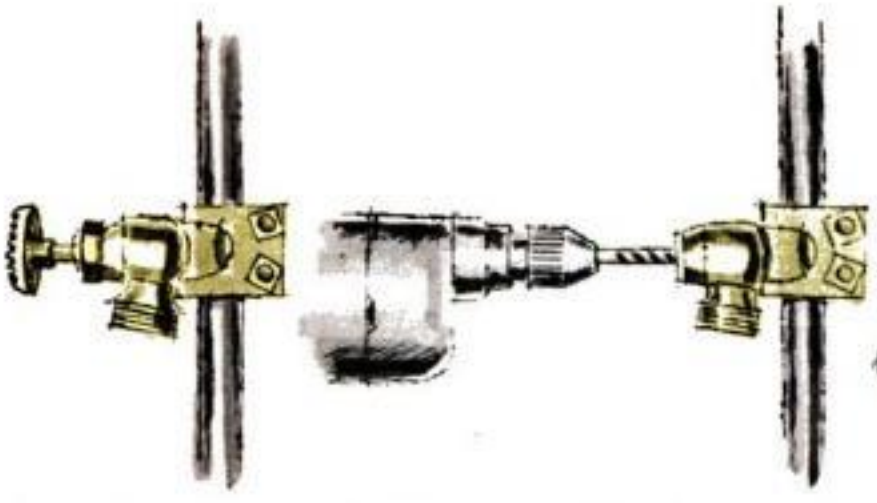

SADDLE VALVES quickly provide faucets for clothes washers. Valve body clamps around pipe and guides drilling of hole for the valve stem.

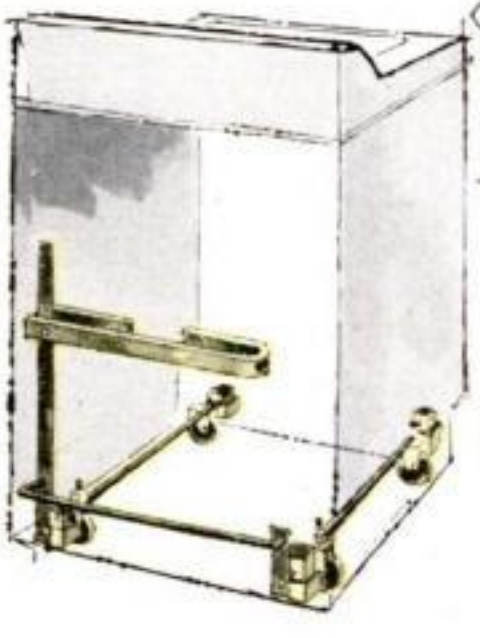

WHEELED FRAME makes a standard washer portable—it can be used near sink and stored out of the way. A handle lowers the machine to the floor for operation.

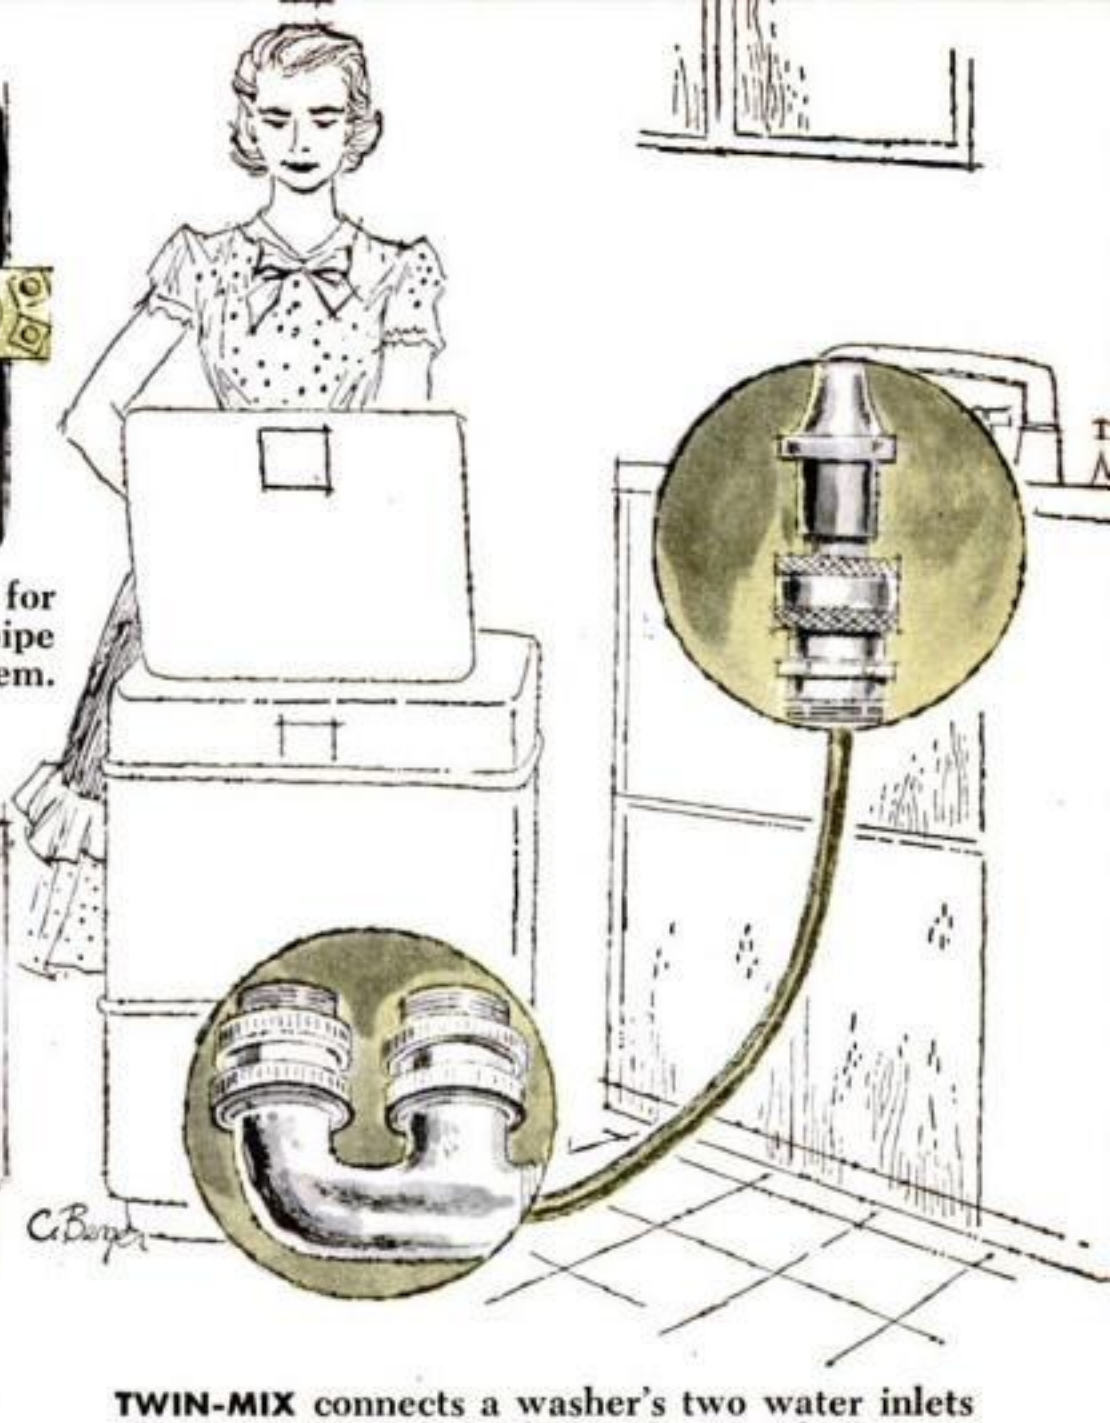

TWIN-MIX connects a washer's two water inlets (hot and cold) to one hose when machine must be filled from sink faucet. This arrangement makes machine's mixing controls inoperative.

ally sort of rudimentary closets that you build out from the real wall. Some built-ins have vents (to let air circulate around the machinery) made as part of their fronts. For others you have to build louvers into your box. One maker (Westinghouse) provides separate compressors, which you can install as much as five feet from the boxes, even hanging them from the cellar ceiling if you like.

Refrigerators and freezers draw little juice and plug into a 110-volt outlet.

Electric cooking units need 220-volt lines brought to them. Once that is done, they are easy to hook up, with simple connector blocks and ample BX cable factory-attached. Gas units are connected the same as ordinary gas stoves, a straightforward pipe-fitting job for a knowledgeable handyman.

Ovens fit into boxes exactly as refrigerators do. The oven just slides inside, but must be carefully leveled (or it won't bake evenly). The range drops into a hole sawed out of a counter top. The range flange supports it, and clamps underneath lock it in place.

Garbage disposers ($80 to $120) are simple to install in modern sinks. You remove the drain flange and drop in the disposer sleeve. The disposer itself replaces the drain pipe between sink and trap. It bolts on—no pipe-fitting.

The job is not much more involved with an old-style sink if you make wise use of installation accessories. A number of fittings can adapt the disposer to odd-size drain openings. Some distributors will even lend you a special hole saw, powered by a ½" drill, that cuts a new opening in the sink. Old traps are likely to be too big to accommodate a disposer, but several different replacement traps are made for getting around this obstacle.

Wiring: Disposers need 110 volts nearby, but not necessarily a separate circuit. Some units have their own switches.

Dishwashers ($150 up) go next to the sink where hot water and drain connec-

[*Continued on page 266*]

Copyrighted material

Air-Conditioning Kits

that use a new kind of fold-up duct let you install a central cooling system with home tools and a handyman's skill.

By John L. Springer

COMPLETE central air-conditioning systems now come in kits that you can install yourself.


What makes this possible is a new system of light, glass-plastic ducts that you fold together and join into lengths to carry cool air anywhere in the house. There's no metal to cut and fit, no framing needed to support their weight.

The cooling units used with these ducts require no water. You can set them up in an attic, crawl space or basement. If you already have a warm-air heating system, you can connect this unit to its ductwork.

You can buy one of these new systems for as little as $600 complete—less than half the cost that contractors usually quote for whole-house units.

The kits are designed primarily for one-story houses that have enough clearance, either over the ceiling or under the floor, for you to crawl around in to set them up. If you have an existing outside wall opening 30″ square—large enough for the main cooling unit to pass through —no cutting of joists or wall studs is necessary.

In fact, the manufacturers* have done so much simplifying, eliminating difficult furnace, duct and water hookups, that surprisingly little carpentry is needed

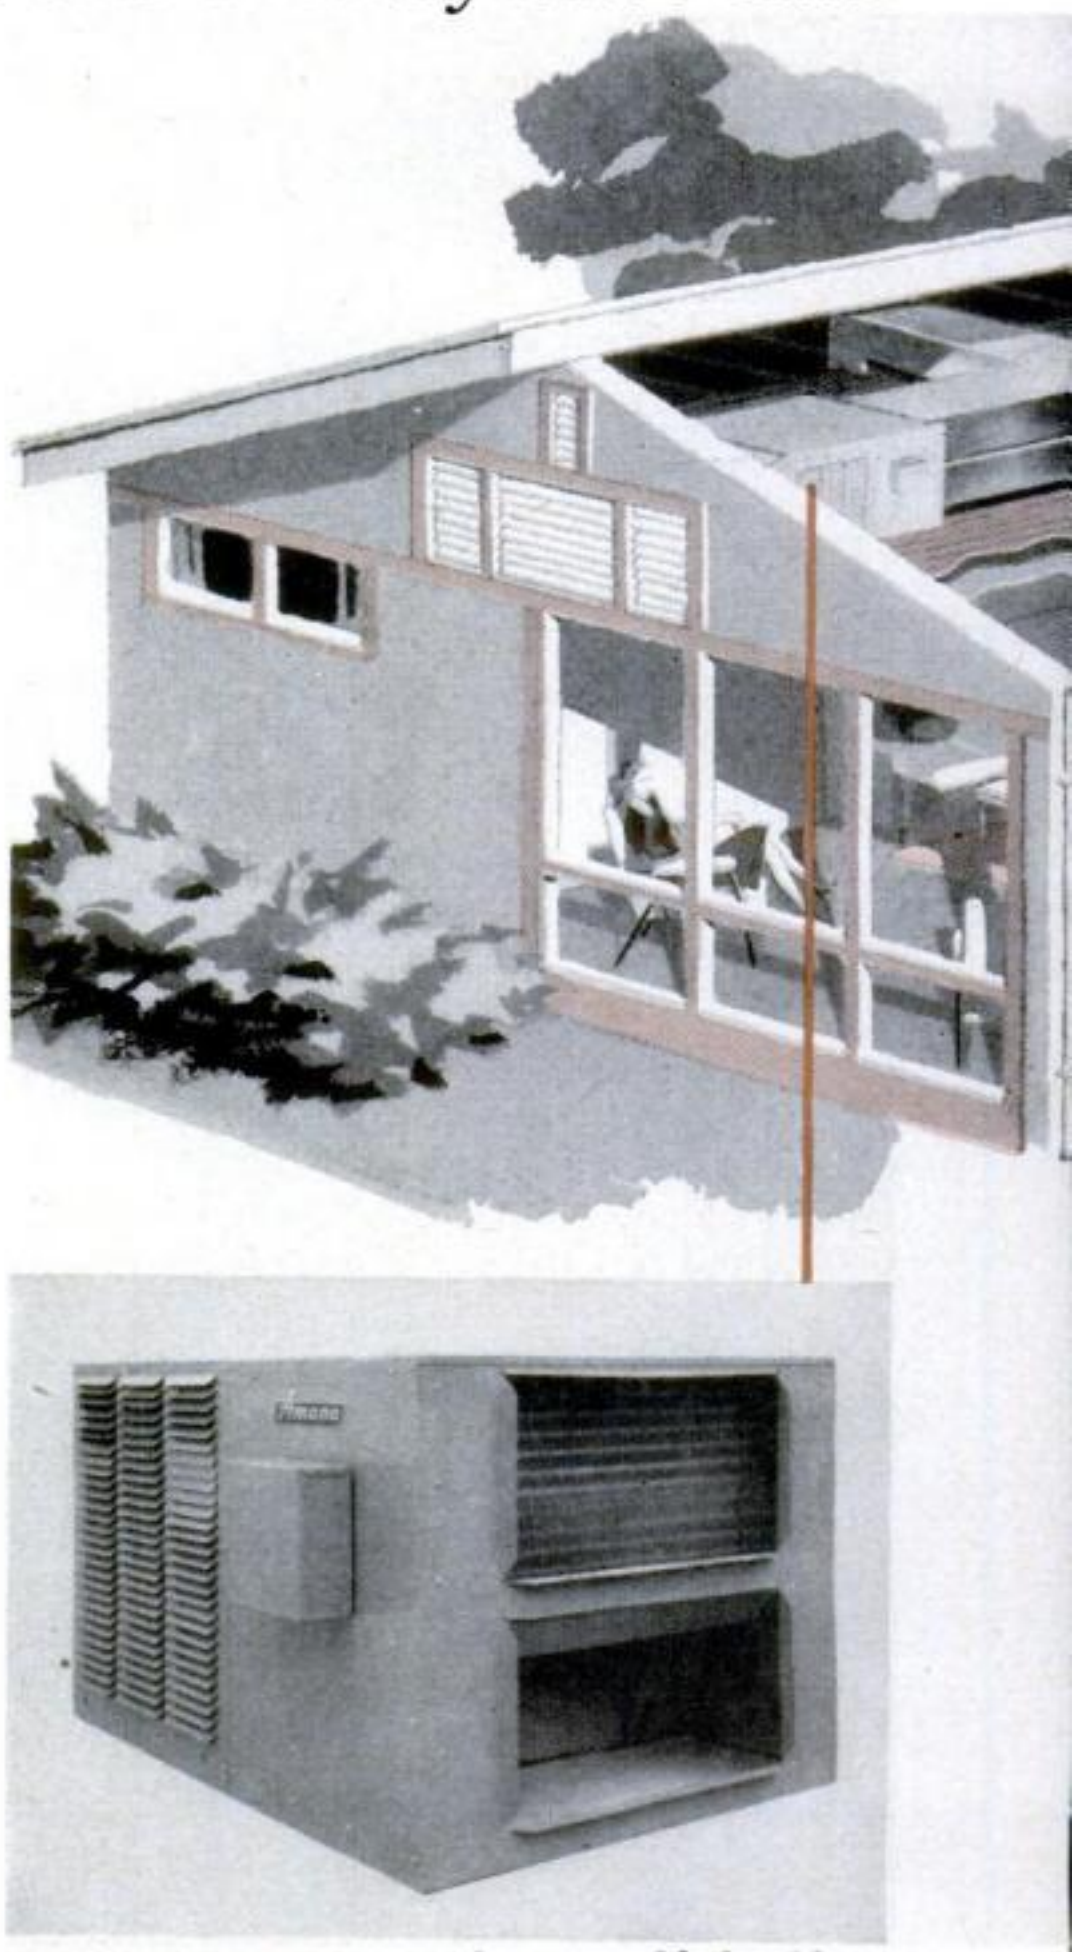


COMPACT COOLING UNIT is mounted behind louvers in end wall of house. Hot room air from a central collector is pulled into lower opening, cooled, then fed to rooms from upper one.

*Among those making kit air-conditioning systems are: Amana Refrigeration, Inc., Amana, Iowa; O. A. Sutton Corp., 1814 W. Second St., Wichita, Kan.; Philco Corp., 445 E. Tioga St. Philadelphia.

Copyrighted material

AIR DUCTS are mitered and taped together to form the 90-degree elbows that lead from main supply line down into rooms. The ducts are light enough to be tied in place with wire.

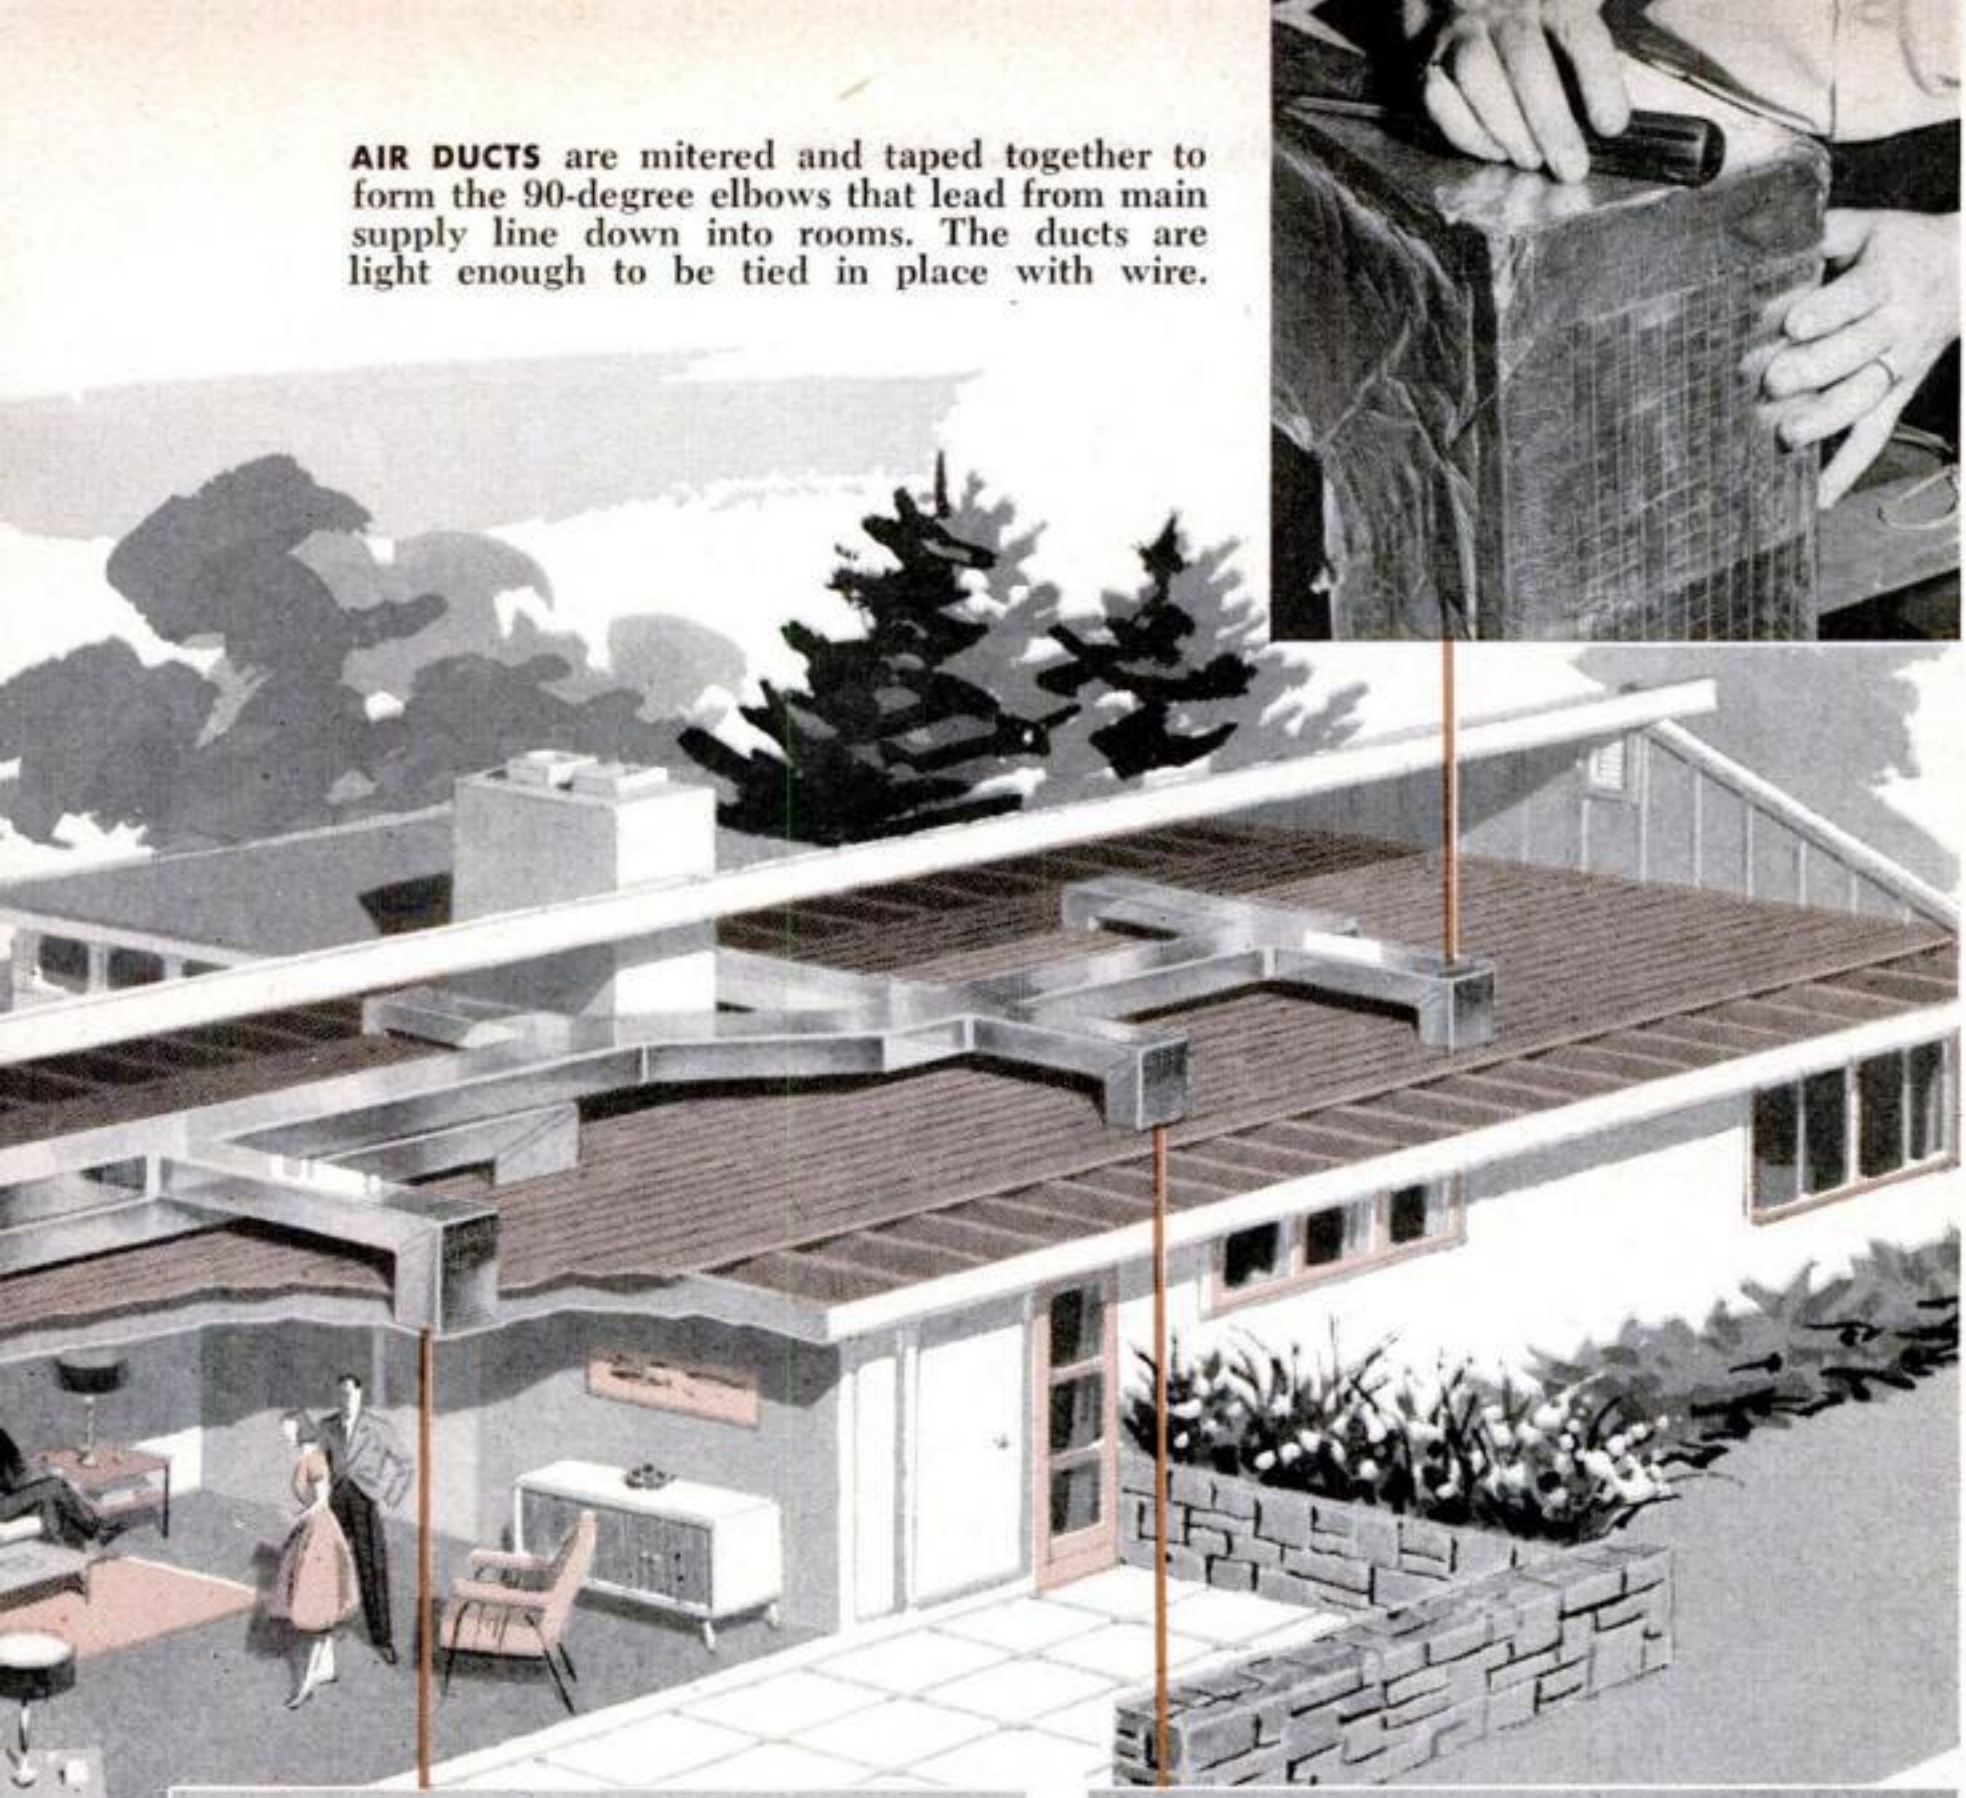




SINGLE RETURN GRILLE for collecting warm air is located in ceiling above hallway or other central area of house. Removable aluminum filter is inserted and louver bolted over it.




COLD-AIR OUTLET fits in ceiling of each room. Small diffusing grilles go between joists without framing and are quickly screwed to the ceiling after the ducts have been installed.

Copyrighted material

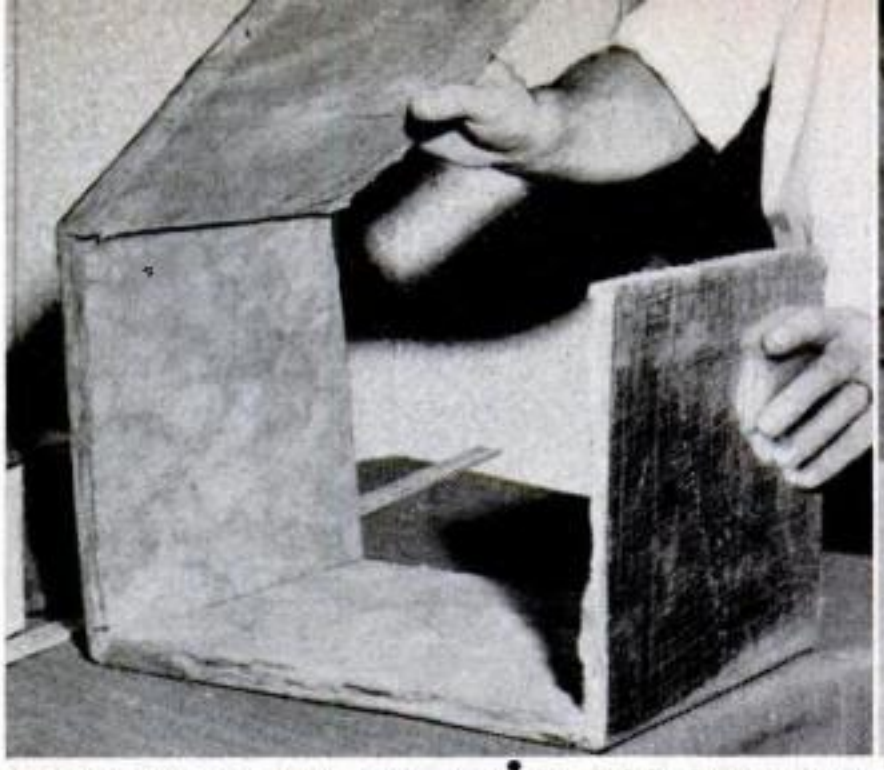

DUCTS COME FLAT, are quickly folded into rectangular conduit. Glass-fiber lining ¾" thick **is beveled along the score lines so that it bends easily without bunching at the corners.**

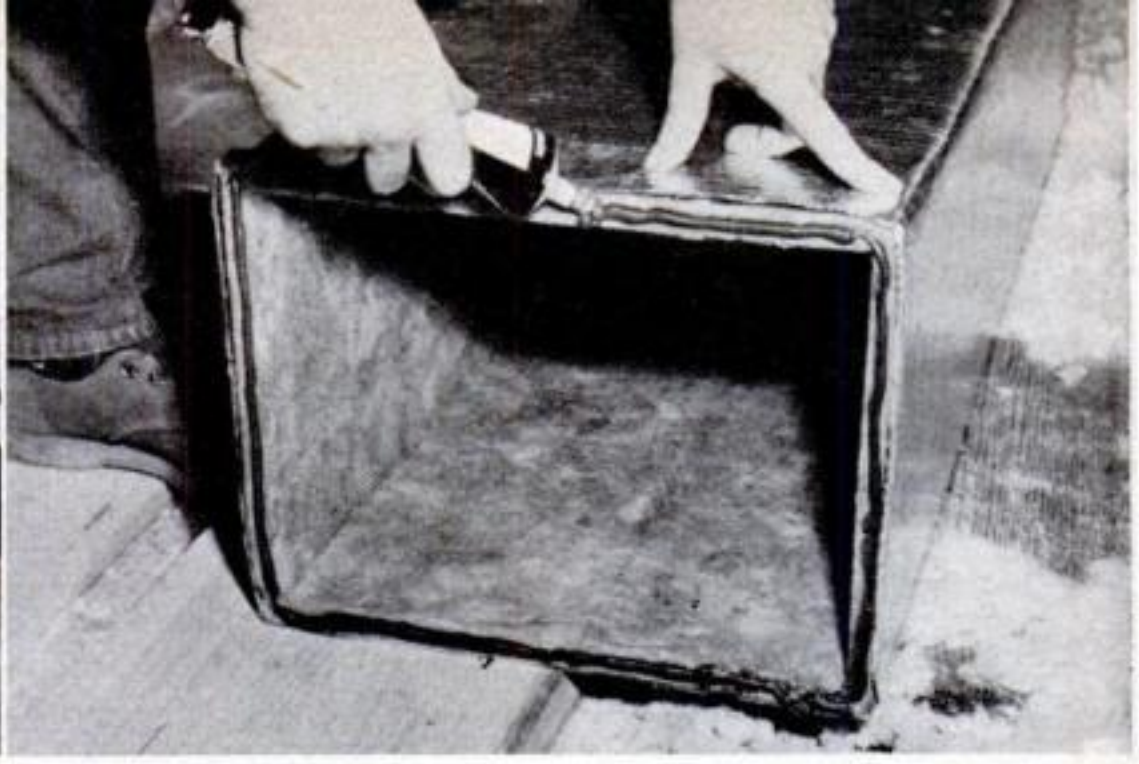

EDGES ARE COATED with a quick-drying sealing compound before the sections are joined together. **The inside surface has been smoothed to minimize resistance to the air flow.**

anywhere. In the attic installation, one wall opening for the main unit, two small ones for moisture drain-off, and a ceiling opening in each room are often the only cuts needed.

The parts you get for the $600 price tag include a two-horsepower cooling unit, prefab ducts, a remote-control thermostat, grilles, and all necessary hardware to complete the job.

The two-horsepower conditioner (roughly equal to a two-ton unit) is designed to cool an average-size home with up to 1,500 square feet of floor area. One company (Amana) also makes, for less than $1,000, a 3½ horsepower unit to cool up to 2,200 square feet.

The do-it-yourself conditioner is remarkably simple. In effect, it consists of an oversized window conditioner rigged up with ducts to cover the whole house. But instead of a window, it stands against a louvered wall opening and draws in hot, humid air from the house through one centrally located grille. It then feeds cooled air through separate grilles to each room.

The new ducts are prescored sheets of ¾"-thick glass-fiber board that are delivered flat. On the job, you fold them into a rectangular shape and seal the edges and joints with a special tape.

You can cut and fit the ducts with an ordinary knife. The main supply and return trunks are 10" by 14" and run over or under the floor so that you don't have to cut through any joists. The individual room ducts are 6" square and lead down between the joists to the ceiling, eliminating the need for making breaks in walls and studs.

Templates in the kit help you to make neat, circular cuts in the ceiling for outlets.

If the conditioner is installed in the basement, registers are set in the floor. Engineers say that the attic system is better, however, because it draws off warm air that rises and feeds in cool air that settles. Floor registers are all right, but

HOISTING COOLER TO ATTIC takes a little engineering. You can use block and tackle to get it up there; or, better, borrow a fork-lift truck or a sign painter's derrick to do the job.



Copyrighted material



CEMENT IS BRUSHED on joints to hold tape that will cover seams. The ducts are surfaced with fire-resistant aluminum sheet that helps insulate the cool house air from hot attic air.



ALUMINUM TAPE 4" wide is wrapped around the seams to strengthen and seal the joint. Duct sections come in 4' lengths and can be cut and shaped with an ordinary knife blade.

they tend to draw off cool air, which you want, while leaving warm air trapped at the ceiling.

In a typical setup (such as Philco's), an attic installation also lets the conditioner double as an exhaust fan, drawing off hot attic air before it has a chance to heat the rooms below. A separate fan in the unit does this, pulling fresh air into the attic through another louver at the opposite end of the house. The fan can be used independently of the cooling unit or turned on a short time ahead of it, as engineers advise, to lessen the load on the conditioner.

Whichever installation you make, you'll need a three-wire, 220-volt cable to power the unit. Many communities require that such wiring be put in by a licensed electrician.

Even at that, you'll be able to put in a complete home air-conditioning system for the price of a couple of window units. And just think—you can put away your screens forever and leave your storm windows on all year round. END

Room Conditioners Do New Tricks, Too

THIS year's crop of room air conditioners will be slimmer, slicker, more versatile and easier to install.

On most smaller models, you won't have to stand the cost of a special electrical circuit. These '56 units draw less current than an electric toaster and can be plugged into existing outlets in most homes without overloading the circuit.

You won't have to give up half a window for a big, bulky box that pokes into the room and steals light and view. Slim units, mounted right in the wall, sit inconspicuously flush with the inside surface and project a few inches outside.

They will be prettier, too. Many now come attractively finished in colors to match your room decorations. One unit (Cory) has a removable plastic cover plate that can be painted or wallpapered and put on in the winter. Flush-mounted units can be hidden behind drapes.

They will do more jobs. At least two lines of conditioners (Westinghouse and Emerson) have electrostatic cleaning devices that remove smoke, pollen and dust from the air. Another make (Amana) uses a charcoal filter to trap odors and fumes.

Several double-duty units circulate cool air in summer and warm air in winter. Most air conditioners you will be able to install and forget—thermostats now work with timer controls to make your cooling system as automatic and attention-free as your heating system.

Copyrighted material



1956 / Home Show


Modern Clock *for your wall is old clockworks dressed up with scraps of wood and tin.*

A TIN CAN, some minor doodads and an old clockworks can be made into one of those swank, wall clocks that sell for up to $30. Even if you buy a new clock mechanism, the job should cost you only a few dollars.


Most clockworks fit nicely inside a one-pound coffee can. Drill a ¼″ hole in the bottom for the shaft and mount the motor inside with small stove bolts. If you use a spring-wind clock, no power cord will show.

Twelve arms, tipped with 1″ cork balls, mark the hour positions. The balls are sold at hobby and fishing-tackle shops; they often come with ⅛″ holes in them. If not, drill the balls to fit on the ⅛″ dowels that are used as arms.


Cut the hands from tin or 1/16″ balsa wood. The hands are 4¾″ and 6″ long. Remove the old hands and solder or cement the new ones on top, then replace. We painted hands and arms black, housing gold.—*Ron Anderson, Minneapolis.*

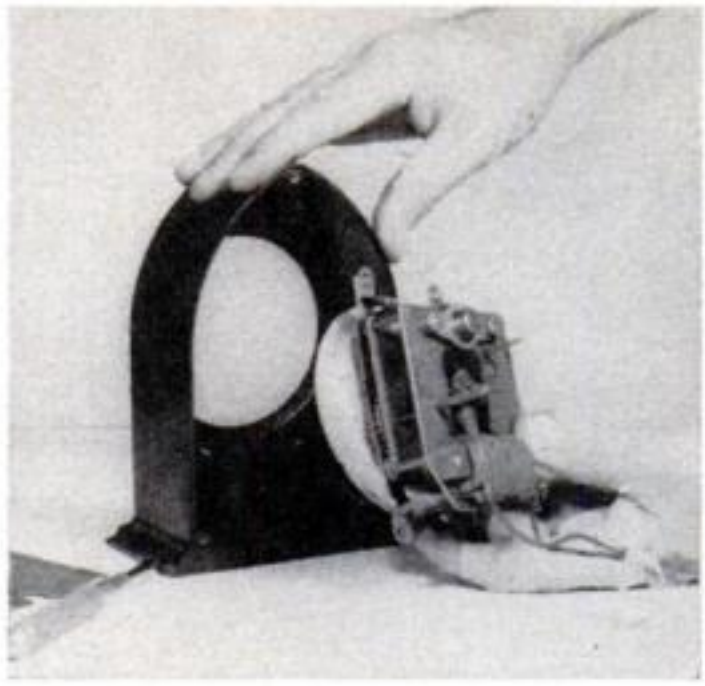

TWENTY-YEAR-OLD RELIC provided a motor for the modern clock at left. You can usually bend the mounting brackets so that they bolt from the side of the can, instead of through the face.

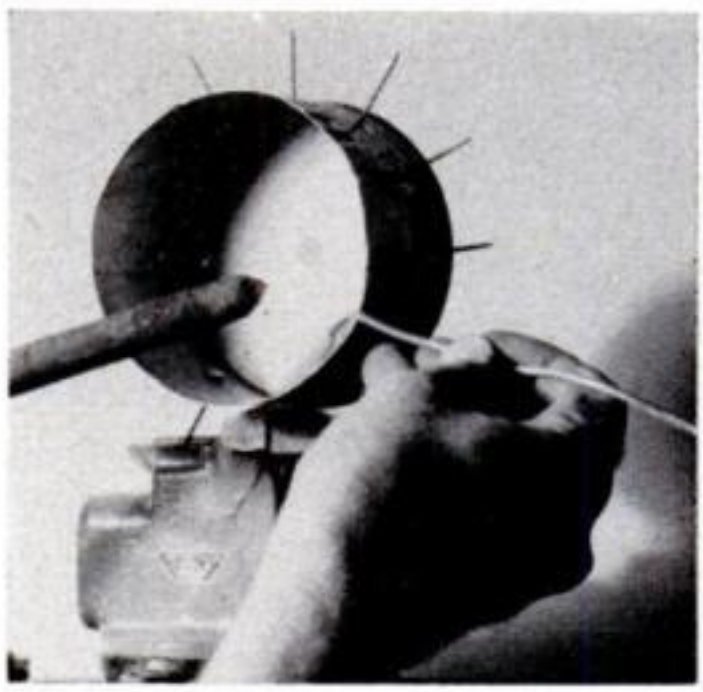

INSERT SMALL NAILS, with points out, through holes drilled at 12 equal intervals, 1″ back from the face. Solder the nail heads inside the can. Attach a metal angle at top to hang clock.

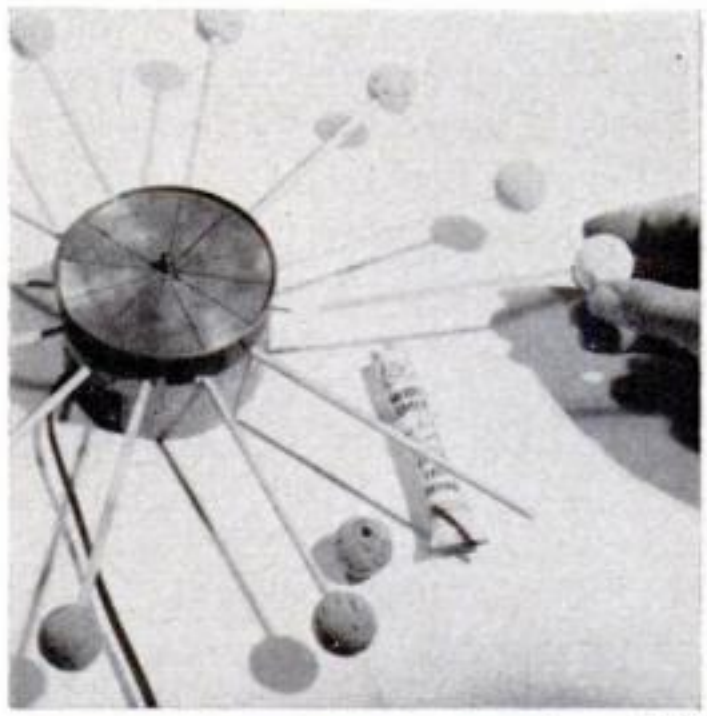

BALLS OF CORK are cemented on ⅛″ dowels, each 5″ long. Clip the nails short that stick out of the can and cement them into snug-fitting holes drilled in the other ends of the dowels.


Copyrighted material

New for the Handy Man







1. Metal Trim Snaps on Doorway. It takes only a few minutes to snap the spring metal above into a kerfed jamb and get a finished doorway like that shown at left. Tin snips are all you need to cut the material. It was specially designed for wallboard walls but can be used on other kinds, too. The surface is already primed for painting. Similar trim comes for use on picture windows.

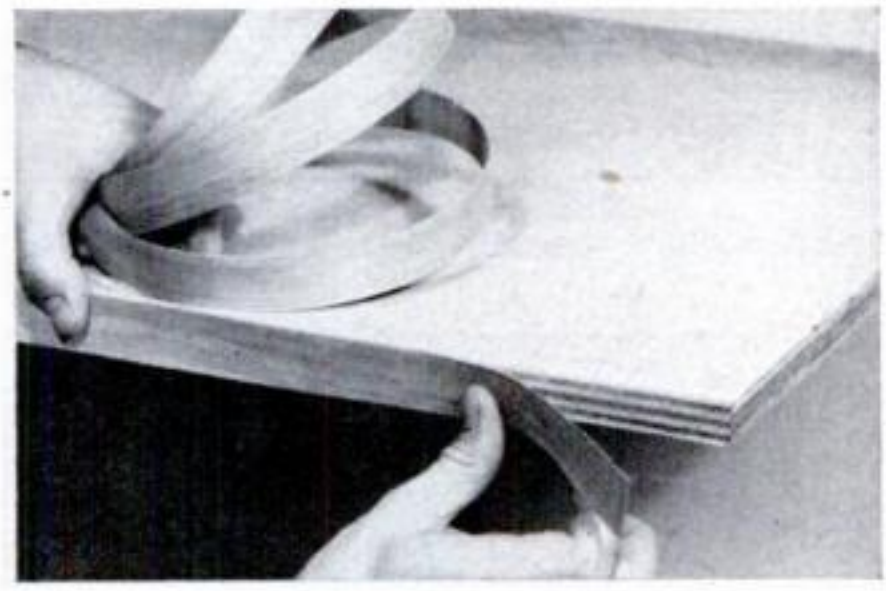

2. Low-Cost Marble Tiles. Marble now comes in a less-expensive, easier-to-use form: ½″-thick tiles. Intended for walls and floors, the tiles are set in adhesive over plaster, plywood or concrete. They are made in several colors and three sizes: 8″ by 8″, 12″ by 12″, and 8″ by 12″.

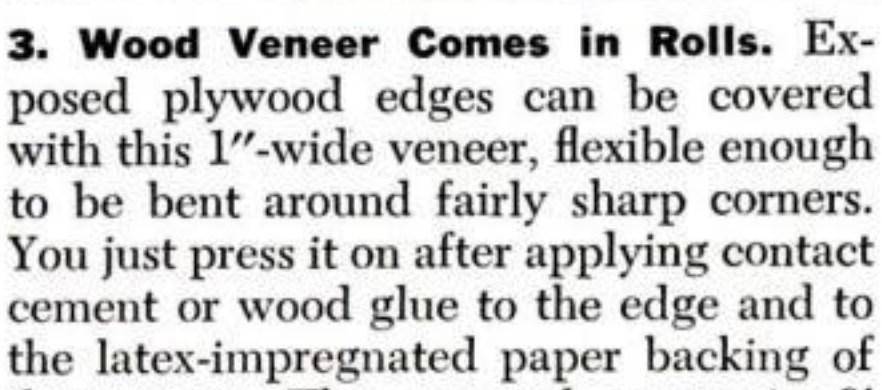

3. Wood Veneer Comes in Rolls. Exposed plywood edges can be covered with this 1″-wide veneer, flexible enough to be bent around fairly sharp corners. You just press it on after applying contact cement or wood glue to the edge and to the latex-impregnated paper backing of the veneer. The material comes in 8′ lengths, in five standard finishes.

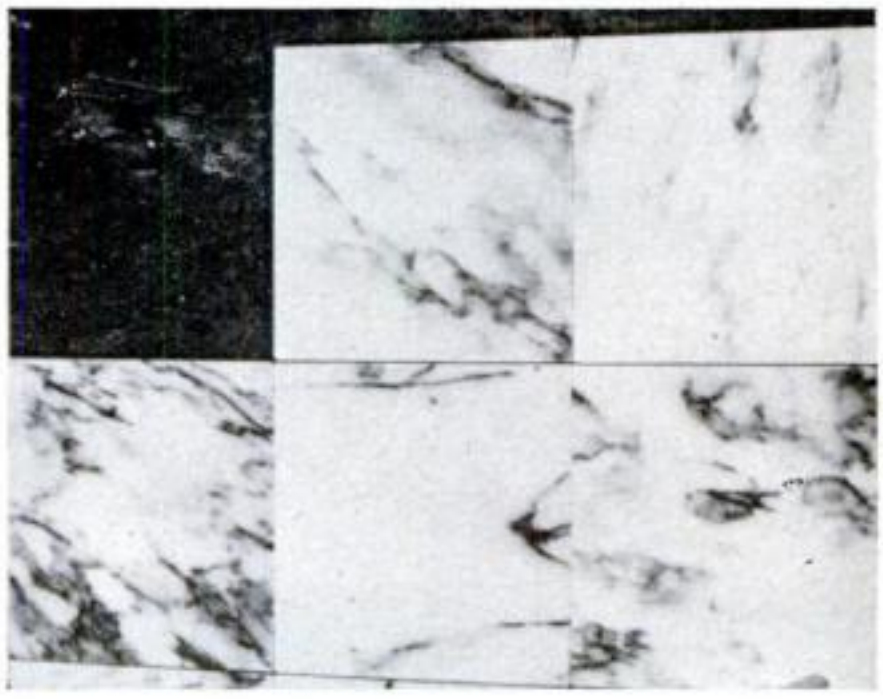

Further information on the products shown on this page can be obtained from: 1. U.S. Gypsum Co., 300 W. Adams St., Chicago 6; 2. Vermont Marble Co., Proctor, Vt.; 3. U.S. Plywood Corp., 55 West 44th St., New York City 36.

Copyrighted material

A Gate


should swing right into the design of your house. Here are five concepts.


THE best-looking gates are blood relatives of the houses they serve. A rustic style looks ill at ease in front of a colonial home and a prim, white picket gate appears self-conscious before a rambling, modern ranch house.

Here are designs for five gates —at home in city, suburb or country—that you can make inexpensively with nothing more than a hammer, saw and drill. One of them should match your house. An afternoon is all it takes.




SHIP'S WHEEL adds a nautical touch to any seaside bungalow. Lacking the real thing, scrollsaw the wheel in segments and mount it atop an ordinary picket gate. The spoke ends can be cheap screwdrivers with shanks shortened, sharpened and stuck into holes in the wheel rim.

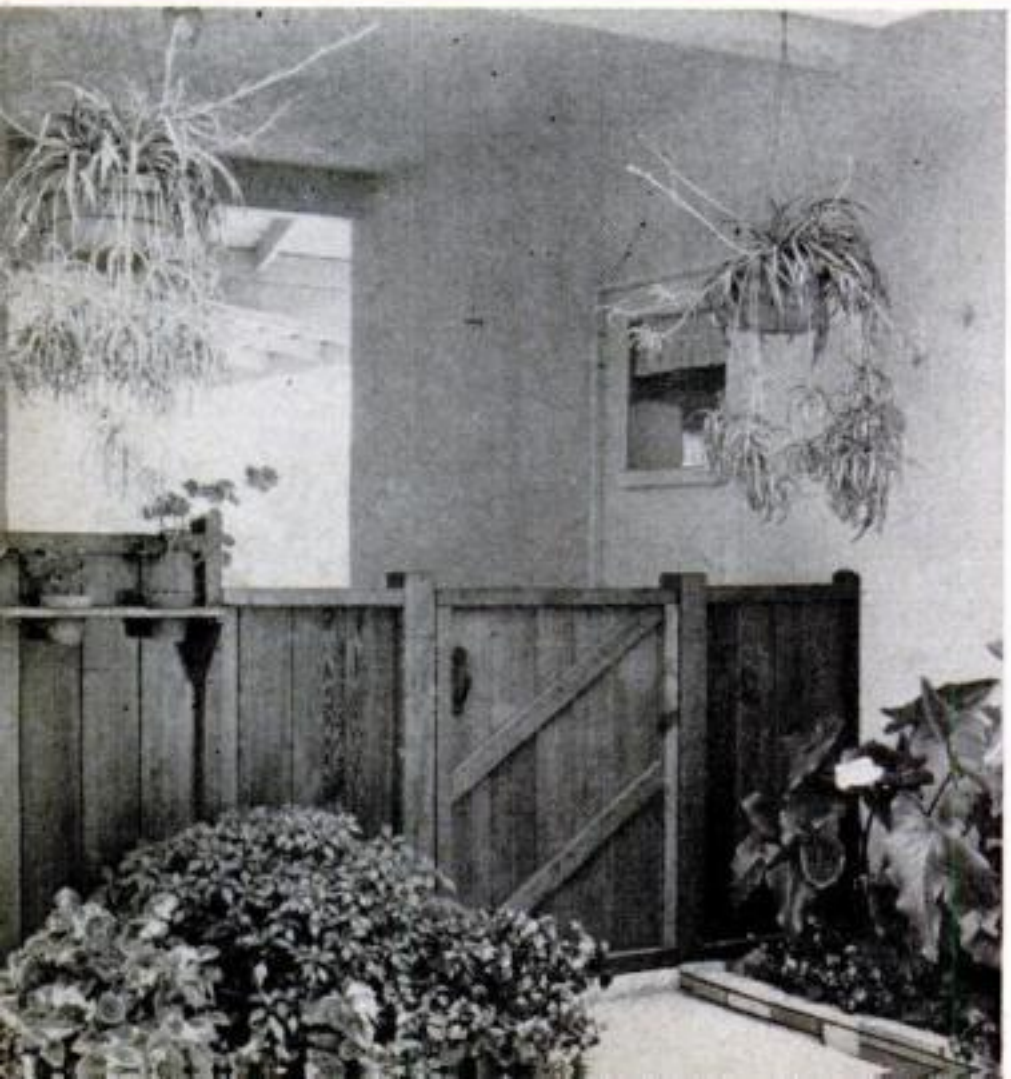

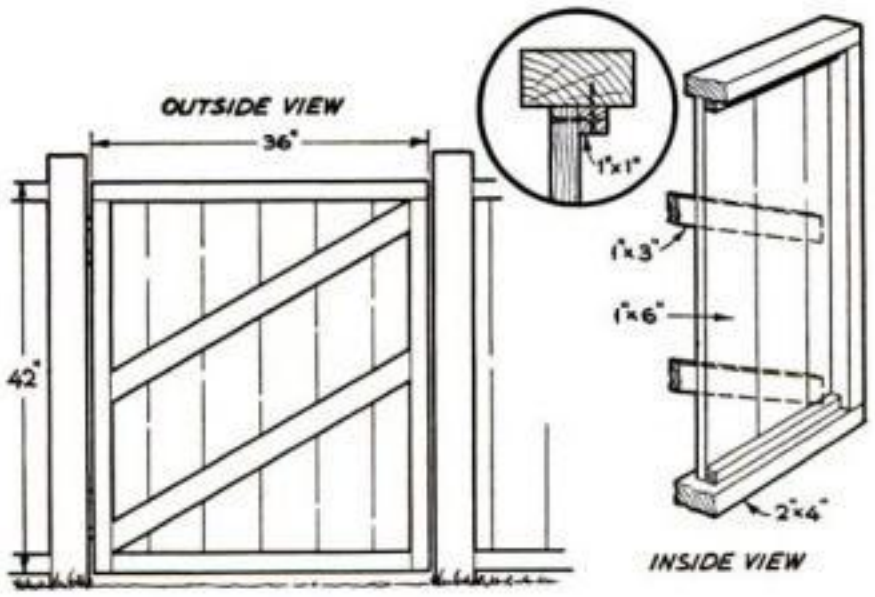


FRAMED BOARDS give privacy to a house in town. Use two-by-fours for framing, and brace with diagonal cleats. The cleats add to appearance as well as strength. This gate, a simple hammer-and-nails job, screens a breezeway.

Copyrighted material

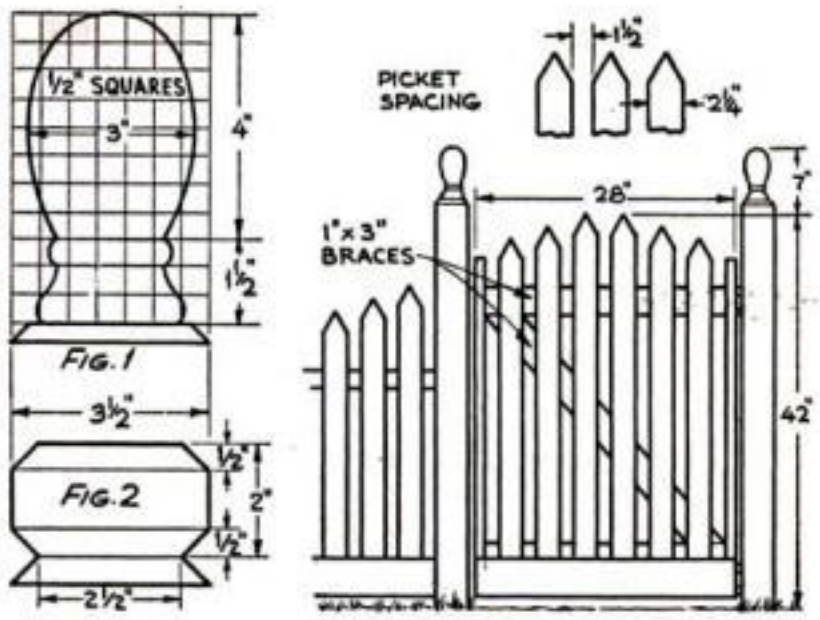



PICKETS AND CAPE COD COTTAGES are old friends. The finials on these gate posts were lathe-turned, but you could hand-saw simpler ones, as shown in the drawing. Notice how the outline of the gate pickets slopes into the fence.



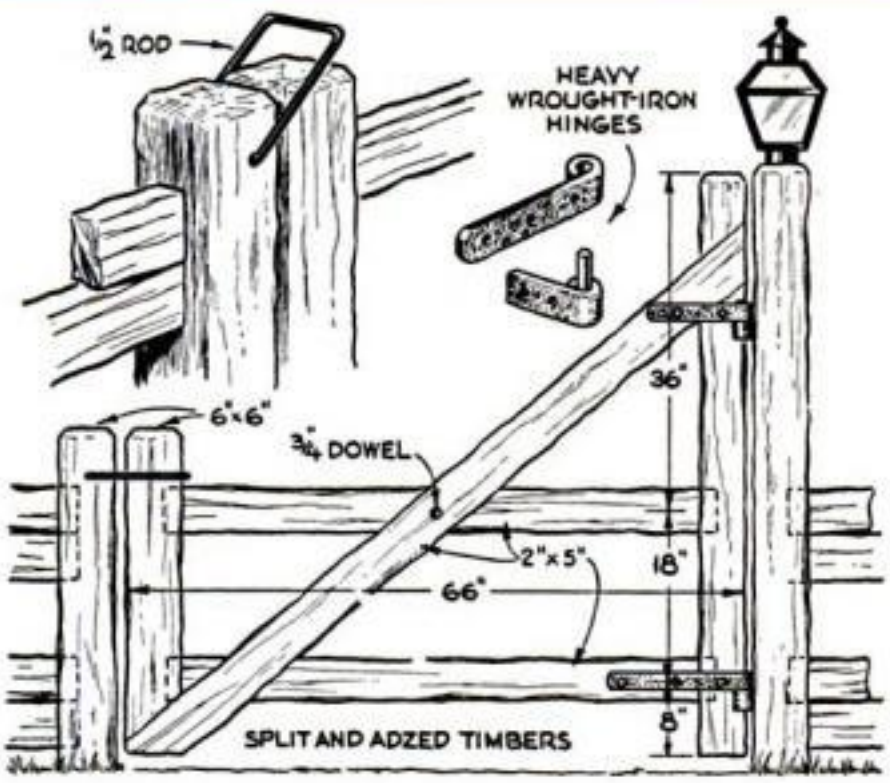


SPLIT-RAIL GATE matches a ranch-style fence and house. Rough timbers were hewn by hand with an adze to heighten the rustic effect. The gate is hung on heavy, wrought-iron hinges and latched with a loop of bar iron.

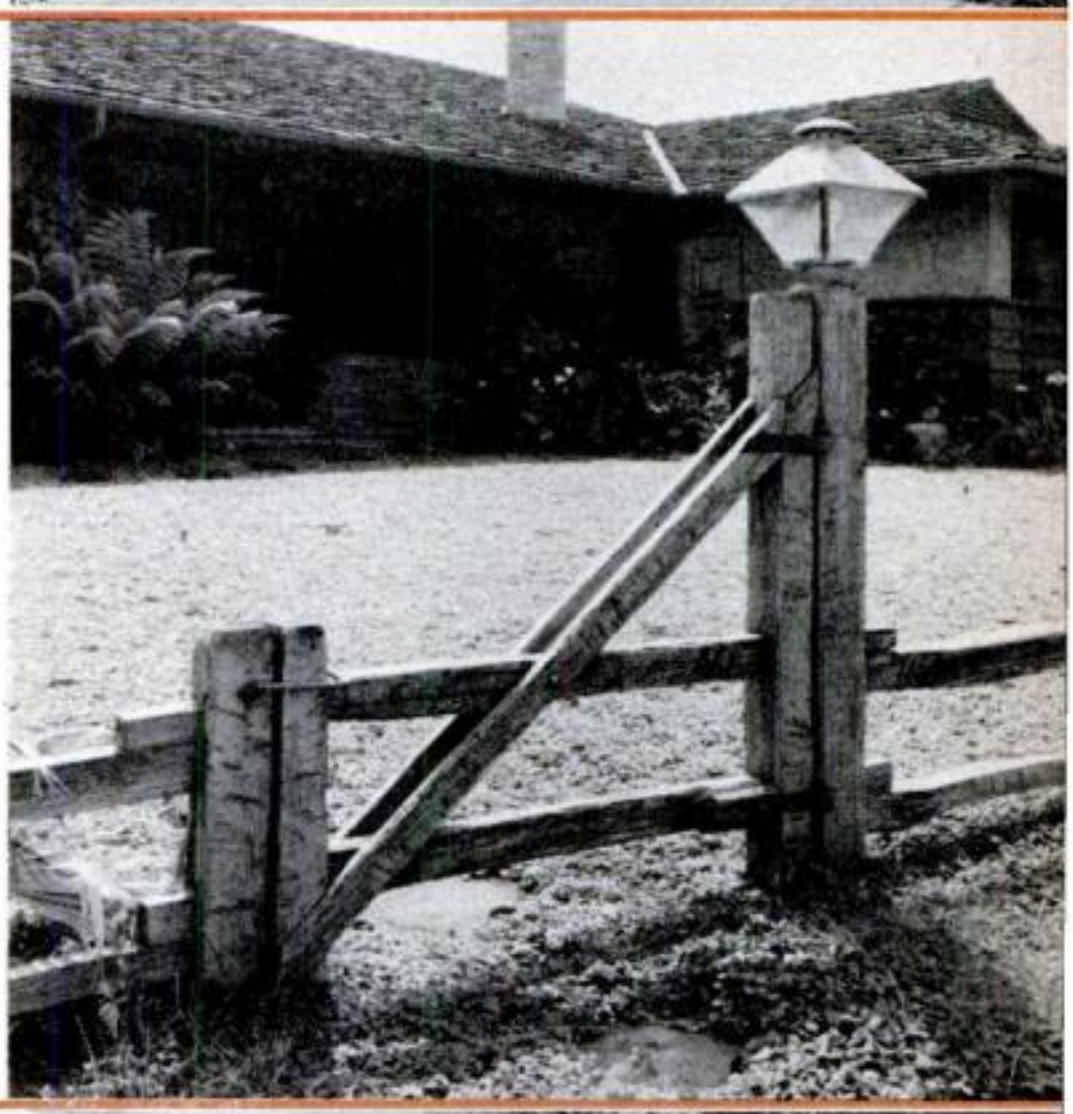

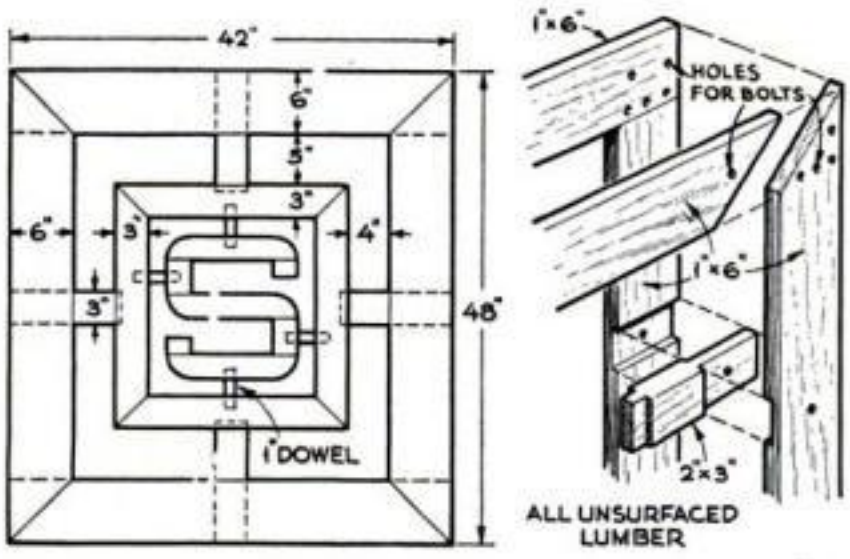


INITIAL in a gate and fence of plain boards fancies up a simple masonry house. Straight lengths of two-by-three screwed together make the letter. Dowels connect letter to inner frame, which is supported by short mortised pieces.



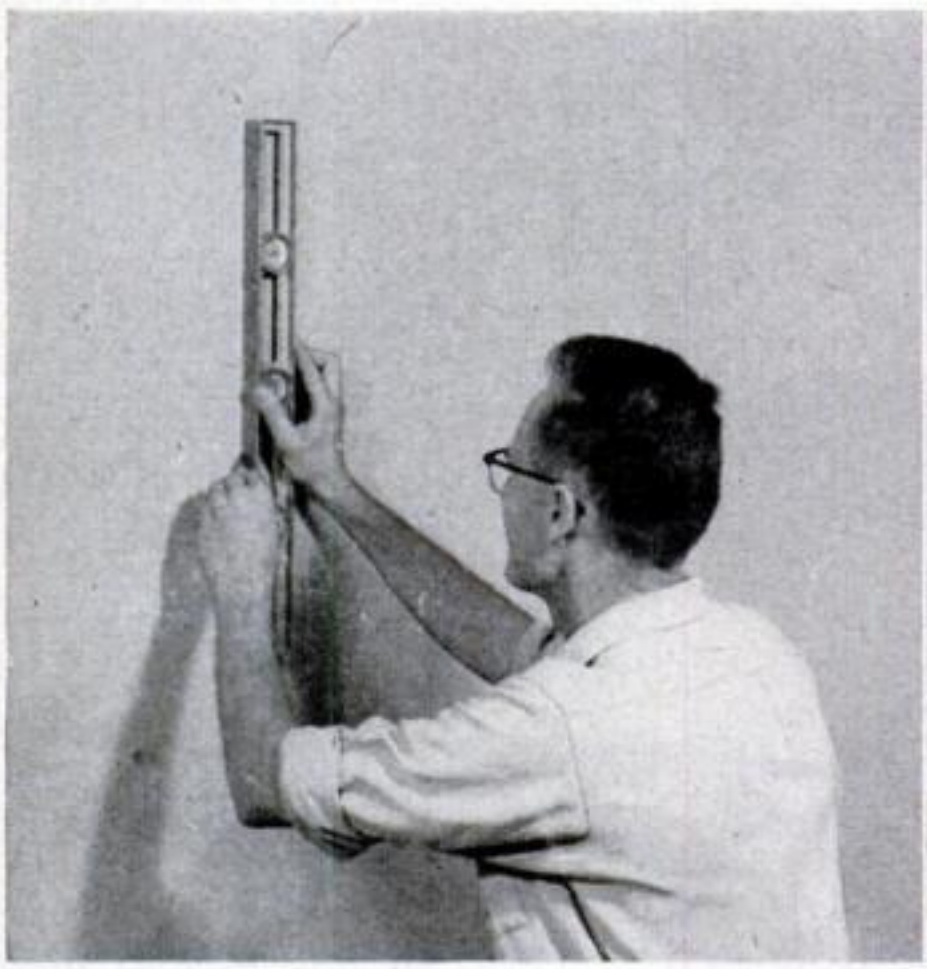

1 MARK A TRUE VERTICAL with level or chalk line—walls are seldom plumb. Starting point, usually a corner, is the middle of an unbroken wall here, to center the big plaid pattern.

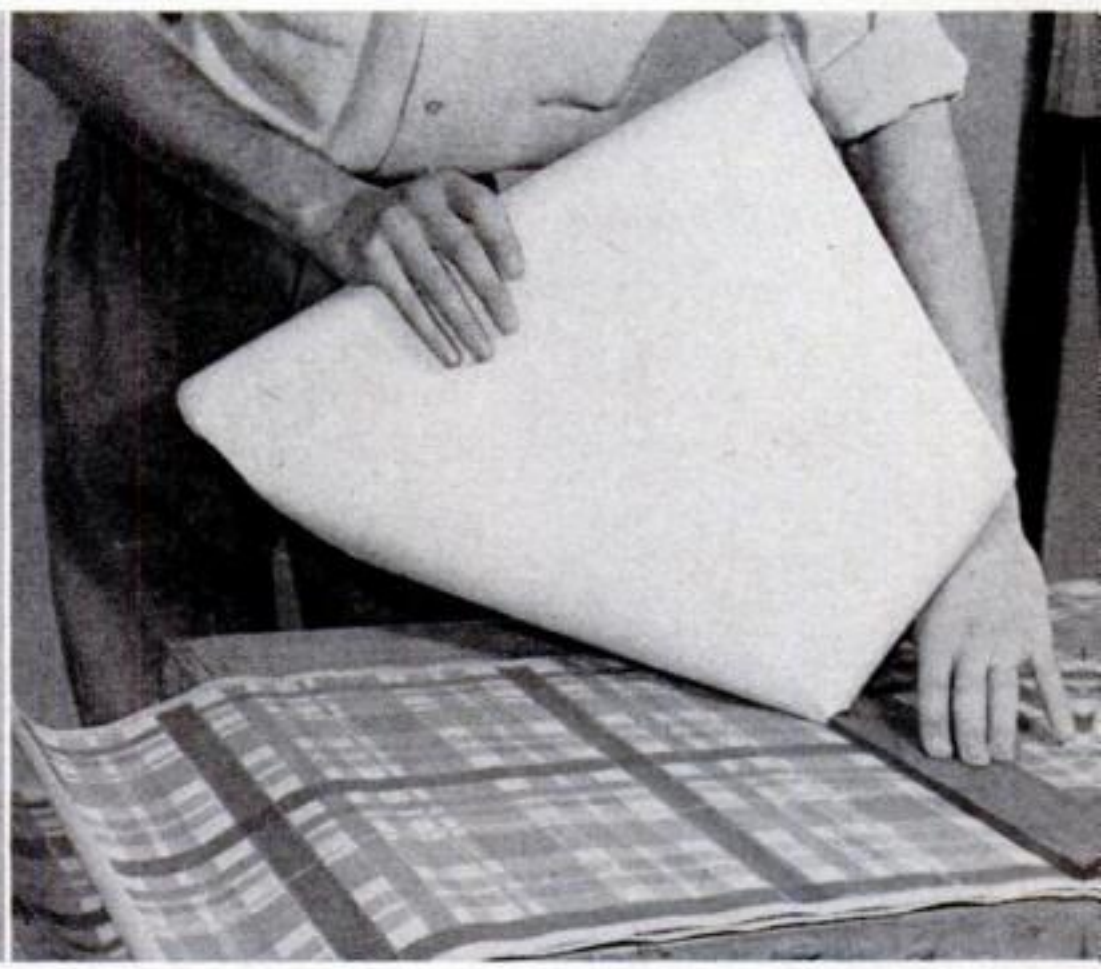

2 ANY STRAIGHTEDGE serves for tearing paper. Allow 6" of waste on each strip, matching strips by the selvage marks or pattern. Tear several at a time—pros do all of them at once.

Copyrighted material

Wallpapering Tips *show you how to turn out top-quality work—just like the pros—without fuss, lumps or slanted seams.*

BEFORE starting to wallpaper our little girl's room, I hunted up a pro and watched him work. The tricks that I learned can help you turn in a slick job, too, next time your wife says, "Now, dear, just think what new wallpaper would do for this room!"

What you need: professional tools, by all means. It is easy and inexpensive to rent a complete paper-hanging outfit—good brushes, seam roller and the right kind of knife. Most important, you will get a pasting table. This folding gadget provides a big, handy surface for cutting paper and applying paste to it.


Buy good paste. You may want to try one of the new, slow-drying brands. They give you more time to slide paper around for a good match.

I could never get rid of the lumps in paste. My pro friend mixed by hand, literally. Stuck his hand in the bucket and squeezed the stuff smooth.

Choose wallpaper carefully. Don't give your wife free rein when you decide on color and pattern. Wallpaper with a light background and a small over-all pattern is the easiest to hang. Big, widely spaced patterns, stripes or plaids require more finesse in matching. Very dark



3 HAND MIXING, right in the bucket, is the only way to get all the lumps out of paste. Pour paste into water with one hand, mix with the other. Mix should be smooth, cream-thick.

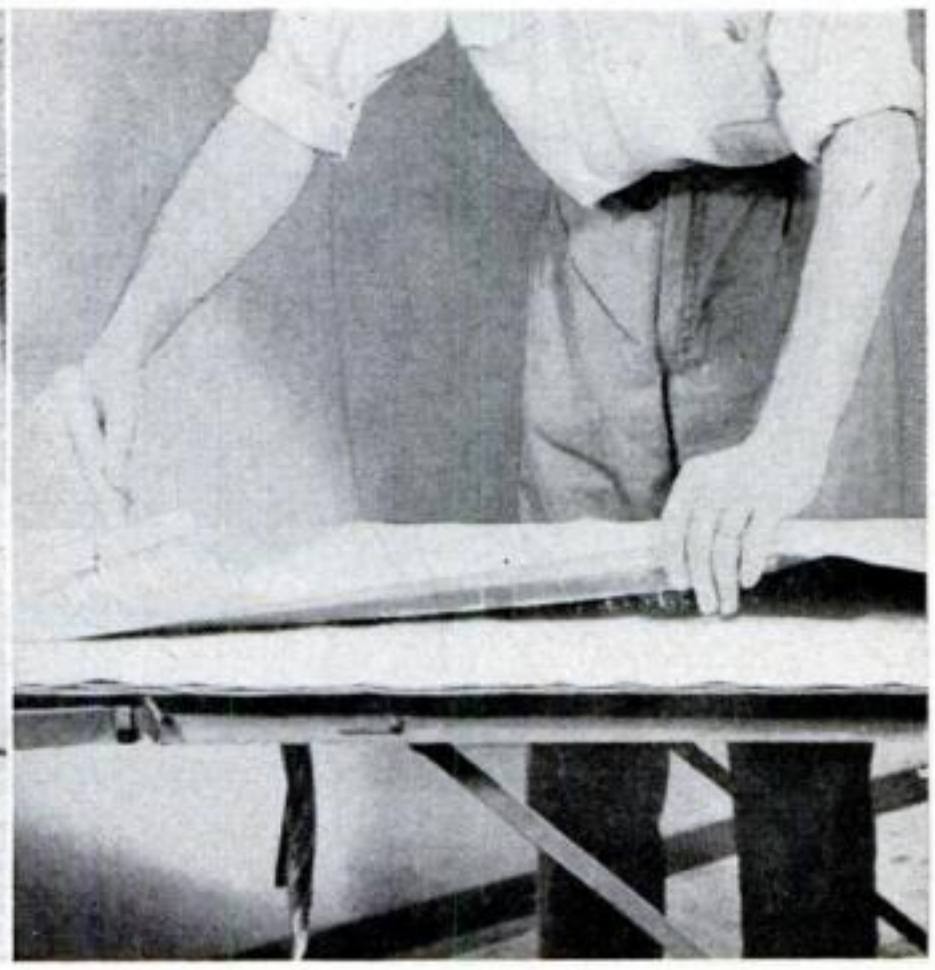

4 LIFTING EDGE as you apply paste helps keep other sheets clean. Professionals paste up several sheets at a time. This speeds the job and gives the strips a good chance to soak.

Copyrighted material



5 FOLD OVER a piece of the top half of a strip after it has been pasted. Now shift strip around and paste bottom half, which has been overhanging the table. Fold the bottom also.



6 OPEN LONG TOP FOLD and press top edge of strip to wall. You can slide it easily into exact position. This first strip is being butted to the vertical line which was marked earlier.



7 SMOOTHING BRUSH firmly anchors top part of a strip to wall and irons out any wrinkles. Do this first, then unfold the bottom part and brush it on, too. The creases will all disappear.

background colors (such as black or deep red) show paste smears badly, and you can't help smearing some paste.

Let your wallpaper dealer trim the rolls for you, if they are not already factory-trimmed. His machine does a far more accurate job than you can do by hand. Just the same, check the trimmed rolls before you leave the store. An inexperienced clerk, or a machine that is out of whack, can cut a wavy edge that will be hard to conceal later.

Professionals trim the selvage from both edges of a roll and then butt the edges when hanging the paper. Many amateurs prefer to trim only one edge and lap over the remaining selvage when hanging the paper. Lapped seams are easier to make than butted ones; they also look a lot neater than imperfectly butted edges.

Hanging the paper. Start in the least conspicuous part of the room. When you get back to the starting point, the last sheet probably will not match up with the first one. You cannot prevent the mismatch, but you can make it happen where it won't be noticed. The side of a door is usually the best place to start. Here the mismatched seam will be very short (just the little piece that goes above the door).

Line up wallpaper with the true vertical, not with parts of the house structure. You cannot trust corners, ceilings, baseboards, window or door frames to be plumb or square. So keep the paper vertical; trim edges to fit the house.

Here's how to put up the first strip of paper on a wall, assuming that you work toward the right. Measure out from the starting point (a door frame or corner) a distance slightly less than the width of one wallpaper sheet. Make a vertical line with a level or plumb line.

The right-hand edge of the first sheet butts against this line and the left-hand edge overlaps the starting point ¼" to ½". If you started from a door frame, the overlap is trimmed to match it. If from a corner, the left-hand edge goes around the corner onto the adjoining wall. Put

Copyrighted material

up the second strip to the right of the first, and so on.

Handle the paper carefully, but don't coddle it. I was surprised by the quick, sure way the pro worked. He ripped several sheets to length at a time, tearing against a yardstick. He applied paste to several at once and folded a strip to keep it out of his way. (Creases disappear when the paper dries.) He worked the paper around on the wall to line it up, brushing and rolling vigorously.

Turning corners. The pros *never* paste a full sheet into a corner so that half of it is on one wall and half on another. Paper put up that way usually pulls loose or tears later. Here's how the pros do it:

They rip the corner sheet lengthwise into two strips. The first strip is just wide enough to finish the wall that they are working on and extend about ½" onto the adjoining wall.

Since the second strip starts a new wall, plumb the right-hand edge. Trim its left-hand edge to fit the corner. Then continue as on the first wall.


Windows. The professionals have half-a-dozen ways of papering around a window and can usually adapt one to any problem. The thing they never try is to cut a window opening out of a full sheet.

Most often, the pros tear a full sheet lengthwise into two strips, one for each side of the window. They fill in the spaces above and below the window with matching pieces cut from leftover sheets. A tip on this: You will have less trouble matching if you *don't* cut all above-the-window strips from one sheet and all below-the-window strips from another. Instead, divide one long strip so that the upper part of it fits above the window and the lower part fits below.

Work clean. Keep a pail of clean water and a sponge handy. You'll need them to wipe the seam roller, ceiling, baseboard and your hands promptly when paste gets on them. While you're sponging paste smears off newly hung paper, it's a good idea to do the whole sheet. That way the entire sheet will look the same when dry.—*Jerry Parker.*



8 SHARP KNIFE, guided by a metal straightedge, trims top and bottom of a strip neatly. You can use scissors, cutting wheel or razor, but a knife—kept sharp—works very well.

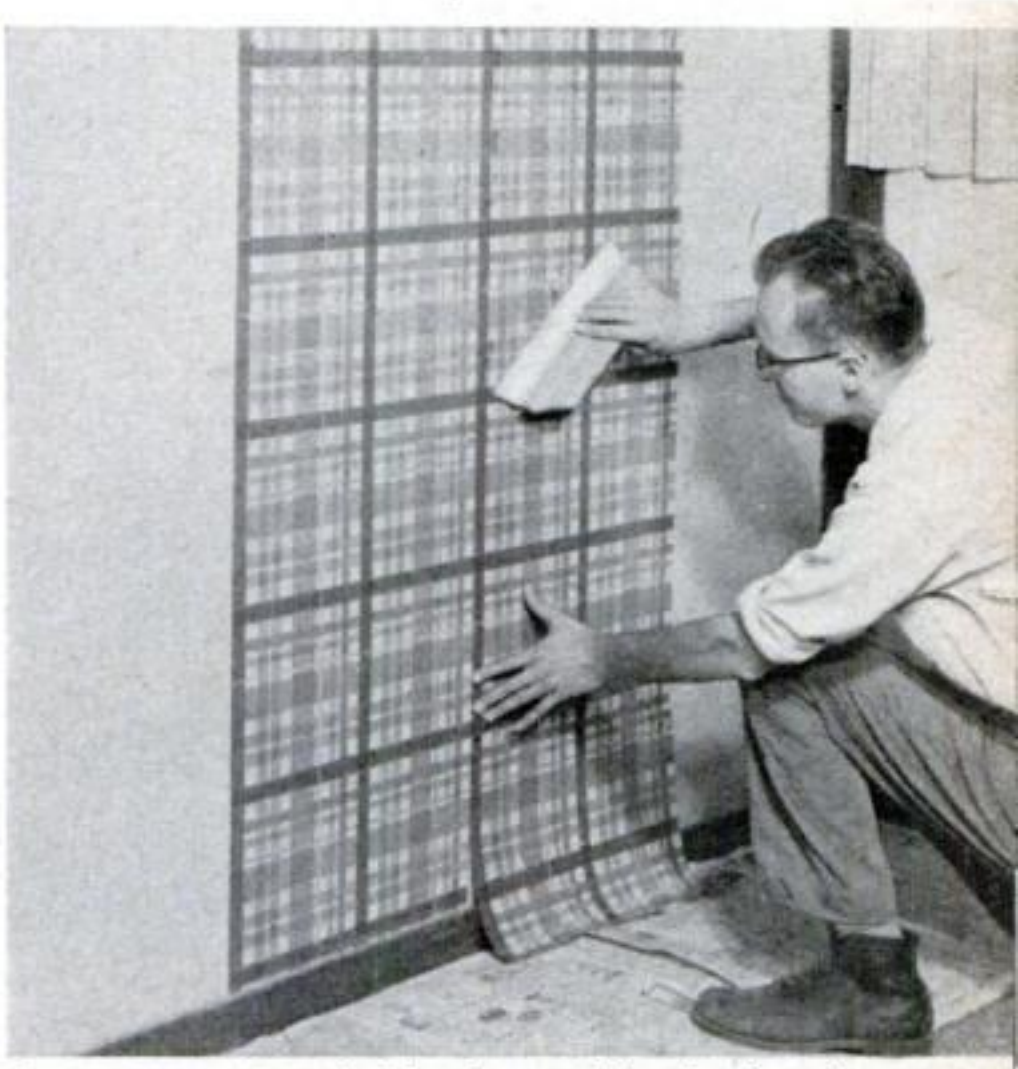

9 SECOND STRIP is lined up with the first by matching the design. Slide the paper over for a neat seam, using the brush and your hands. Author used butted-edge seams, as pros do.

10 ROLL SEAMS after paper has been up for 20 or 30 minutes. Apply light pressure so you don't squeeze paste out through seams. Wash the roller frequently to avoid paste smears.



Copyrighted material

Flagstone Patio

is laid down quickly in sand and held together by mortar, but you never lift a trowel.

FLAGSTONES come with the mistakes already built in. They are irregular and uneven, so you can't go wrong in using them for a simple walk or terrace. And the construction job is very simple if you lay them in dry mortar: Put the flags down, sweep unmoistened mortar mix into the joints, spray with a hose. Any way you lay it, a flagstone surface may crack. But nobody will notice.



SMOOTH THE GROUND and tamp it down hard, pitching it for drainage. Spread a 2" layer of coarse sand and level with a two-by-four. In cold climates, put cinders under the sand.



MATCH FLAGS the best you can, leaving at least a ½" gap between them. Wiggle each stone into the sand and shove more sand under wobbly pieces. Use the two-by-four to even surfaces.

SWEEP DRY MORTAR into all the gaps between stones and brush the tops reasonably clean afterward. Use one part portland cement to two parts fine sand—plus coloring if you like.



SPRAY A FINE MIST over the whole works, saturating the mortar. Repeat this every 15 or 20 minutes for a few hours to wet it down to the sand bed. Then relax—you're finished.



Copyrighted material



Copyrighted material

Concrete Drive

puts a heavy, steel-reinforced spur of superhighway alongside your house.

By JIM MILLER

MY NEW driveway is like a spur of superhighway—heavy concrete, steel-reinforced, 5″ thick. It shouldn't crack when the fuel-oil truck rolls in. I can sweep away snow without sweeping away the drive. And there should be no upkeep. It should last until I trade my car for a helicopter.

With ready-mixed concrete, which the truck dumped and spread in the forms for me, it took less time than I expected.


Forms. I used two-by-fours. (If you intend to salvage the lumber for re-use, prime-paint it first.) A carpenter's level set the slope, which should be arranged to drain off water from rainstorms.

My garage is above street level, so I pitched the forms ⅛″ per foot lengthwise for the "flat" stretch in front of it, then more steeply to meet the street. Because the grade provides good drainage, I placed the concrete directly on the ground. If you have a drive that collects water, a 6″ base of gravel or cinders is recommended under the concrete to prevent frost-caused heaving.

To make sure of good runoff, I dished the concrete after it was poured by leveling it with a screed tapered about ½″ downward at the middle. This makes the drive a shallow trough that sluices rain right into the street. If your drive must slope down to the garage, keep the surface flat but pitch it to one side (the side away from the house).

Concrete. To estimate how many cubic yards of concrete you will need, multiply the length of your drive by the width and by the depth—all in feet—and divide this figure by 27.

Building regulations where I live required 3,500-pound concrete (able to support 3,500 pounds per square foot) for the strip between my property line

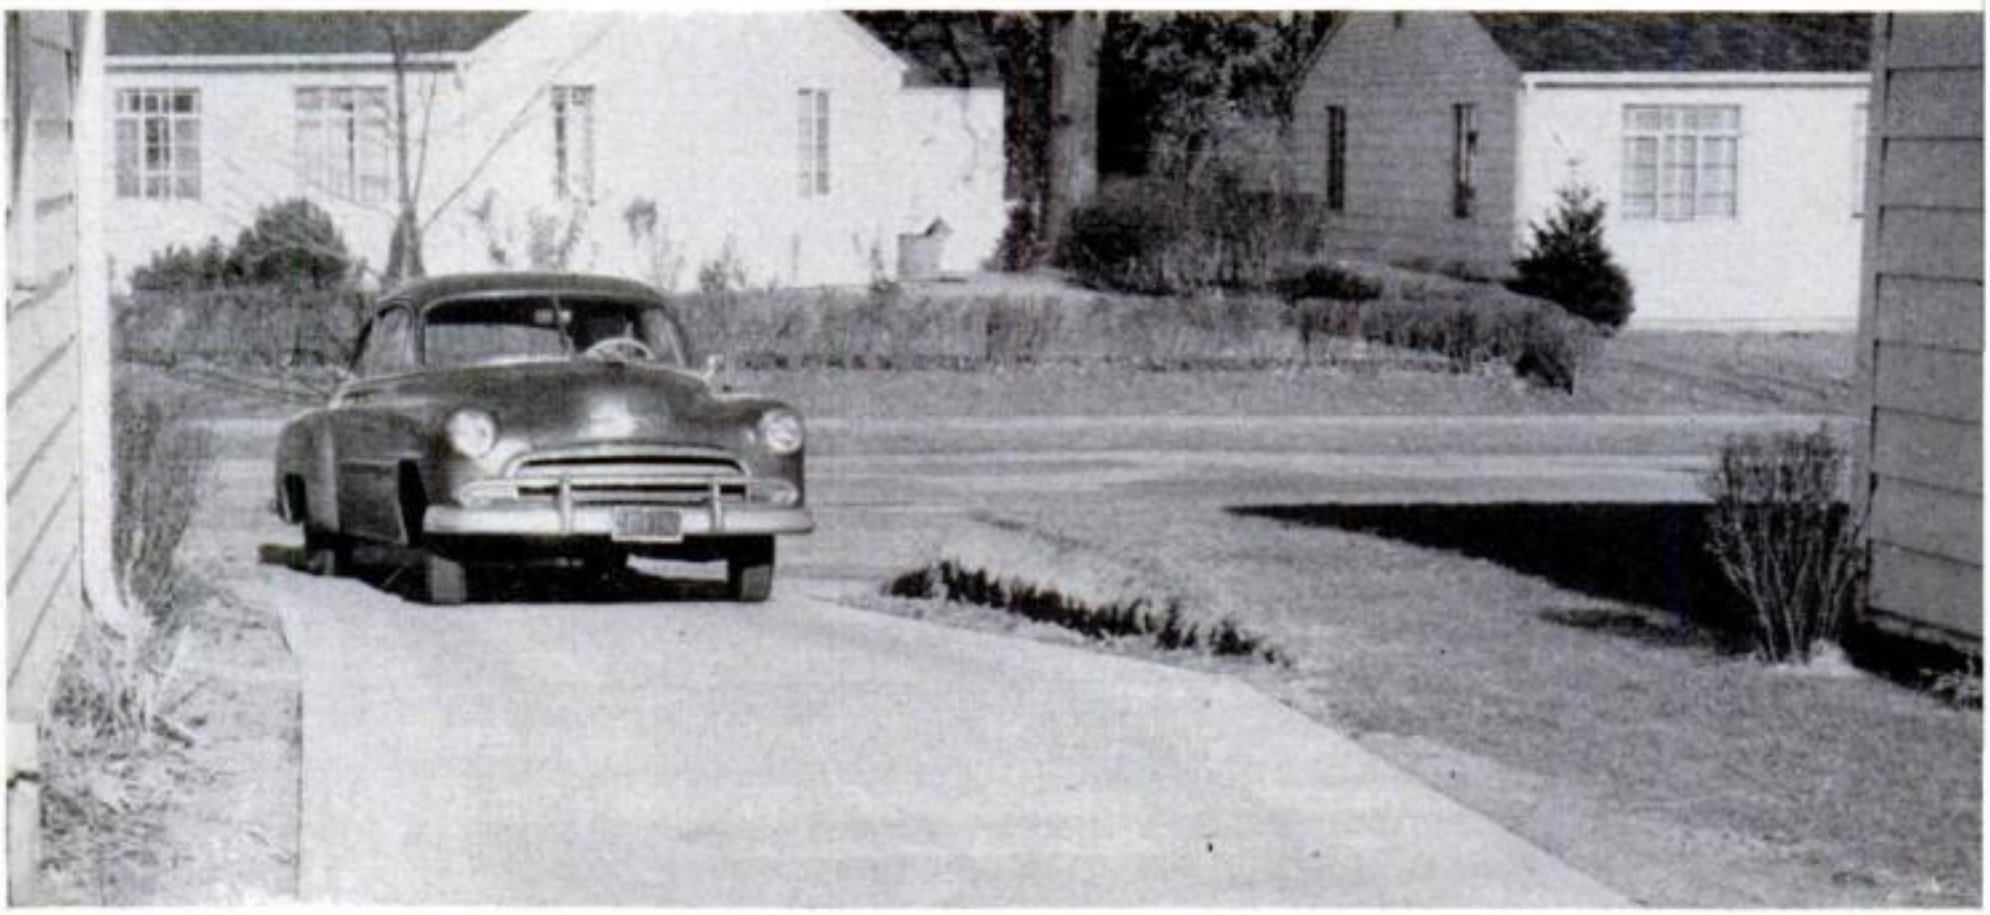


Copyrighted material




DIG OUT THE BED about a foot wider than the drive will be, to make room for forms. Strings between corner stakes outline the area. Dig deep enough for the slab thickness—here 5".



TWO-BY-FOUR FORMS, staked every 4', do not reach bottom of 5"-deep bed. Depth is checked with a gauge made by nailing blocks on ends of two-by-four. It slides along the form pieces.

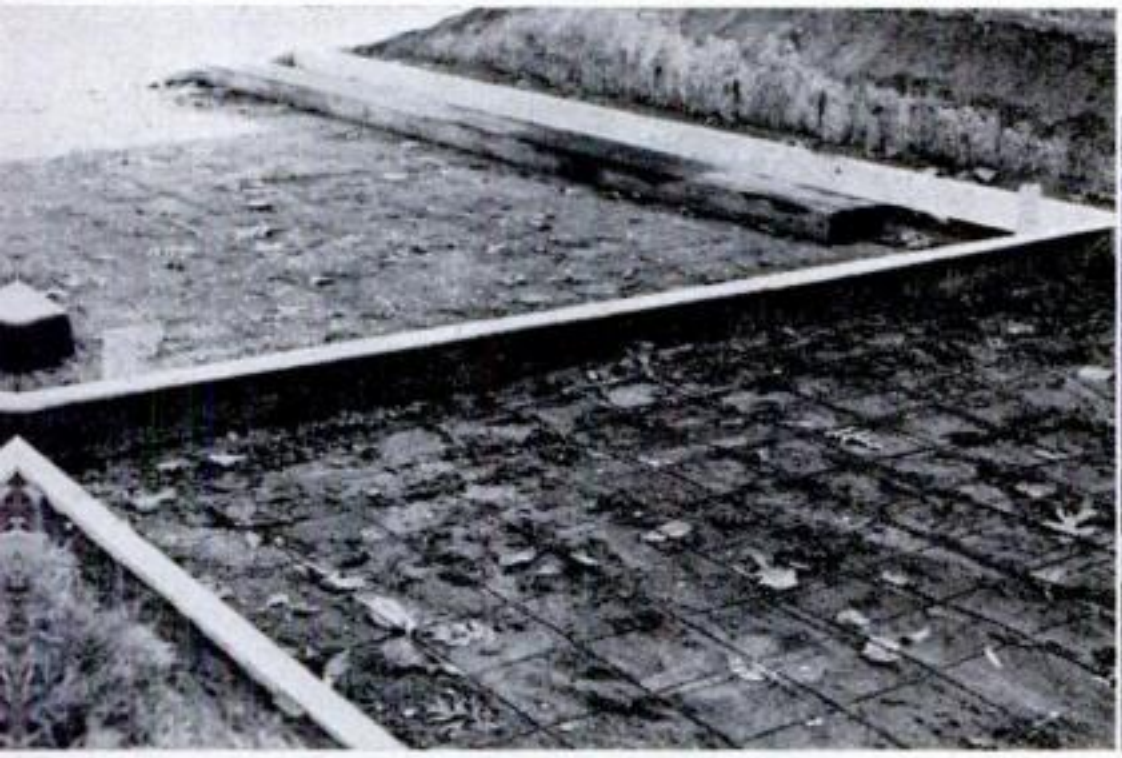

EXPANSION STRIPS of tarred felt are held in place by two-by-fours until concrete is poured. Note the heavy planks laid to support the concrete truck while it pours the first slab.

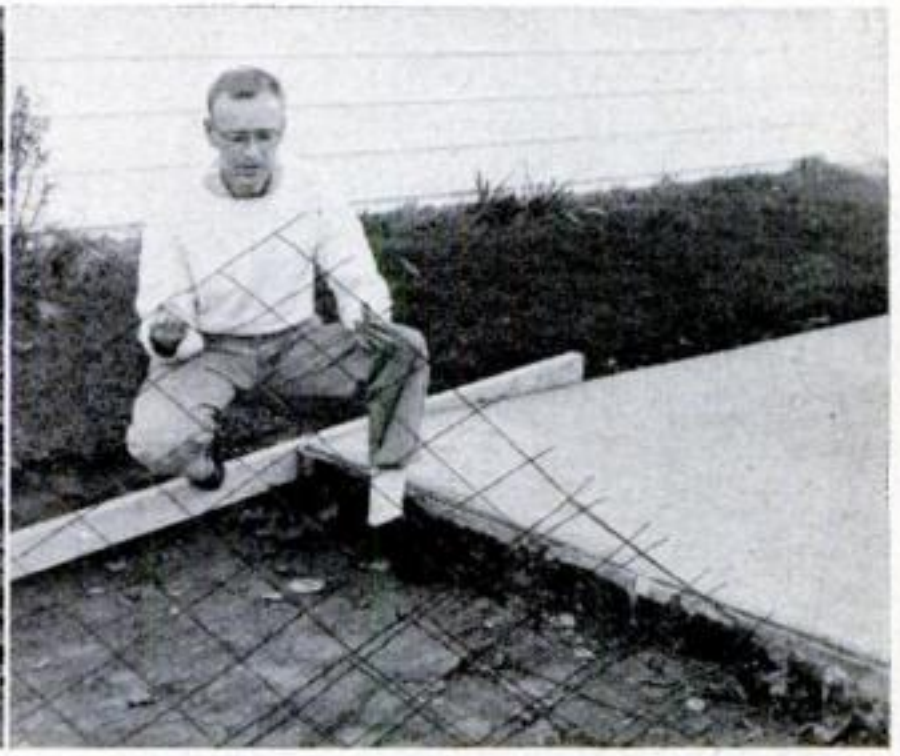

REINFORCING MESH—this is 10-gauge wire with 6" openings—keeps slab from cracking. Cut it with fence-wire clippers to fit forms with 3" gap at sides. Lay it just before pouring.


TRUCK POURS MIX a slab at a time. Helpers spread it while reinforcing mesh is pulled up every foot or two to center it in concrete. Hook, bent from ¼" steel rod, lifts the mesh.



Copyrighted material



TO LEVEL THE CONCRETE, two-by-four screed is dragged over it. Make first striking with screed held rigid, then repeat several times, vibrating it back and forth to smooth surface.

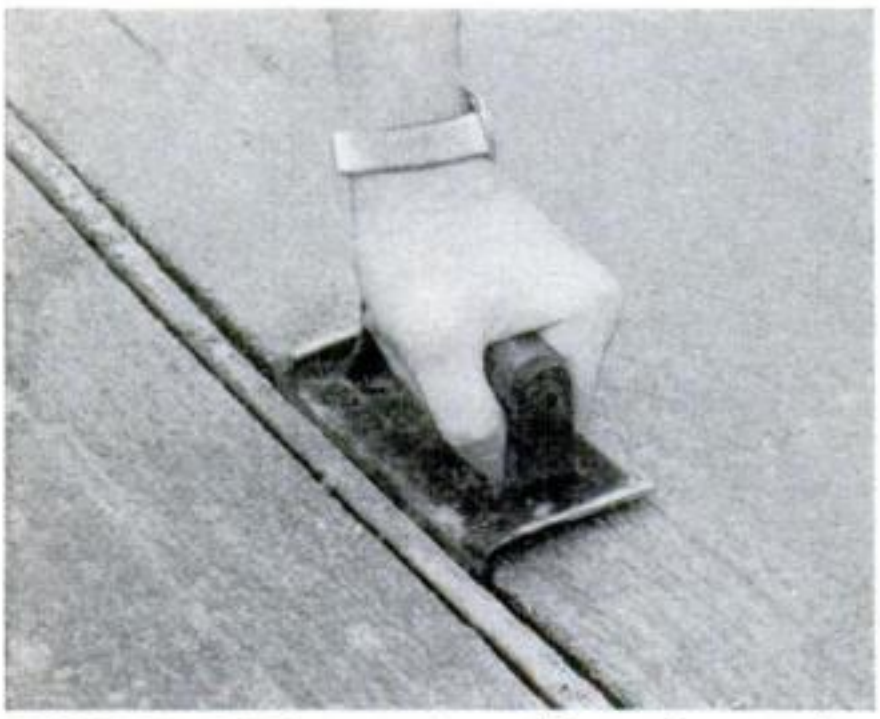

ROUNDED EDGES are put on sides and expansion joints after concrete has become firm to touch. For safe traction, surface was not troweled, but left with texture produced by striking.

and the street. Since this mix cost only a little more than lighter stuff, I used it for the entire drive.

Reinforcing. Your driveway will be much less likely to develop cracks if you embed steel mesh in the concrete. The mesh is sold by concrete dealers in sheets and rolls—the rolls are usually cheaper. I used 10-gauge mesh, light enough to be cut with fence clippers.

Cut off pieces for all the slabs, but place them in the forms one at a time, just before the concrete is poured—you don't want the truck to ride over the mesh. As the concrete is poured, be sure that you lift all of the mesh up so that it will be suspended in the middle of the slab thickness.


Expansion joints, which give each slab room to expand and contract without cracking, are made with strips of tarred felt (the concrete man sells this, too). The felt is held in place with a two-by-four, with the top edge about ½" below the concrete surface. You need joints every 15′ to 20′.

After the slabs are poured, remove the expansion-joint two-by-fours and level the concrete right over the felt expansion strips, marking their locations first. You expose the joints later by running the edging tool along the strips.

Give your driveway plenty of time to set. The forms can be removed after 24 hours. If the weather is warm, the concrete may dry out too fast. So keep it damp for several days by sprinkling it regularly or by covering it with wet newspapers, burlap or straw. Better not drive on it for at least a week. END

Copyrighted material

Keeping the Home Shipshape

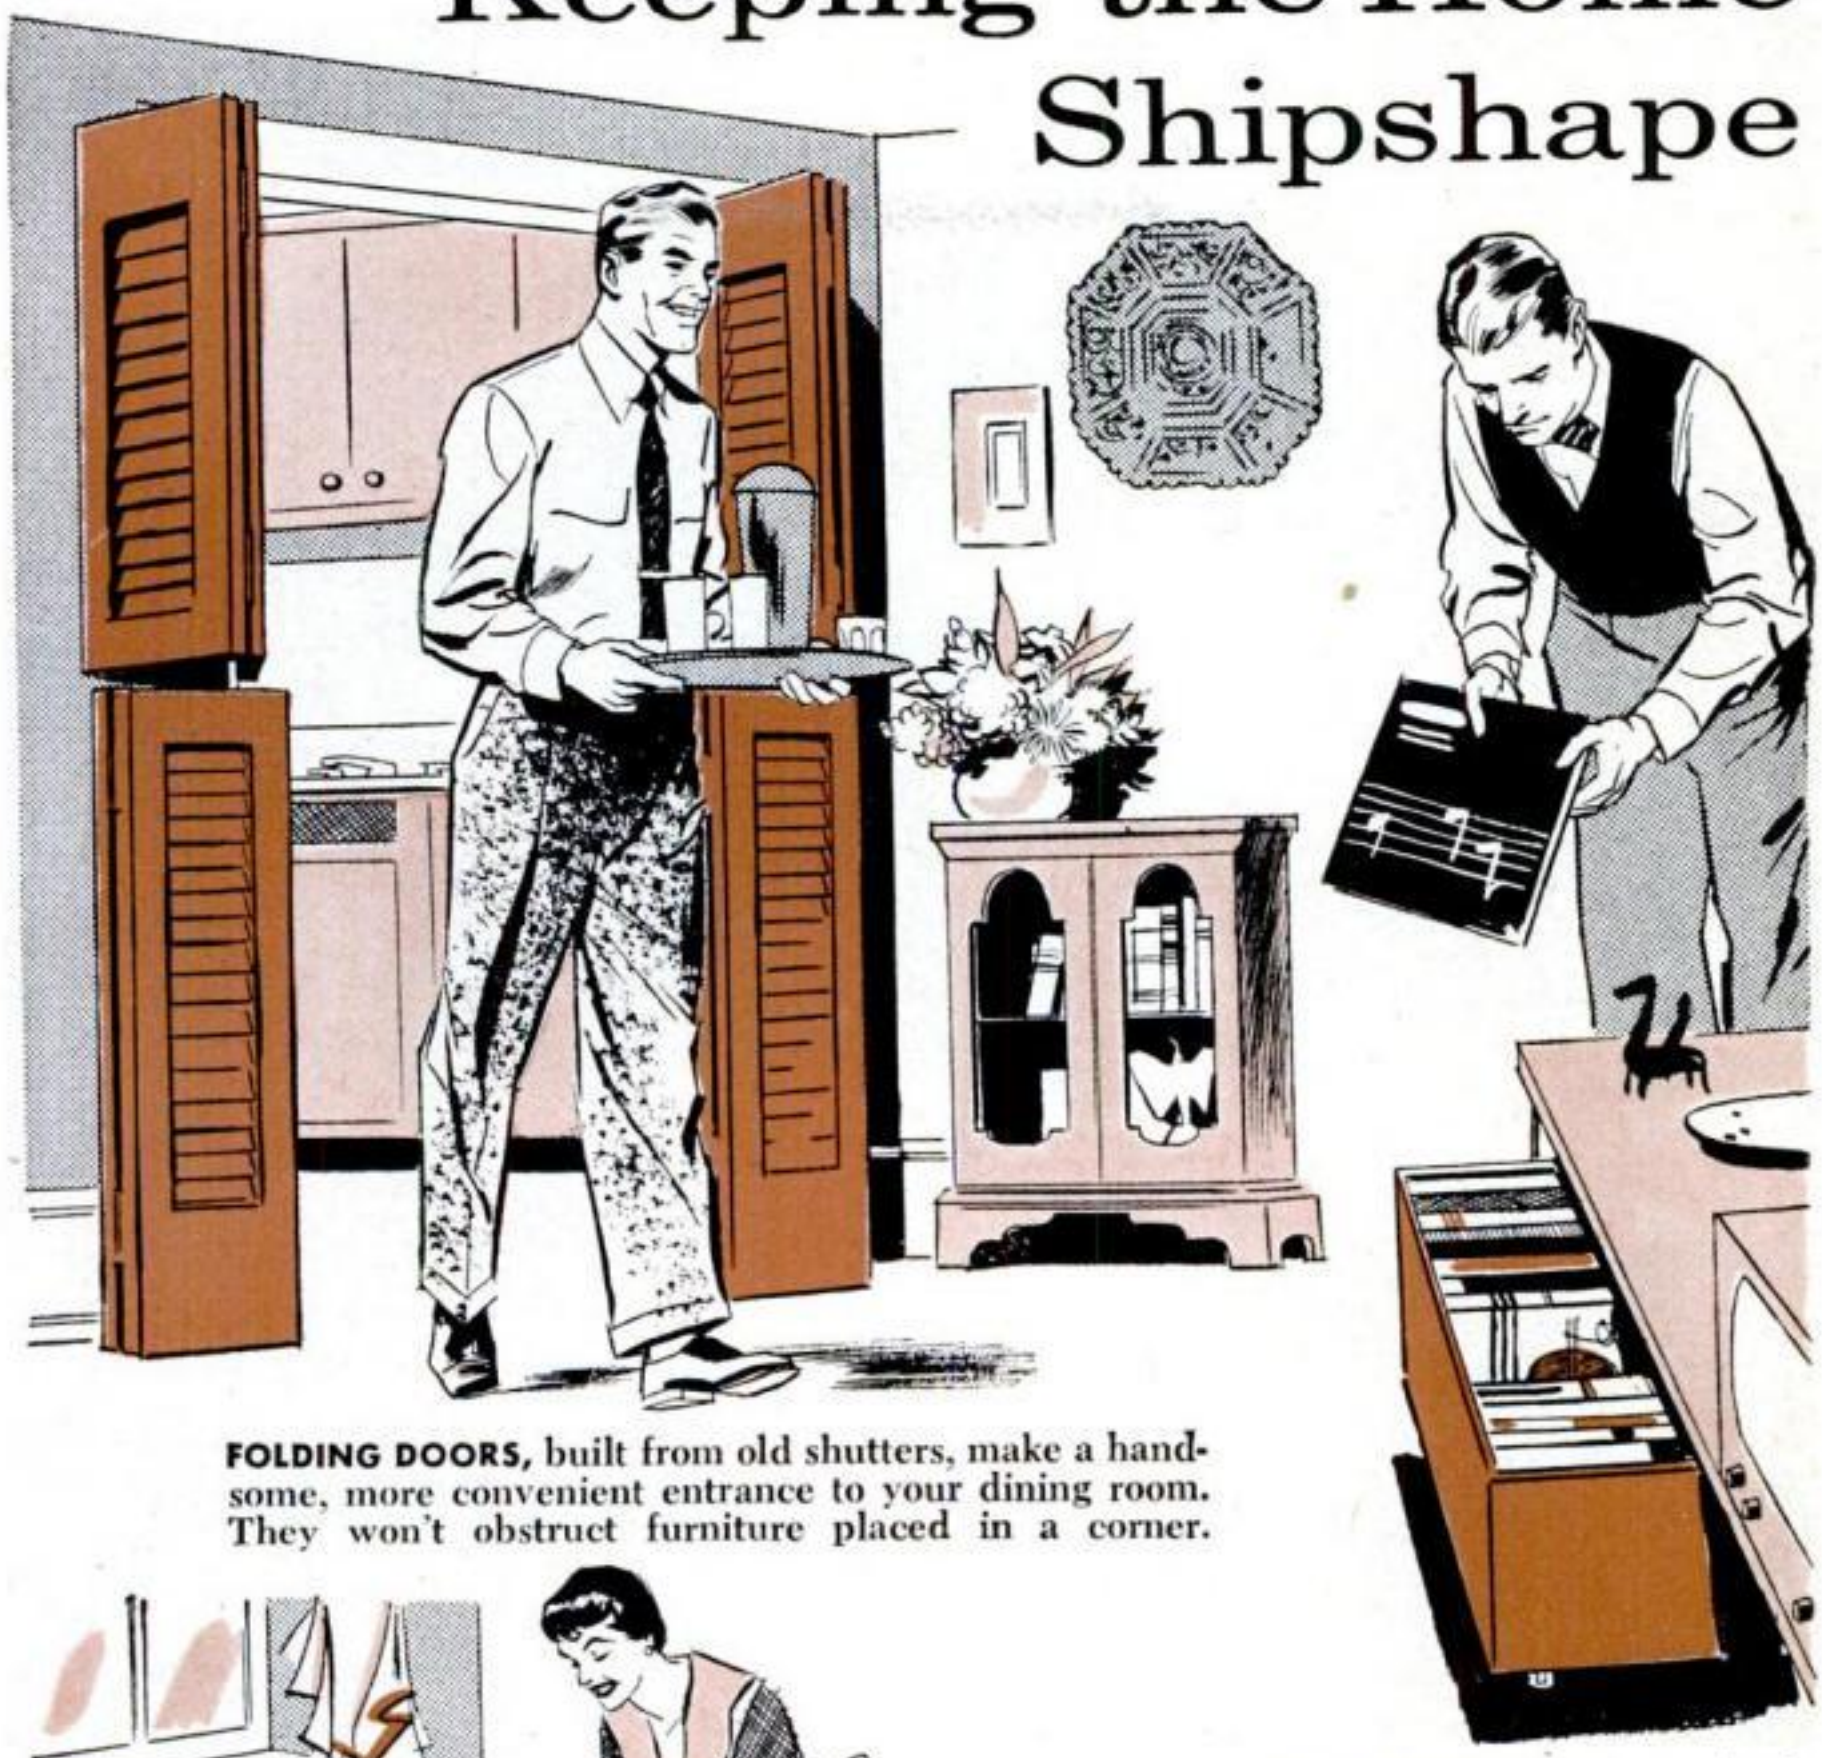

FOLDING DOORS, built from old shutters, make a handsome, more convenient entrance to your dining room. They won't obstruct furniture placed in a corner.



TO MAKE AN OLD SINK LOOK NEW, enclose it with a woven bamboo curtain. The curtain comes ready to hook over a stock rod, which can be supported by hangers nailed to adjacent cabinets. The curtain opens for access to equipment under the sink.

A ROLL-OUT DRAWER—a simple box on casters—keeps records under a low table. Store albums in the drawer with their backs up so that the titles will show.



QUICK AND EASY SHELVES, ideal for a recreation room, hang on plastic clothesline from hooks screwed into joists. The line is knotted beneath holes in each shelf to support the shelf and keep it level.

Please turn the page for more home tips

Copyrighted material

More Home Tips




AN OLD-FASHIONED FIREPLACE that crowds a small room can be scaled down by removing the slablike mantel and framing the brick with shadow-box molding.



CLOSETS JAMMED? A bedroom door that is rarely closed offers extra storage space on its back. A separately hinged shelf unit (above) can be hung there to hold ties, shoes, gloves and other small articles of clothing.




SMOOTH LIGHT FOR A SMOOTH SHAVE is provided by three fluorescent fixtures, two at the mirror sides and one on the ceiling. The overhead lamp throws light down into the washbowl where it will reflect up under your chin.

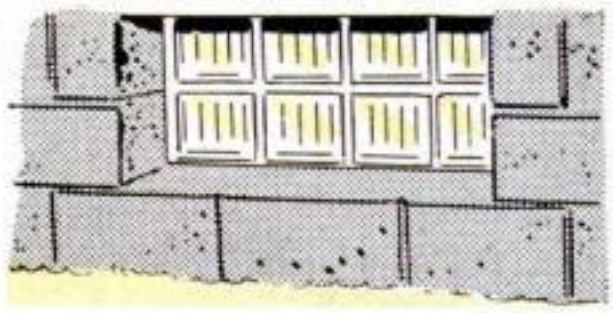

THERE'S NO FRAME to fix and paint if you replace seldom-opened cellar windows with glass bricks, as above.



A LARGE WINDOW in an old-fashioned bathroom goes modern when you fit it with shutters of perforated aluminum The perforations admit light yet obscure the view, eliminating the need for curtains or shades.

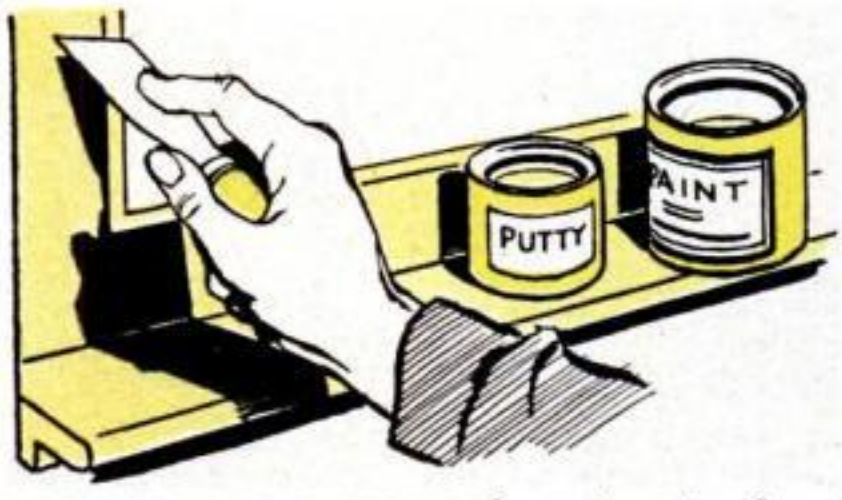

YOU CAN SAVE TOUCHING-UP by using tinted putty to make minor repairs on your windows. Save a little of the trim paint that you used on your house, and mix some in with putty as you need it.

Copyrighted material

Dripless Paint *looks like jelly, but liquefies as you brush it. You don't need a dropcloth because you just can't spill it!*

By DARRELL HUFF

SEVEN-YEAR-OLD Laurie was just putting the last brush strokes on our living-room wall when our next-door neighbor, Mrs. S, stopped in. Before she could even say hello, she spotted Laurie and gasped:

"You're not letting that *infant* paint! And without any what-d'-ya-call-it—drop-cloth—or anything!"

I couldn't resist the temptation. I gently upset the can of paint six inches from her obviously new suede pumps.

Mrs. S let out a shriek and did a broad jump to equal anything in the Olympics. Not a drop of paint flowed out of the can.

That's dripless paint. It just won't

HERE'S PROOF that you can paint without dropcloths, even kick over the pail without spilling. Dripless paint remains firm in can and on brush, turns to liquid when you spread it.



Copyrighted material



WORKING OVERHEAD is no problem for even this seven-year-old. Dripless paint won't spatter or run down her arm. The brush won't "load" and leak no matter how long she keeps working.



PAINT CLINGS TO BRUSH, allowing you to cover larger areas with fewer time-outs for refilling. Brush is pulled straight from can with no stopping to scrape off the excess on the side.

budge. You really have to work to get it to drop, droop, splash or run. A thick, fluffy, jelly-like substance, it won't spatter when you put it on, won't flick off a brush or roller, and won't run down your arm.

No preparation or cleanup. Dripless painting becomes quick and casual, instead of a major undertaking. You can paint whenever you have a few minutes to spare because there's no time wasted in arranging dropcloths or cleaning up stray spots later.

You don't have to mix the paint, either, any more than you would homogenized milk—and for the same reason. The pigment, held in the jelly-like mass, always remains evenly distributed throughout the entire can.

To start, you just remove the lid, dip in your brush, and paint.

How it works. What keeps the paint from dripping is a special "thixotropic" vehicle, called Burnok, made from plastic resins.

Thixotropic means jelly-like. This jelly breaks down quickly under motion. In the can and on the brush it remains firm. But spread it on a wall and the friction turns it into a thin liquid that smooths out evenly over the surface.

It paints better, too. Because the no-drip paint returns to a jelled state as soon as you put it on, there are no runs and sags. On vertical surfaces, especially, these can ruin an entire job.

More paint clings to the brush, so that you get more strokes to the brush-load without stooping and dipping as often. It also seems to go farther (600 to 650 square feet per gallon, claims the manufacturer) and to have better hiding power, making it the nearest thing to a true one-coat paint.

The jellied vehicle can be used to make various alkyd, oil and varnish types of paint, of which flat wall paints are the most popular. These wall types are now being sold by a number of manufacturers, including the pioneer, Superior Paint and Varnish Corp. of Chicago, as well as such mail-order houses as Sears, Roebuck and Montgomery Ward.


Color mixing is easy. Dripless paints (sometimes called jell, gel, anti-drip, no-drip or controlled-flow) come in the same wide assortment of colors as standard paints. But you're not limited to these stock hues alone. You can intermix the colors, if you use the same type of paint.

You just dump the two colors together

[*Continued on page 270*]

Copyrighted material

New Ideas from the Inventors

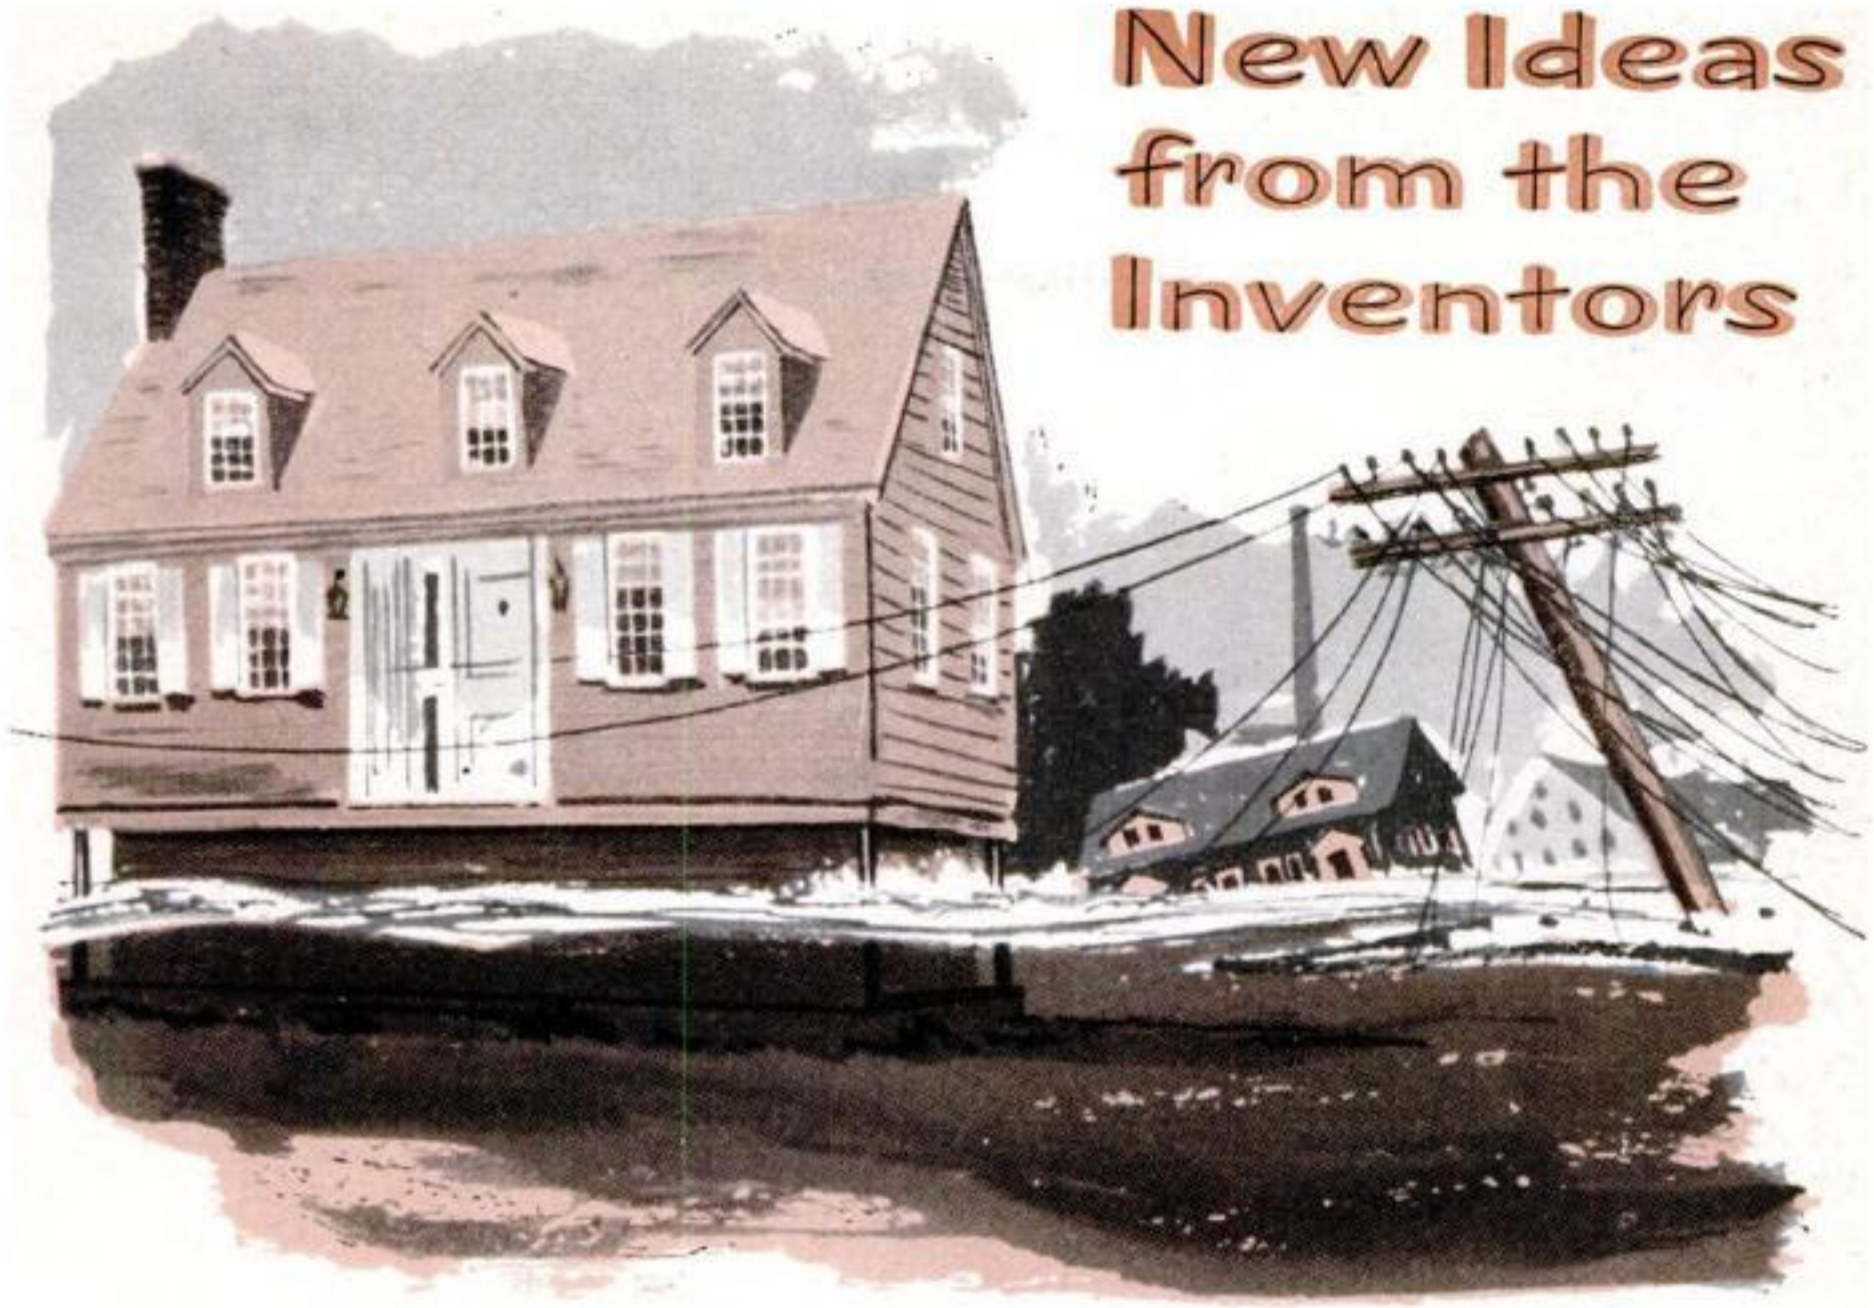

1 Floatable House to Ride Floods. Large air tanks, normally recessed into cellar space, would serve to float this house over the crest of a flood. Vertical rails—spring-mounted to allow some sway—would join the building to the foundation and guide it back into place again after the water had receded.

2 Match Cover to Strike a Light. When released by a thumb button, springs in this matchbook holder would open the cover and lift and strike the first match. After each used match was torn out, the wire lift arm would hook under the next match on the card.




3 Handle to Hold File Flat. You could keep the full cutting face of a file flat against the work if it had a handle like this attached to it. Grippers at one end would engage slots in the tang; a screw-tightened foot at the other end would lock the arched holder firmly to the file.



Please turn the page for more new ideas

Copyrighted material

More New Ideas from the Inventors

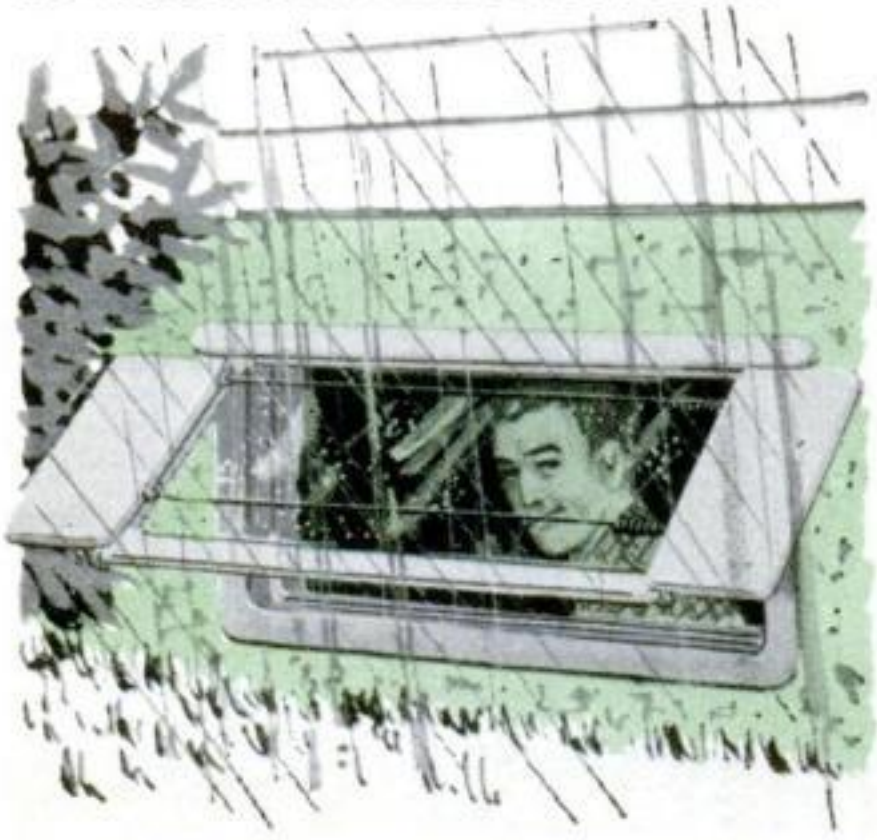

4 Window Flaps to Keep Cellar Dry. Slanting rain would be less likely to find its way into your basement if you added these extensions to awning-type windows. The flaps could be screwed to wooden windows or attached to metal frames by flanges and springs.




5 Dimmer Pedal to Signal Turns. One bar switch that could be levered right or left to blink a car's turn signals, or pushed straight down to dim the headlights, might simplify auto wiring. In clutchless cars the pedal could be placed within easy reach of the left foot.

7 Paper Shields to Keep Off Rain. Patrons wouldn't be left stranded by sudden rains if stores or theaters provided throw-away cardboard umbrellas. Arm straps attached to these waterproof disks would permit them to be worn. The cheaply made rain shields could be given away or sold in public places.





Copyrighted material

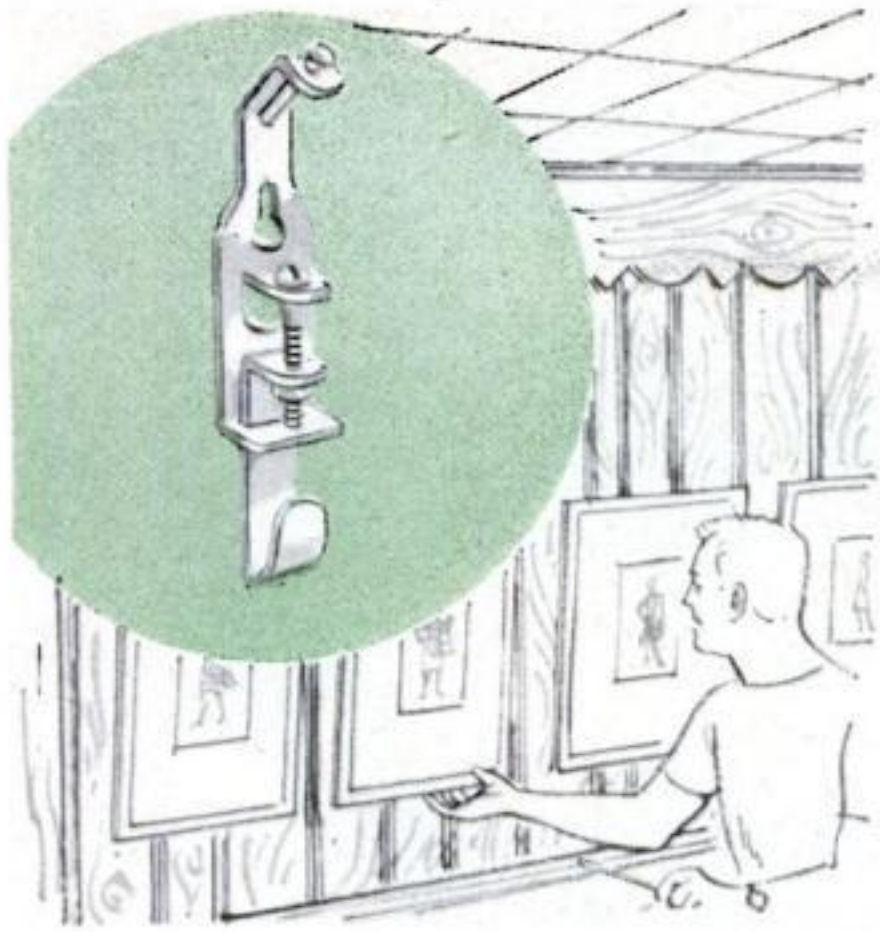

6 Hook to Adjust Picture Height. With this adjustable hanger you could quickly straighten a picture or line up several in exactly even rows. The top and bottom of the hanger would be separated and a screw would be turned to raise or lower the picture's position.

8 Net to Catch Rejected Toys. Babies have a way of throwing their playthings out of reach and then crying until somebody comes along to pick up the toys and return them. With this play-pen net catching an infant's wild pitches, a mother could go on with her work instead of acting as a retriever.

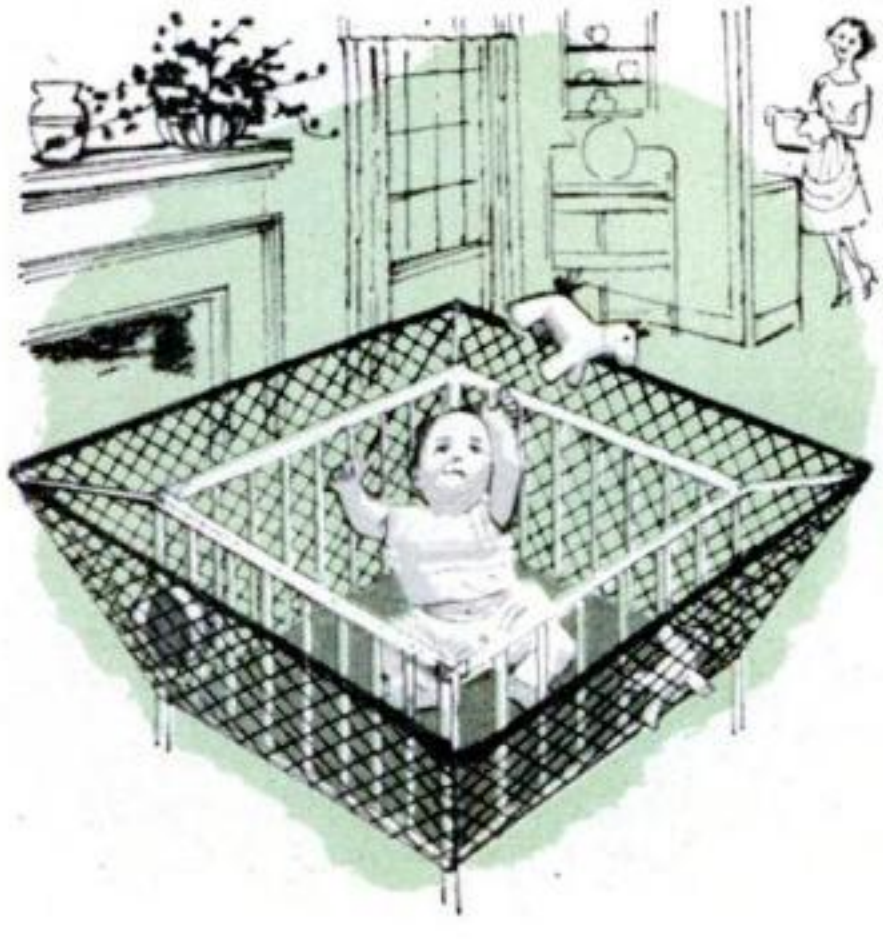

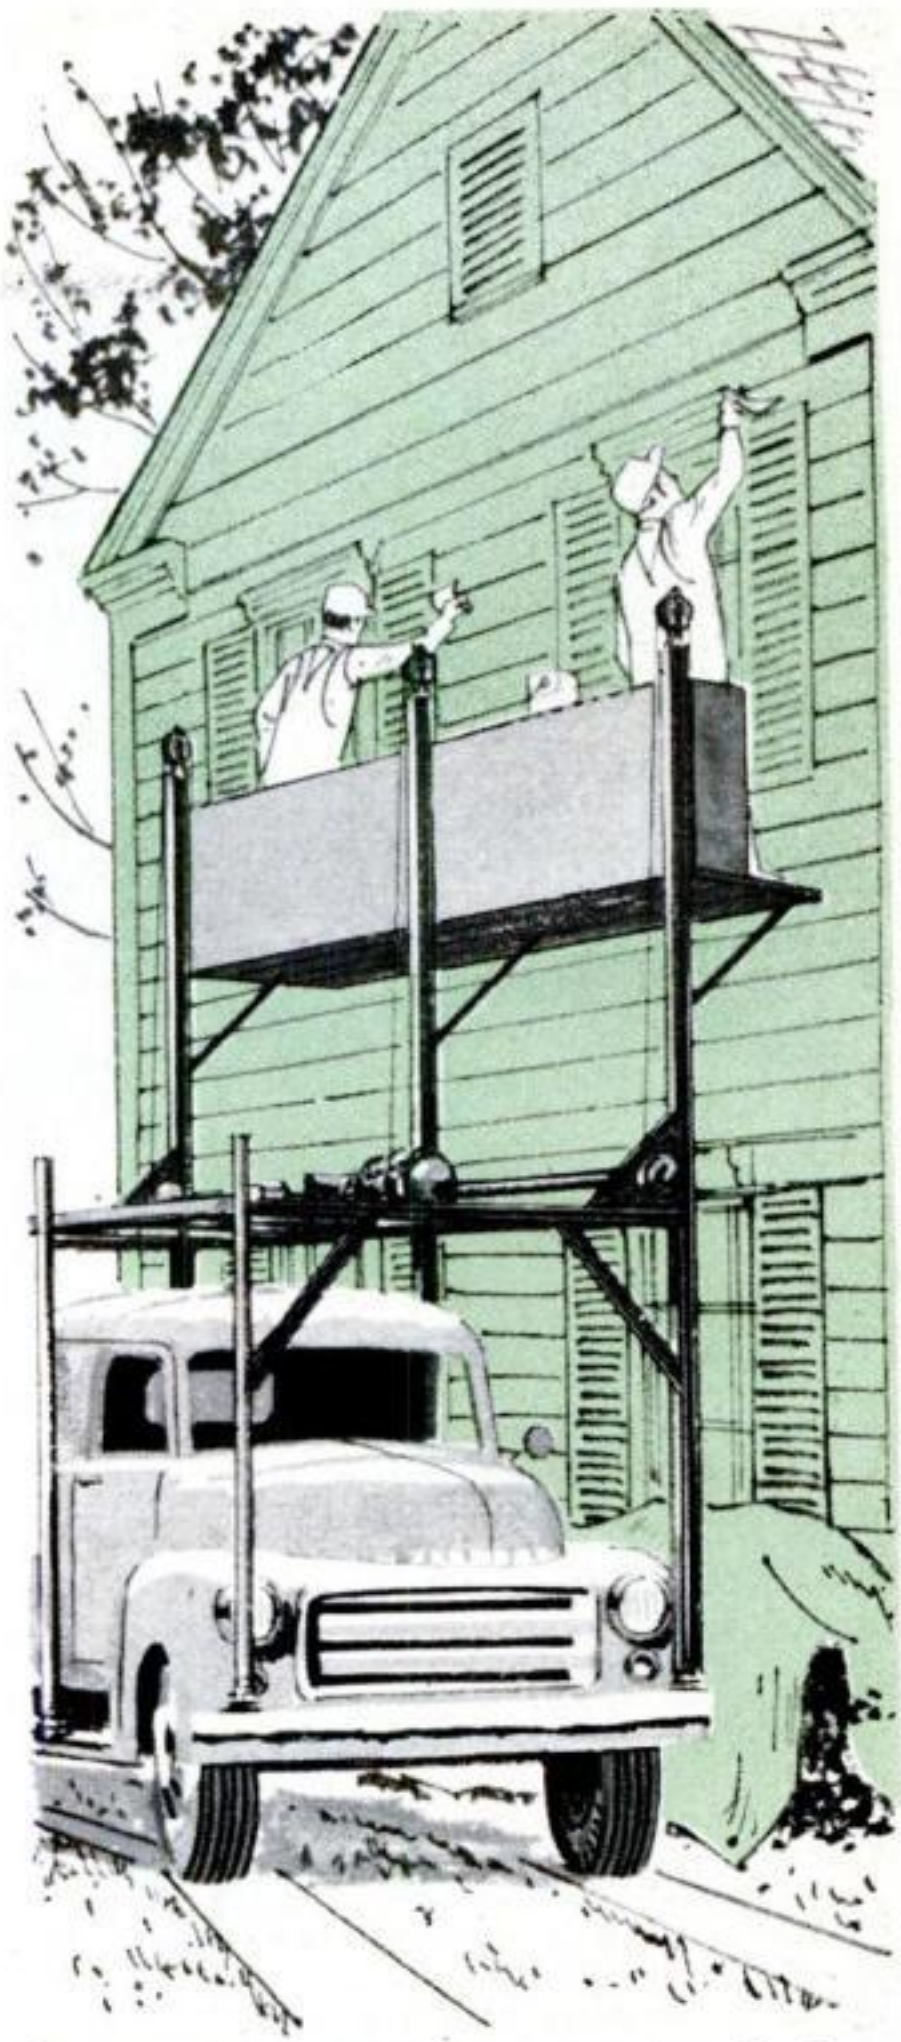

9 Scaffold to Ride to Job. Attached to a frame mounted on a car or truck, this mobile work platform could be set up faster than ladders on most jobs. An electric motor would crank the scaffold up and down as needed. For road travel the vertical support rails would be retracted and the platform removed or folded against the frame on the truck.

U.S. patents on these inventions have been granted to: 1. Richard Carver, Cleveland; 2. Charles Soule, Reno, Nev.; 3. Gabriel Domonkos, Detroit; 4. Glenn and Betty Scott, Miami; 5. Thyra Howard, Detroit; 6. Joseph Pjankuch, Menominee, Mich.; 7. Edgar Jones, Indianapolis; 8. Norman Le Roy, Miami; 9. Arthur and Vern Solomon, Seattle, Wash.

Copyrighted material

New for Boatmen



1. Fishtails Afloat. Now they're making dream boats that look like dream cars. Sports-car designer Brooks Stevens dreamed up this $11,000 Evinrude Lark, the most expensive outboard runabout ever built. The 16-footer has Cadillac fins, bucket seats, auto-type dash and lots of dazzling chrome.



2. Inboard-Outboard "Aquaplane." Made of glass-fiber-reinforced plastic, this skimmer is powered by its own outboard. The motor, available in seven to 20 hp. is forward for better stability. Hand ropes steer the craft through a rudder at the stern; if you let go of the ropes, the motor stops.



3. TV for Small Craft. Boat owners may be taking their TV sets cruising with them, now that a full range of converters and filters is available for marine use.

They supply the right kind of current and squelch interference from generators, motors and electronic gear that spoils good pictures.

Copyrighted material






4. Seagoing Volkswagen. An industrial version of the four-cylinder, air-cooled engine that powers VW cars drives this 18-foot Olympia. The 36-hp. motor pushes the boat along at 18 m.p.h. and uses 1½ gallons of gas per hour. The engine and exhaust system are separately cooled by air ducts having intakes inside the boat.

5. Transparent Pram. You can see right through this eight-foot plastic boat. Its one-piece, 44-pound hull will carry three people and can be driven by a small outboard motor. The transparent plastic is leakproof and requires no maintenance. The boat is 45 inches wide and has mahogany gunwales and seats.




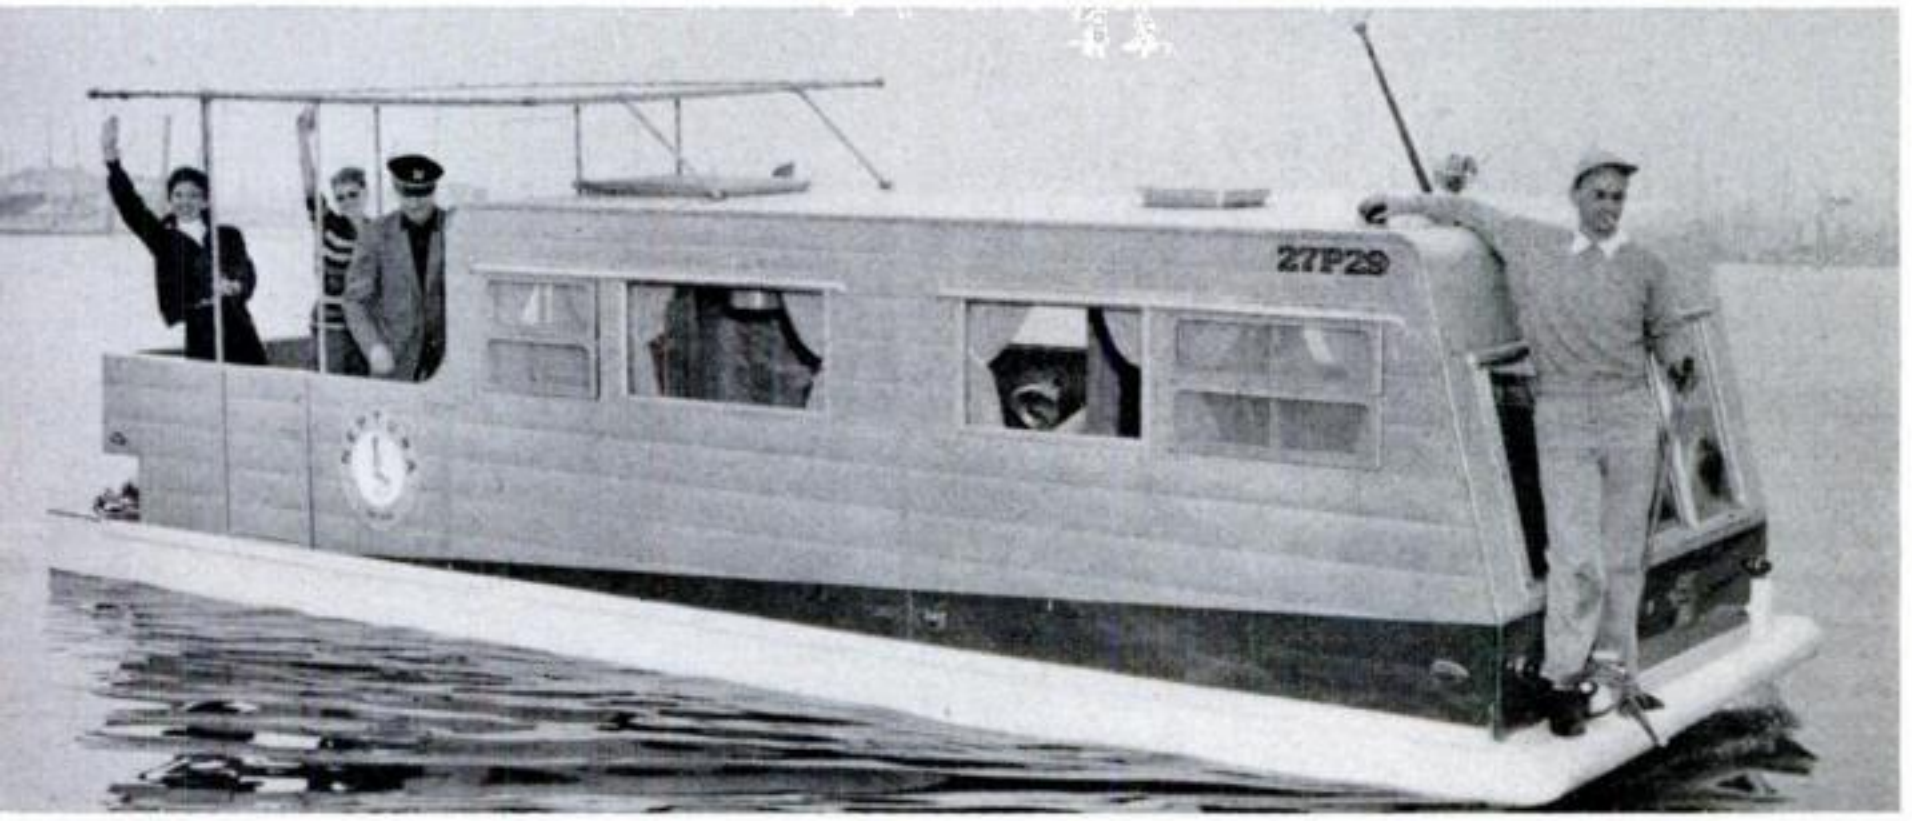

6. Houseboat-Trailer Combo. This land and water cruiser is a houseboat with wheels—or a trailer that floats. Ashore, a car tows the 26-foot boat on two retractable wheels. Afloat, an outboard motor pushes it. Inside the steel hull are bunks for four, a lavatory and a kitchen with sink, stove and icebox.

Further information on the products described on these pages can be obtained from: 1. Evinrude Motors, Milwaukee, Wis.; 2. Luria-Cournand, Inc., Havre de Grace, Md.; 3. Cornell-Dubilier Electric Corp., South Plainfield, N. J.; 4. U-Mak-It Products, 701 Whittier St., Bronx 59, N. Y.; 5. Sudbury Laboratory, South Sudbury, Mass.; 6. Neptuna Corp., 1127 Wilshire Blvd., Los Angeles 17.

Copyrighted material

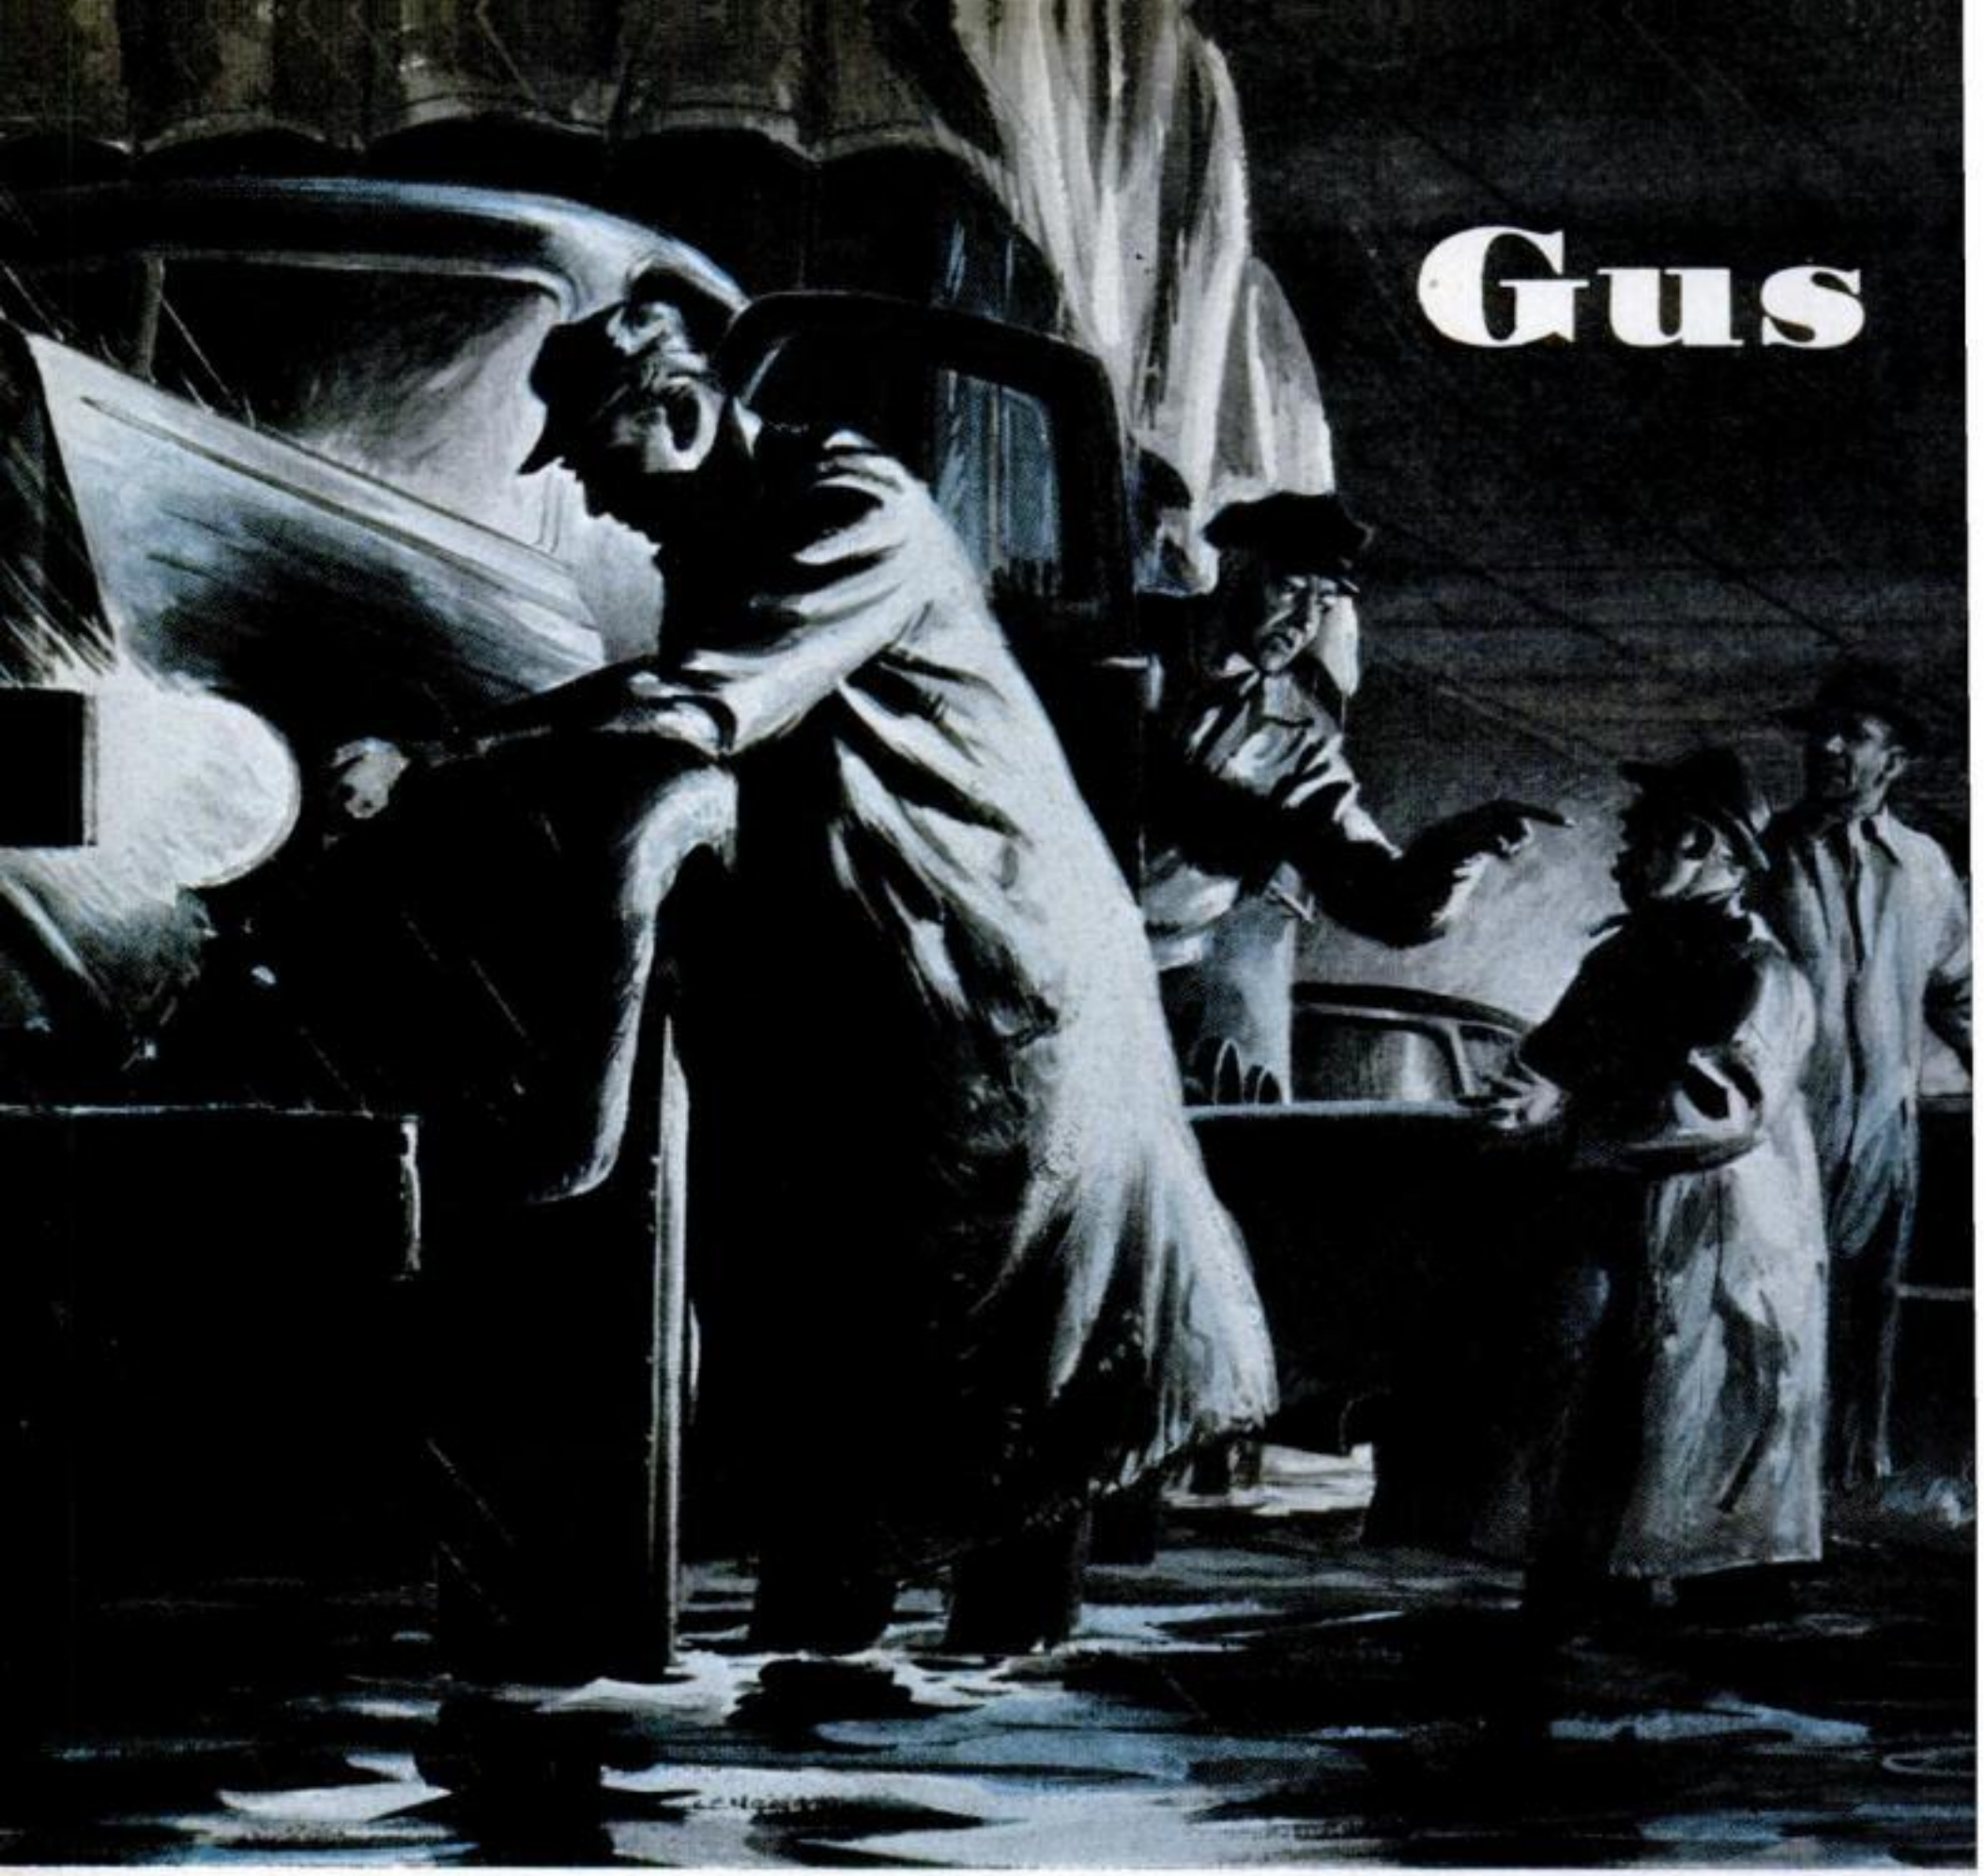

Most guys in a spot are glad of a little


By Martin Bunn

GUS WILSON, burly proprietor of the Model Garage, was driving back to town after spending Sunday in the country with friends. It was a wild night, with a torrent of rain lashing the windshield. As Gus's car nosed down into the concrete-walled underpass beneath the railroad tracks, the green sedan in front of him suddenly flared its stop lights, slewed crazily and shuddered to a halt crosswise of the highway.

Gus tapped his brakes off and on to avoid a spin, had a moment of horror when he glanced into his rear-view mirror and saw headlights bearing down on him from the rear. Coming to an instantaneous decision, Gus swung his wheel over hard toward the graveled shoulder and the concrete wall beyond it. It took delicate timing to swing the wheel back at exactly the right moment, tramp his brakes to slew the rear of his vehicle around, release brakes and shoot down into the underpass, barely missing the

Copyrighted material

Meets a Flood of Trouble

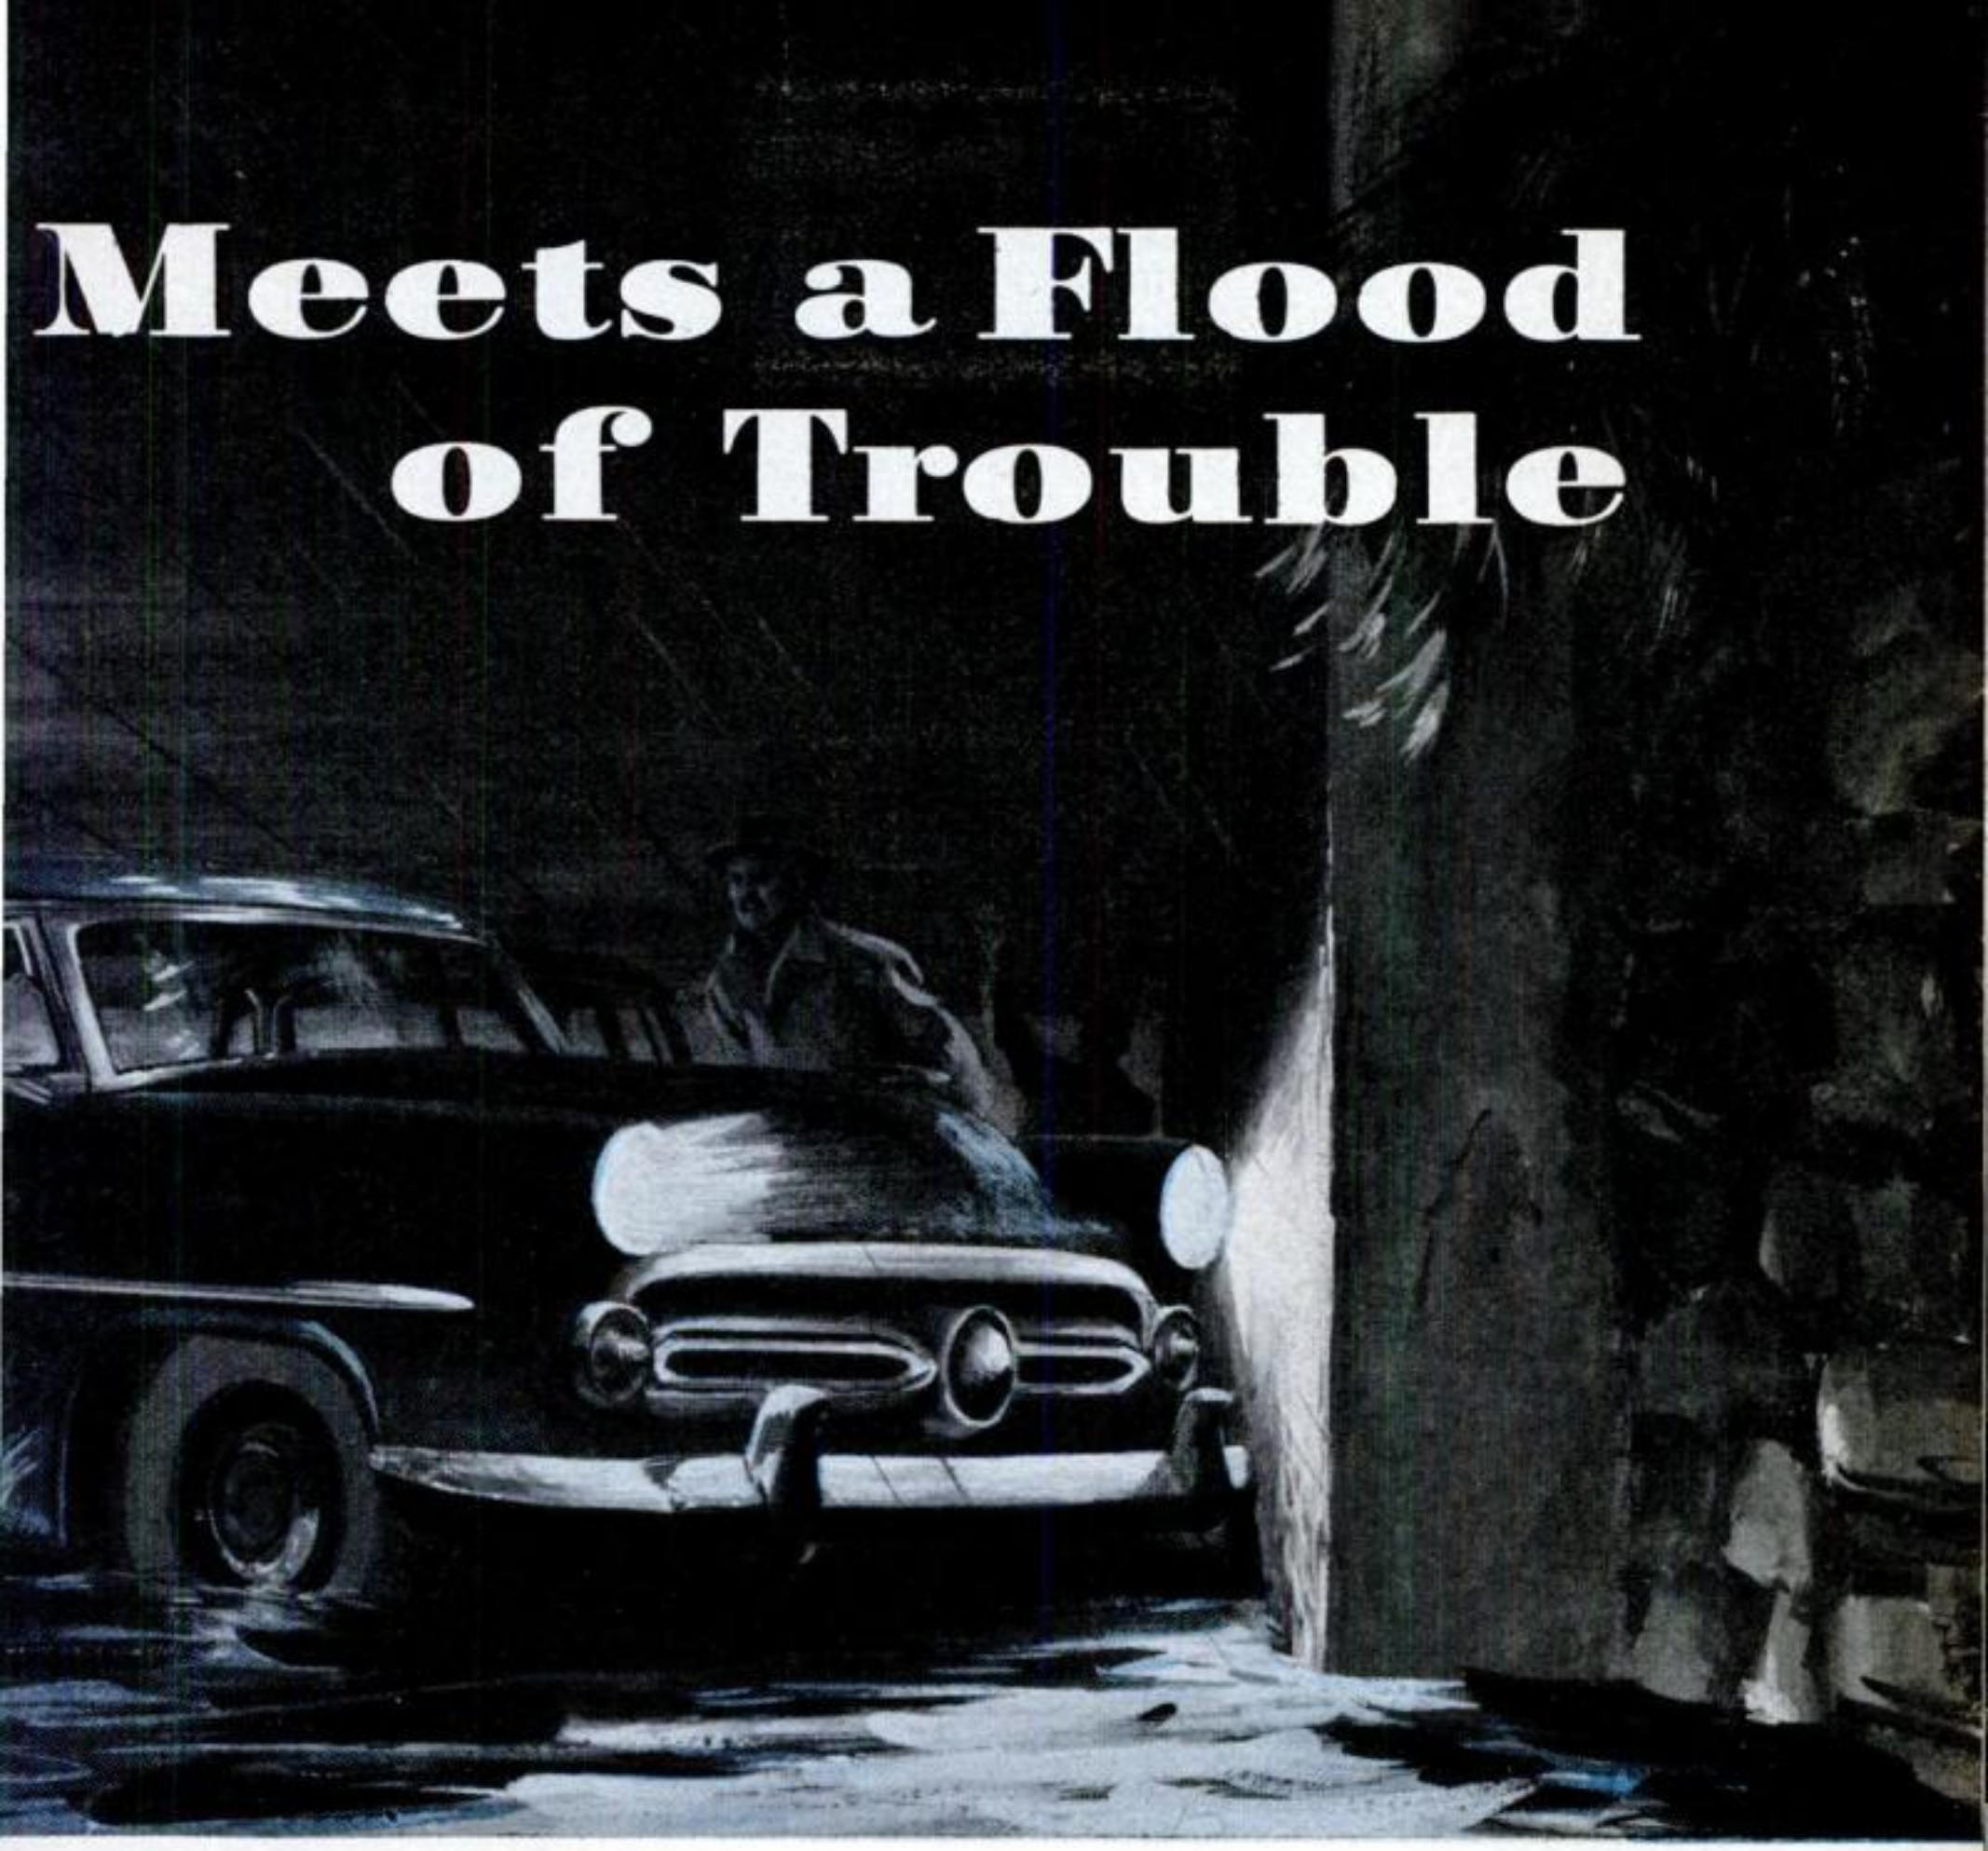

help—but this trucker was a queer one.

halted sedan. As Gus's car rode into the underpass a wall of water sprang up over his windshield, completely obscuring his vision. He brought the car to a halt and leaped out, flashlight in hand.

To his astonishment he found himself standing in a foot of water. His involuntary grunt of distaste turned to an exclamation of horror as his flash beam pierced the darkness. Something had evidently clogged the drain of the underpass. The concrete bowl was filling with water to create a trap in which several cars were stalled. Gus began running back, waving his flashlight in warning to any cars that might be approaching.

As Gus came to the green sedan he saw that the car that had been behind his had also managed to miss the stalled vehicle by turning its nose over the shoulder. Even as he recognized the car as Pete Vancourt's, Pete sprang out.

"Gus Wilson!" he exclaimed. "That was a narrow squeak."


"Sure was, Pete," Gus said crisply. "Here comes another car. Better try to

Copyrighted material

stop it. The underpass is full of water and stalled cars."

"Good Lord!" Pete exclaimed, and then he was running towards the tunnel entrance, swinging a flashlight back and forth to wave down the oncoming car.

GUS was running the other way, intent on warning cars that might be coming out from town. As he went under the shelter of the underpass the downpour of rain went away but the water at its deepest part rose above his knees. Cars shooting into this at high speed had driven such waves of water over the windshields that startled drivers had clamped on the brakes and slewed in all directions. Undoubtedly some motors had also been drowned out. Arriving at the opposite end of the underpass, Gus was relieved to see that some quick-thinking citizen was there before him, halting the cars that were coming from town.

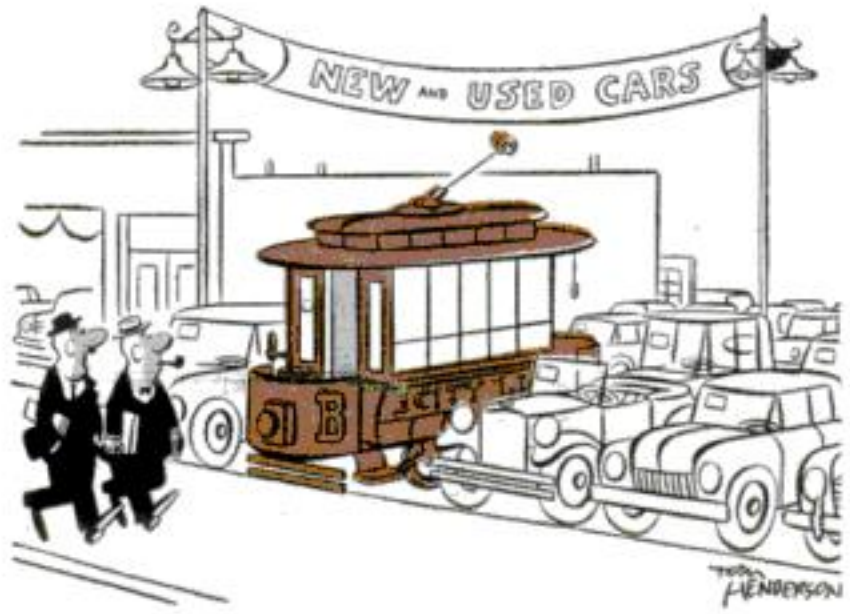

"Lots of these places are making fantastic trade-in deals."

A quick inspection of the underpass drain grate showed Gus that it wasn't clogged where he could clear it. Intent on clearing the highway jam, he got tools, a tire pump, a dry cloth, and a tow cable from his car.

The underpass was a bedlam of sound, magnified to a fearsome bellow by the tunnel. Timid drivers were leaning on their horns and yelling at one another, while the more energetic were wading about in the knee-deep water trying to do what they could. It was a miracle that there had been no serious wrecks or injuries.

The first vehicle in line was a truck with a fully enclosed van body. This truck had managed to ride through the deluge before drowning out. It had swerved obliquely across the highway with its hood thrust out in the downpour. The next two cars, a Ford and a Chrysler, had managed to miss crashing into it, but just barely. The Ford had its front bumper against the left wall of the underpass, its rear against the truck's side. The Chrysler had skidded the other way, ramming its snout under the rear of the truck's body, and laid its rear bumper within inches of the right wall. The three vehicles formed a solid barricade behind which several cars were stalled.

Gus took in the situation at a glance. The truck was the key vehicle. Nothing could move until it moved. It couldn't be towed by one of the cars on the town side of the underpass, due to its oblique and car-locked position. It would have to inch around on its own power. A group had gathered about the truck, offering assorted advice to the driver, who was grinding on the starter.

"Need any help here?" Gus inquired. "Better take that battery slow."

The driver, a lanky individual whom Gus had never seen before, climbed down and thrust his light in Gus's face.

"I've had all the advice from you yokels that I want," he said harshly. "How about standing clear and minding your own business?"

"WHY, you durn fool—" Gus recognized Tom Hanratty's exasperated voice—"that's Gus Wilson you're talking to, mister."

"I don't give a hoot who it is," the driver snapped. "Clear out, all of you. I've started stalled trucks before."

"Yeah," a sarcastic voice called from the group, "and then we'll stay stalled here all night. Come on, men, let's shove the front end of this rig around."

"Get away from my truck," the driver yelled, and his face held an ugly look.

Gus doubted that the group could

[*Continued on page 244*]



How to Make Archery Safe

This booming sport is lots of fun. Here are pointers on how to make harmless blunt-nose arrows.

By Andrew Pfeiffer

IF ROBIN HOOD could step out of the TV tube now, he would find about 500,000 organized archers and about as many more casual ones zinging arrows at targets and game. Archery is the fastest-growing sport in the country, says the National Sporting Goods Dealers Association.


Last year one large manufacturer sold $1,500,000 worth of archery equipment. This was more than double the company's sales figure for 1952.

Hunting with bow and arrow follows the same upward trend. Over 123,000 licenses were issued in 1954, as against the 93,000 that were registered during the year before, according to the National Field Archery Association.

There's much more to archery than just the romance of Robin Hood. The biggest kick comes from watching an arrow fly to its mark, from the instant it leaves the bowstring until it chunks into the target.

Next to that is the fun of making the tackle. It doesn't usually pay to make a bow, but you can turn out the arrows, a quiver, an armguard and shooting gloves yourself. Each of them is a workshop project that will bring you a lot of satisfaction and, incidentally, some sub-

Copyrighted material

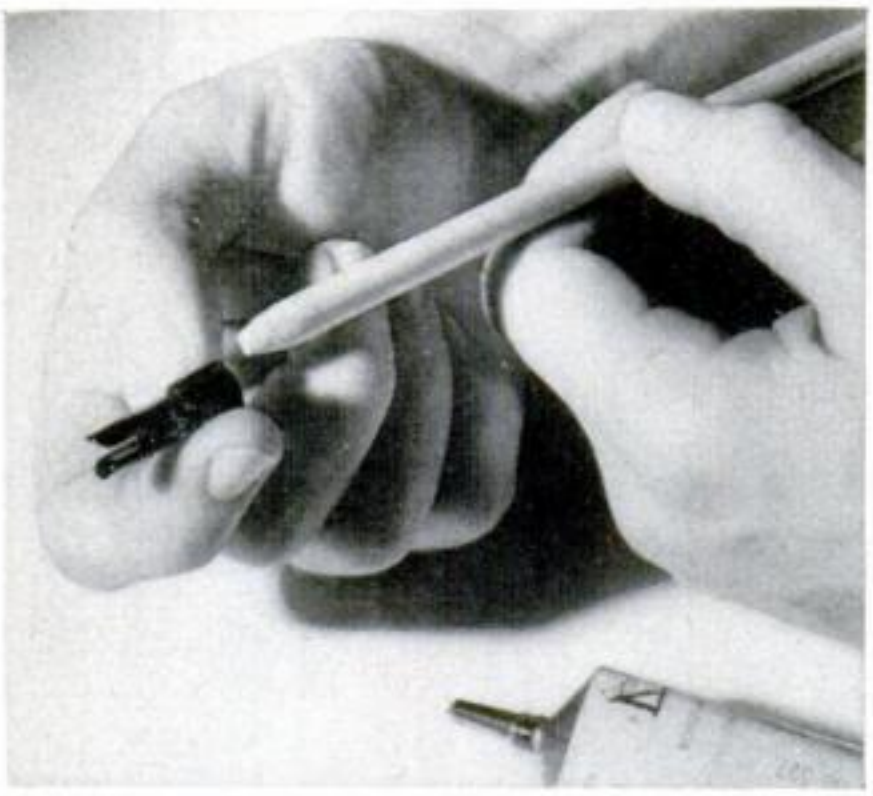

TO MAKE AN ARROW, first cement a nock on one end of a bare shaft. It fits the bowstring when you shoot. A pencil sharpener will taper the shaft to start, but finish it with a knife.

stantial savings over ready-made gear.

A good way to get started in this exciting sport is to make a dozen or so of the special blunt-tipped arrows described here. They're safe even for the kids to shoot and seldom break or get lost because they can't dig into anything. With reasonable care you can turn out arrows every bit as handsome and accurate as the best ready-mades—for about one-third the cost.

Three simple jigs speed the work and ensure uniformity. One holds all three feathers against the shaft simultaneously for gluing. A second shapes the feathers and a third steadies the shaft while you paint on cresting.

From your local archery dealer or a mail-order supplier* you will need:

- 1 doz. $\frac{5}{16}$" nocks (notched devices that fit the bowstring).
- 1 doz. $\frac{5}{16}$" Port Orford cedar shafts.
- 1 doz. right-wing feathers, black.
- 2 doz. right-wing feathers, red.

A $\frac{5}{16}$" arrow shaft can safely be used with bows having a pull of under 45 lb. For heavier bows, order $\frac{11}{32}$" shafts and nocks. All wing feathers should come from the same side of the bird so that the arrow will rotate properly in flight.

Fit a nock to the shaft. Taper one end of the shaft with a sharp knife until you can twist the nock on snug and true. Cellulose (household) cement will hold it permanently. After the cement has set, give the shaft a protective coat of lacquer.

Feather the arrow by inserting the nocked end of a shaft in the base of the feathering jig. A rib on the nock fits into the notch provided. Cut one black and two red feathers to about 5" length and put them in the clamps. (The black cock feather lines up with the rib on the nock.)

Apply a heavy layer of household cement to the quill-edge of each feather and slide the clamps into the jig. A rubber band twisted around the tops of the clamps will hold feathers and shaft tightly together. Allow about 20 minutes for the cement to dry.

Shape the feathers. You can streamline feathers quickly and uniformly with the hot-wire feather trimmer. Plug in the trimmer and wait until the wire becomes red hot. Now insert a feathered shaft in the holder and rotate it counterclockwise. As the wire touches a feather it will burn through, leaving a smooth edge.

Finish feathering by paring down the quill where it's cemented to the arrow shaft. The quill should blend into the shaft so that a sharp edge won't cut your hand when you shoot.

The hot wire used in this jig is cut from a 600-watt heater element wired into the circuit. *Any other kind of wire is dangerous.* Remove the screw on the side of the heater element base and unwind about 20 spirals of wire. Cut this loose end off, smooth it out and shape it to the outline of a feather. Don't forget to reconnect the heater element wire or you will have an open circuit.

Crest the shaft. The bright bands on an arrow shaft are like the owner's name. An archer who takes pride in his tackle gives careful thought to a distinctive combination of wide and narrow bands.


Multi-colored decoration also makes an arrow stand out better when it lands in the underbrush. You won't lose as many.

Your cresting kit should include two or three bottles of lacquer (various colors) plus a narrow and a wide paintbrush. With a feathered shaft in the cresting

**The materials that I used came from Pride Archery Co., RFD No. 1, Danbury, Conn.*

Copyrighted material


How to make and use a simple, three-way feathering jig

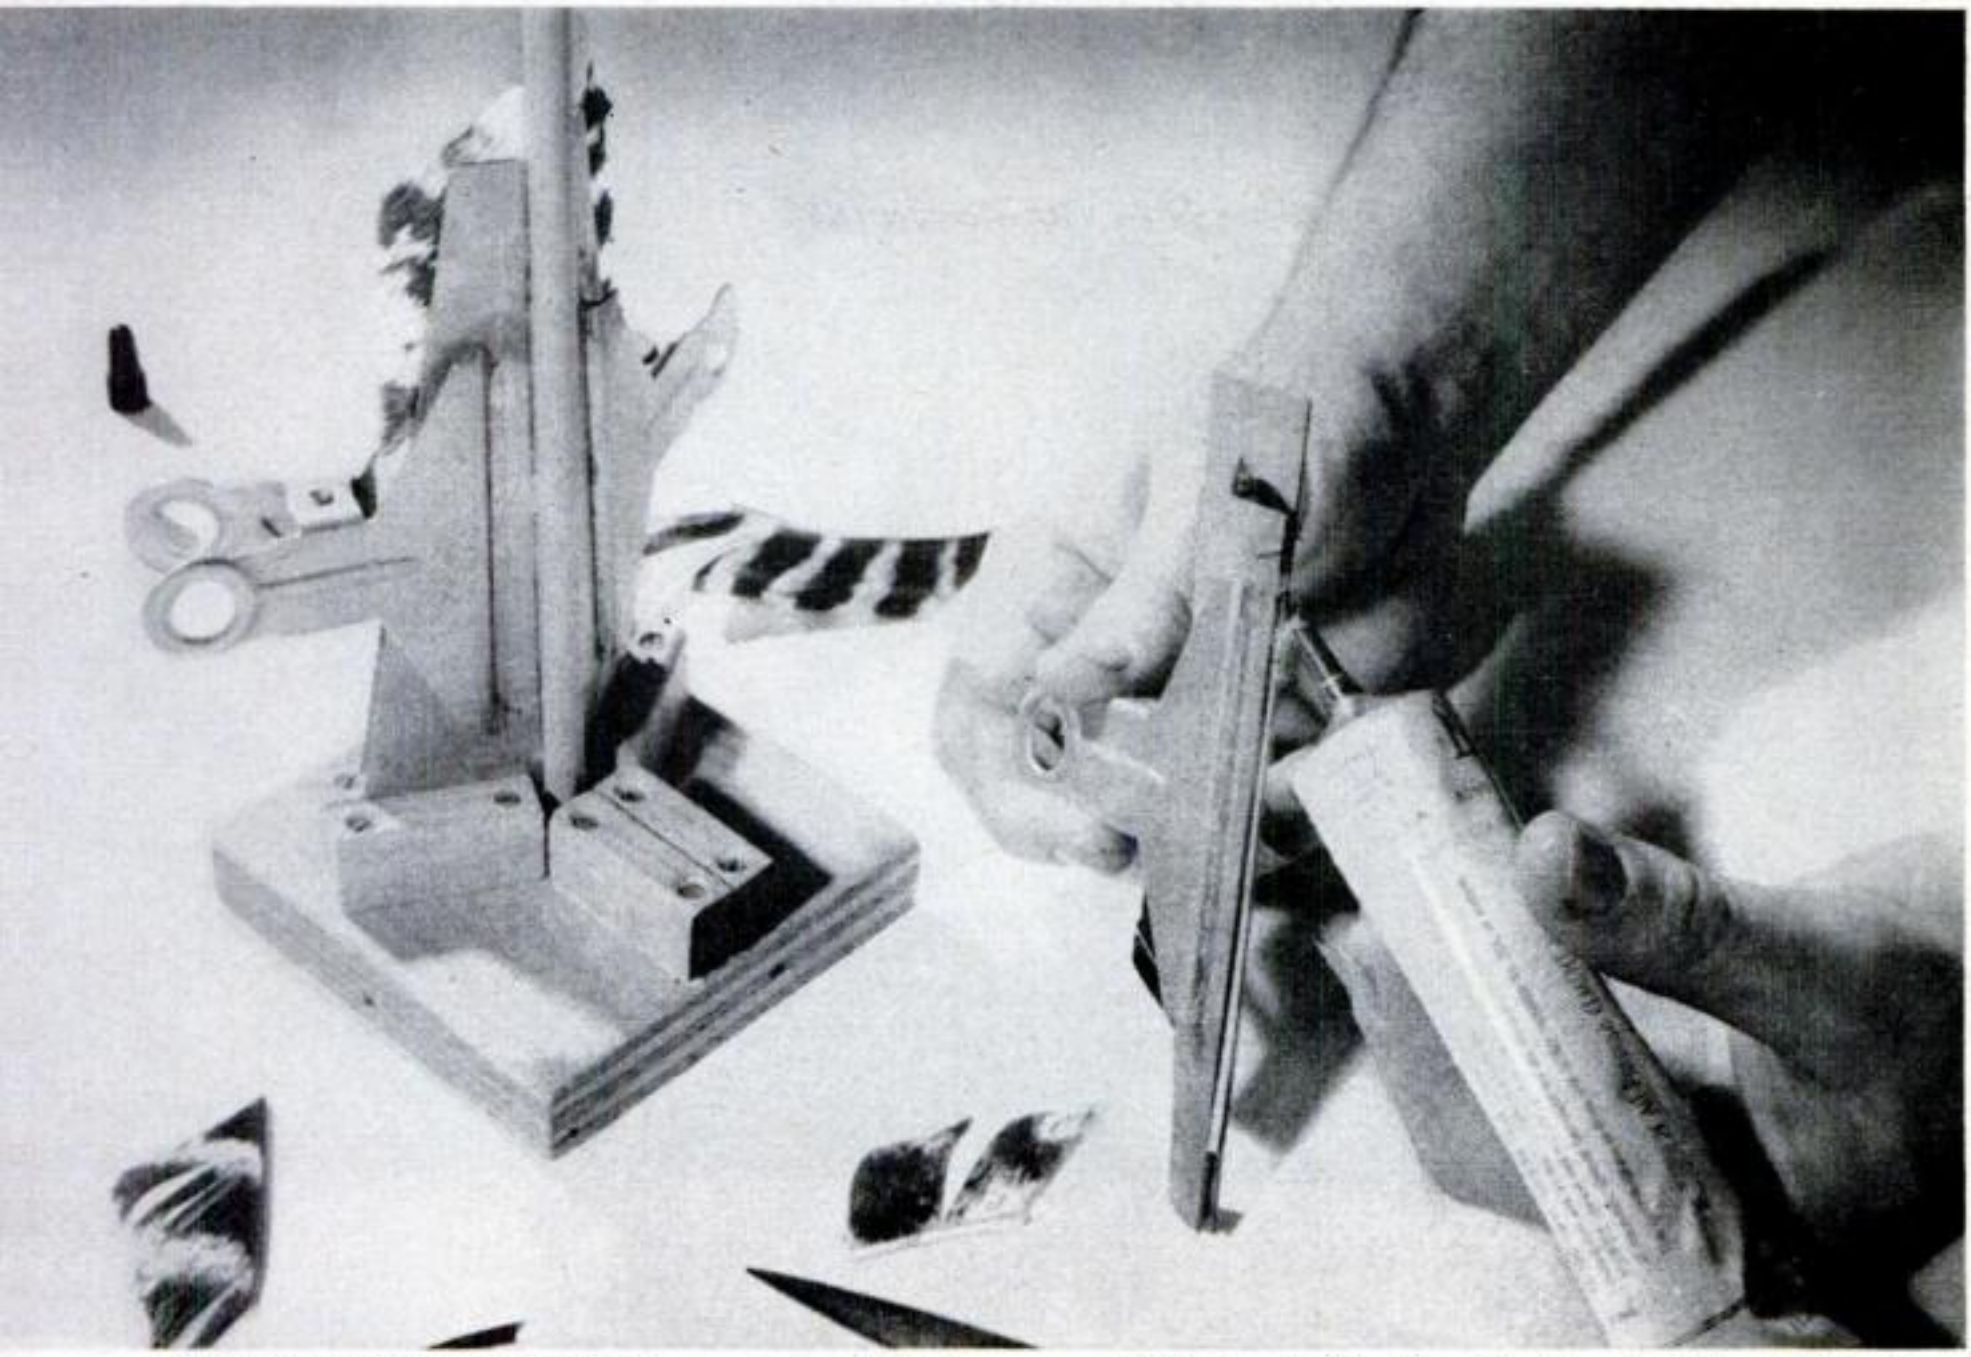


THREE FEATHERS AT ONCE are cemented to an arrow shaft in the second step. The jig's wood base holds a shaft and three metal clamps.


Grip a 5" length of feather in a clamp so that the barbs slope toward the nock. Coat the quill with cement and slide into place.

To make the base, drill a hole through the center of a square block and mount three pairs of blocks to it. The blocks straddle guide lines 120° apart. Draw them with a protractor or use a compass to locate points on a circle (as in sketch). Notch the center hole to admit the rib on the nock and shim the six small blocks with paper to square them with the base. Heavy paper clamps are soldered to extensions of 20-gauge galvanized sheet metal.

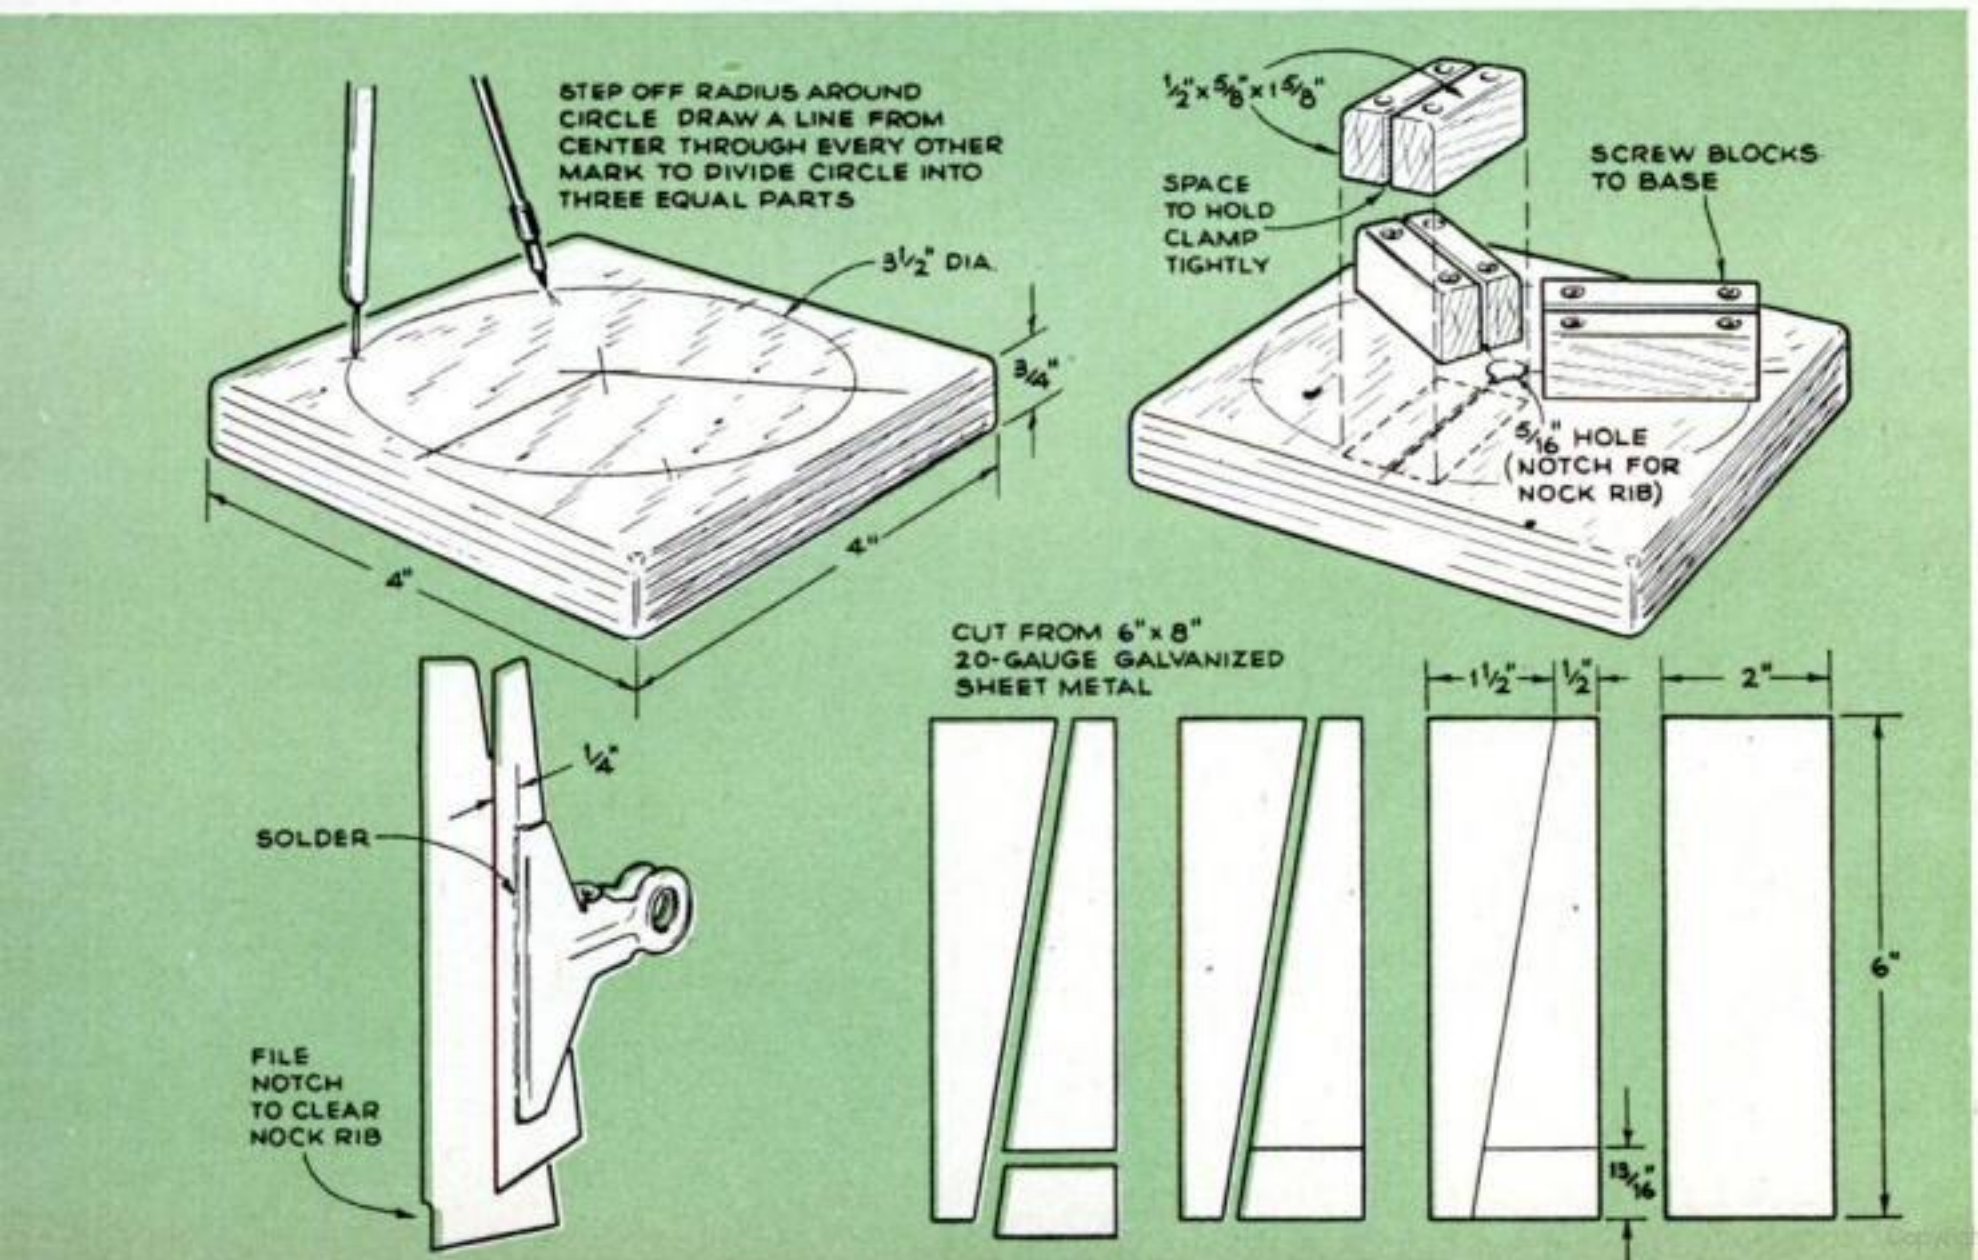

Copyrighted material

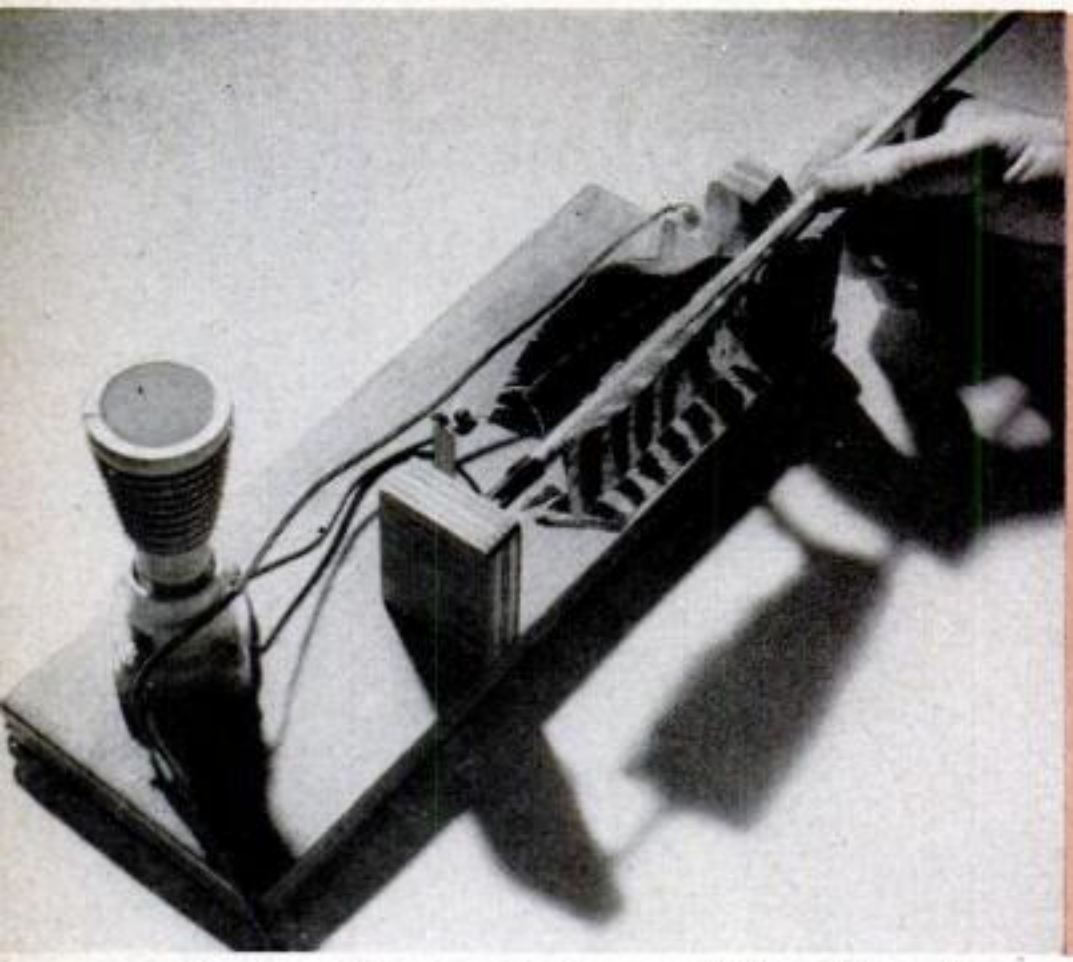

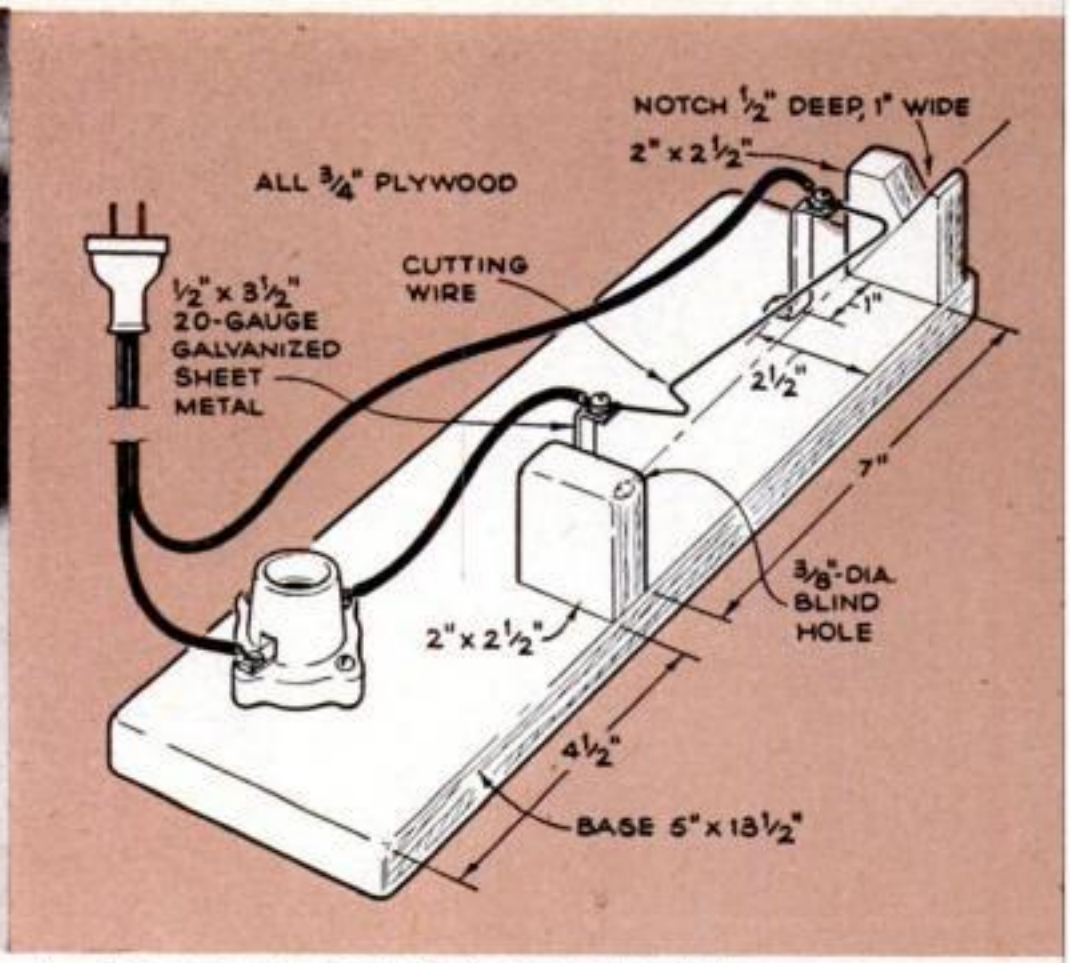

Shape the untrimmed feathers

A HOT-WIRE JIG burns the feathers into shape for flight. Perform this third step by slowly rotating the arrow counterclockwise. To make the jig, mount a porcelain socket and two scrap-metal strips on a base. Wire as shown. Screw a 600-watt heater element into the socket and connect a piece of wire taken from this element, properly shaped, to the metal strips.

jig, hold a brush against the shaft with one hand while you rotate the arrow away from you with the other. I also paint my shafts between the feathers and up to the edge of the nock.

Make the tip. Carve a blunt arrowhead from a block of hardwood. (Or use 1″-diameter birch dowel if wood carving is not one of your specialties.) Drill a $\frac{5}{16}$″ hole about an inch into the tip—the shaft fits in here. A dummy shaft slipped into this hole will give you a handhold for carving. It can be chucked in an electric drill or lathe so that you can turn the tip instead of handcarving it.

Cut the shaft to length. The unfinished shafts come about 30″ long and will have to be cut to size. Find the proper length by slipping a tip on a shaft temporarily and fitting the arrow to your bowstring. With the arrow pulled back at full draw there should be about ½″ between the narrow end of the tip and the bow.

Cut the shaft to proper length and glue the head on with household cement. A coat of clear lacquer will protect the tip or you can decorate it with color.

A quiverful of these blunt-tipped arrows, a bow and a target backstopped by straw or heavy cardboard will get you started in archery. The youngsters are in for some exciting times too, but you'd better keep an eye on them. Even though these arrows are considered safer than the sharp-ended ones, it's still best to be alert when someone's shooting.


Scoring is a bit of a problem with blunt-nosed arrows, since they bounce off (which saves wear and tear on your target). But you can get around this by rubbing the tip in carpenter's chalk or cue chalk. Use a different color for each archer.


Shooting is most fun (because it's most accurate) when your bow has just the right pull. The ancient Arabs devised a method for finding their best pull that's still used.

Run some line through a shoulder-high pulley. Tie a small loop in the top end of the rope and fasten a 20-to-25 lb. weight on the lower end. Grasp the loop with three fingers, as you would a bow string, and lean against the pulley support as though it were a bow. Add or subtract weight until the pull feels about right as you draw the loop to the side of your chin in a simulated shot.

This table will give a rough check

Copyrighted material

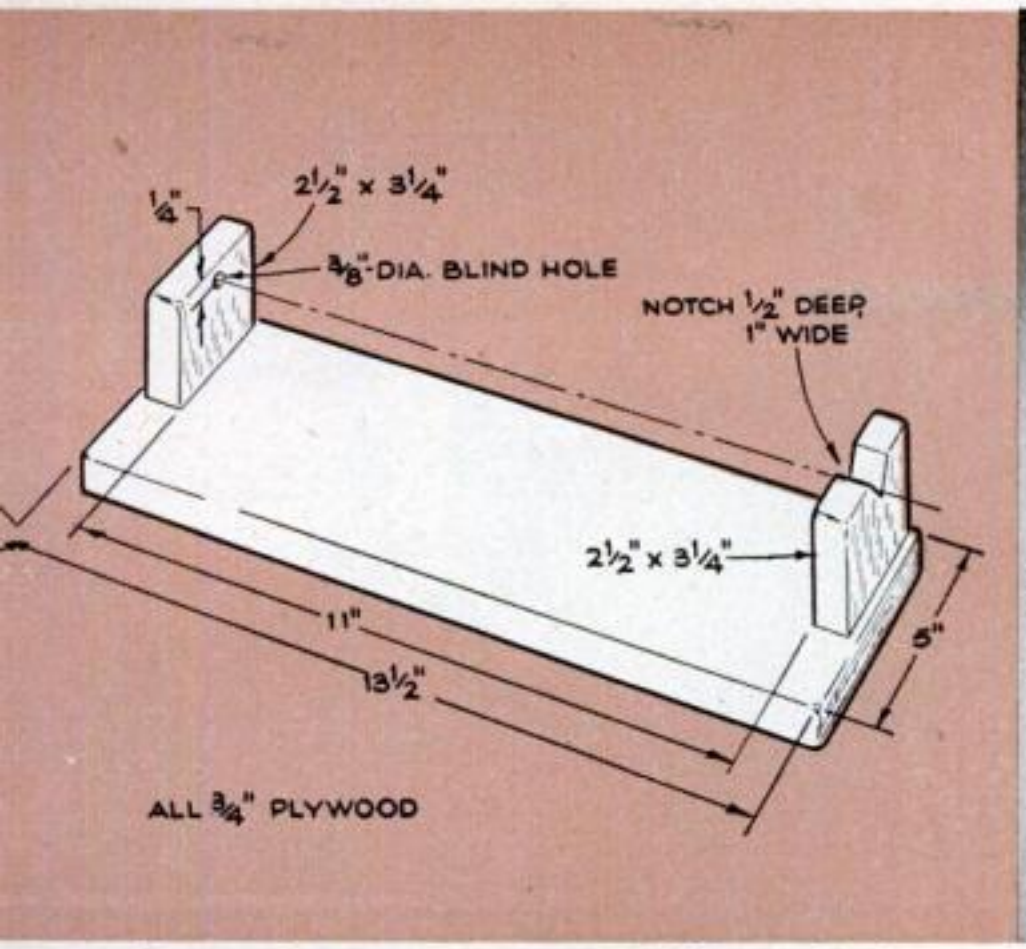

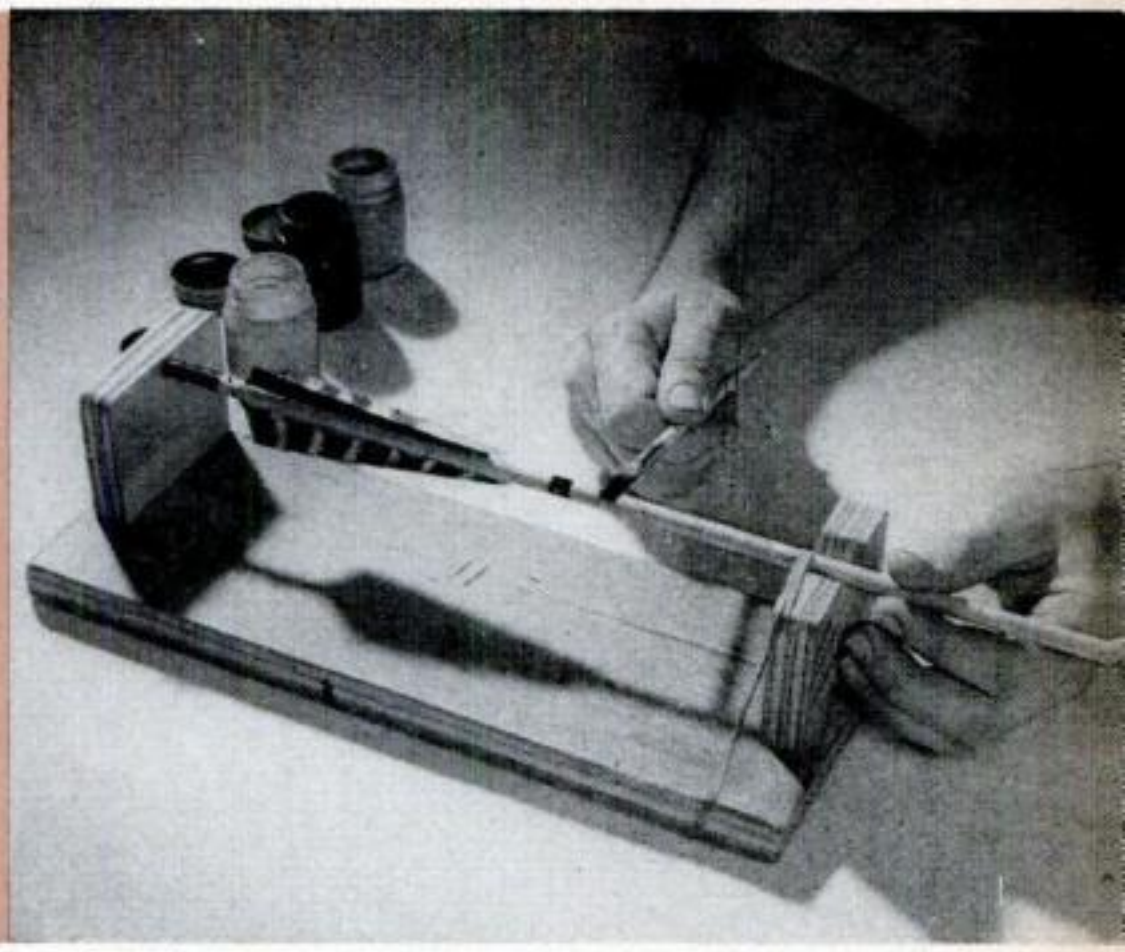

Brand your arrow with paint


A CRESTING JIG helps put on varicolored stripes in the fourth step of preparing your arrow. Paint the identifying stripes with lacquer by holding a brush and turning the shaft away from you. Several colors and brush widths add variety to your special crest marking. Simplest of all the jigs to make, this one uses a 60° countersunk hole in the left upright block to hold the nock.

for younger bowmen. Remember that the pulls given are only averages and do not apply to all individuals.

8-10 years old.....15 lb.
10-12 years old.....15-20 lb.
12-14 years old.....20-25 lb.
14-16 years old.....25-30 lb.


When in doubt it's better to use a lighter bow than a heavier one. A bow that's too heavy won't shoot as straight and it could get out of hand.

In buying bows it's a good idea to make your first one relatively inexpensive. You can swap it for a better one, with more pull, after your skill and shooting muscles have developed. END

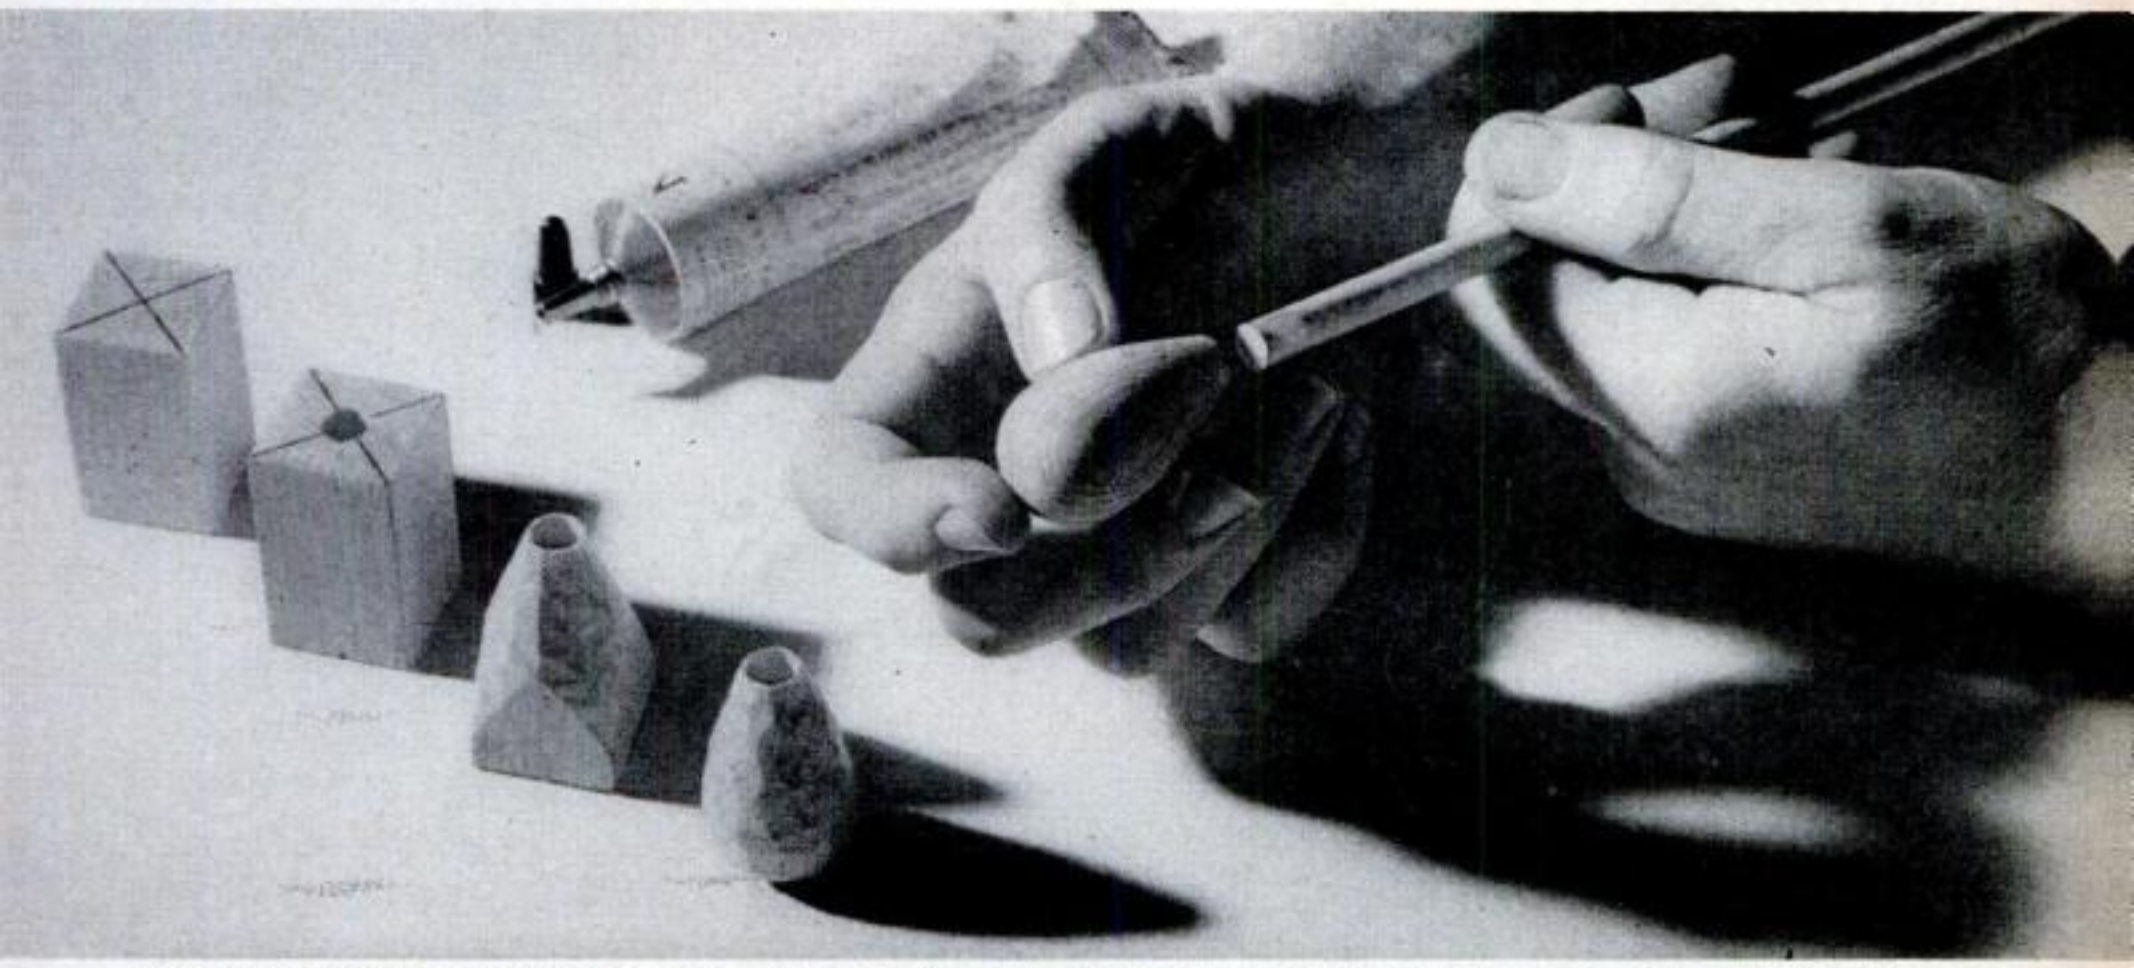

FINISH UP WITH A BLUNT TIP for the business end. Carved or turned from a hardwood block or length of birch dowel, its rounded end can't dig in. Protect it with lacquer. The blocks are 1" square by 1¾" long and have a 5/16" hole drilled an inch into end that fits over shaft.

Copyrighted material

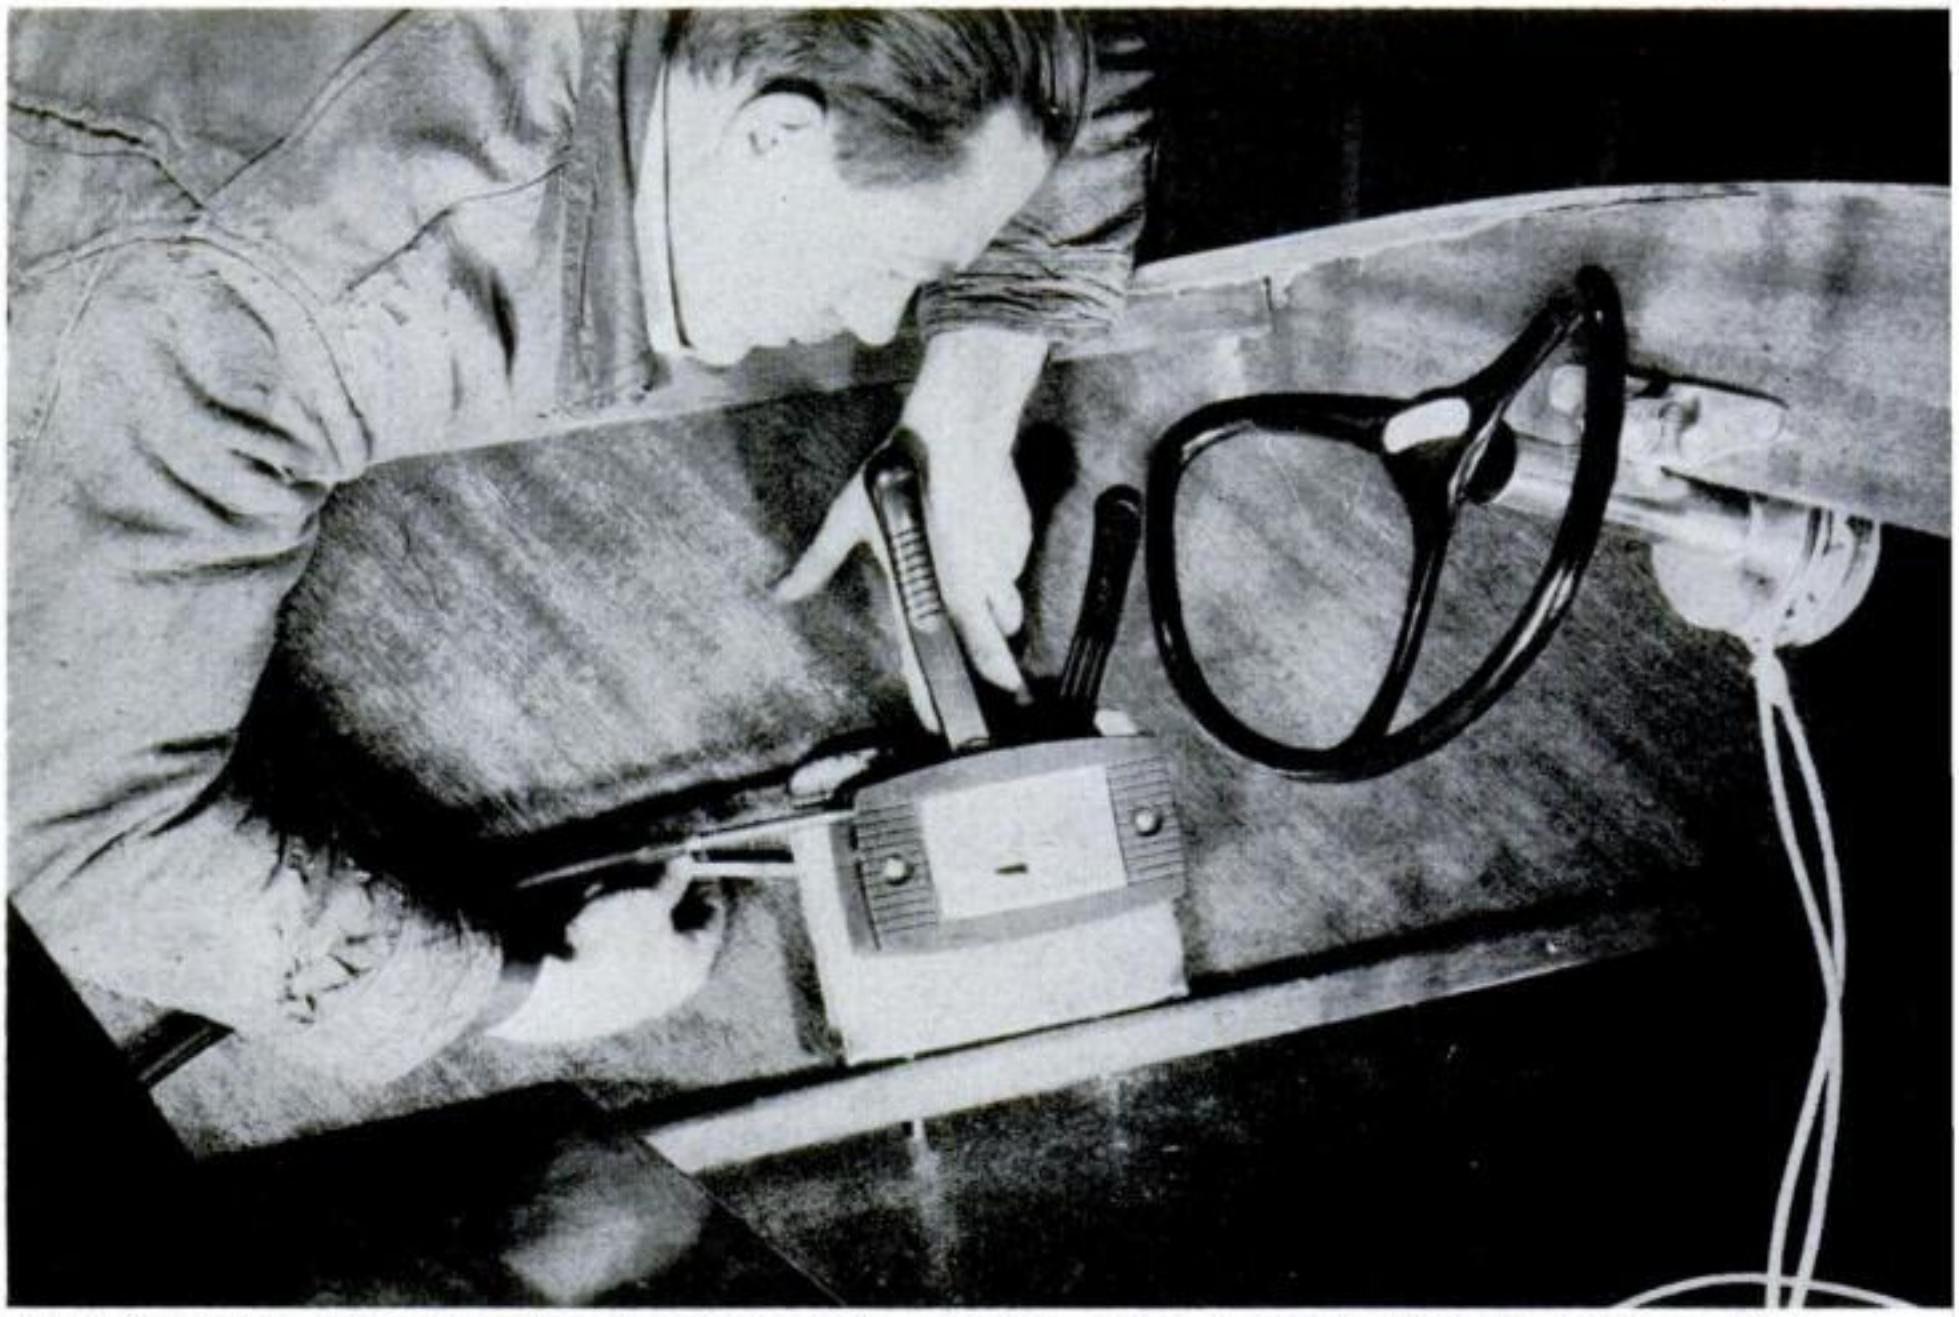

CABLE STEERING. Plane-type wheel operates this Scott-Atwater steering rig, a drum with plastic-coated cable running through pulleys. One lever shifts gears, other controls the throttle.

Remote Controls For Your Outboard Motor



AUTOMOTIVE STEERING. A steering system recently introduced by Gemmer in kit form has a worm-and-sector gear with a pitman arm to push and pull a mechanical linkage.


WHY crouch in the stern with your outboard motor this summer? You can move forward and run the boat as easily as a car by installing remote-steering and engine controls.

For the maximum in convenience you need an electric-starting button nearby, gearshift and throttle levers beside you, and a steering wheel ahead. But you can settle for remote steering alone.


Drum-and-cable steering is the least expensive and most widely used. But you can also buy hydraulic or straight mechanical rigs. Except for the fittings that connect cable to motor, gearshift and throttle controls are all basically alike.

Steering controls can be selected on a


Copyrighted material

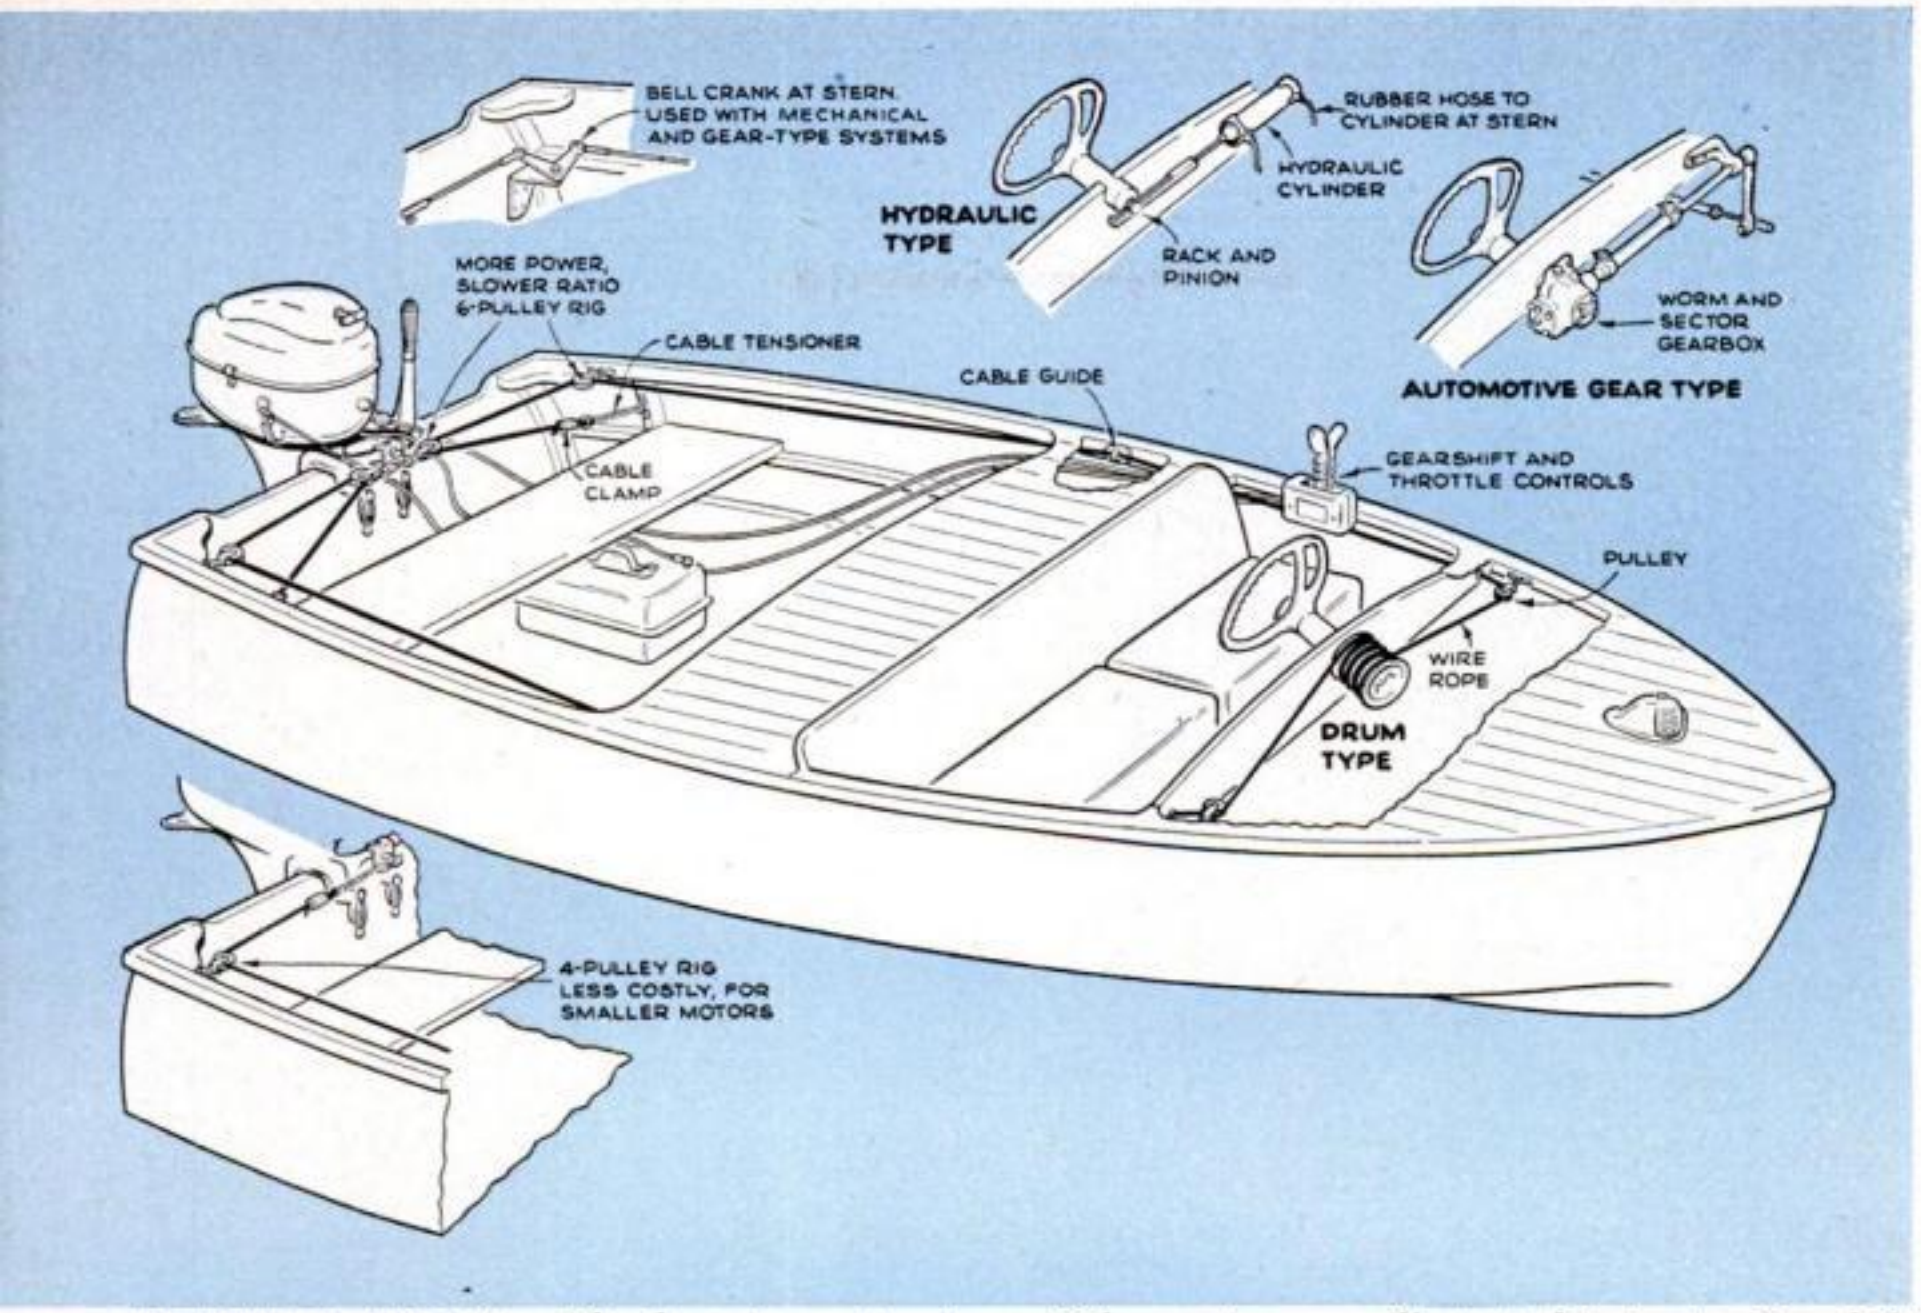

A TYPICAL LAYOUT with drum-type steering through cables and pulleys is shown above. Other systems are illustrated in insets. Gearshift and throttle controls have flexible cables.

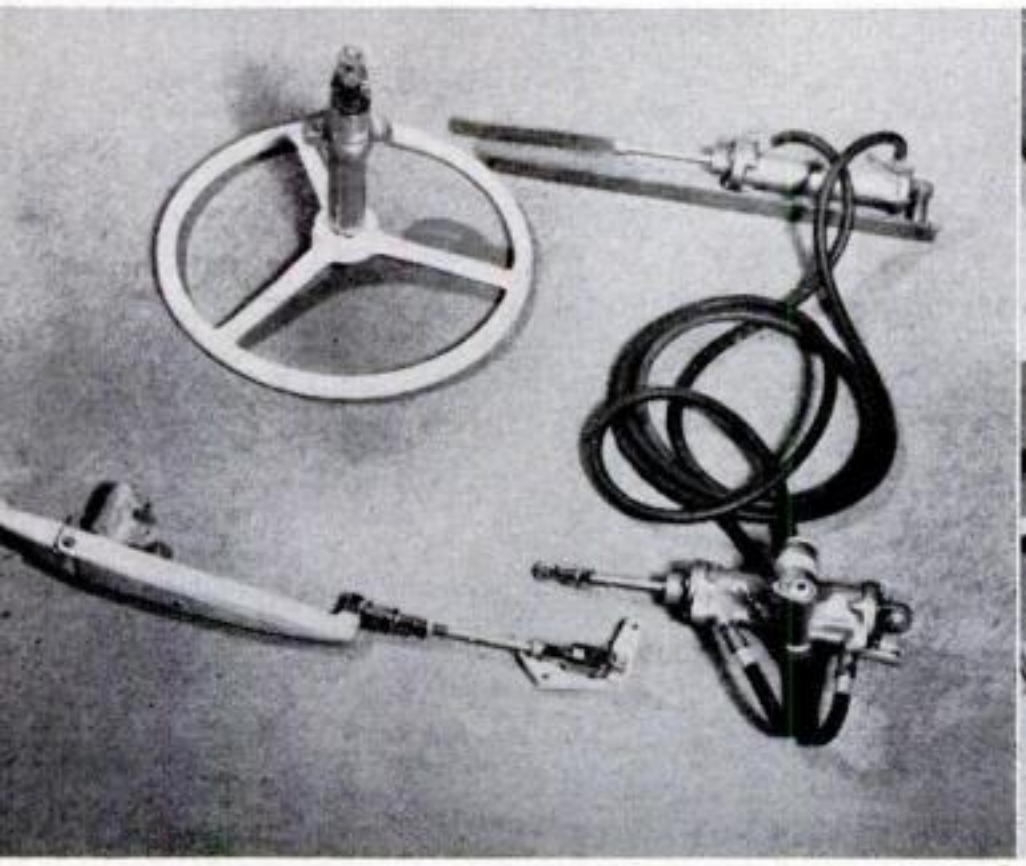

HYDRAULIC-STEERING KIT by Duotrol includes wheel, rack-and-pinion-operated piston in a power cylinder, rubber hose, slave cylinder for mounting at the stern and a bell crank with arm.

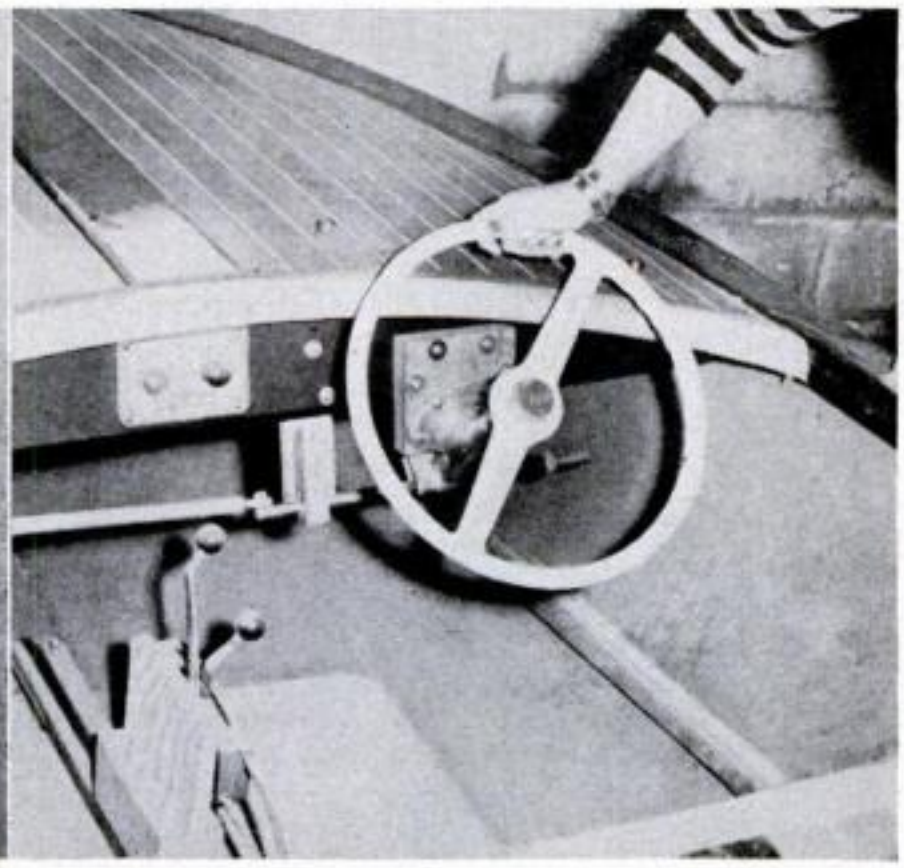


RACK-AND-PINION STEERING with Robart rig is all-mechanical through push-pull links and bell cranks. Note special bracket on inner keel for mounting gearshift and throttle controls.

price basis, but consideration should also be given to safety and the type of boating that you do. Four-pulley rigs for small motors and low speeds, can be treacherous with big motors and fast boats that should have a six-pulley system. END


Further information about the products mentioned here can be obtained from: Gemmer Mfg. Co., 6400 Mt. Elliot, Detroit; Robart, 3010 N. 90 St., Milwaukee; Scott-Atwater, Minneapolis 13; Duotrol, Fox River Sales, Oshkosh, Wis.

Copyrighted material

5 Photo Tips

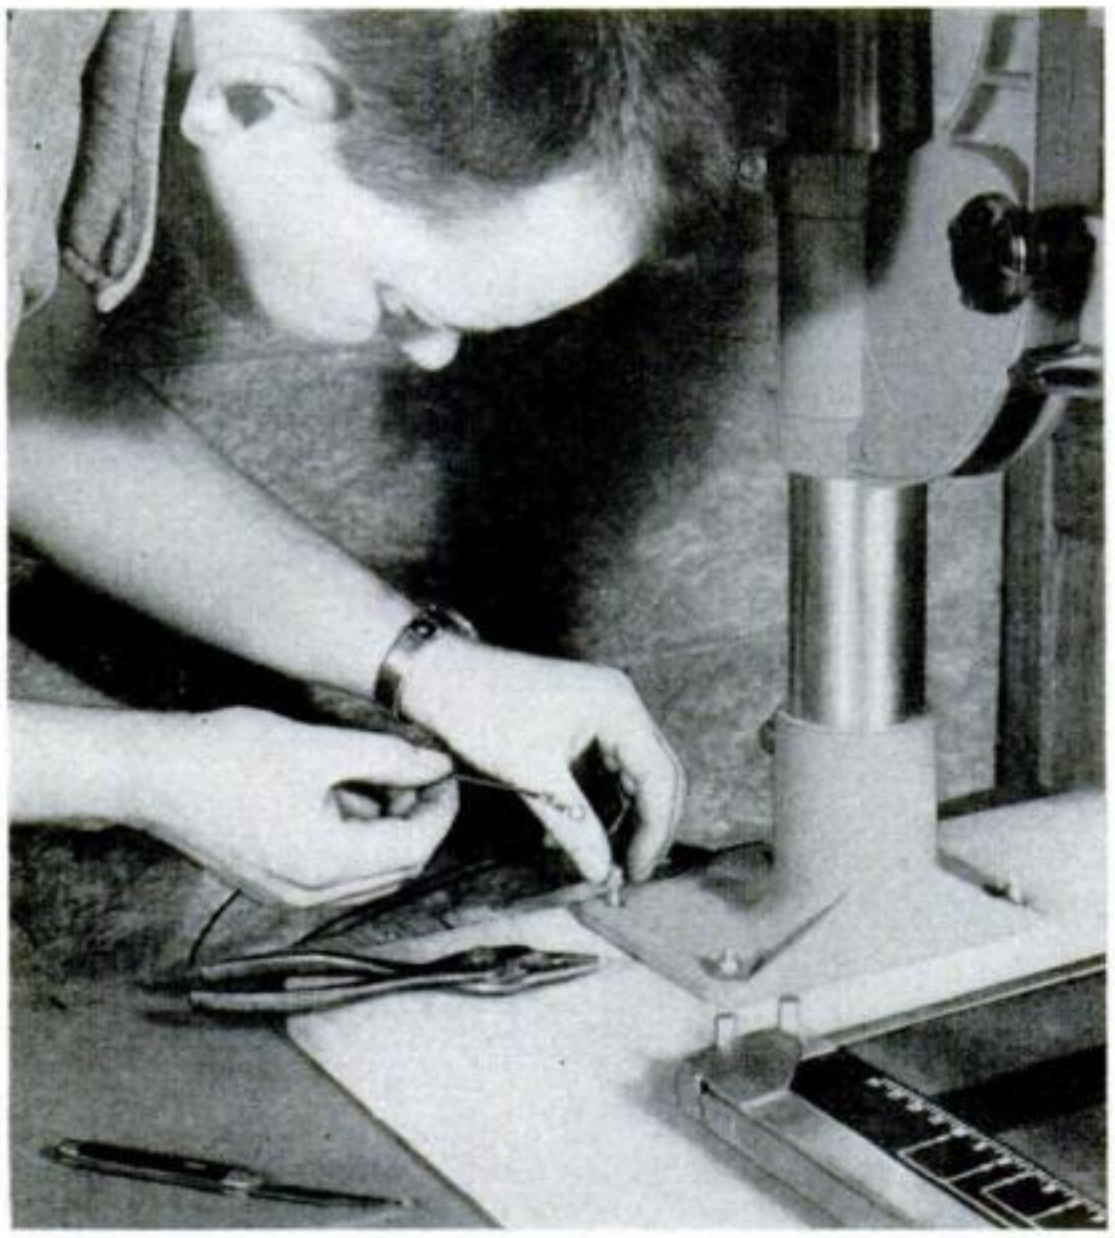

1 GROUNDING AN ENLARGER by running a wire to a water pipe may lessen the number of dust specks on enlargements. A soft brush will remove most of the dust from a negative, but brushing generates static electricity, attracting more dust. The charge will be dissipated when you insert the metal neg carrier into the grounded enlarger.

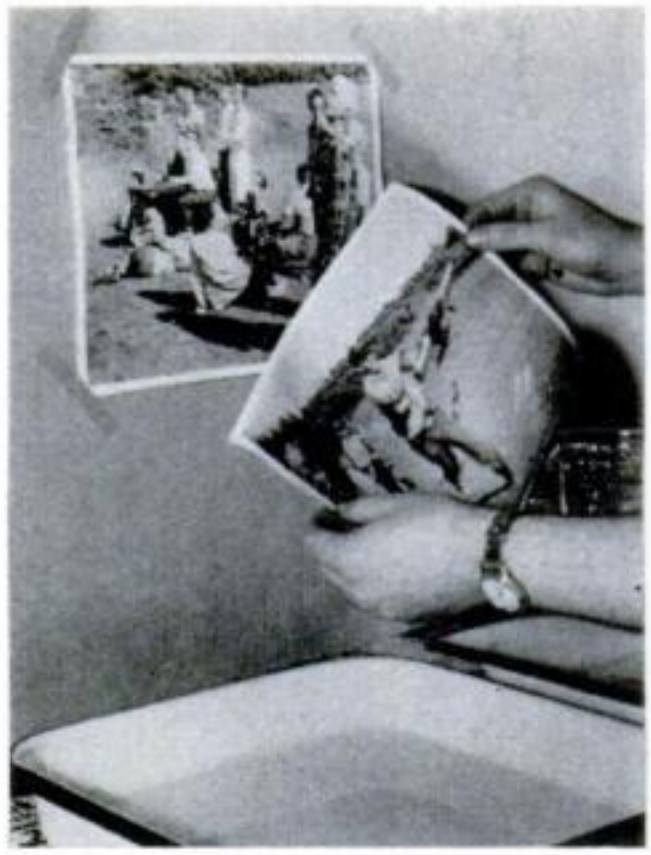

2 A CORRECTLY DEVELOPED COMPARISON PRINT taped behind the developing tray makes it easy to judge when to pull out a print.



3 A POINTER cut from black tape and stuck to the edge of a dial thermometer enables you to spot the 68° position in the darkroom.

4 FOR A HUGE BLOWUP without racking the lamphouse to the ceiling or putting the easel on the floor, slip a closeup lens over the enlarging lens. This reduces the focal length.





5 NEED A SET OF AMBER BOTTLES for storing solutions? Ask your druggist to save the bottles that medicines come in, preferably those with plastic screw caps. Snip labels from photochemical cans. Roughen the label back and glass with a piece of abrasive cloth, and stick to the glass with cellulose or acrylic cement.


Copyrighted material


Oven Rack Dries Prints Fast


If you've been yearning for a fast-working photoprint dryer, look in the kitchen. The oven in the range will dry glossies on ferrotype tins in eight to 10 minutes.

You need a rig to hold prints flat on the tin until they dry. This one is a wood frame (see sketch below), ¼" shorter than the tin to make the tin bow up. The tin is held on each end in the lip of a kitchen-counter molding (below right). A linen apron, cut from an old dish towel, stretches taut over the prints.

Before squeegeeing prints on the tins, soak them in a flattening solution (4 oz. glycerin to 28 oz. water). Set the oven for low heat.

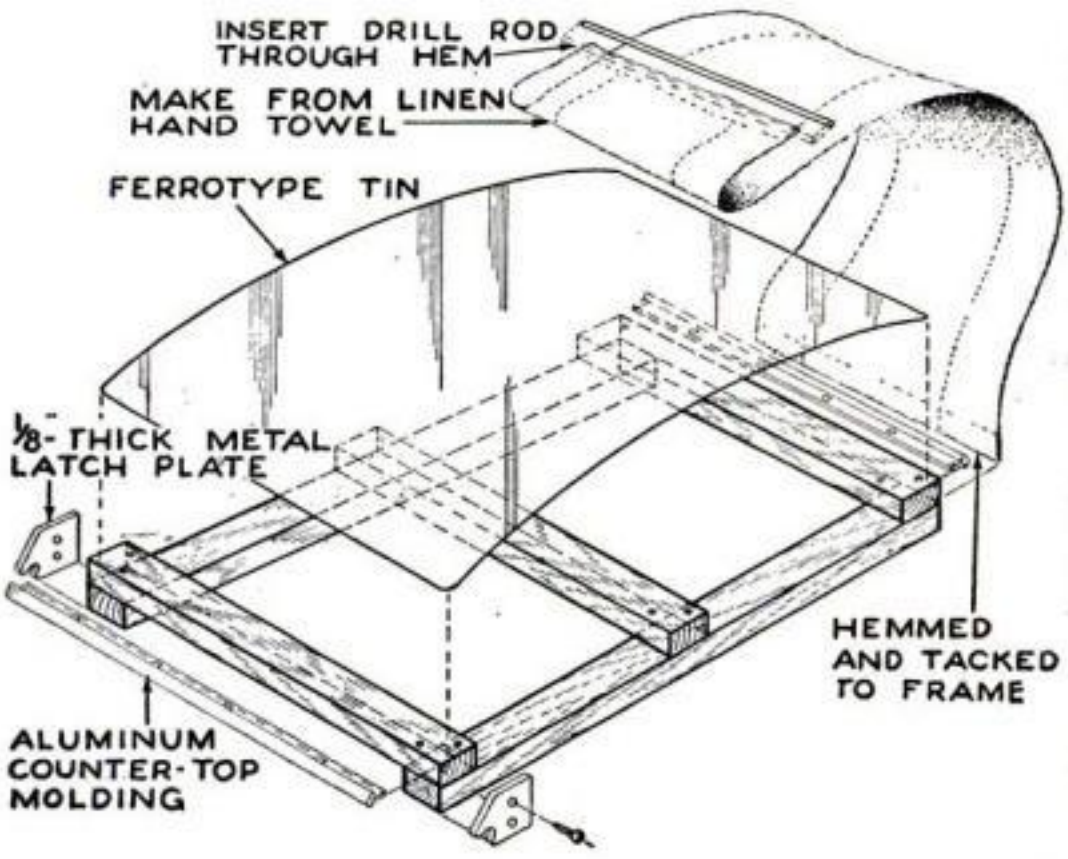

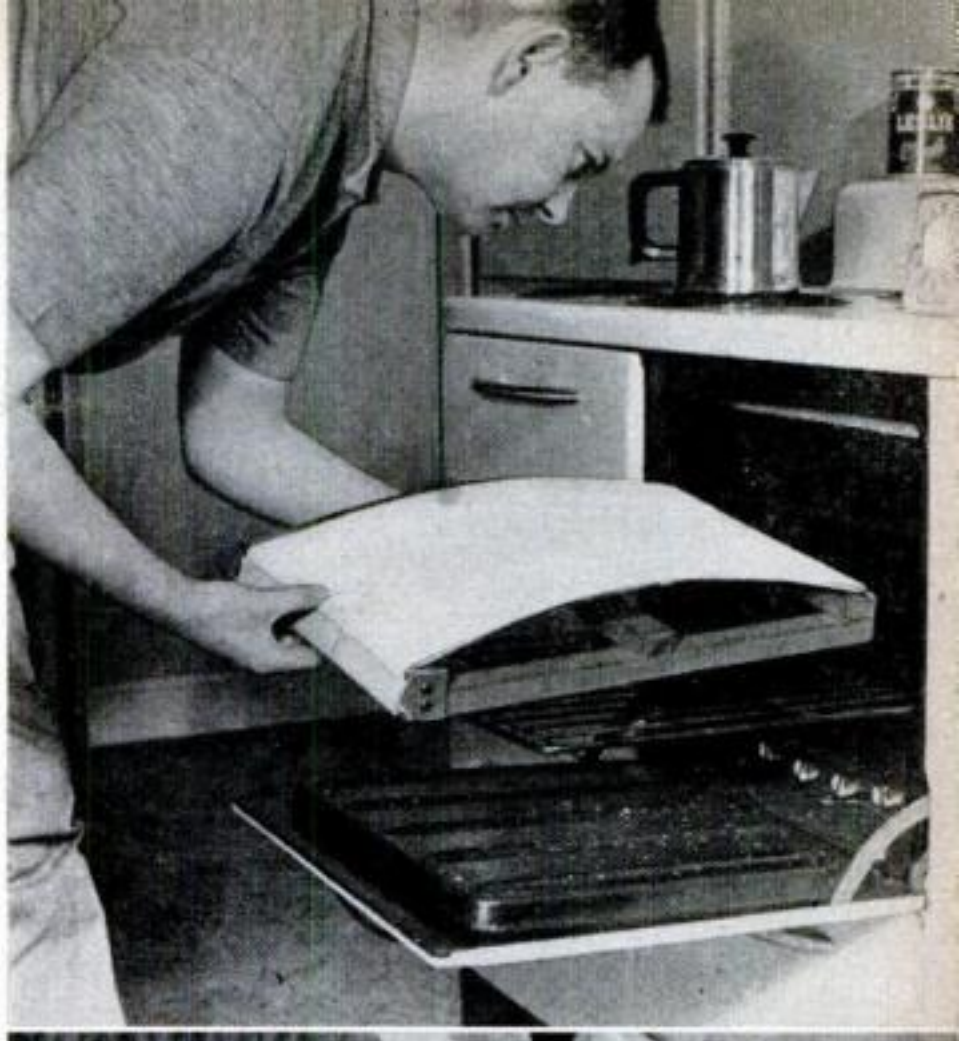


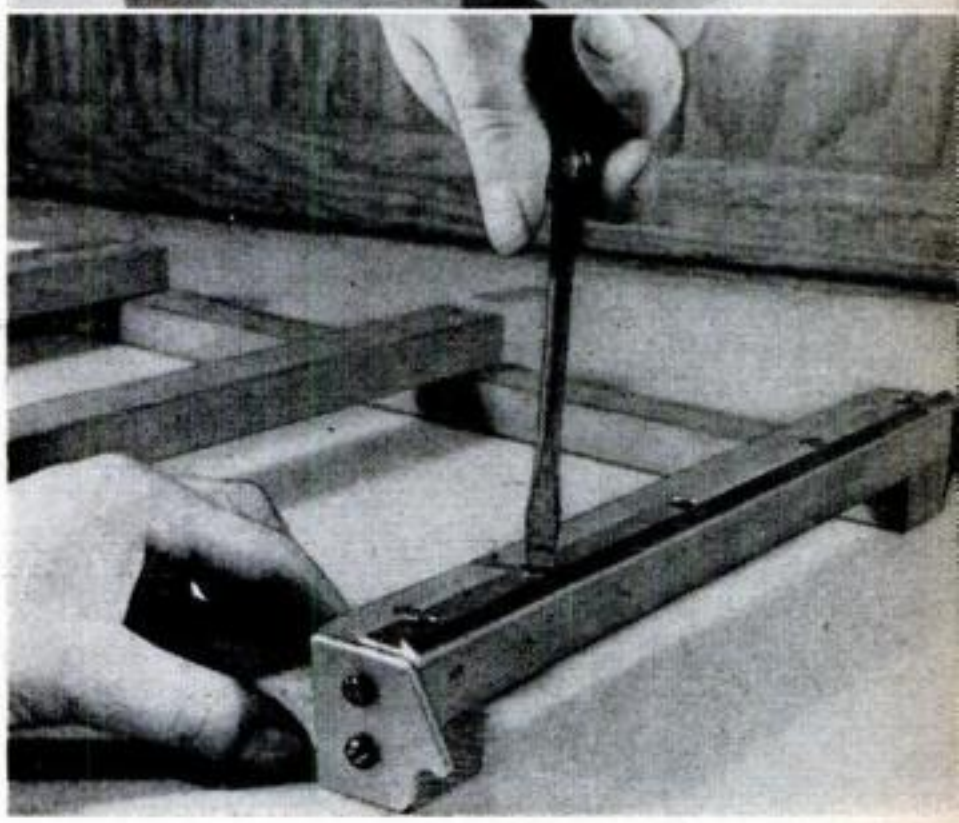


Homemade Plastic Tray Washes Prints Thoroughly in Water Spray

This homemade tray does an efficient job of washing prints at the kitchen sink. It sends a riffling stream of water squirting in one end and out through holes at the other end.


The tray is cemented together from pieces of 3/16" or ¼" acrylic plastic. Water enters by a hose borrowed from a shampoo sprayer and jets onto the prints through 1/16" holes drilled in a baffle. The outlet end has ¼" holes drilled in it. Strips cemented to the tray bottom allow water to circulate beneath the bottom print.—*John Burroughs, Tacoma, Wash.*

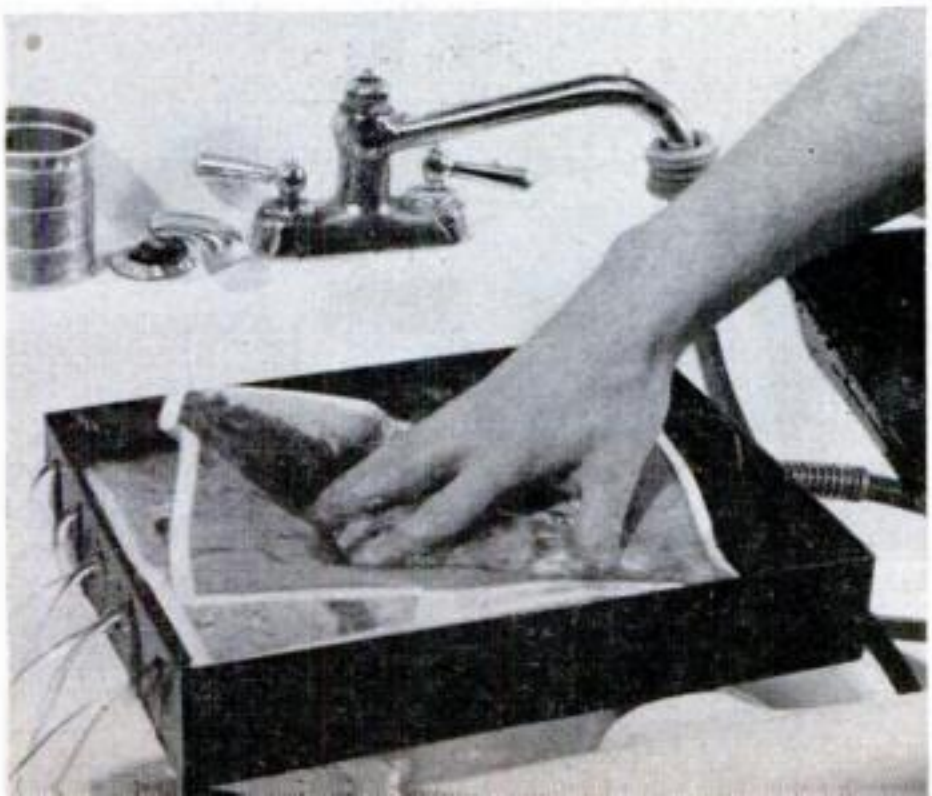

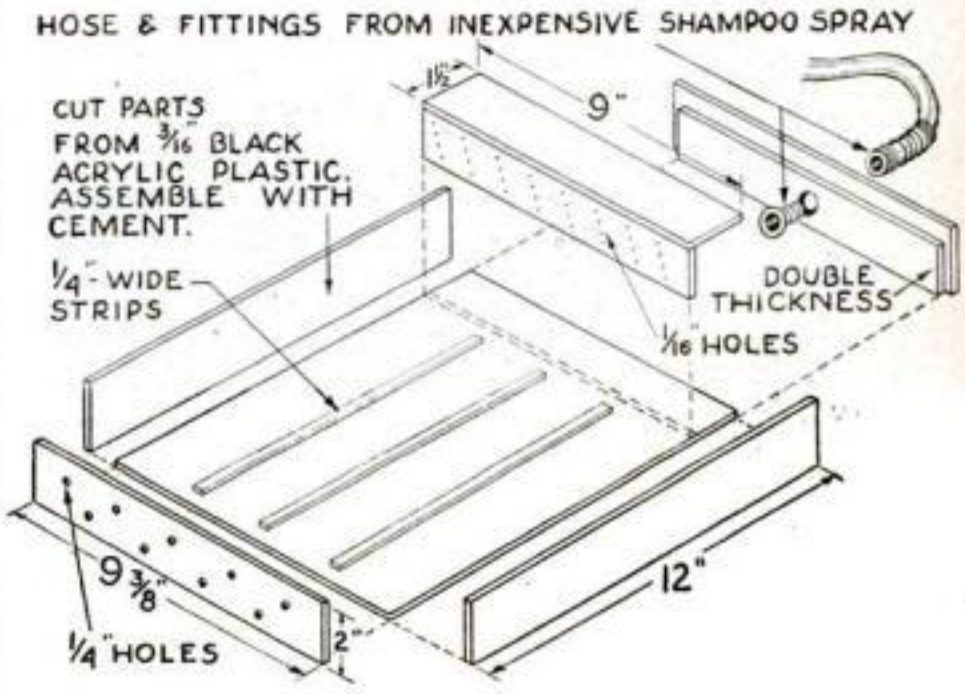


Copyrighted material


8 USES FOR Adhesive Tape Spools

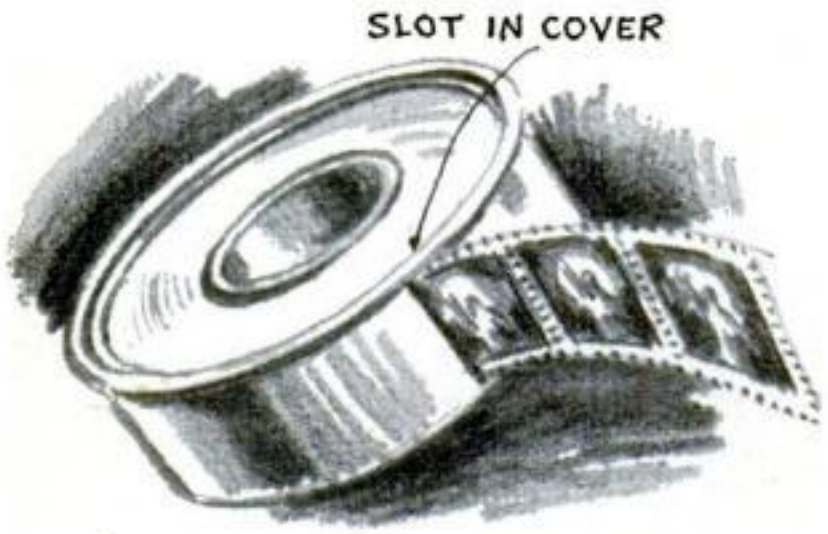


STAMP CONTAINER

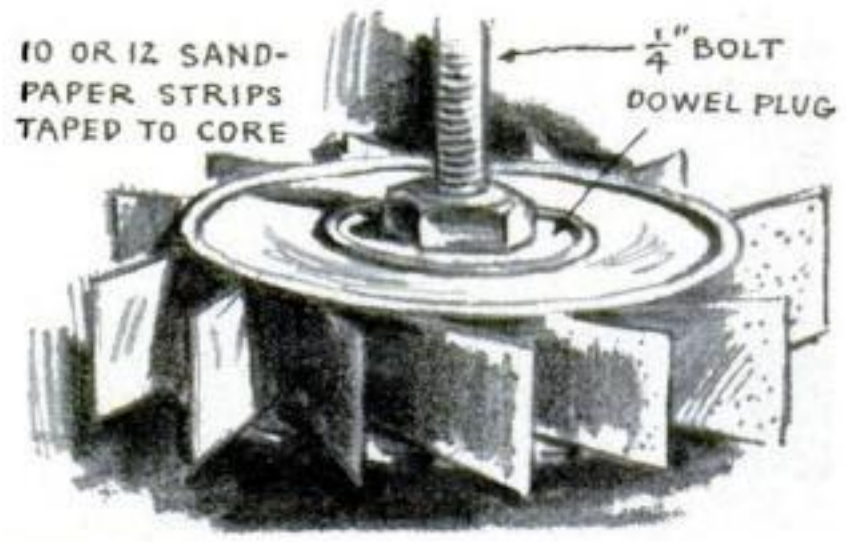


FLEXIBLE STRIP SANDER
FOR ELECTRIC DRILL OR DRILL PRESS

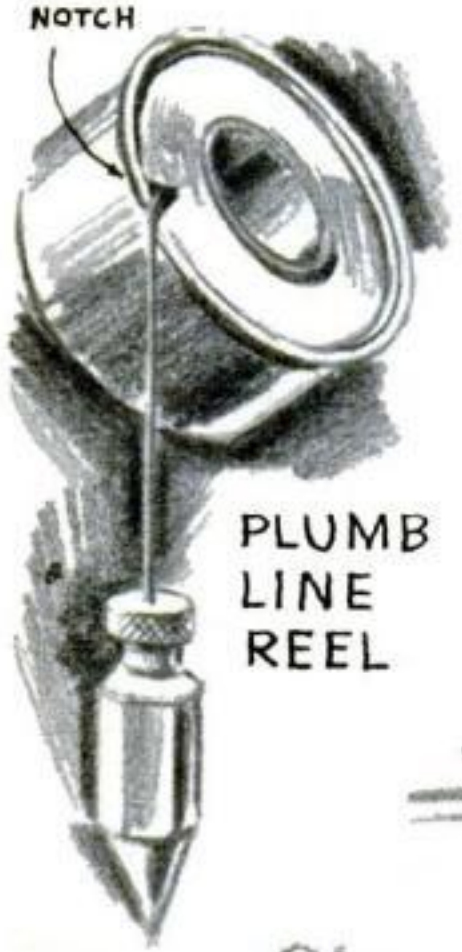


PLUMB
LINE
REEL

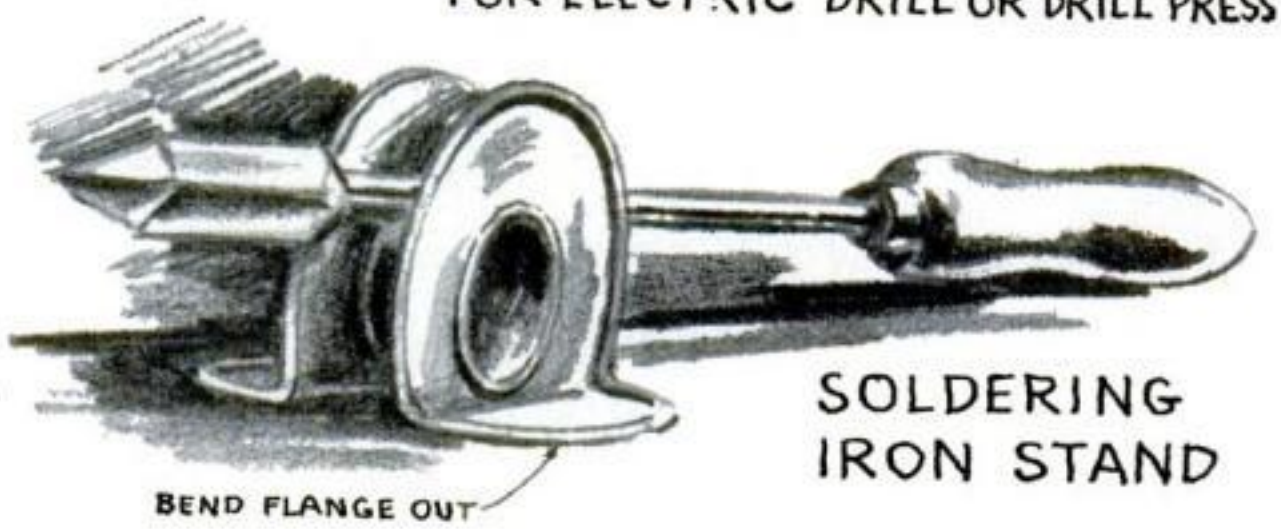

SOLDERING
IRON STAND

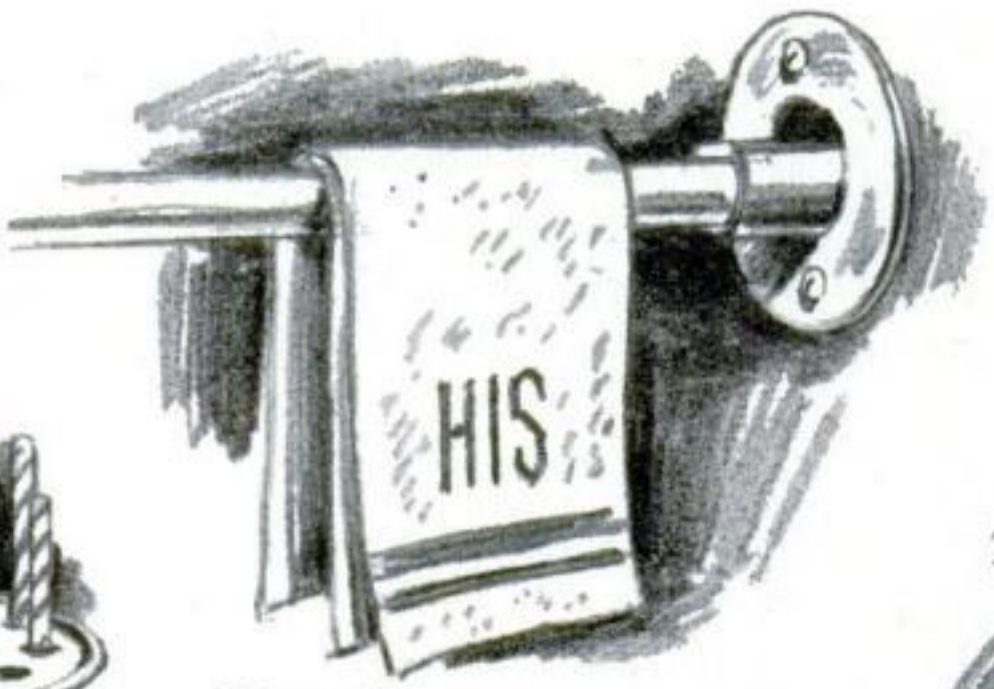

TOWEL-ROD BRACKETS

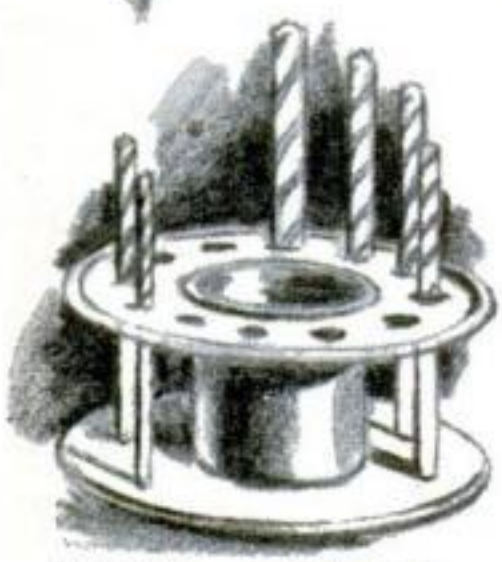

DRILL STAND


PINCUSHION




SINGING TOP


Copyrighted material

Colored Tape Decorates Models

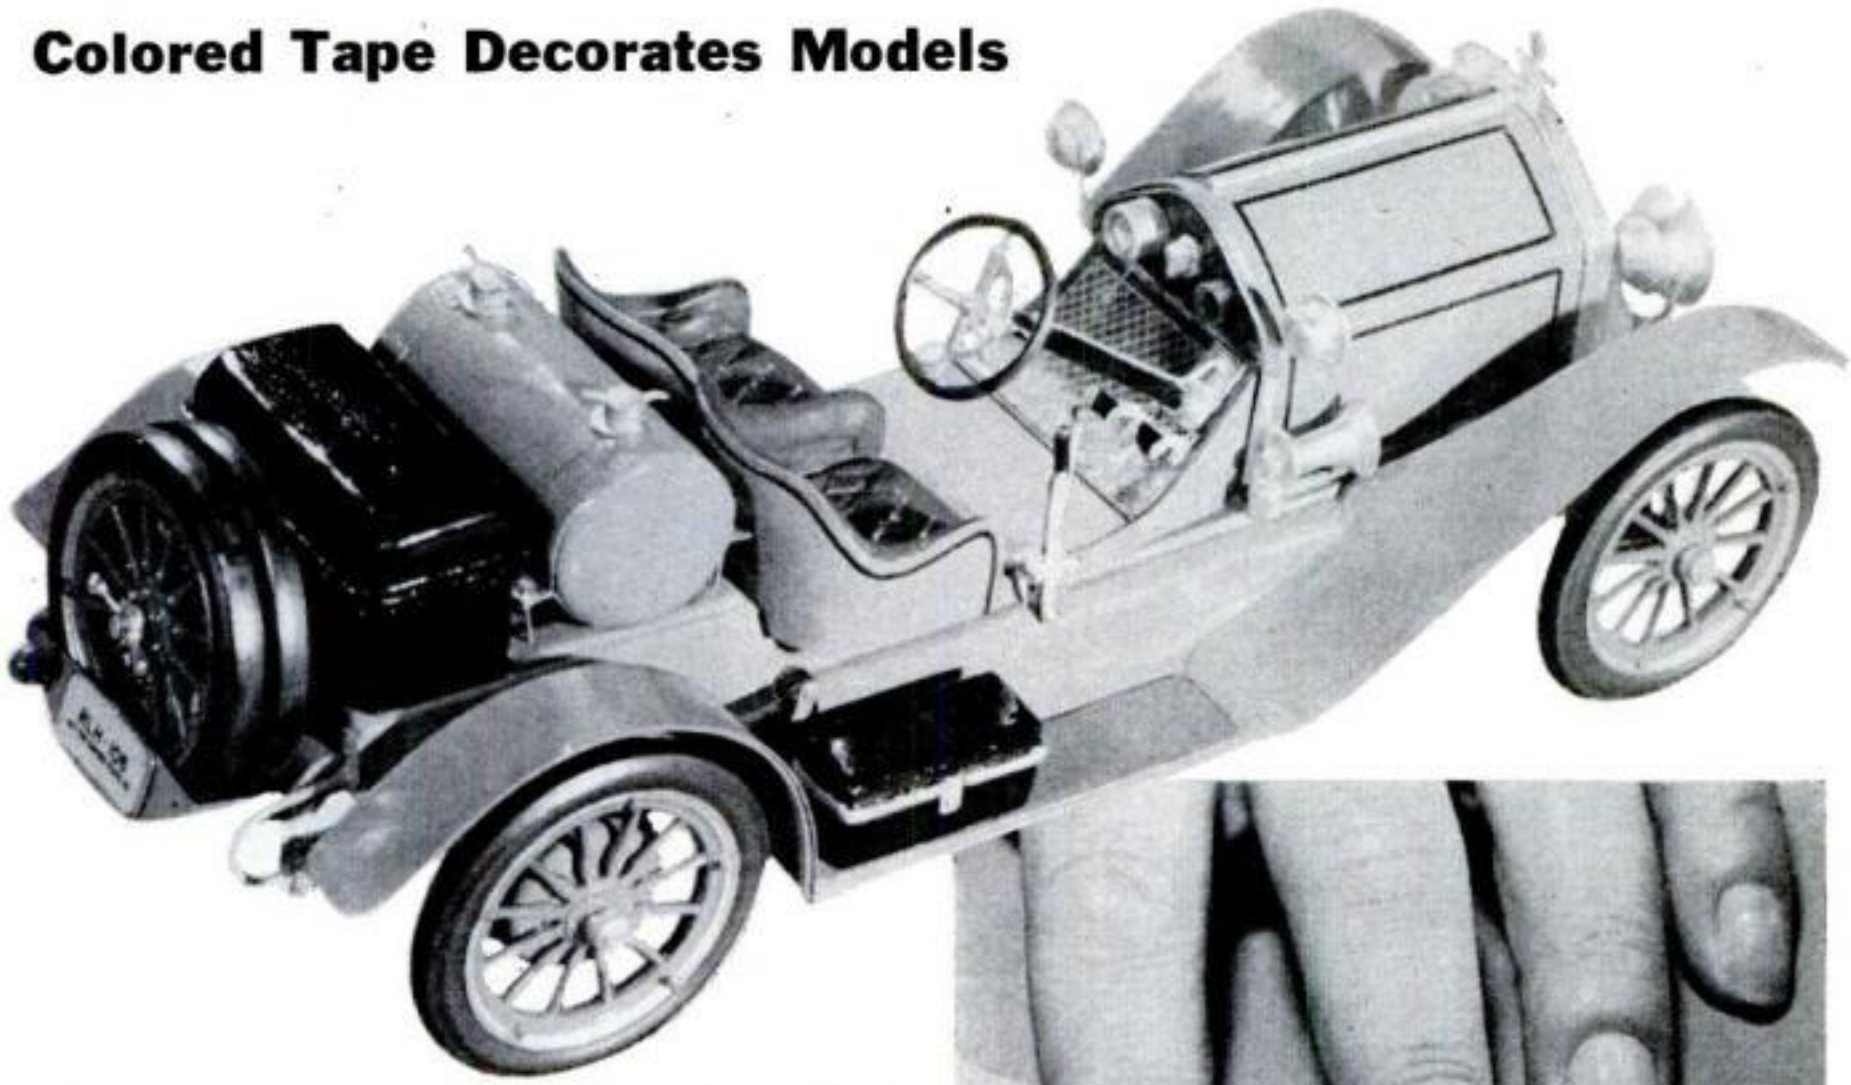

THIN striping on models, such as that on the hood and seats of the car in the photo, is hard to paint evenly unless you are an expert. One way to put it on is with colored adhesive tape. Cut the tape with a razor blade on a nonsticking surface, such as glass or wax paper, using a ruler for a guide. After applying, finish it off with a coat of clear dope.

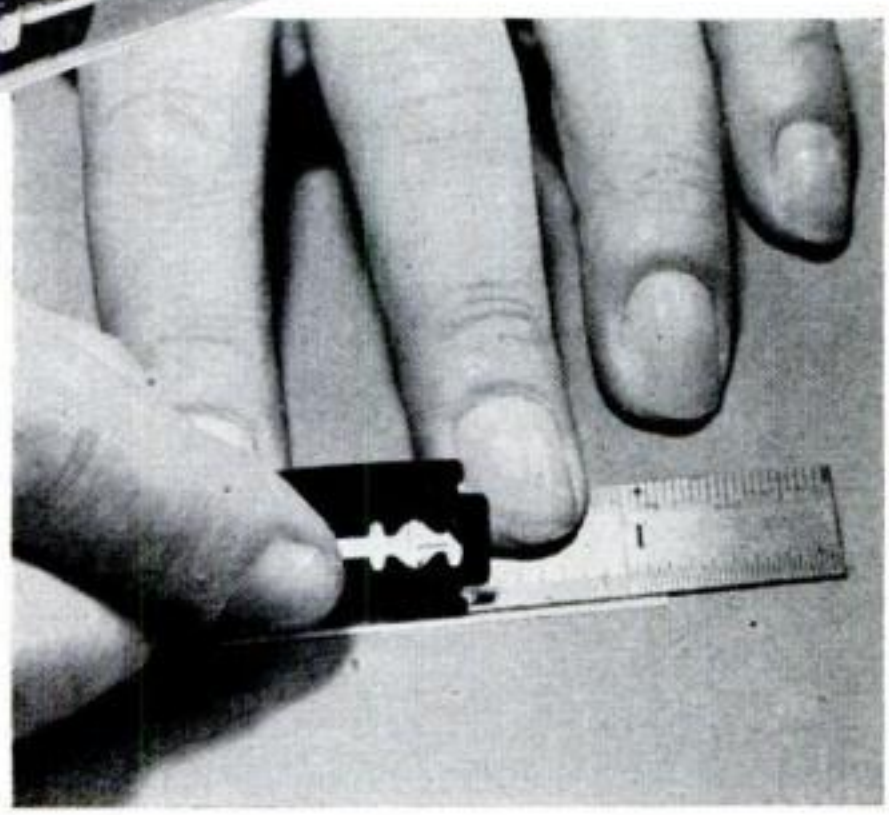

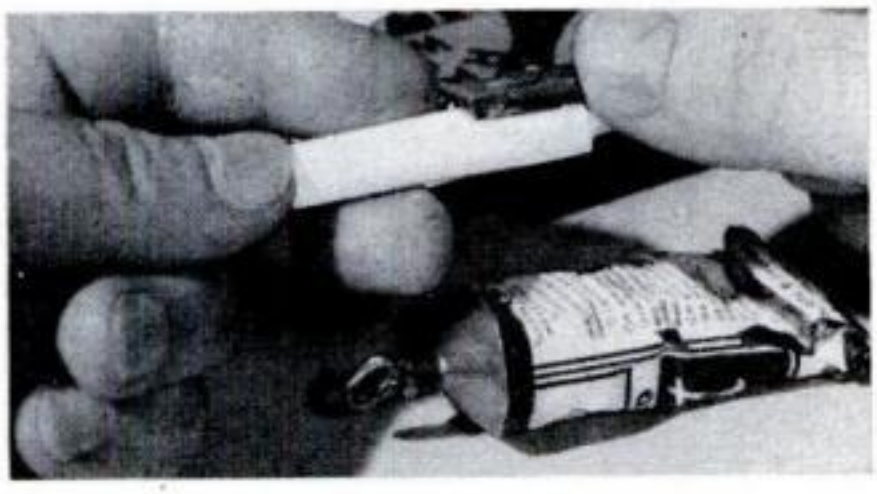

Magnet Holds Chalk to Board

BY CEMENTING a small magnet on a piece of chalk, you can hold the chalk to a shuffleboard scoreboard or other metal surface. Cut a flat side on one end of the chalk as a surface for the magnet.

Cone Slump-Tests Concrete

TO TEST a batch of concrete, fill a 12″ cone and invert it on the ground. If it sags more than 3″, engineers say that the mix is too moist for average use.

Oil Can Puts Heat on Small Jobs


AN INEXPENSIVE oil can fitted with a wick makes a handy alcohol lamp (below) for heating solder, bending glass and other small jobs. Hacksaw the spout to a stub and insert a round wick in it.




Copyrighted material

New in Electronics


1. Test Your Hi-Fi Ear. You discover what notes you can hear at what volume with this audiometer, installed in a "hi-fi salon." You put on the earphones and turn the pitch and volume controls to test your ears at various frequencies.

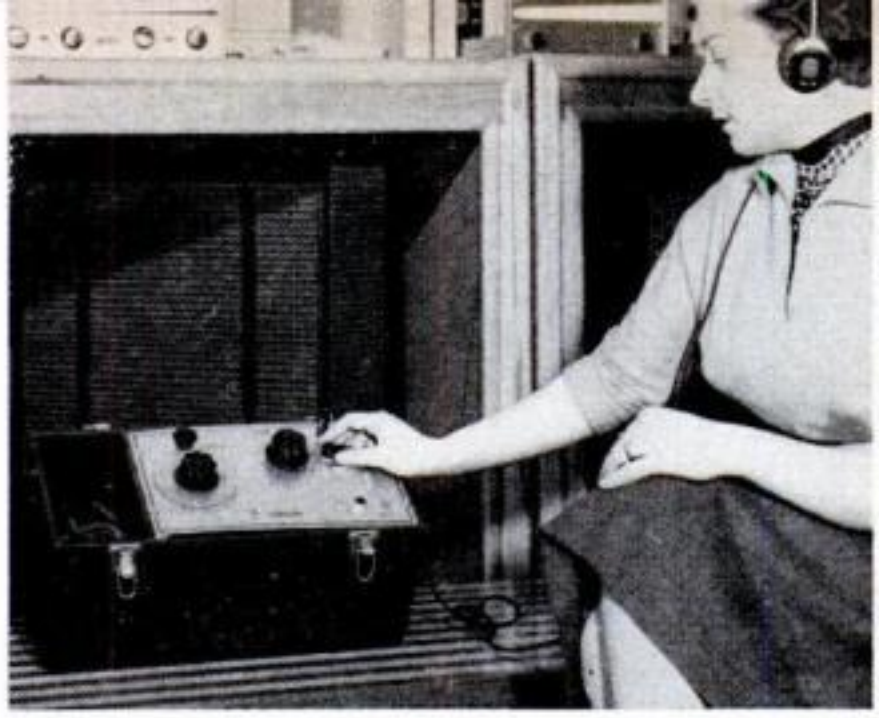

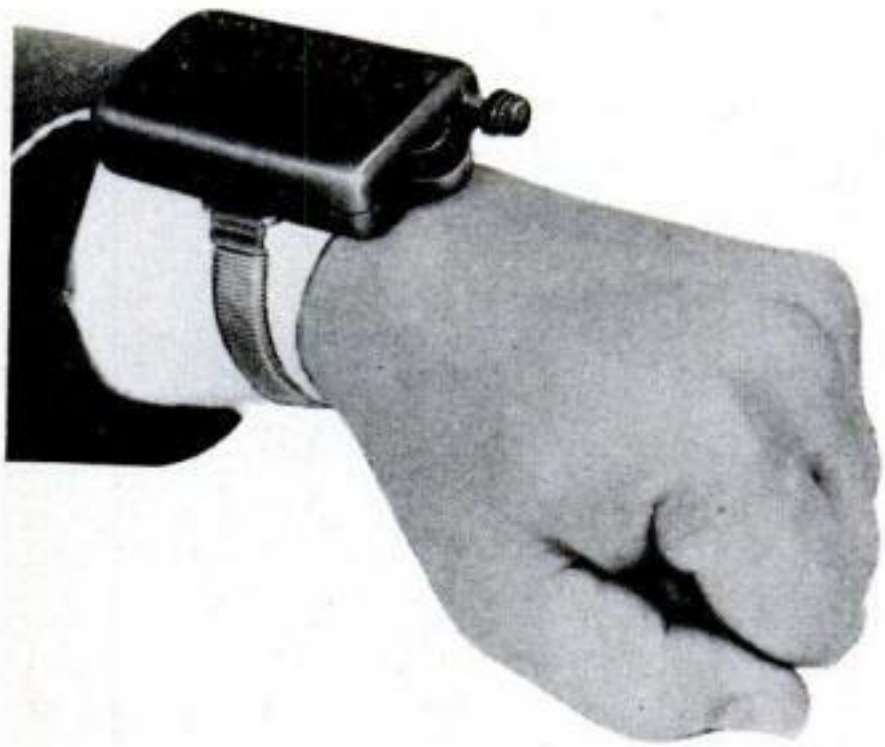


2. Wrist Radio. The Dick Tracy job above covers the broadcast band without an antenna in areas of moderate signal strength. It uses printed circuits throughout, three transistors, five button-size mercury batteries, and a hearing-aid earphone. Small and light (2½ ounces with batteries), the receiver has a two-stage transformer-coupled audio amplifier and a whistle-free regenerative circuit.

3. Transformers Go Miniature. Hardly bigger than an eraser, this miniature transformer for transistor circuits is said to be more efficient than ordinary types.

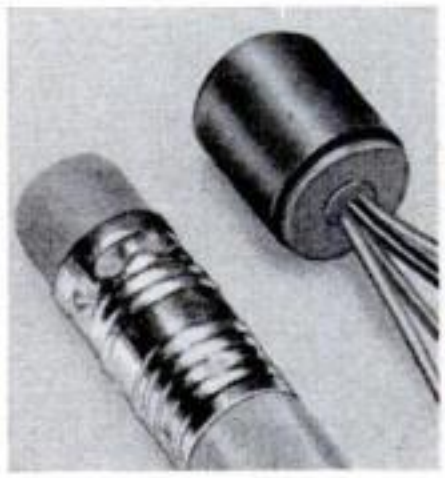



4. Radio Pager. The pocket receiver at left, an all-transistor set, buzzes when the wearer is called and then relays a message to him, privately. It is designed to pick up signals from an inductive antenna loop circling the building in which it is being used.

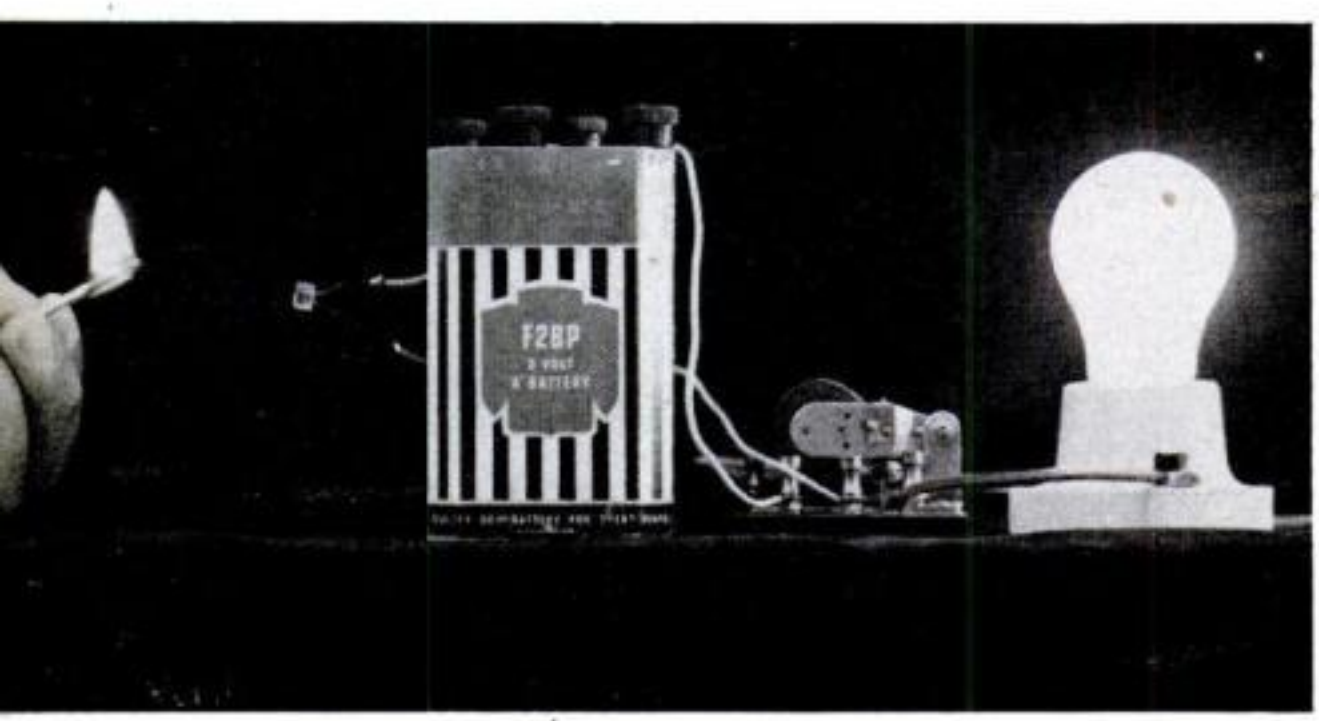


5. Transistor Eye. A new light-sensitive transistor is 10,000 times as responsive as ordinary photoelectric cells and can generate 100 times as much current. In the demonstration at left, light from a match makes the transistor trigger a standard relay—without any amplifier—and turn on the bulb.

Further information on the products above can be obtained from: 1. Federated Purchaser, 1021 U. S. Route 22, Mountainside, N. J.; 2. LEL Inc., 380 Oak St., Copiague, N. Y.; 3. United Transformer, 150 Varick St., New York City; 4. Motorola Communications and Electronics, 4545 W. Augusta Blvd., Chicago; 5. Westinghouse Research Labs, Pittsburgh, Pa.

Copyrighted material

How to Use Abrasive Wheels Safely

By Harry Walton

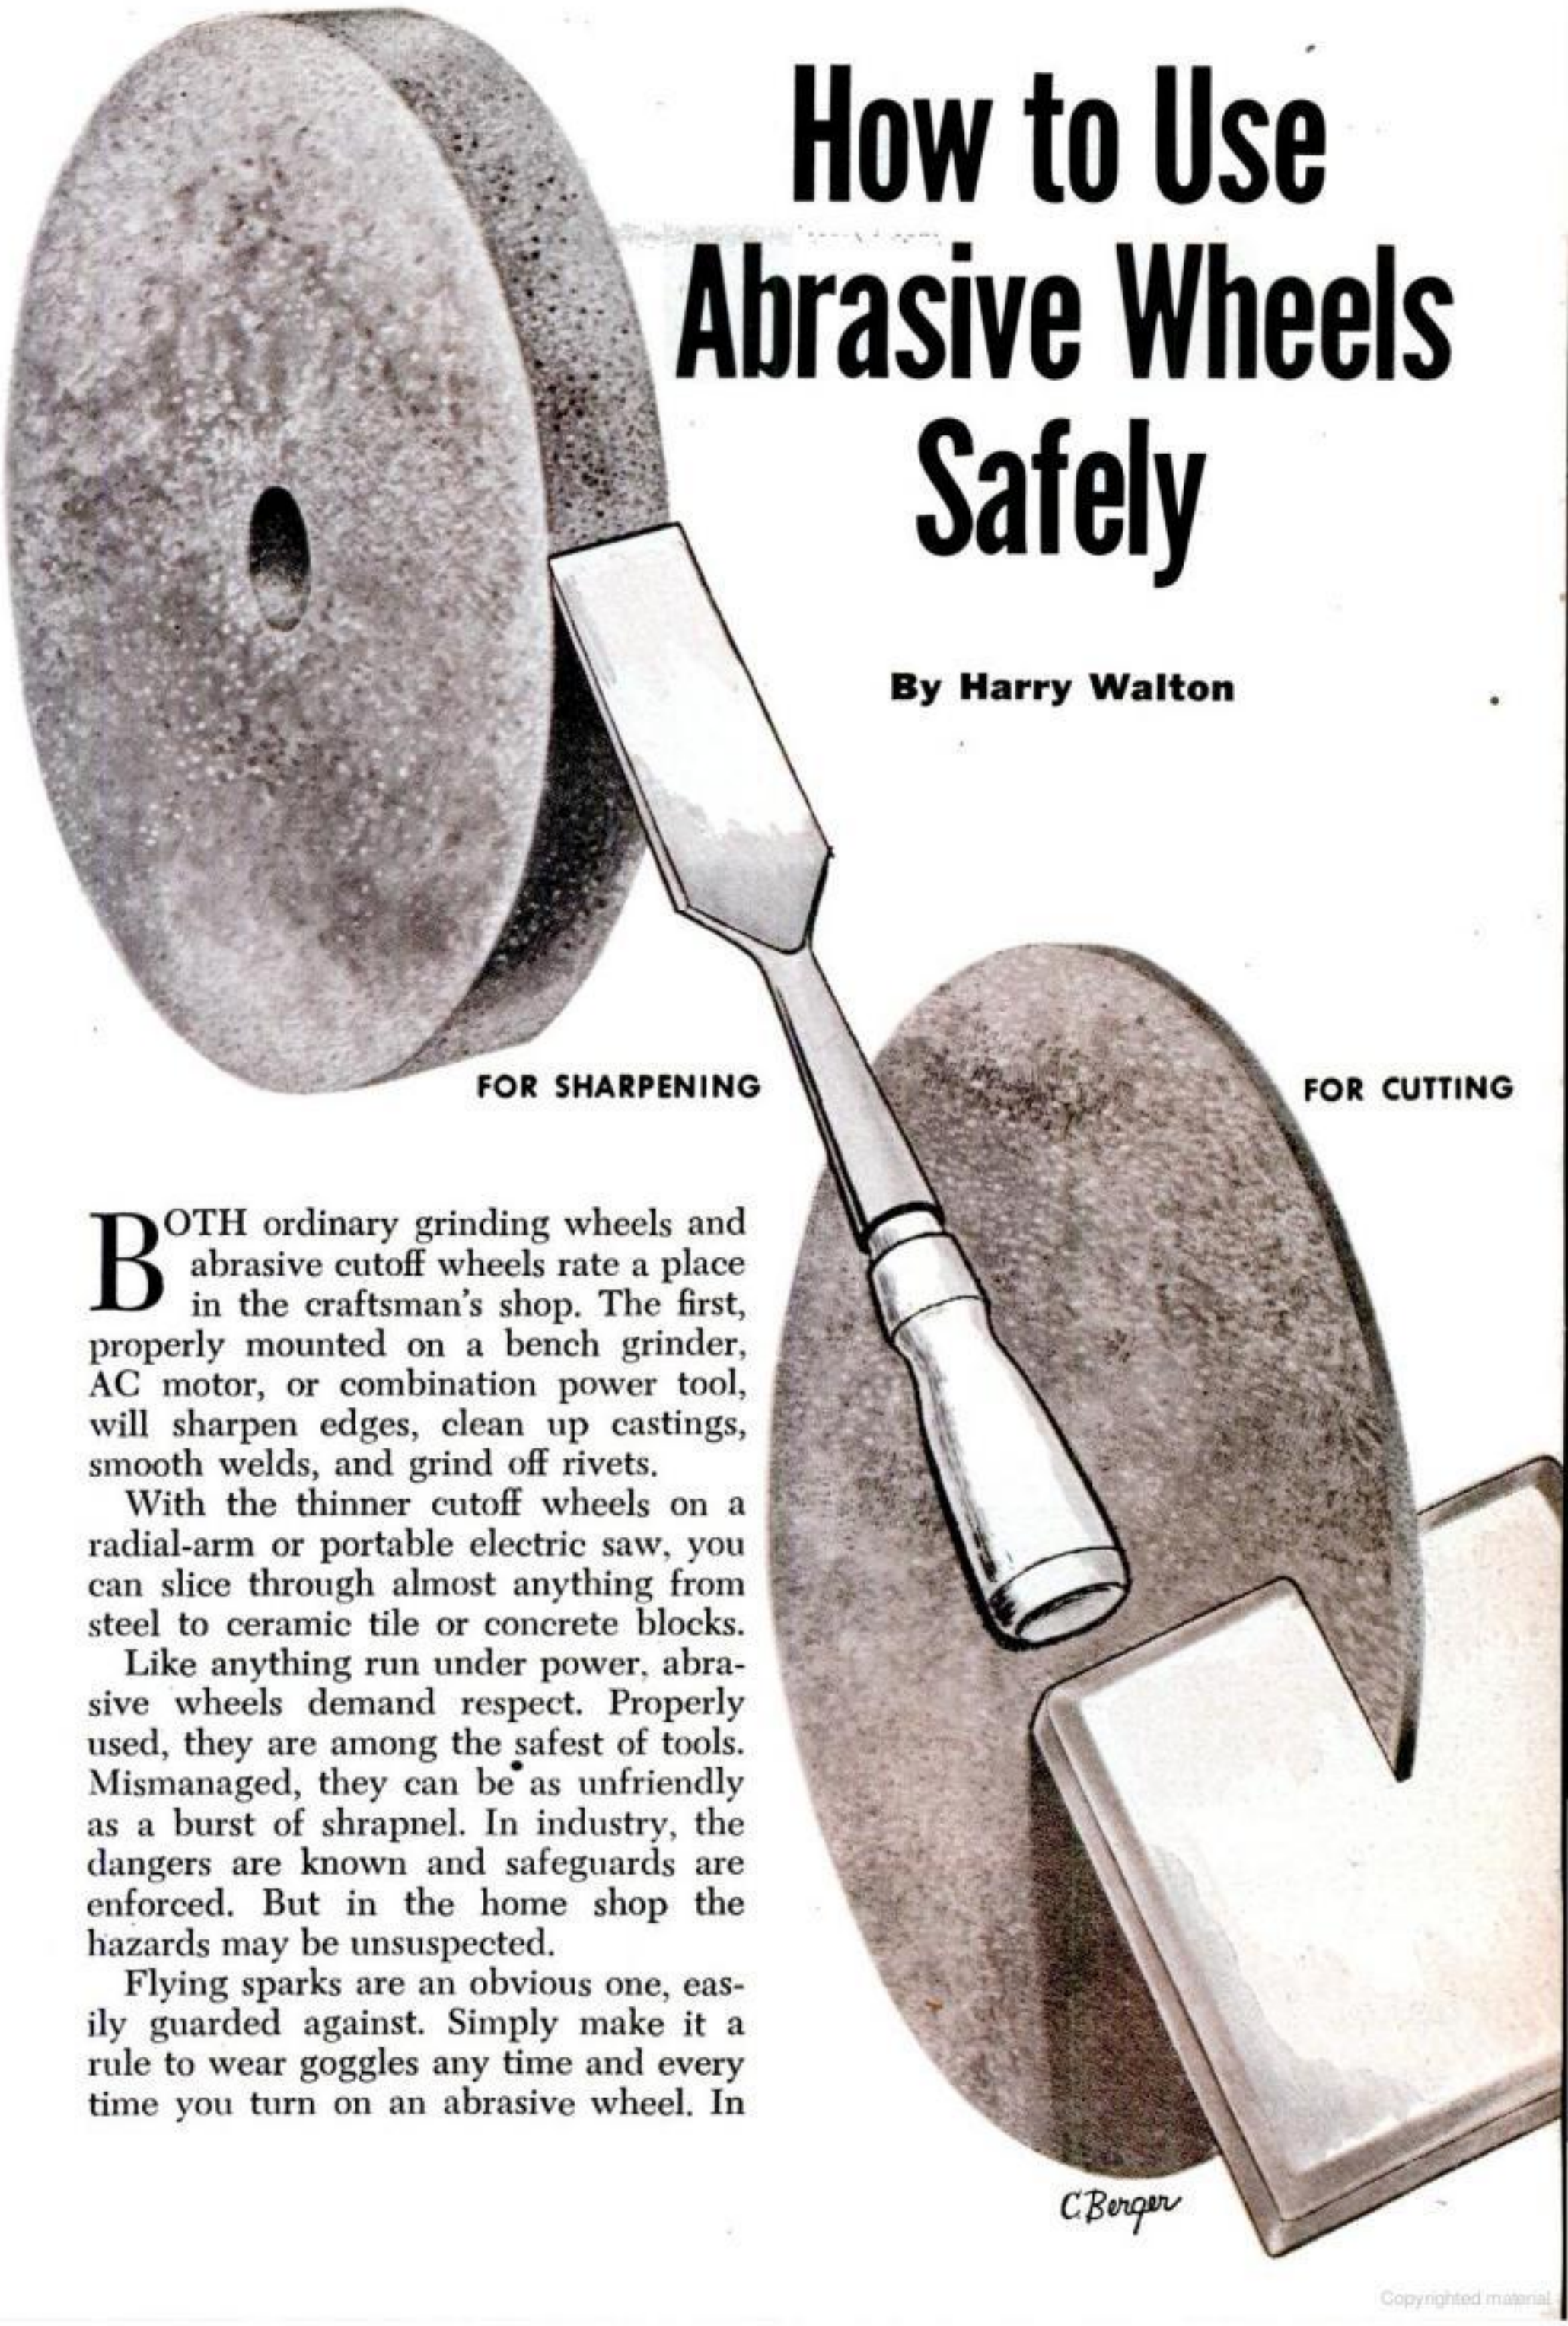

BOTH ordinary grinding wheels and abrasive cutoff wheels rate a place in the craftsman's shop. The first, properly mounted on a bench grinder, AC motor, or combination power tool, will sharpen edges, clean up castings, smooth welds, and grind off rivets.

With the thinner cutoff wheels on a radial-arm or portable electric saw, you can slice through almost anything from steel to ceramic tile or concrete blocks.

Like anything run under power, abrasive wheels demand respect. Properly used, they are among the safest of tools. Mismanaged, they can be as unfriendly as a burst of shrapnel. In industry, the dangers are known and safeguards are enforced. But in the home shop the hazards may be unsuspected.

Flying sparks are an obvious one, easily guarded against. Simply make it a rule to wear goggles any time and every time you turn on an abrasive wheel. In

Copyrighted material

What makes a grinder safe

some modern factories nobody is allowed even to walk through the plant without wearing eye protection.

Danger you can't see. Modern abrasive wheels have come a long way from what were called "widow makers" in the old-time cutlery plants. But no wheel yet made is unbreakable—and that includes so-called flexible wheels, despite brand names and advertising that would seem to label them almost indestructible.

There is no advance notice when a spinning disk of abrasive builds up to a smashing climax. The difference between incident and accident then depends on such details as goggles, guards, and safe working habits. Industry takes these seriously. So should you.

The American Standards Safety Code for abrasive wheels, though written for industrial users, applies equally to the wheel you mount on a wood lathe, the grinder you make from a washing-machine motor, and the cutoff wheel you use to cut patio blocks. Follow this code, and the chances are that you'll never break a wheel—but will be safe even if you do.


Why do they break? The reasons why wheels shatter boil down to three:

- Excessive speed.
- Faulty mounting.
- Improper use.

Right on the blotters—paper disks on each side of a wheel—you'll find its *maximum* speed rating. The wheel has been tested at considerably above this speed running free, but hard grinding creates heat, which joins centrifugal force in trying to tear it apart. So run a wheel not at, but well below its marked speed.

A split-phase motor (the kind you might salvage from a refrigerator or washing machine) should have its r.p.m. rating on the plate (usually 1,750).

When such a motor drives a grinding

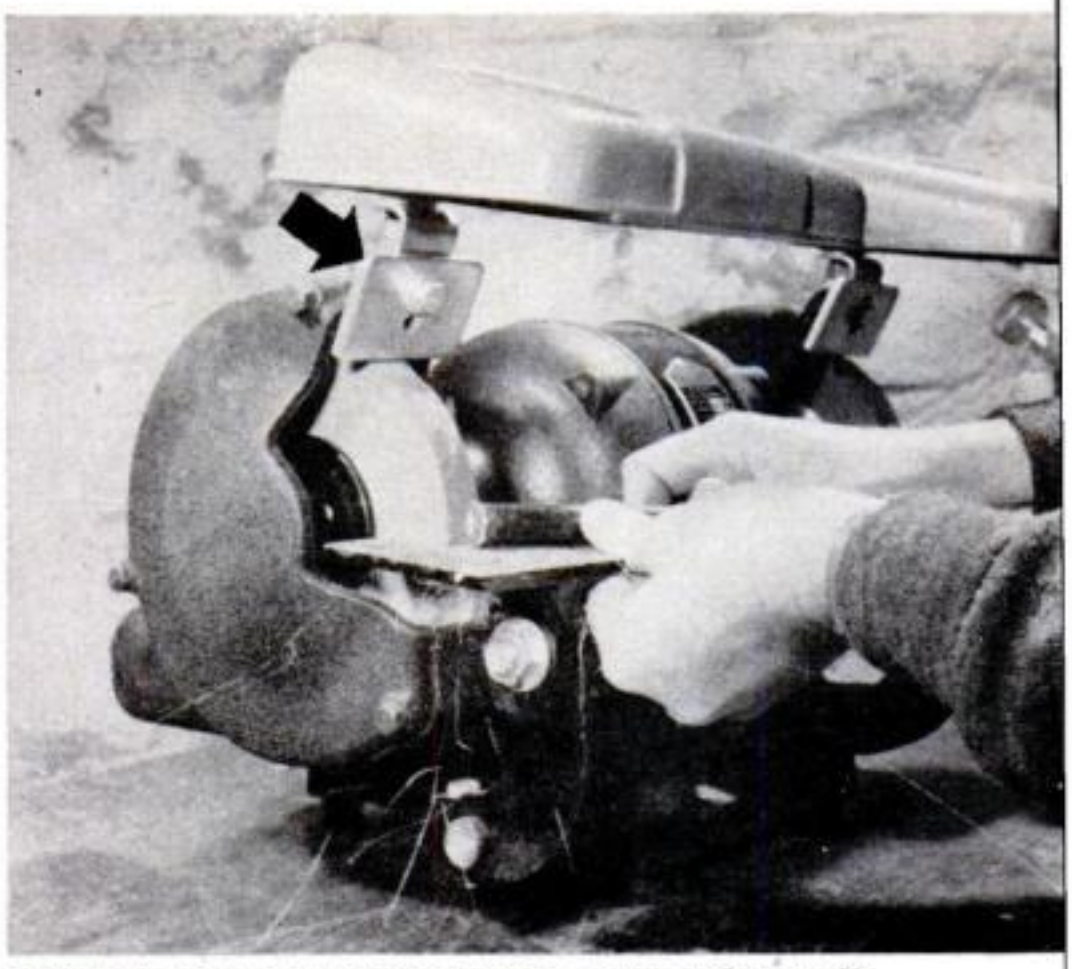



CHECK YOUR GRINDING SETUP against this well-designed bench grinder. It has big flanges, a guard that surrounds the wheel 270°, end covers, and spark shields. A slotted tongue (arrow) can be lowered as the wheel wears to a smaller diameter, maintaining full protection.

How to convert an old AC motor into a safe tool sharpener

ADD A GUARD to a motor salvaged from a washing machine or refrigerator, and you have a useful grinder. The grinding rest is mounted on two slotted supports bolted to the end covers.


TAP HOLES in band-iron rim for screws that hold end-cover brackets. To change wheels, remove rim screws from the four upper brackets, side screws in cover from three lower ones.

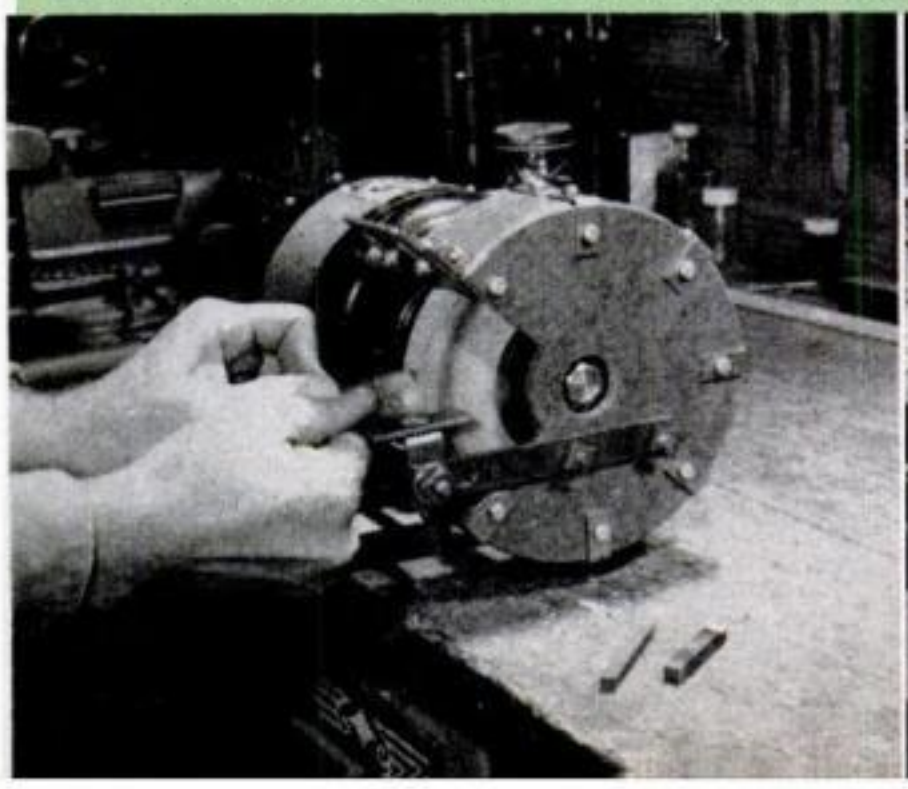

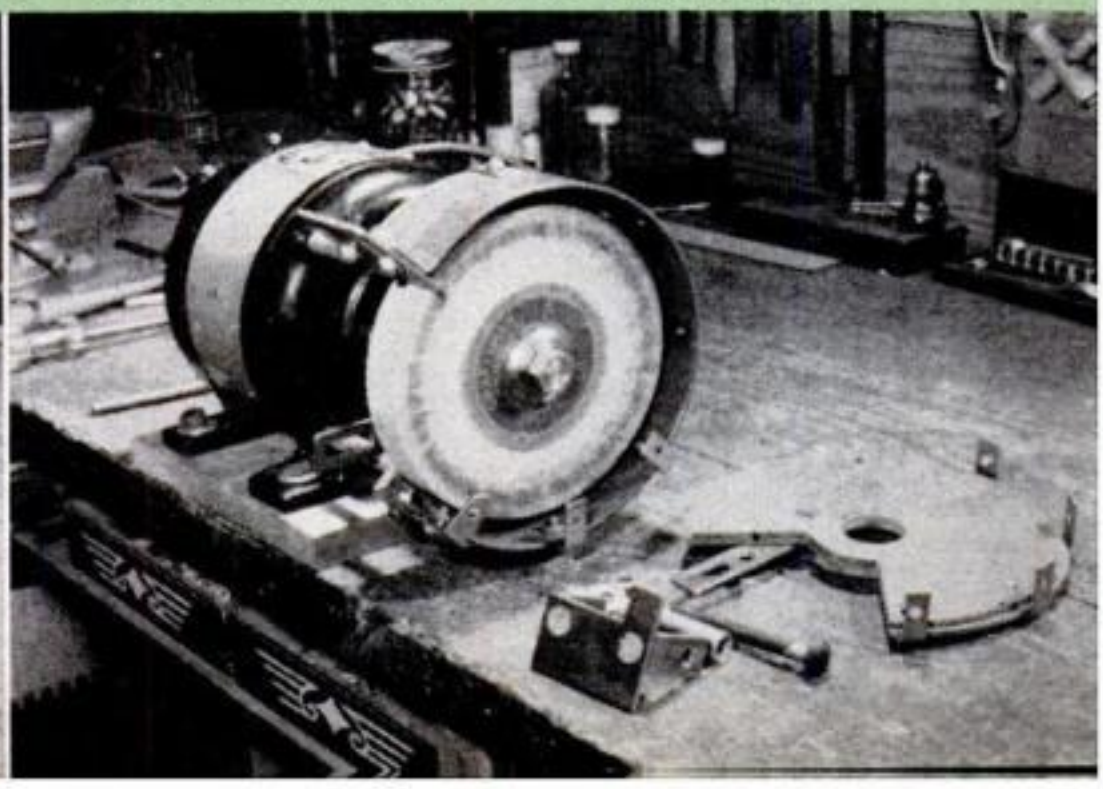

Mount abrasive wheels properly

CHECK ARBOR SPEED against wheel speed on blotter. Tap wheel with a piece of wood; if it does not ring clearly, it may be cracked. See that blotters are larger than flanges, and not damaged. Remove inboard flange, if detachable, to clean it and shaft shoulder it bears against. Replace flange with recessed face out. See that wheel fits freely (never force it on) and put on the outer flange, recessed face toward the wheel. Tighten the nut enough to prevent slippage, but not excessively. Adjust the grinding rest 1/16" to ⅛" from wheel face. Turn wheel by hand to make sure it runs true and clears rest and guard. Standing out of line with the wheel, turn it on. Let wheel run a full minute before using it.

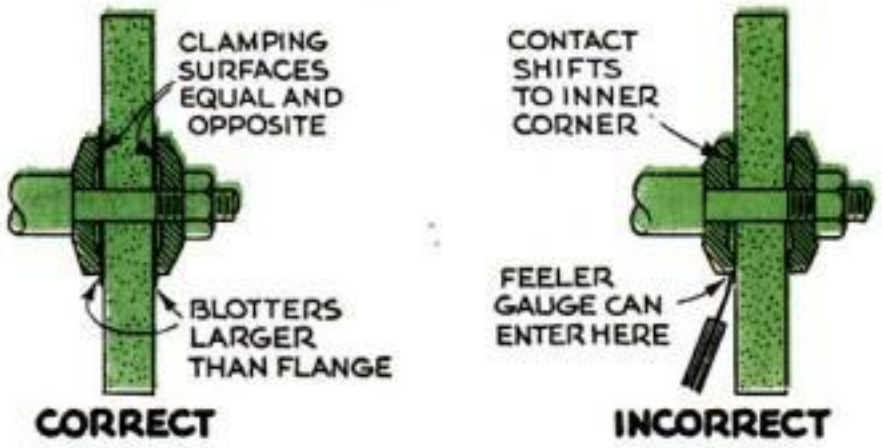



head by means of a belt, a little math will give you the wheel speed. Multiply motor speed by its pulley diameter, and divide the product by the diameter of the driven pulley. (For example, a 3" pulley on a 1,750-r.p.m. motor gives a product of 5,250. With a 1½" grinding-head pulley, dividing 5,250 by 1½ gives a shaft or wheel speed of 3,500 r.p.m.)

V-belt pulleys should be measured on their pitch diameter—the circle on which the center of the belt runs. This isn't easy to do. And strangely enough, a belt-drive ratio can change with time, because the small pulley wears faster than the big one. For these reasons, the only sure way


A radial-arm saw works well with an abrasive cutoff wheel

IT'S A NATURAL for cutoff jobs because the work can be held firmly, straight wheel feed is assured, and the exposed part turns away from the user. Keep others from behind the machine. As metal may turn red hot at the cut, asbestos table covering and metal fence are desirable. To cut tubing, clamp it under a notched block so that it cannot roll, as at extreme right in photo.

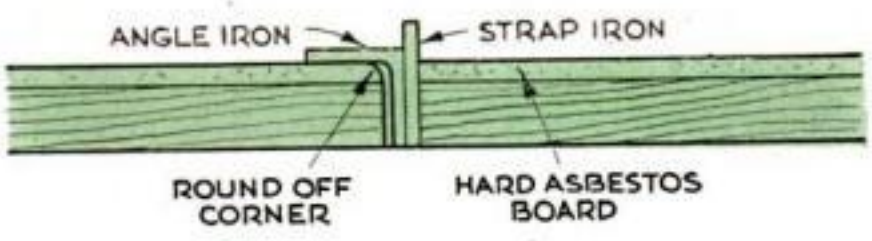

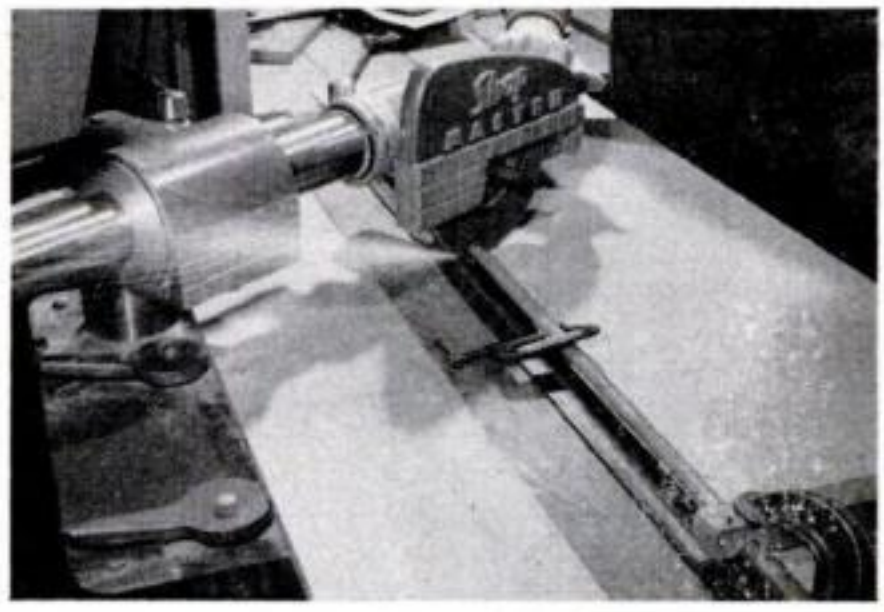



BEND THE RIM no more than 1" larger in diameter than wheel to be used. Turn top end up 90° to hold the adjustable tongue. Guard must be firmly attached to withstand shock if a wheel should break. Replace the motor bolts with long rods threaded at both ends, using spacers to set the guard off so that the wheel will be centered. Better still, anchor the guard to the bench top with lag screws through the bottom of the iron rim.

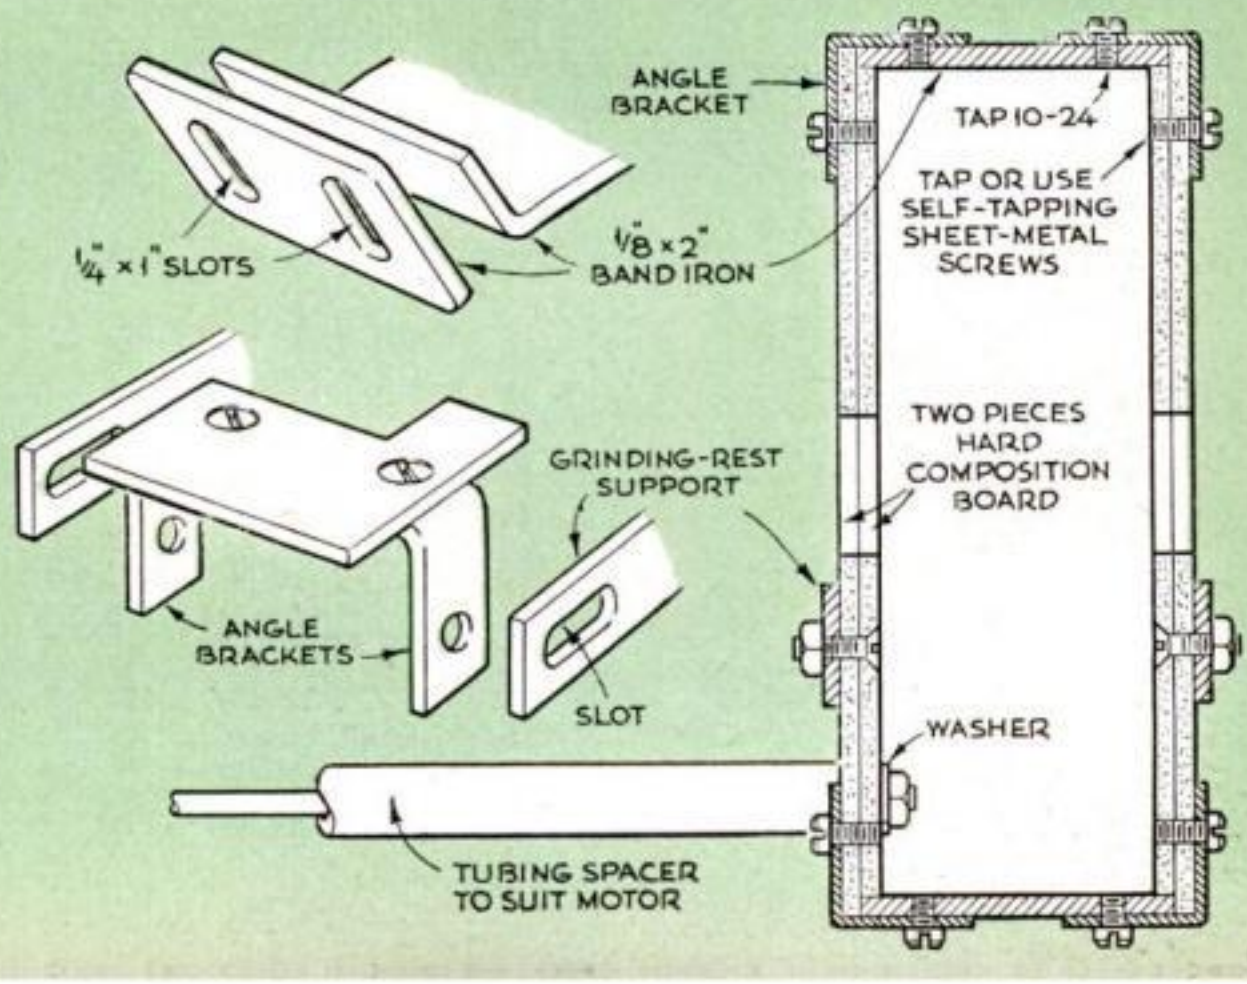


Copyrighted material

A grinding guard for a wood lathe or combination tool

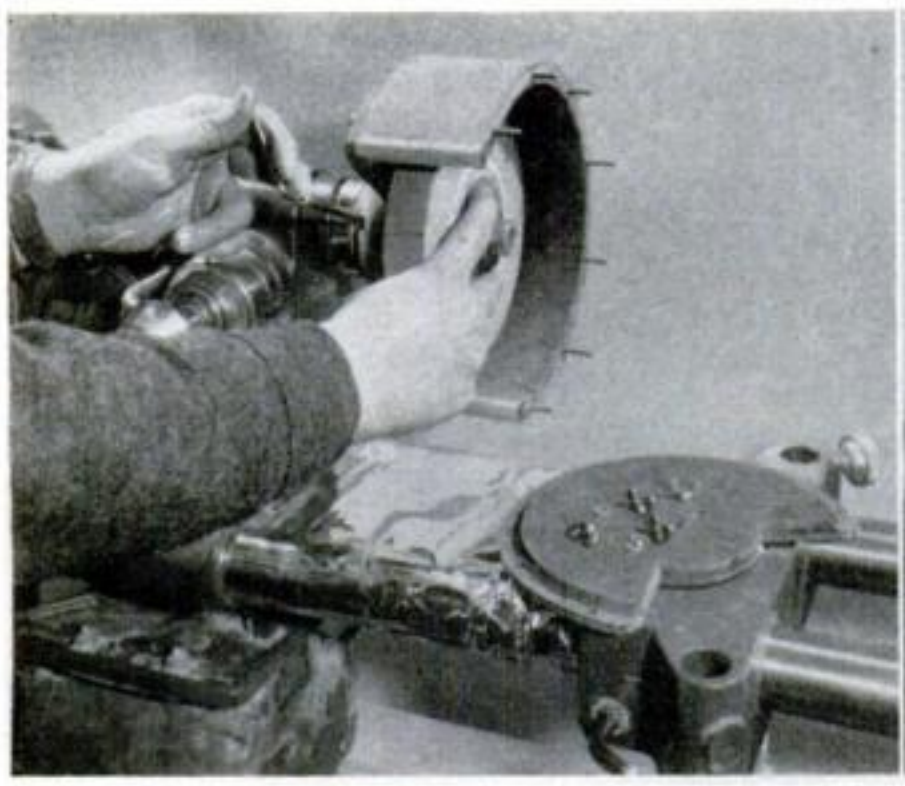

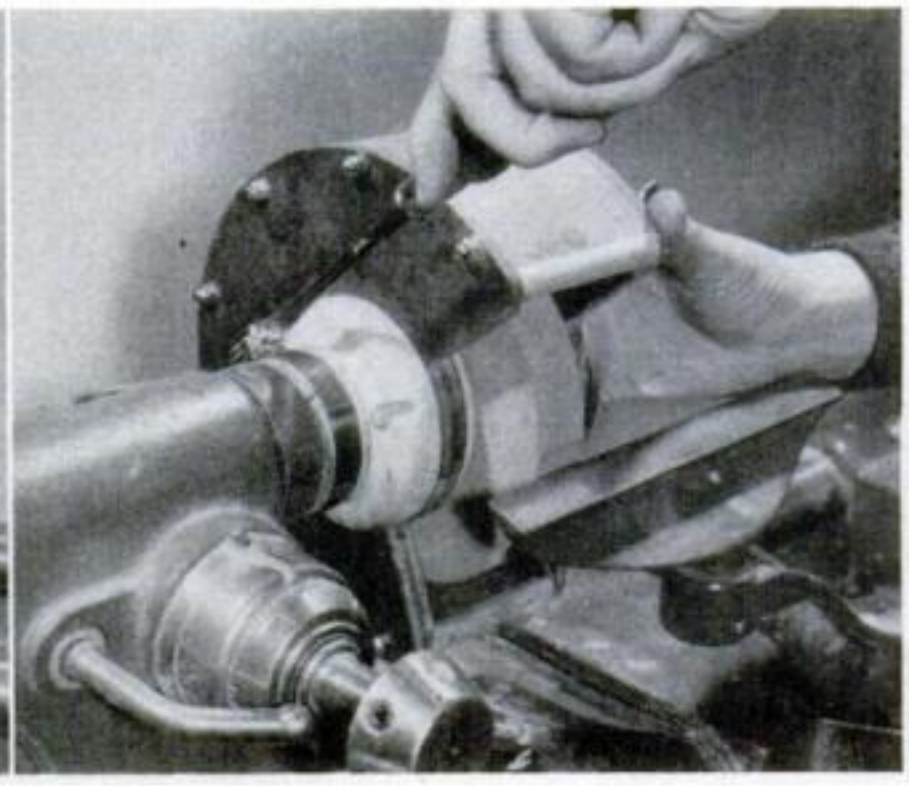

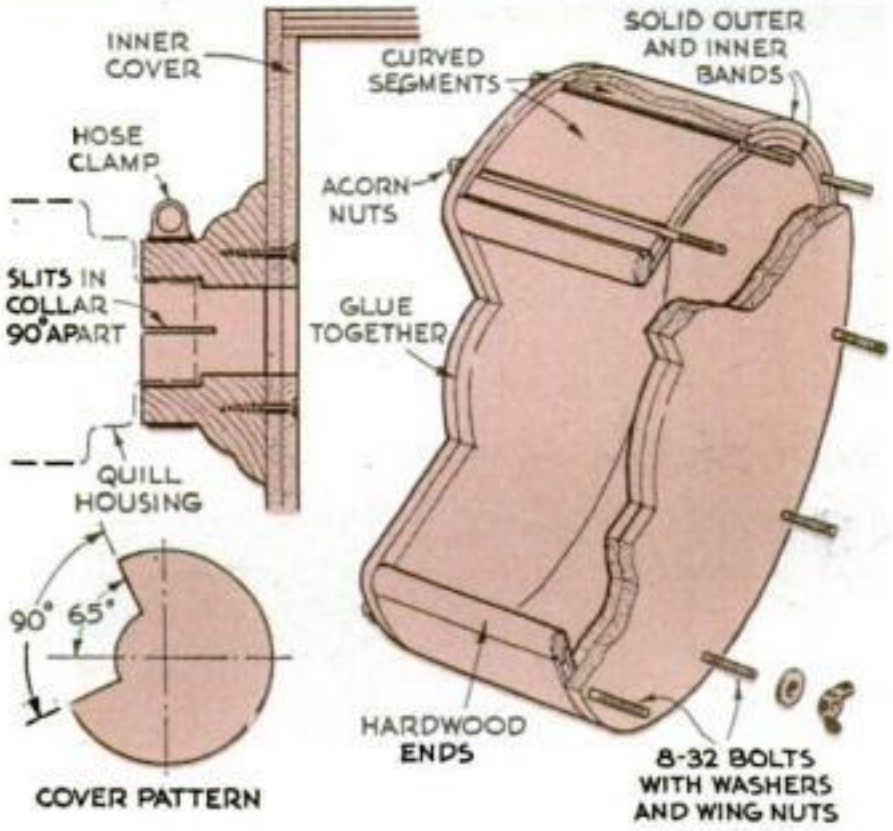

SAFE TOOL GRINDING is possible with this guard made of hard composition board. End covers consist of two ¼" thicknesses each. Soak three ⅛" strips in hot water and bend them around a form. Cut the middle strip into segments. Glue these between the other layers, with 3½" threaded rods between segments. To align rods with cover holes, assemble rim and covers, with wax paper in joints, while glue is soft. Tighten nuts on rods and let glue harden. Turn inside of maple collar to fit the quill housing, outside to suit an aircraft-type hose clamp. Wheel is left inside the guard and the whole rig mounted as a unit, the arbor setscrew being tightened through a hole in the collar as above. Outer cover is removed only to change the wheel. Adjust guard for no more than 65° exposure above the centerline. Kitchen foil used on the tool ways protects them from grinding dust.

to check a worn drive is with a tachometer, or with a rev counter and a watch.

Think a few hundred r.p.m.'s won't matter much? They do. Centrifugal force goes up as the square of the velocity. A wheel safe at 3,500 r.p.m. will be stressed *twice as much* at 5,000 r.p.m.

How about universal motors? You won't find any speed rating on vacuum-cleaner, mixer and similar universal motors—the kind that have two removable carbon brushes and are labeled AC-DC. Running without a load, these can go fast enough to tear the leads off their own commutators—or rip a grinding wheel to fragments.

Rheostats and governors reduce the torque of such motors as well as their speed. Belting them down to drive an abrasive-wheel arbor at a lower speed is safe only if you can accurately measure the top speed of the driven shaft, and may prove unsatisfactory because it will slow down rapidly under load.

Square holes on square shafts. The hole in an abrasive wheel should be a close yet easy fit on the arbor. If it must be wrung or forced on, fracture stresses may be set up around the hole, which is the weak spot in any wheel.

A sloppy fit makes for eccentric running, which is also bad. Bushings are available to make larger holes fit ½", ⅝" or ¾" shafts. On portable electric tools with square shafts, use wheels with matching holes.

Who's got the flanges? The ASA code is specific about the flanges that clamp the wheel on its arbor. Among other things, it says that they should

Copyrighted material


be one third to one half the diameter of the wheel itself, both the same diameter, recessed on the wheel side and machined smooth, and that the inboard or driving flange should be keyed fast.

The average arbor or grinding head will fall down on two counts. The flanges will be too small for the 6″ wheel you'll probably want to mount, and the inner flange will not be keyed, but loose against a shoulder on the shaft.

Until machine manufacturers wake up to code requirements, there isn't much you can do about either of these shortcomings. You can, of course, refuse to buy a grinder with 6″ wheels held by


[Continued on page 254]

Use cup wheel for side grinding

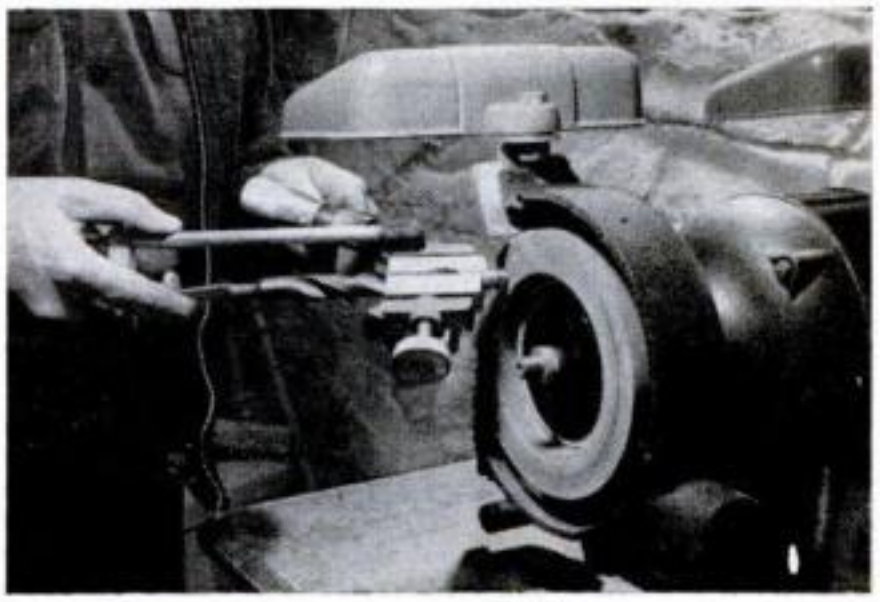


NEVER GRIND HARD or apply heavy pressure on the side of a straight wheel. The right kind for such work is a cup wheel, designed to stand side stress. Here it's being used to sharpen a big drill. The drill jig shown automatically assures getting all the various drill angles right.

How to reduce the hazards of abrasive cutting on a circular saw

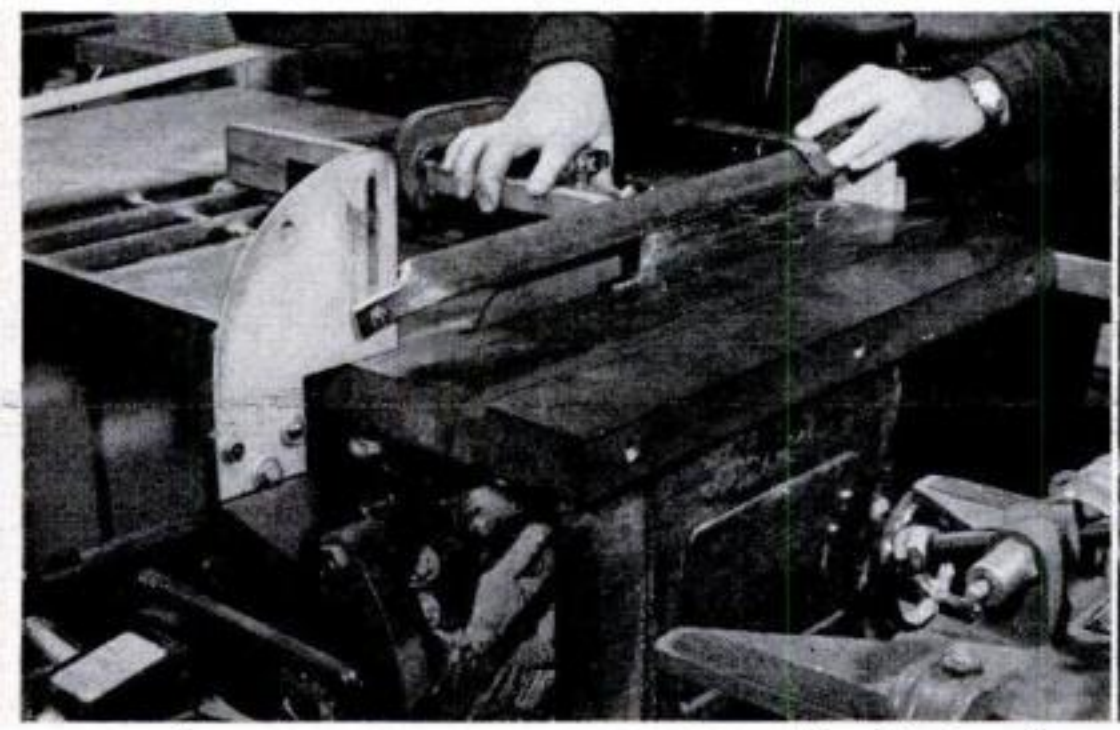


A WHEEL-HUGGING DEFLECTOR like this is safer than most saw guards. Hacksaw the piece of angle, pinch it around the splitter, and drill for a bolt. Slit corner at other end, bend 90° and bolt to a forked wooden support clamped to the front table edge as in the next photo.

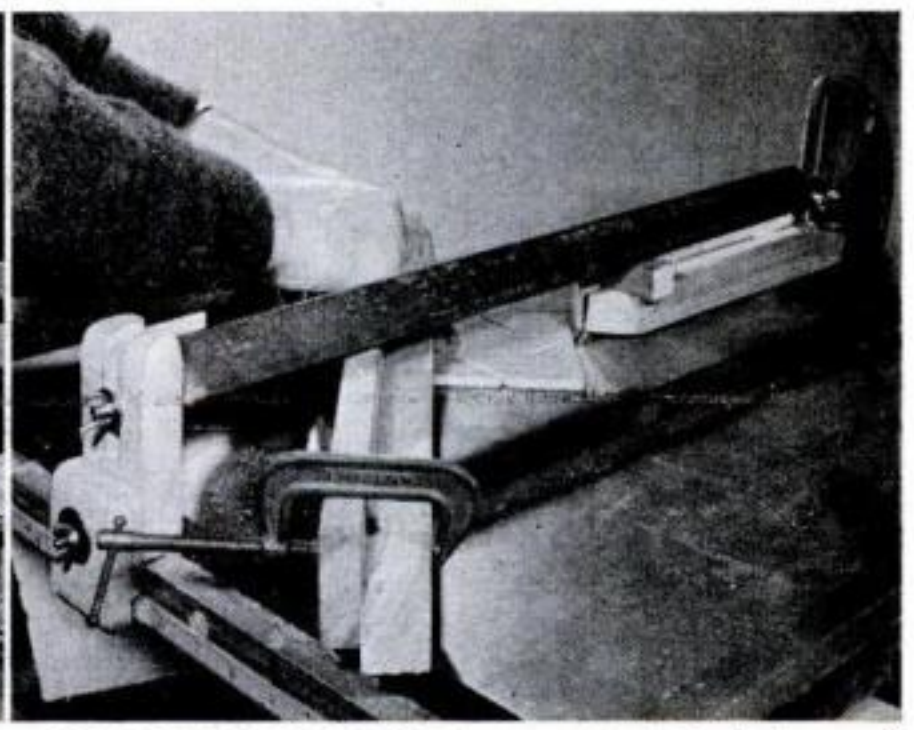


CUTTING CERAMIC TILE is easy. A slotted piece of wood is clamped under the deflector at the back of the saw table, with a shim the thickness of the tile under it. Always clamp cutoff work to the miter gauge or butt it against a stop block so clamped, as above, to prevent side movement.


CUTTING LENGTHWISE is tricky; work tends to climb the wheel. Nor can the fork support be used; instead, a piece of strap iron bolted to the deflector rests on the saw fence (arrow). Work is held down and the user protected by a wooden bar clamped on table with a shim beneath.

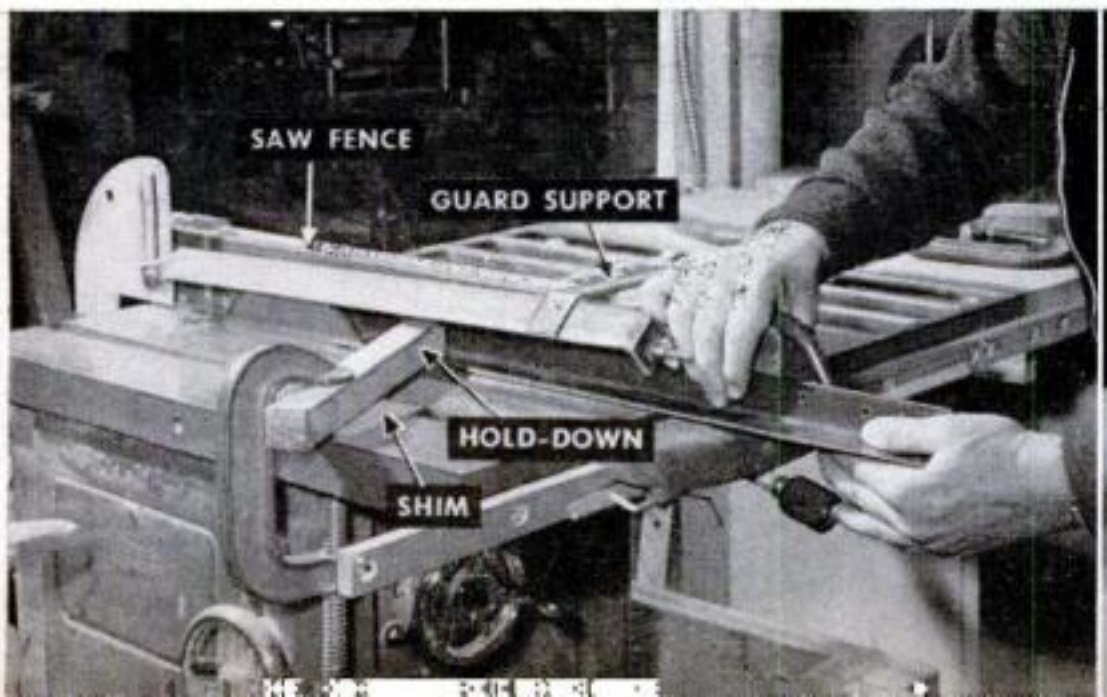


CONCAVE DISKS at right below, sold as saw stabilizers, grip a cutoff wheel better than undersized saw flanges. If blotters are too small, paste on new ones. Sight between wheel and stabilizers to make sure that they clamp on the blotters only, not on protruding edge of wheel bushings.

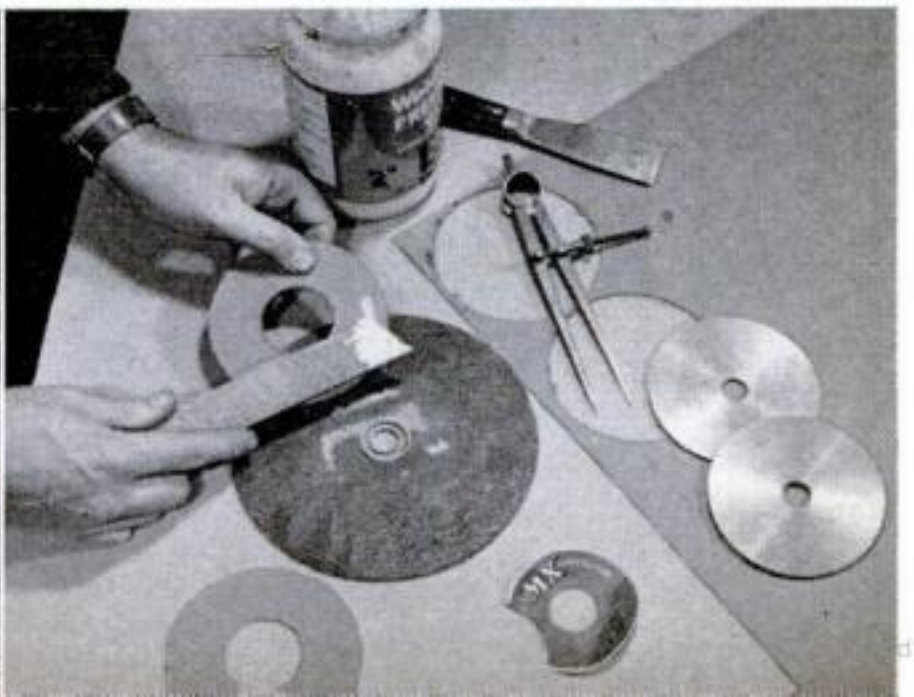


Tripod Grill Folds for Storage in Home or Car

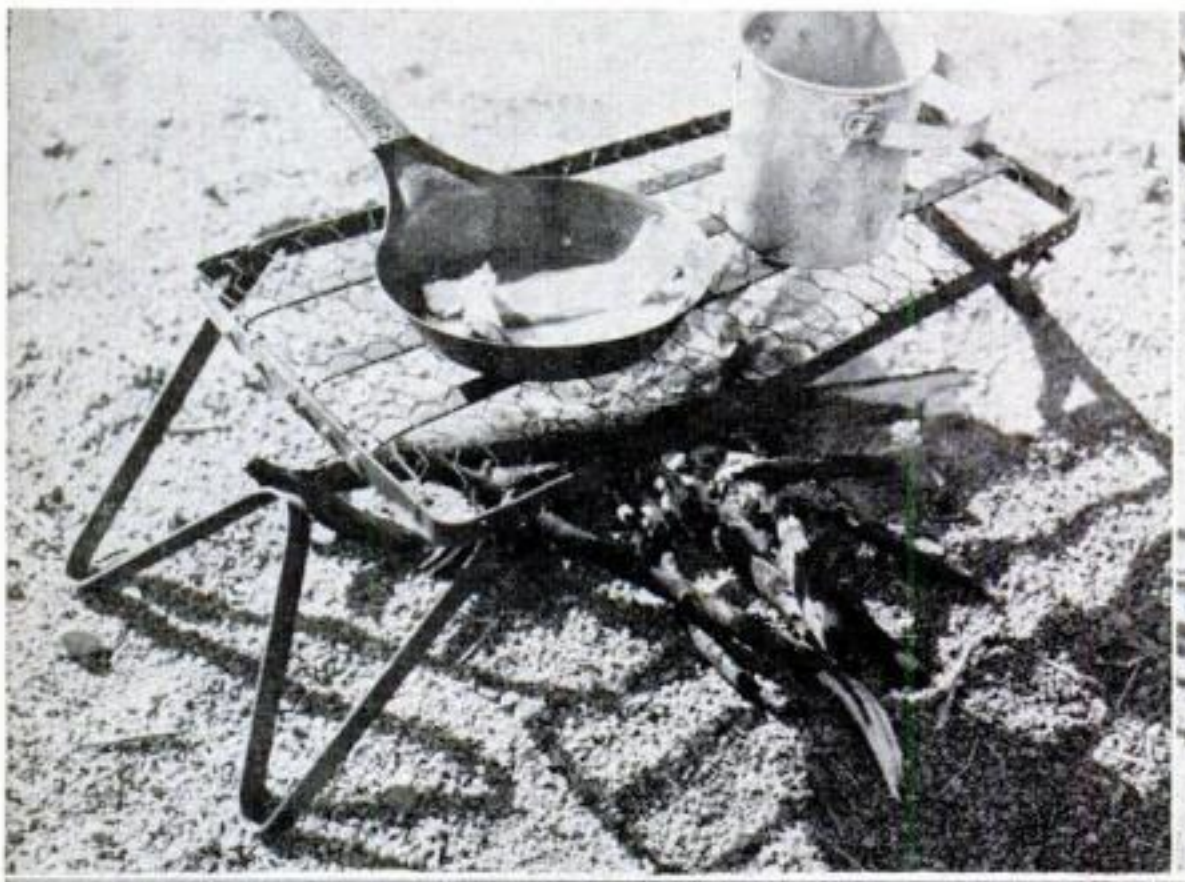



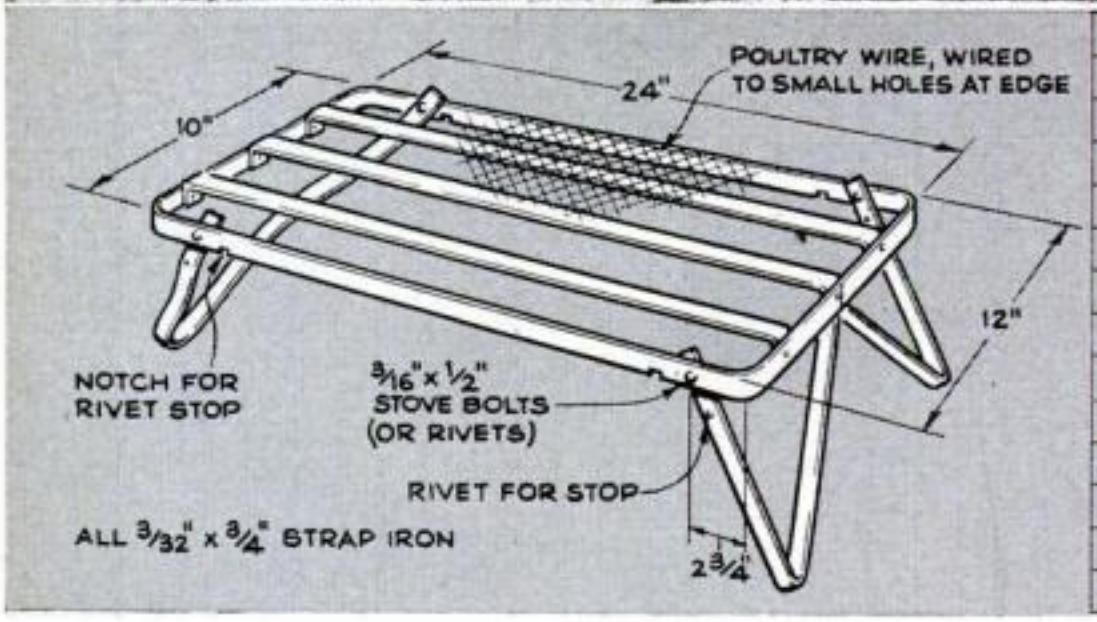


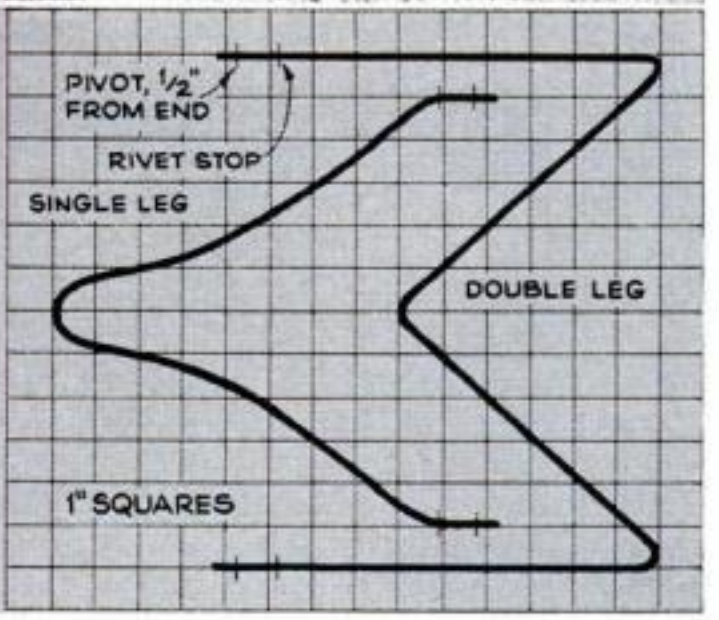

THREE legs support this folding grill on rough ground where one with four legs might not level. It's made of $\frac{3}{16}$"-by-½" stove bolts (or rivets), chicken wire and $\frac{3}{32}$"-by-¾" strap iron formed with a vise and hammer.

You need a strip of iron 5′ 10″ long for the upper frame. Before bending the frame to shape, drill holes for the leg pivots, the three frame longitudinals and for fastening the chicken wire. Lap the meeting ends of the frame and secure with a bolt, or tie them together with a short piece of strap iron, bolted or riveted. Saw the longitudinals 25½″ long to allow for a ¾″ bend at each end.

After drilling pivot holes in the legs, make a temporary assembly and set up the grill to see where the rivet stops should go. This will vary according to how you shape the legs. On final assembly, place washers between the legs and frame so that the legs swing smoothly.—*J. G. Wing, Santa Fe, N. M.*

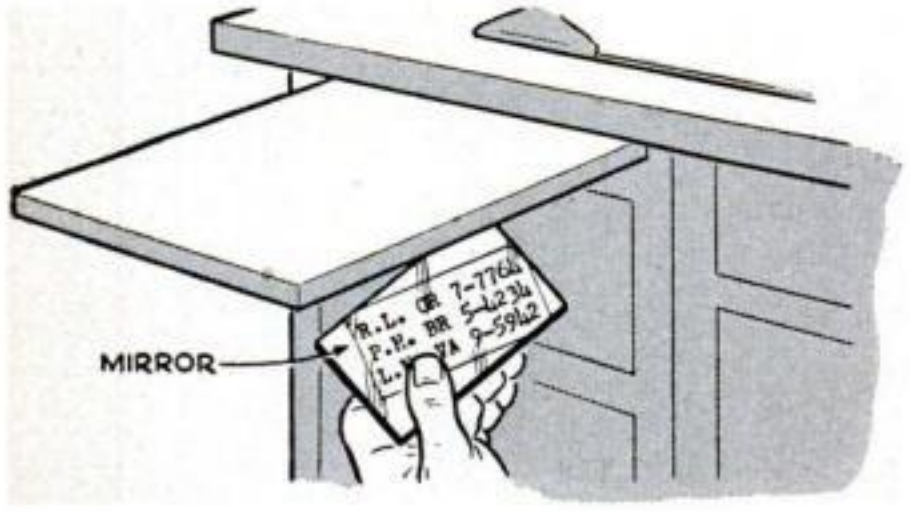


Secret Information Concealed

CONFIDENTIAL phone numbers and addresses can be kept secret by typing them in reverse and taping the paper to the bottom of a desk pull-out. To type in reverse, you set the typewriter for stencil and use the carbon paper backwards against the paper. To read the writing, hold a mirror under it.

Copyrighted material

New Tools

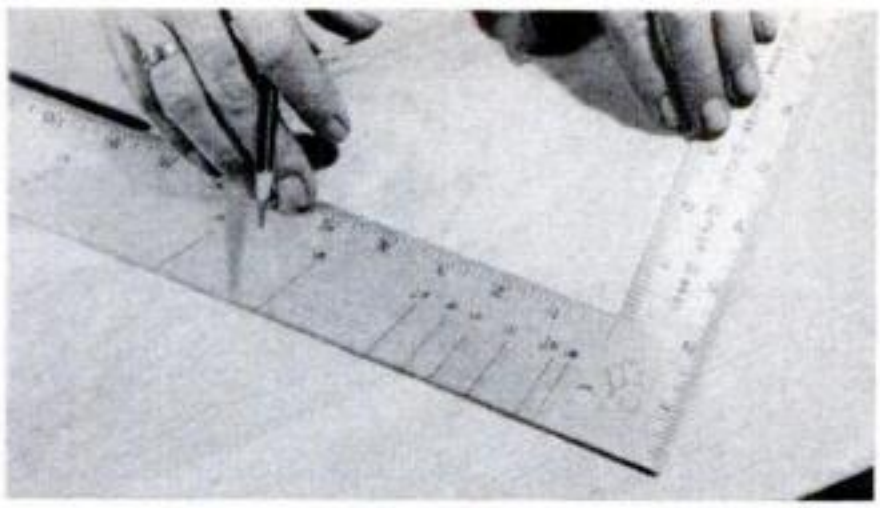


1. New Angle to Carpenter's Square. This aluminum square has all the calibrations that you usually find on a square, plus a "quick angle" scale. Line up one of the 10 pitch marks, ranging from 80° to 30°, and you've got the angle.

2. Table Saw Goes Portable. Pull this ¾-hp. circular saw out of its table mounting and you have an 8″ portable saw. A special shoe and guard enclose the blade for protection when it's hand-held.



Shaper and jointer attachments come as standard table-saw accessories. Other attachments make the tool a lathe, drill press, sander, mortiser or router.

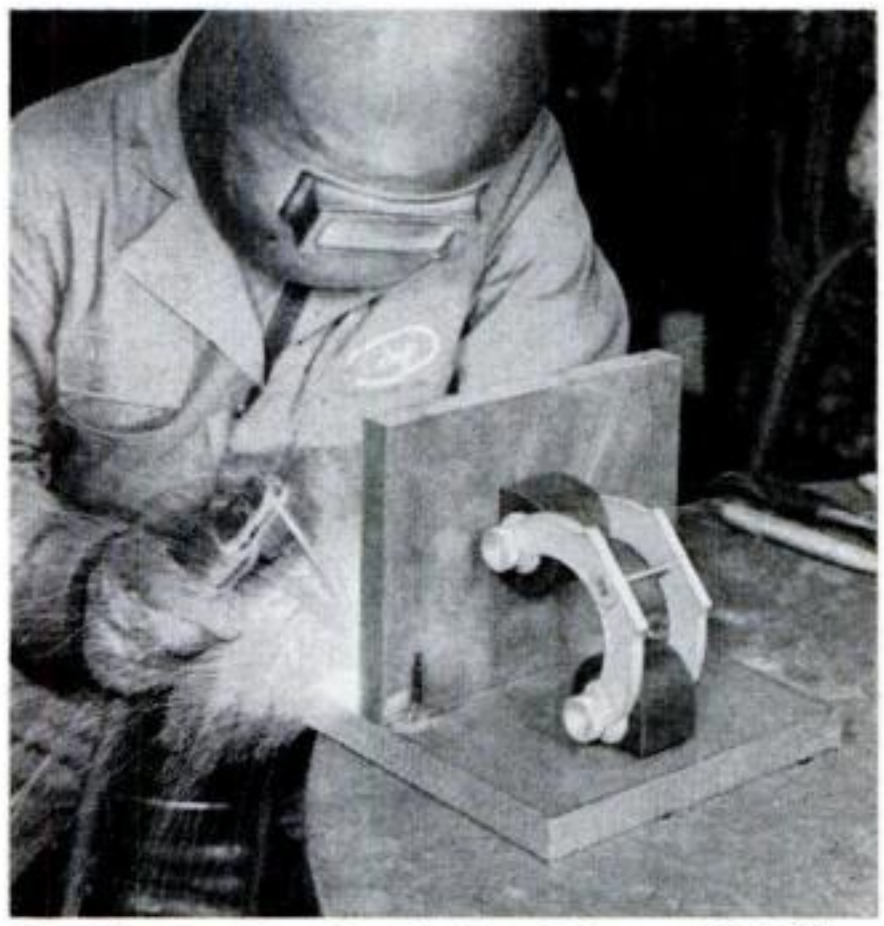


3. Magnetic Hand Positions Welding Work. Here is a magnetic third hand, with a 45-lb. pull, that holds material while it is being welded. Each magnet adjusts through a full circle, by a dial marked off in 5°, to grasp your work. A third magnet can be attached to top.

Further information on the products shown on this page can be obtained from: 1. Fairgate Rule Co., Cold Spring, N. Y.; 2. Reamstown Products Co., Reamstown, Pa.; 3. Standard Portable Cord Co., Mayville, N. Y.; 4. The Speed Corp., 4734 N. Albina, Portland, Ore.

4. Suction Holds Sandpaper to Disk. Blind holes in the rubber face of this 8″ aluminum disk hold paper against it as long as the disk turns. Skin friction and centrifugal force create a partial vacuum in the holes, as sketch shows. The greater outside pressure forces the paper to disk.

Attached to the shaft of a table saw, the disk can carry sandpaper on both sides. With the disk comes a tool that cuts circular sandpaper facings from standard sheets and punches a center hole.

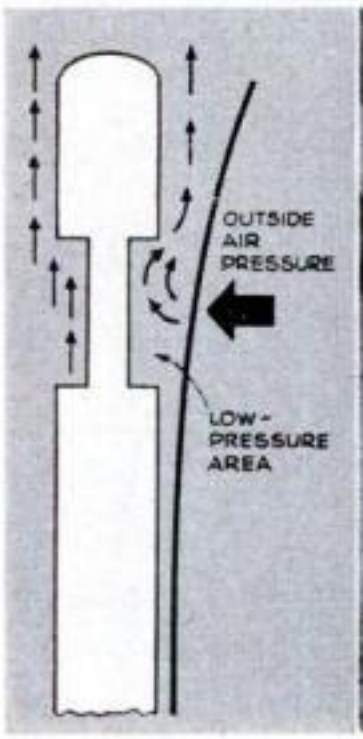





Copyrighted material

By Roy Doty and Ralph S. Wilkes

Wordless Workshop




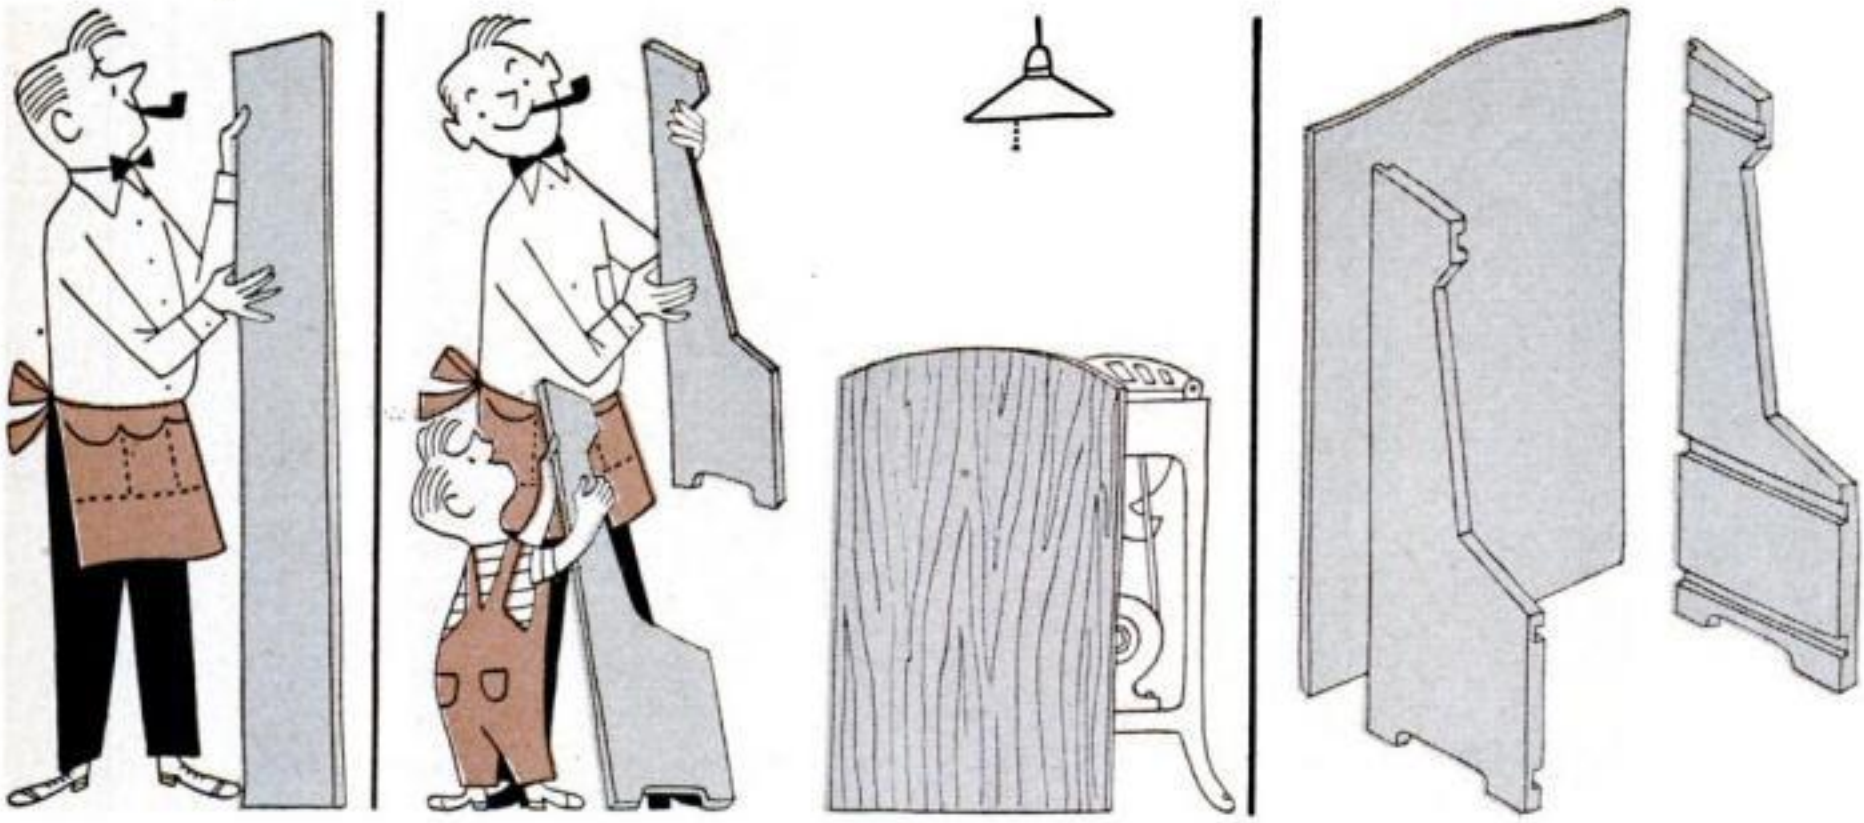

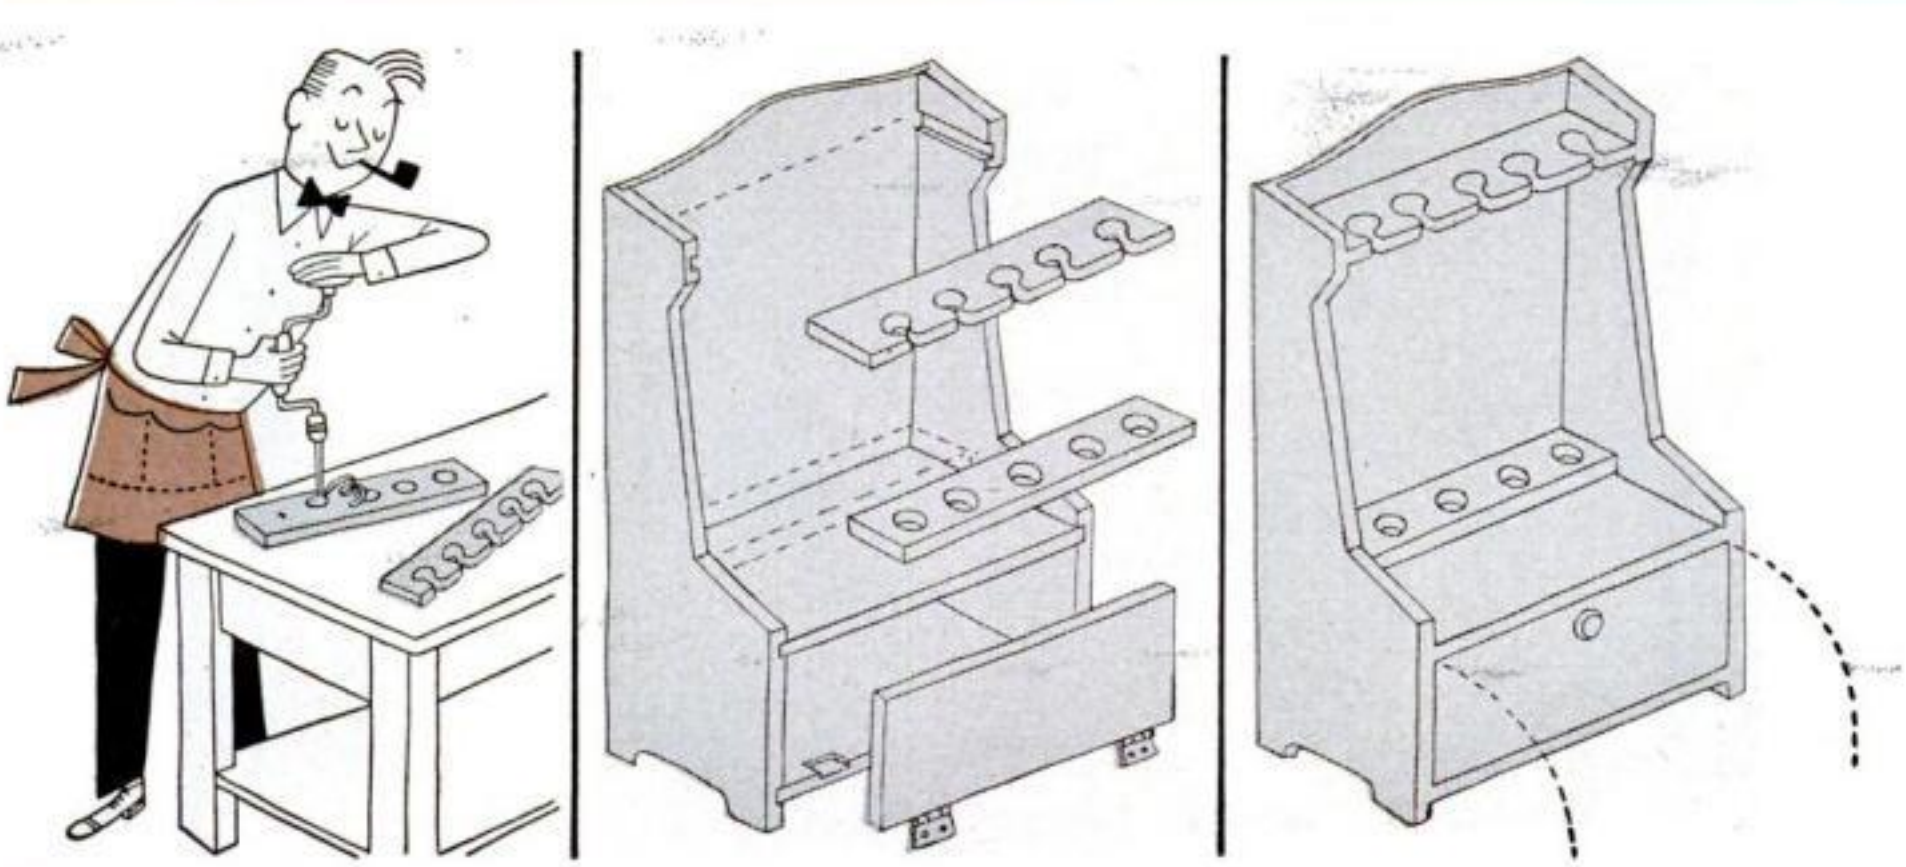

Copyrighted material



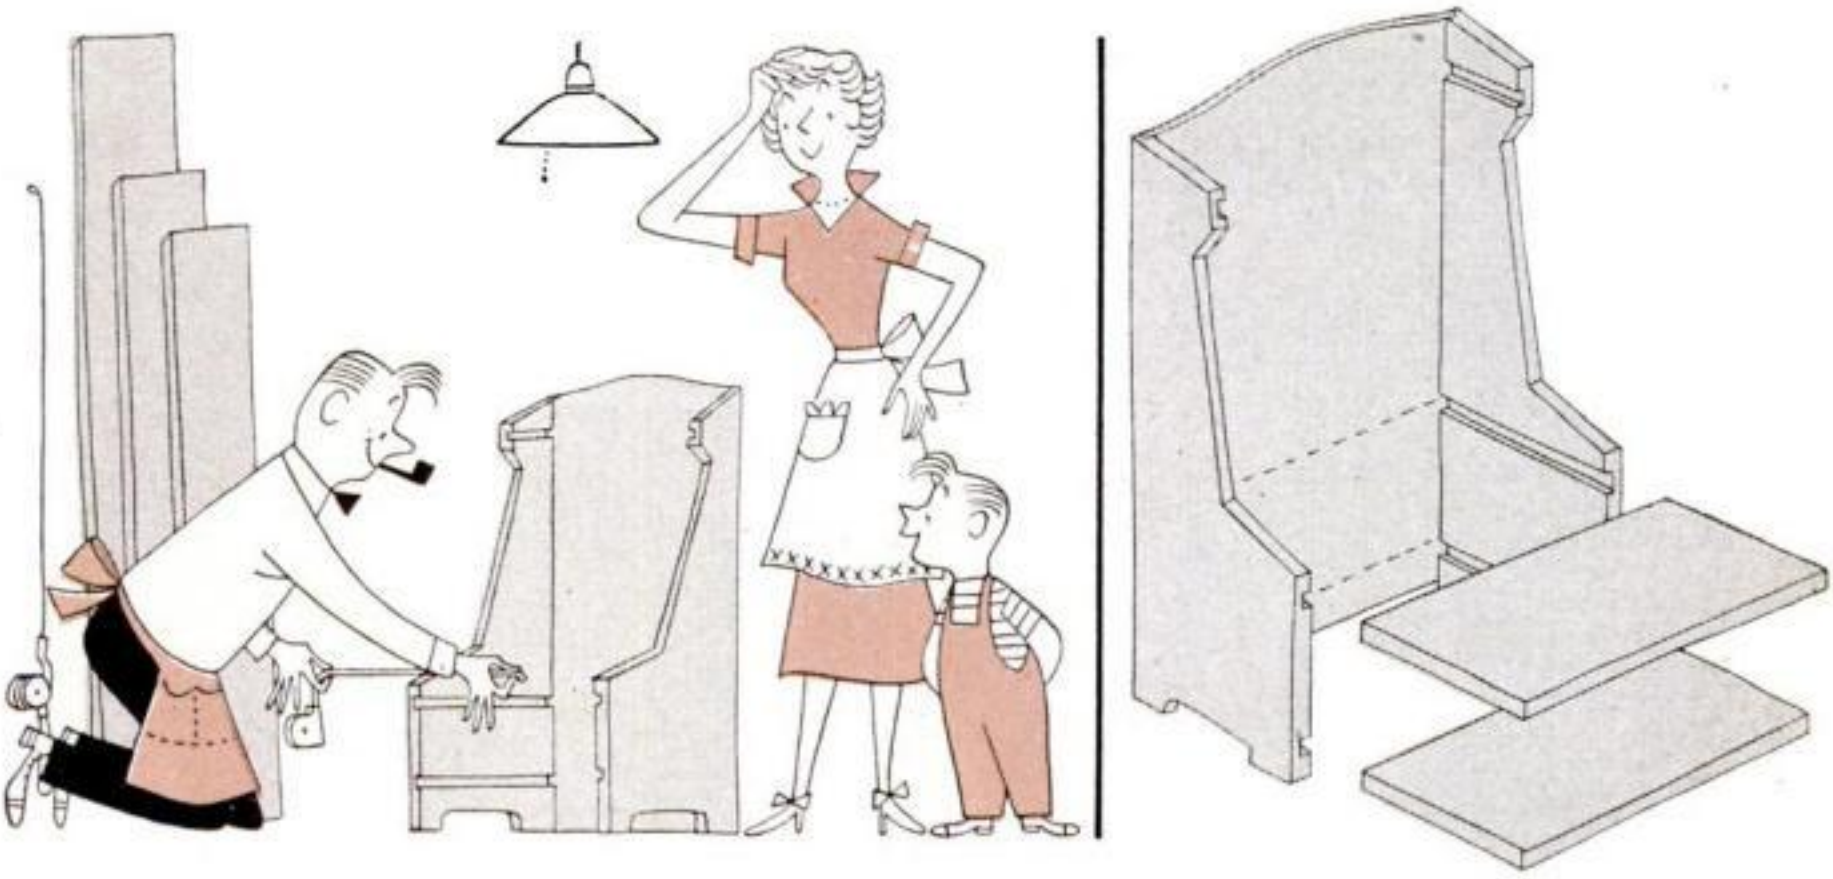



Next Month: A space-saving rack for storing bicycles in a garage

Copyrighted material



Could You Bore a Square Hole?

You can with this offbeat tool: a triangular bit that turns in an ordinary carpenter's brace.

By Walter E. Burton

NEXT time you want to stump a tool expert, ask him how to make a square hole with a brace. While he's chewing it over, you can go ahead and show him.

This stunt will raise numerous eyebrows, but it has a practical use, too. The homemade bit on these pages does a good job of making mortises for square tenons. Turned by hand, it works as cleanly as a power-driven mortising chisel. A smaller bit, shaped from a file as shown on page 216, will make holes to fit gear racks, key stock, square shafts and so forth in metal as well as in softer materials.


How it cuts corners. The three-sided bit works in a four-sided hole in a guide plate that you screw or clamp to the work. As the bit is turned clockwise, it "walks" counterclockwise from corner to corner of the guide hole, its outer edges serving as pivot points. Stock is removed by the scraping action of three edges on the end. Only two of these work at any one time, the third—acting as a pivot—going backward.

Shape it from round. Use a piece of round steel, faced square at the end (for a ¾" bit use a bar ⅞" in diameter). Prick-punch the center; then follow the drawing on the facing page, drilling the holes $\frac{5}{16}$" for a ¾" bit. Before filing the edges, drill a ¼" or ⅜" hole in the center of the other end for a shank.

In a piece of ⅛" steel drill a hole and


Copyrighted material

Here's how a three-cornered bit makes that square hole

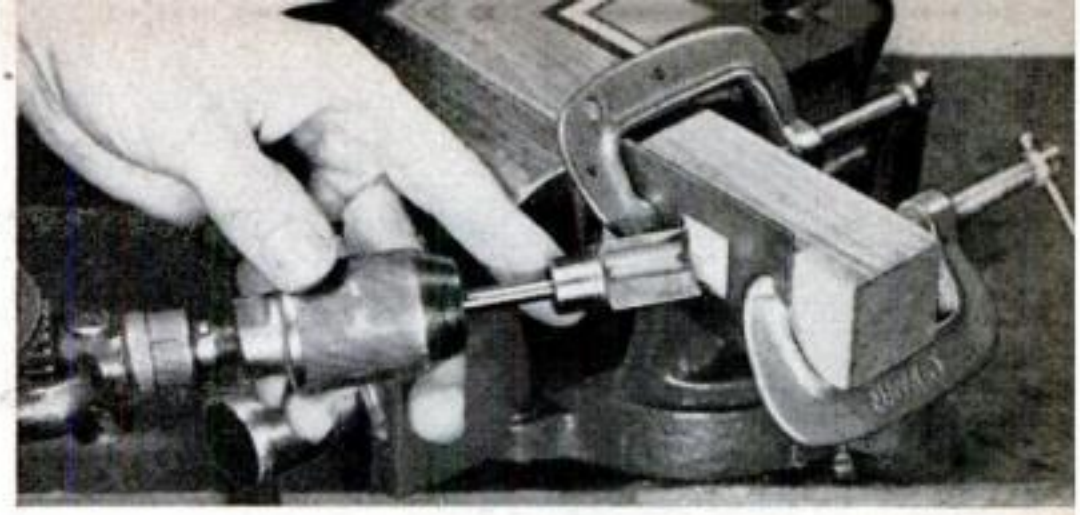

KEY TO THE TRICK is the square hole in the metal guide plate clamped to the work as at right. If you start turning with the bit as at *1* below, it will pivot in a corner of the guide hole on point *A*. Points *B* and *C*, with their cutting edges, will sweep to the right, removing stock as in 2. Edge *A*, moving backward, will not remove stock. Reaching position *3*, the bit will begin to pivot on point *B*, in the upper corner of the guide hole. Points *A* and *C* will sweep to the left, their edges removing stock as in *4*. When point *C* reaches the next corner as in *5*, it becomes the pivot point, while *B* and *A* will next sweep downward, cutting as they go.



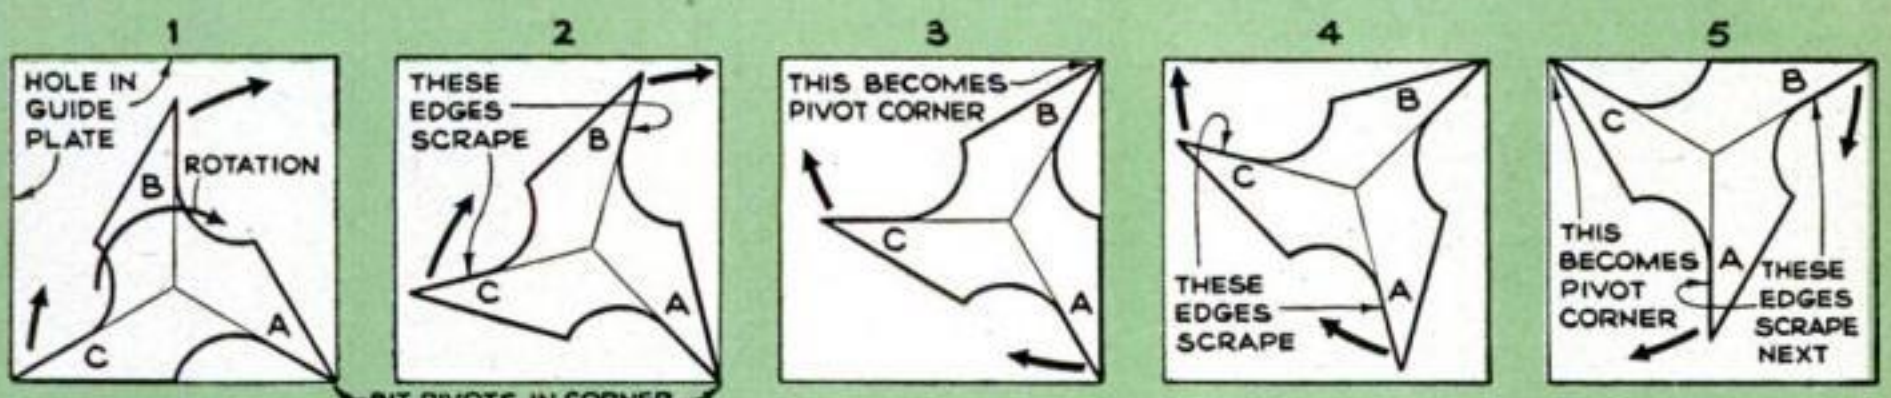


file it square. Use the bit as a gauge when filing to final size, making each side as long as one side of the bit. Drill two holes by which to screw the plate on the work in case clamping it on is not feasible.

For limited use in wood, the tool can be used as it is, but it will give longer service if heat-treated. If made of tool steel, the bit and plate can be hardened by heating red hot and quenching in water or oil. Low-carbon steel must be casehardened. After hardening, polish a portion so that the tempering colors can be easily seen. Then draw the pieces to a light yellow.


File one from a file. For a smaller bit, anneal an old triangular file by heating it red hot and letting it cool slowly. Grind or file the end square. Then shape it as shown on the next page and reharden it. Make a guide plate as described for the larger bit.

Using the bits. Because of their off-center action, it is best to turn the bits by hand. If you use them in a drill press, run it at the lowest speed, and remember that the work must be left free to wobble. Clamp a wooden fence to the table,

Bit is sawed and filed to shape

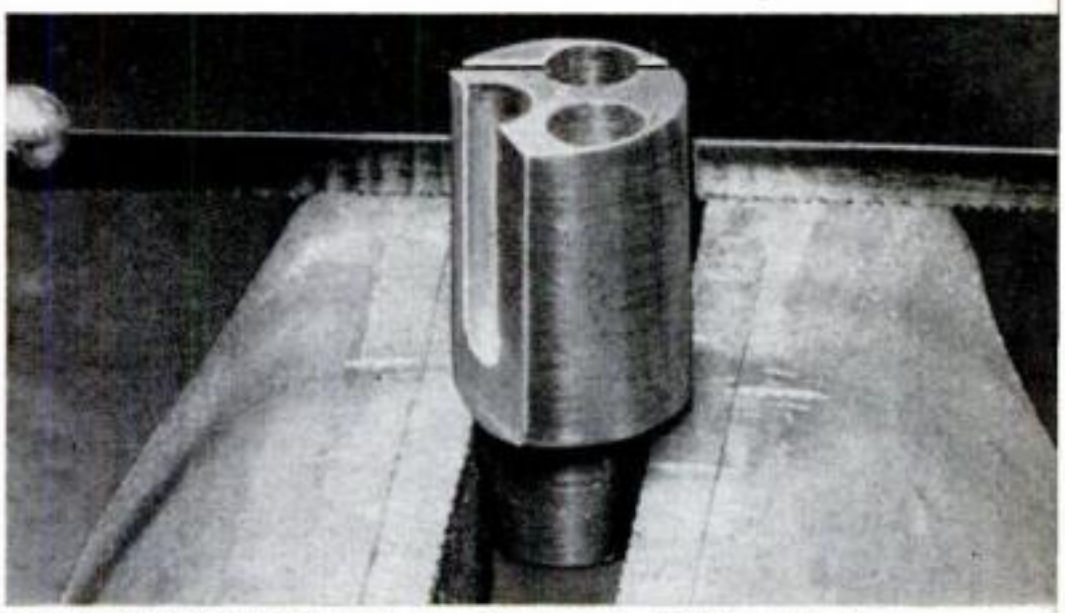


DRILL THREE HOLES from the end of the blank to help bring the bit to shape. Then hacksaw through these the long way as above, removing excess metal on three sides. File the cutting edges as shown in the diagram below. In filing the clearance back of each, stop 1/64" short of the very edge. Then oilstone this narrow line to keenness at a slightly shallower angle.

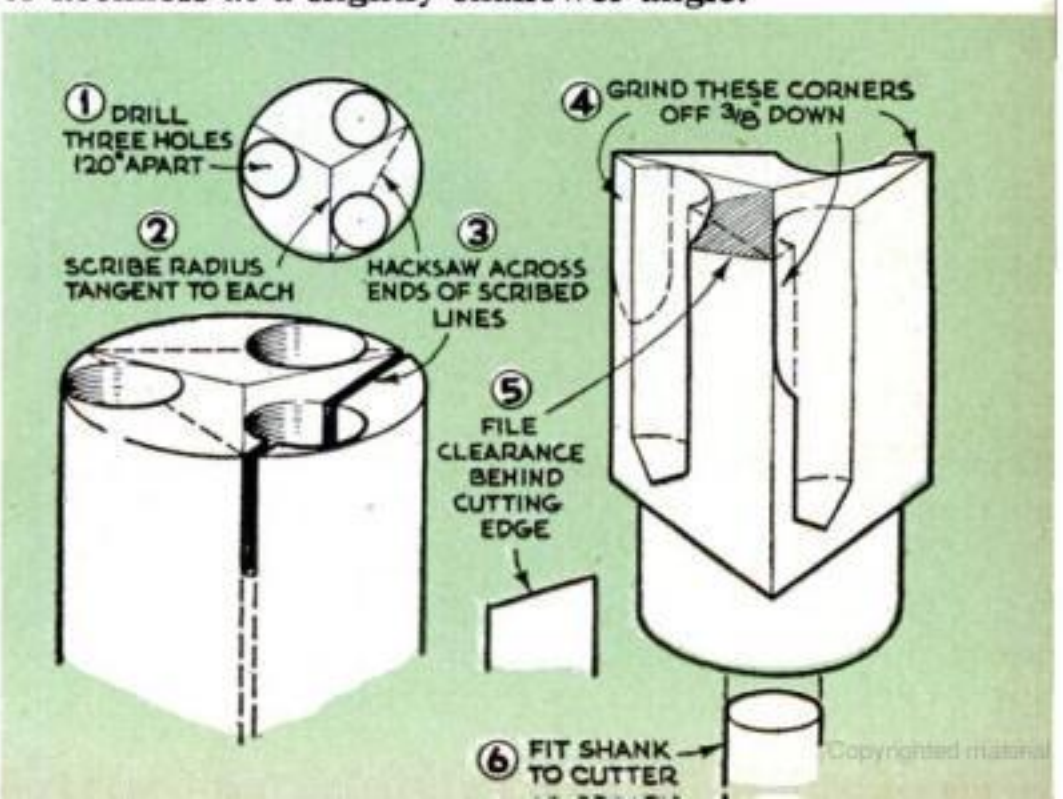


Copyrighted material

This smaller square-hole bit is made from a triangular file

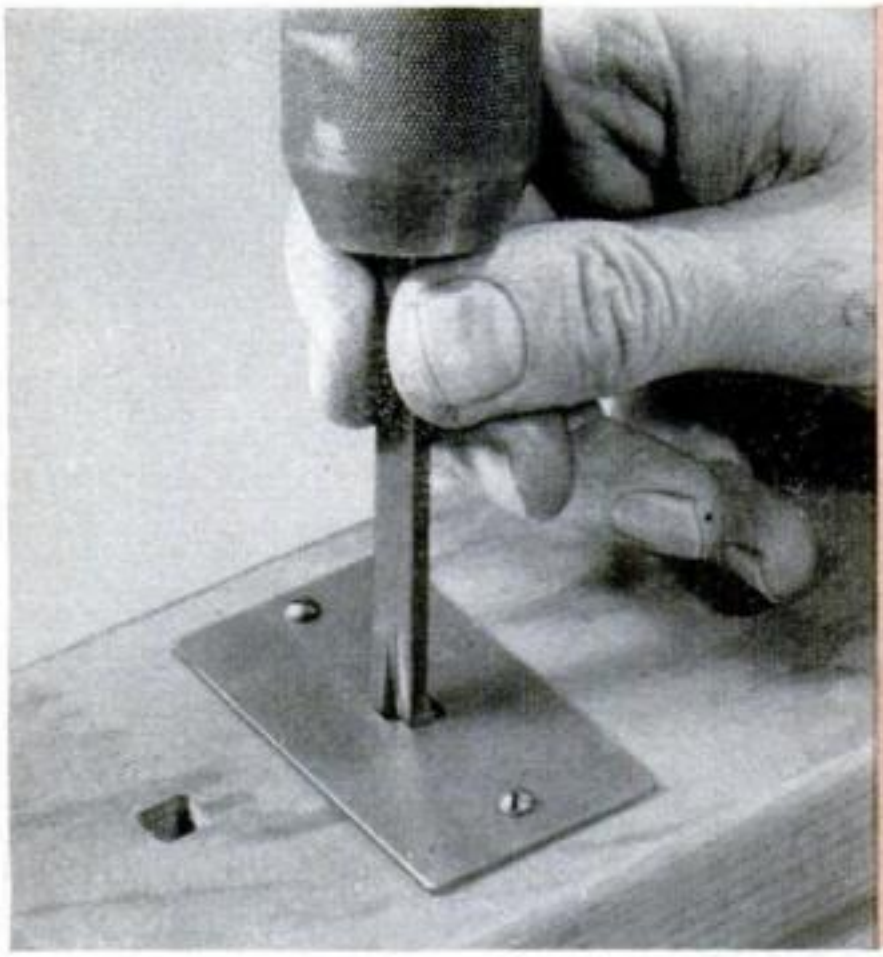


SCREW OR CLAMP the guide plate in position. Triangular bit will work even if not precisely centered in the chuck, but it should run straight to keep all three bottom edges in contact.

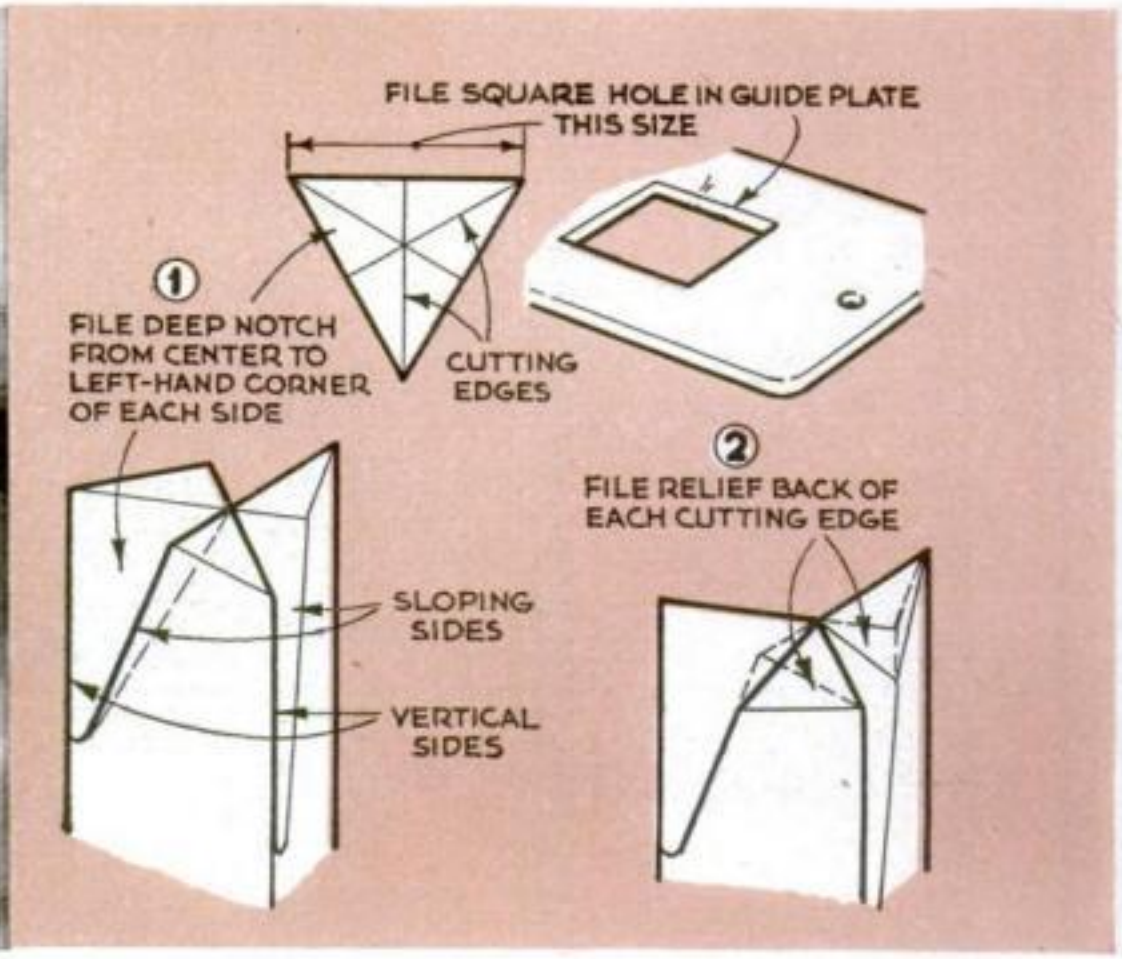

ANNEAL THE FILE so that the end can be shaped by filing as shown above. Rehardening is easy: heat it red hot and quench. Temper by reheating until a polished part turns yellow.

close enough to keep the work from turning but leaving it free to oscillate. Turn the chuck by hand to check this before starting the motor.

Want to make hex holes? A five-sided bit turning inside a hexagonal guide hole will produce six-sided holes. The bit should be made of round stock of a diameter equal to the distance across the flats of the desired hexagon. This will make the sides of the bit the same length as those of the guide hole. END

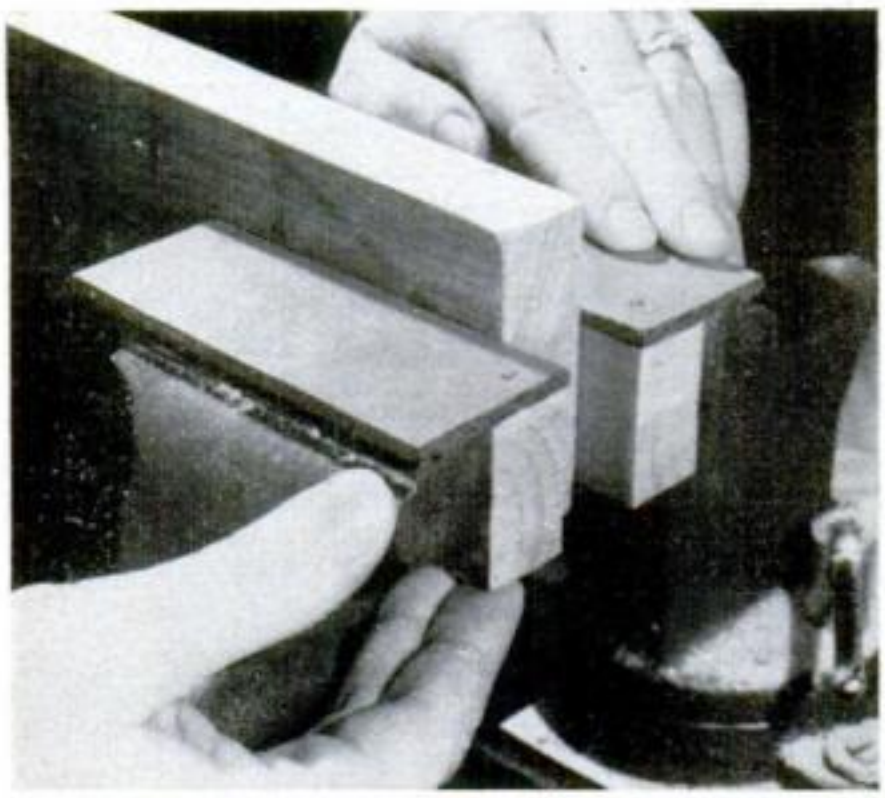

"L" Blocks Pad Metal Vise

A MACHINIST'S vise will double as a woodworking vise if two L-shaped wood pads are used in it. Hardboard lips nailed to bits of scrap wood hold them in place on the vise while you adjust the work.



Oil Can Releases Single Drops

THE opening of an oil-can spout can be reduced to release one drop of oil at a time. Insert a small nail or brad; then pinch the spout around it with pliers or a clamp and remove the nail.

Copyrighted material



SECRET OF GOOD SPRAYING is moving the gun parallel to the work for even distribution, instead of swinging it like a brush. **Stroke back** and forth, aiming each new stroke **at the bottom** of the preceding one to make **sure that you** get double coverage with no missed spots.

How to Use a Spray Gun

By David X. Manners

NO DOUBT about it, spray painting is usually faster and better. But what do you actually do when you have a gun in your hand? It's loaded, turned on, you're ready to press the trigger—now what?

The main thing to remember is that a gun is not a brush—and you'll probably have to squelch the urge to swing it like one. This moves the gun in an arc, spraying on too much paint in the middle and too little on the ends.

Point the gun squarely at the work and move it steadily sideways as nearly parallel to the surface as you can. When you complete one stroke, go on to the next, never go back over the same area. In spraying, you build up the paint by putting on several successive coats, not by putting on a lot of paint in one coat.

You can pick up the basic technique of handling a gun in 15 minutes. After a few practice jobs, you'll enamel a chair in minutes instead of an hour, lacquer a car in one hour instead of four. What's more, you will produce a slick, glass-smooth finish that no master of the brush could ever get.

If you've ever had the experience of turning out a fine piece of woodworking and then ruining it with a second-rate finish, you'll agree that no shop should be without a sprayer.

Can I get by cheap? Inexpensive sprayers (some for under $10) are available that you just plug into an electric outlet or into one of your car's cylinders. You can also get an attachment that fits your vacuum cleaner. These are fine for small painting jobs. For heavier duty,

Copyrighted material




You can do jobs like these quickly with a sprayer

PICKET FENCE is a backache with a brush but a breeze with a gun. Spray up and down, holding gun at an angle to hit face and one edge. Repeat to catch backside and opposite edge.

SOAKED NEWSPAPERS make it easy to mask around window frames and trim in outdoor or semi-open areas. Papers stick on by themselves, peel off when dry. Don't spray in closed areas.

NEAT-LOOKING SIGNS can be made by pasting letters formed with masking tape over a background color. Spraying on second color and removing tape then leaves outlines of letters.

BOOKSHELVES and other hard-to-reach areas are quickly sprayed where a brush might miss. Always wear a mask when you are painting for a long time or at close quarters like this.

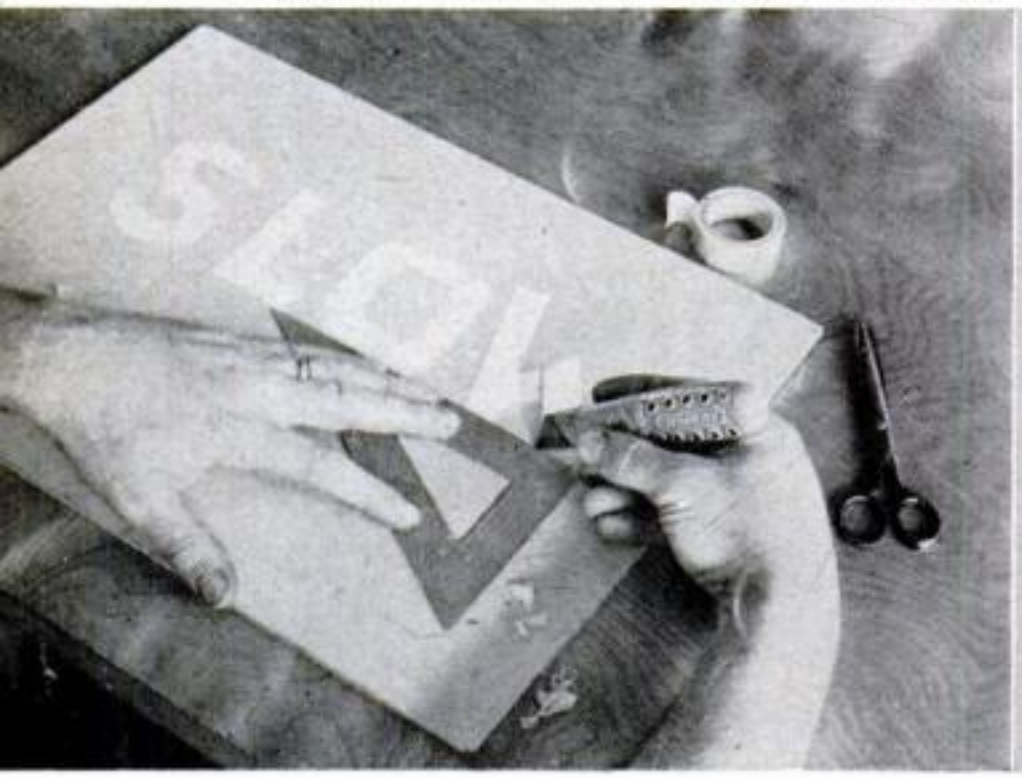



compressor-type sprayers, driven by an electric motor, are available for about $75 complete.

If you already have a ¼-hp. or ⅓-hp. motor, you can buy just the gun and compressor at a considerable saving. If you don't want to buy a gun, you can often rent one from a hardware or paint-supply store for a few dollars a day.

Don't get "trigger happy." The secret of smooth spraying is an even, continuous stroke. Don't pump the trigger on and off or slow down during a stroke —the paint will pile on unevenly.

A screw at the back of the gun controls the flow of paint. For practice, it's best to turn this down until you get a pattern only an inch or so wide, then open it up to 6″ to 8″ as you acquire full control.


Keep the length of your strokes within a comfortable reaching range—about three feet. Begin a couple of inches to one side of the work and follow through the same distance beyond the opposite side.

Move the gun at a uniform speed, about as fast as you would a brush. Aim each new stroke at the bottom edge of the preceding stroke to insure an overlap of at least half the depth of the stroke. As you become experienced, use less lap.

Copyrighted material




Spray at the right distance

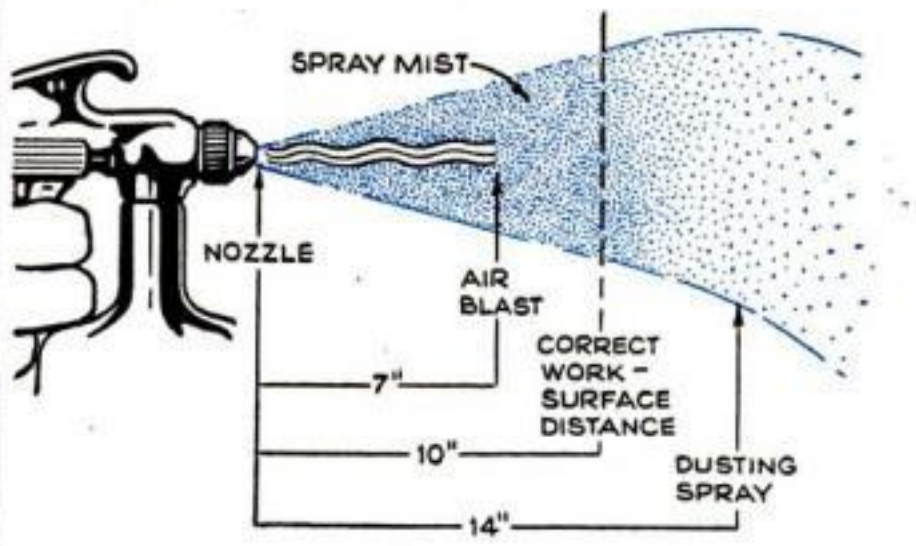

A HAND'S SPREAD AWAY, about 8", is a quick check against spraying too close. Correct distance is about 10", but may vary some depending on type of paint used. If the paint "globs" on, causing runs, you're too near; if it just "dusts" on, then you are too far away.


Adjusting the nozzle lets you fit the spray to the work

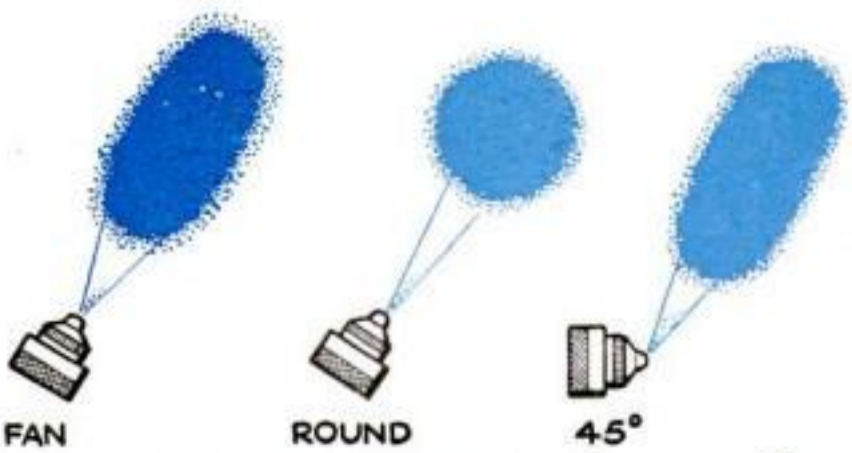

INTERCHANGEABLE NOZZLES produce an oblong pattern for long, slender work, a round one for large areas, or an angled spray for reaching high or low spots without tilting the gun.



AIR JETS on external-mix guns can be rotated crosswise for vertical pattern, or vertically for a horizontal one. On internal-mix guns, you can get the same effect by rotating the nozzle.

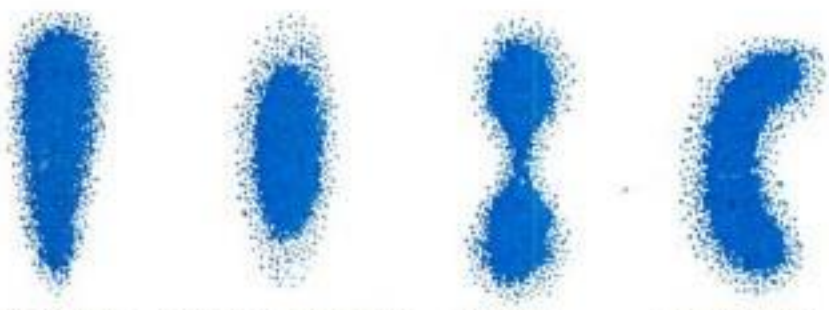

AN ODD-SHAPED PATTERN indicates a dirty or partially clogged nozzle. If center is heavy, reduce fluid flow with screw adjustment. If pattern splits, air volume may be too high.



Sags, runs, orange peel? Paint for spraying should be 10 to 20 percent thinner than for brushing. But if it runs or sags, it may be too thin.


If it seems to pile on too quickly, hold the gun farther from the work or move it a little faster. Remove runs with a brush or a swipe of the hand—a cloth may leave lint.

Paint that's too thick may produce a pebbled surface that looks like an orange peel. Try thinning it, but first make sure that there are no air leaks to cause loss of pressure. The compressor's safety should also be kept tightly closed to maintain pressure, except at the start when it should be opened to permit warm-up without load.

Be sure to ventilate. It's never wise to spray indoors—and in some communities it is illegal. But you can still make use of your compressor by hooking it to a pressure-type paint roller.

Even in semi-open areas such as a

Copyrighted material

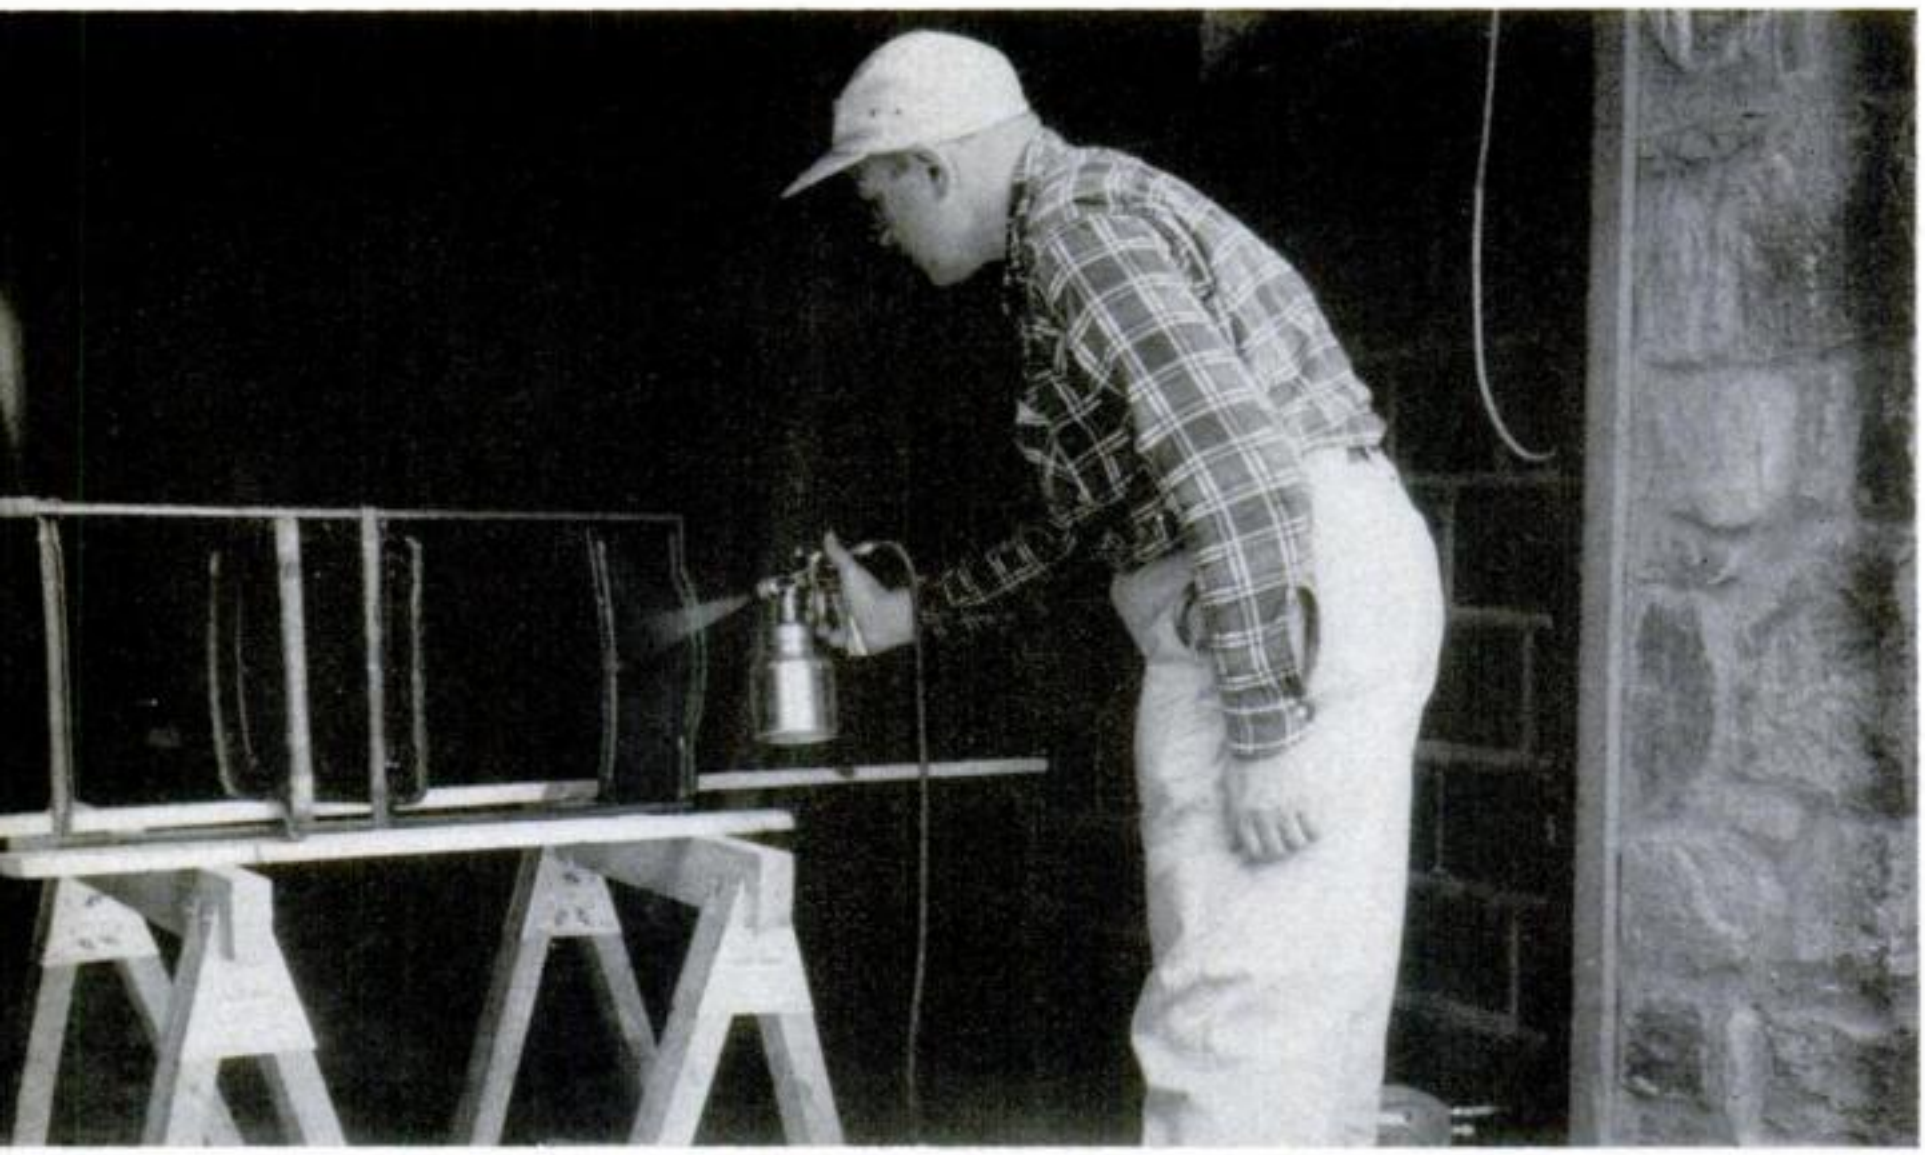

Be sure to do your painting in a well-ventilated place

WORK IN AN OPEN GARAGE or outdoors, never in a fully enclosed area, so that you do not breathe concentrated paint fumes. Place the work at arm level, either on sawhorses or by suspending it on wires, so that you don't have to tilt the spray gun too far up or down.

Prepare the paint carefully

TO PREVENT CLOGGING, thin regular paint 10 to 20 percent and filter it through an old nylon stocking. Thin clear lacquers 25 percent, pigmented lacquers about 100 percent. In humid weather, add 10 percent retarder to keep lacquer from "blushing"—turning a milkish white.



garage or porch, open all doors and windows to get as much ventilation as possible. Masks that filter out the paint fumes cost about $4 and should be worn. Never paint near a furnace, running car engine or open flame.

What kind of sprayer? You'll find that there are two types of guns—pressure-feed and suction feed. Pressure-feed guns use air directly to *push* the paint out of the nozzle. These are particularly good for heavy house paints, floor enamels and other thick mixes.

Suction-feed guns use a siphon action to draw the paint out. Their "plumbing" is a little simpler and thus easier to clean—an advantage if you are making a lot of color changes. They are especially fine for lacquers and other thin materials.

Types of nozzles. Your gun will mix the paint either inside or outside of the nozzle. Internal mixing provides finer atomization of heavy paints. External mixing is better for quick-drying paints that might clog an internal-mix nozzle.

Copyrighted material

Choose a gun with a nozzle that best suits the type of painting that you do most often.

Watch out, too, for two types of air-control systems—"bleeder" and "non-bleeder." Non-bleeder guns require an air-storage tank and are usually found on heavy-duty professional rigs. Bleeder guns that pass air continuously are much cheaper. You just "bleed off" air as you need it by pressing the trigger.

Preparing the surface. Because of the thinness of the spray coats, it is important to start with a smooth, clean surface, particularly on metal. Sand all spots where old paint has chipped or broken away, feathering the edges smoothly.

If you get down to bare metal, use a primer-on it first. Remove grease and dirt with a solvent. If you are painting near an edge or corner where the over-spray may fall on something behind it, tape on pieces of cardboard to catch the paint.


Always apply fast-drying materials so that the over-spray falls on unfinished work. In spraying a door or table, start at the near edge and work away from you. Spray falling on finished areas produces a sandy texture.

For best results, be prepared to spray on as many as three to five or more coats. Even at this, you'll find that spray painting is still four to six times faster—and a sparkling world of beauty better. END



Clean the gun right after use

SCRUB PARTS with solvent and an old toothbrush, then spray solvent until it comes out clear. Clean air jets with a broomstraw or toothpick, nothing hard that might distort them.

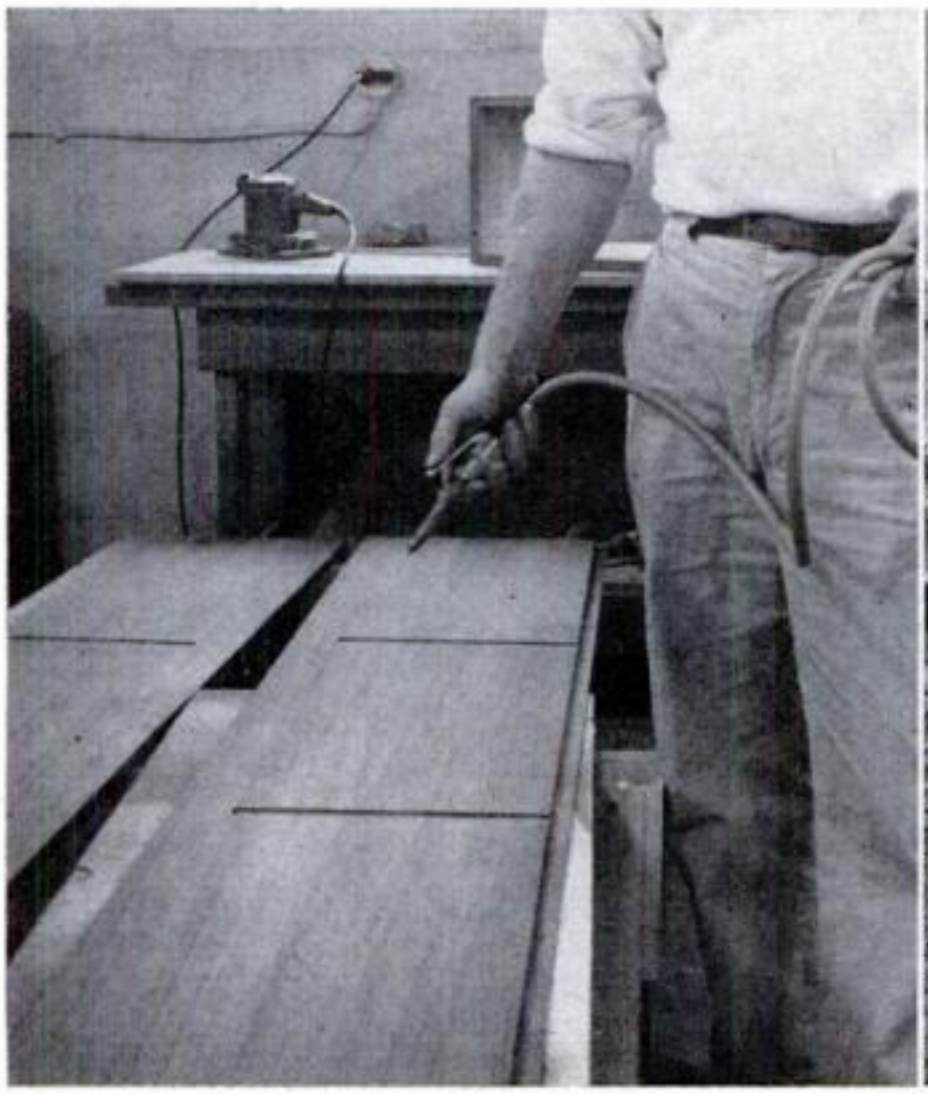




Your spray gun will do many other jobs like these

AIR-GUN ATTACHMENT blows chips from saw cuts and quickly dusts out motors, typewriters and other inaccessible spots. Regular gun will spray insecticides on plants (above right) and put a protective oil mist on power mowers and other tools. You can also use the compressor alone to inflate tires and water toys, operate a small forge, even do sandblasting.

Copyrighted material

I Built Our Kitchen Blender

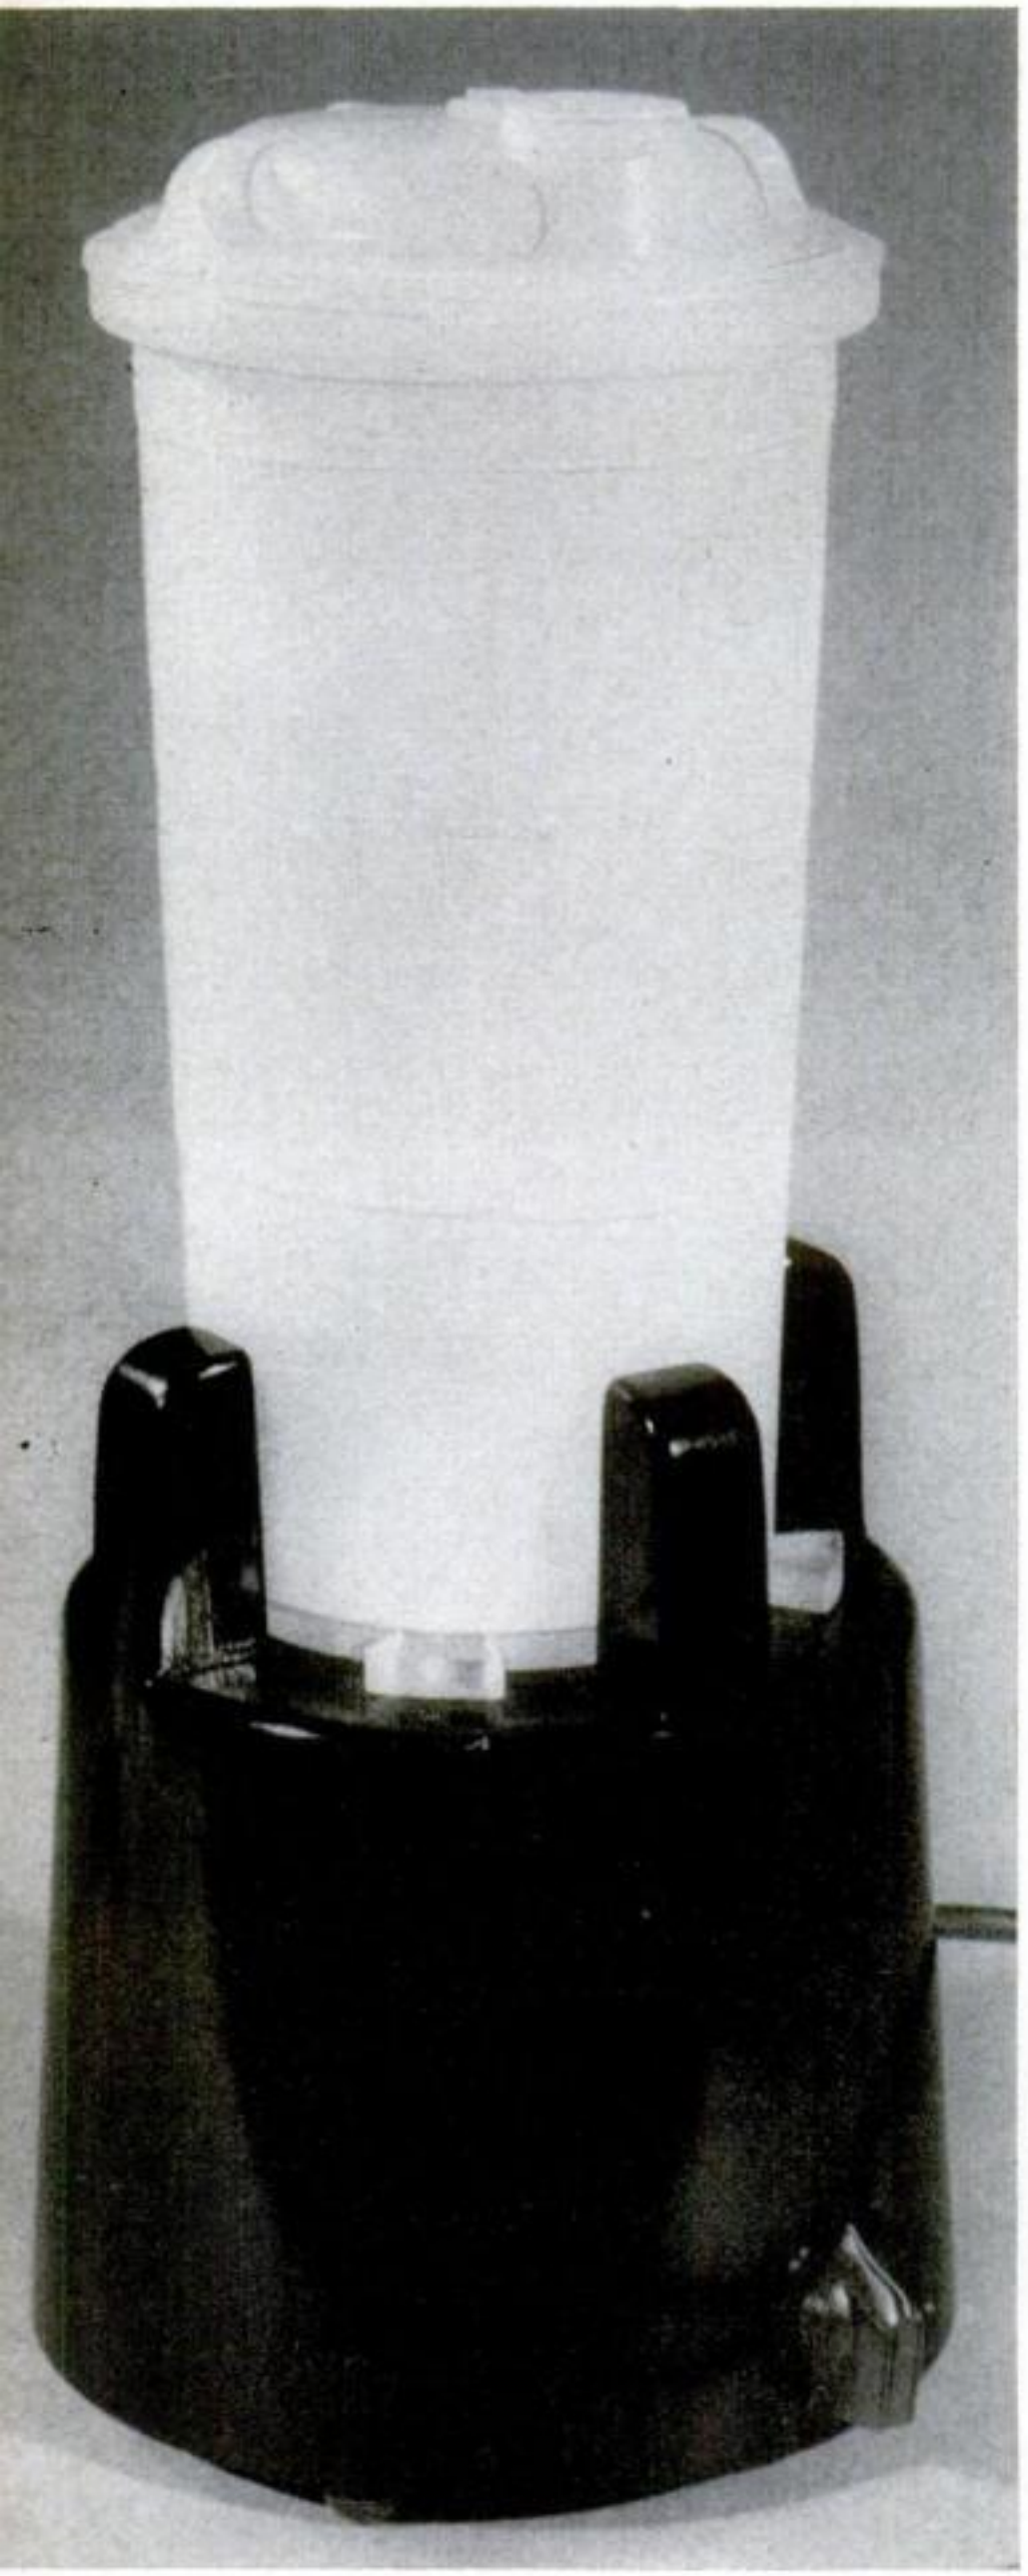

By Herbert R. Pfister

THE blender that I built cost only a fraction as much as a factory-made job, but it performs as well as the best of them. Pour in a glass of milk, add some sliced banana and the banana will disappear in seconds to make a creamy, healthful milk drink. Mixed party drinks take on new flavor when blended violently with cracked ice.

A husky sewing-machine motor housed in a wood base powers the blender. The mixing jar is a separate plastic container with a stainless-steel blending knife mounted on a shaft in its bottom. The shaft turns on a bronze bearing and a ball bearing, both set in clear plastic where they can't come in contact with the food. A rheostat gives a whole range of blending speeds.

The base. A hollow housing for the motor was built up by gluing three wooden rings on top of each other. These are 6″ in diameter and 1½″ thick. The centers were cut out with a circle cutter set to 2⅜″ radius. A disk of ¾″ pine with a 1¾″ hole in its center was glued on top of the rings.


Tilting the table of a disk sander 3° tapered the base as it was sanded round. Four jar supports glued to the top of the base were then sanded to match the tapered sides. The rheostat is mounted in a recess chiseled on the inside near the bottom.

After the wood had been sealed with several coats of shellac, the base was enameled to match the kitchen finish.

Motor and drive shaft. The motor is bolted to a 4¾″ disk of ½″ plywood held by screws inside the base.


Motor torque is transmitted by a short piece of $\frac{5}{16}$″ hexagon rod drilled to fit over the ¼″ motor shaft and pinned to it with a brass escutcheon pin. The top edges of the hex were rounded to slip easily into the socket of an Allen-head

Copyrighted material

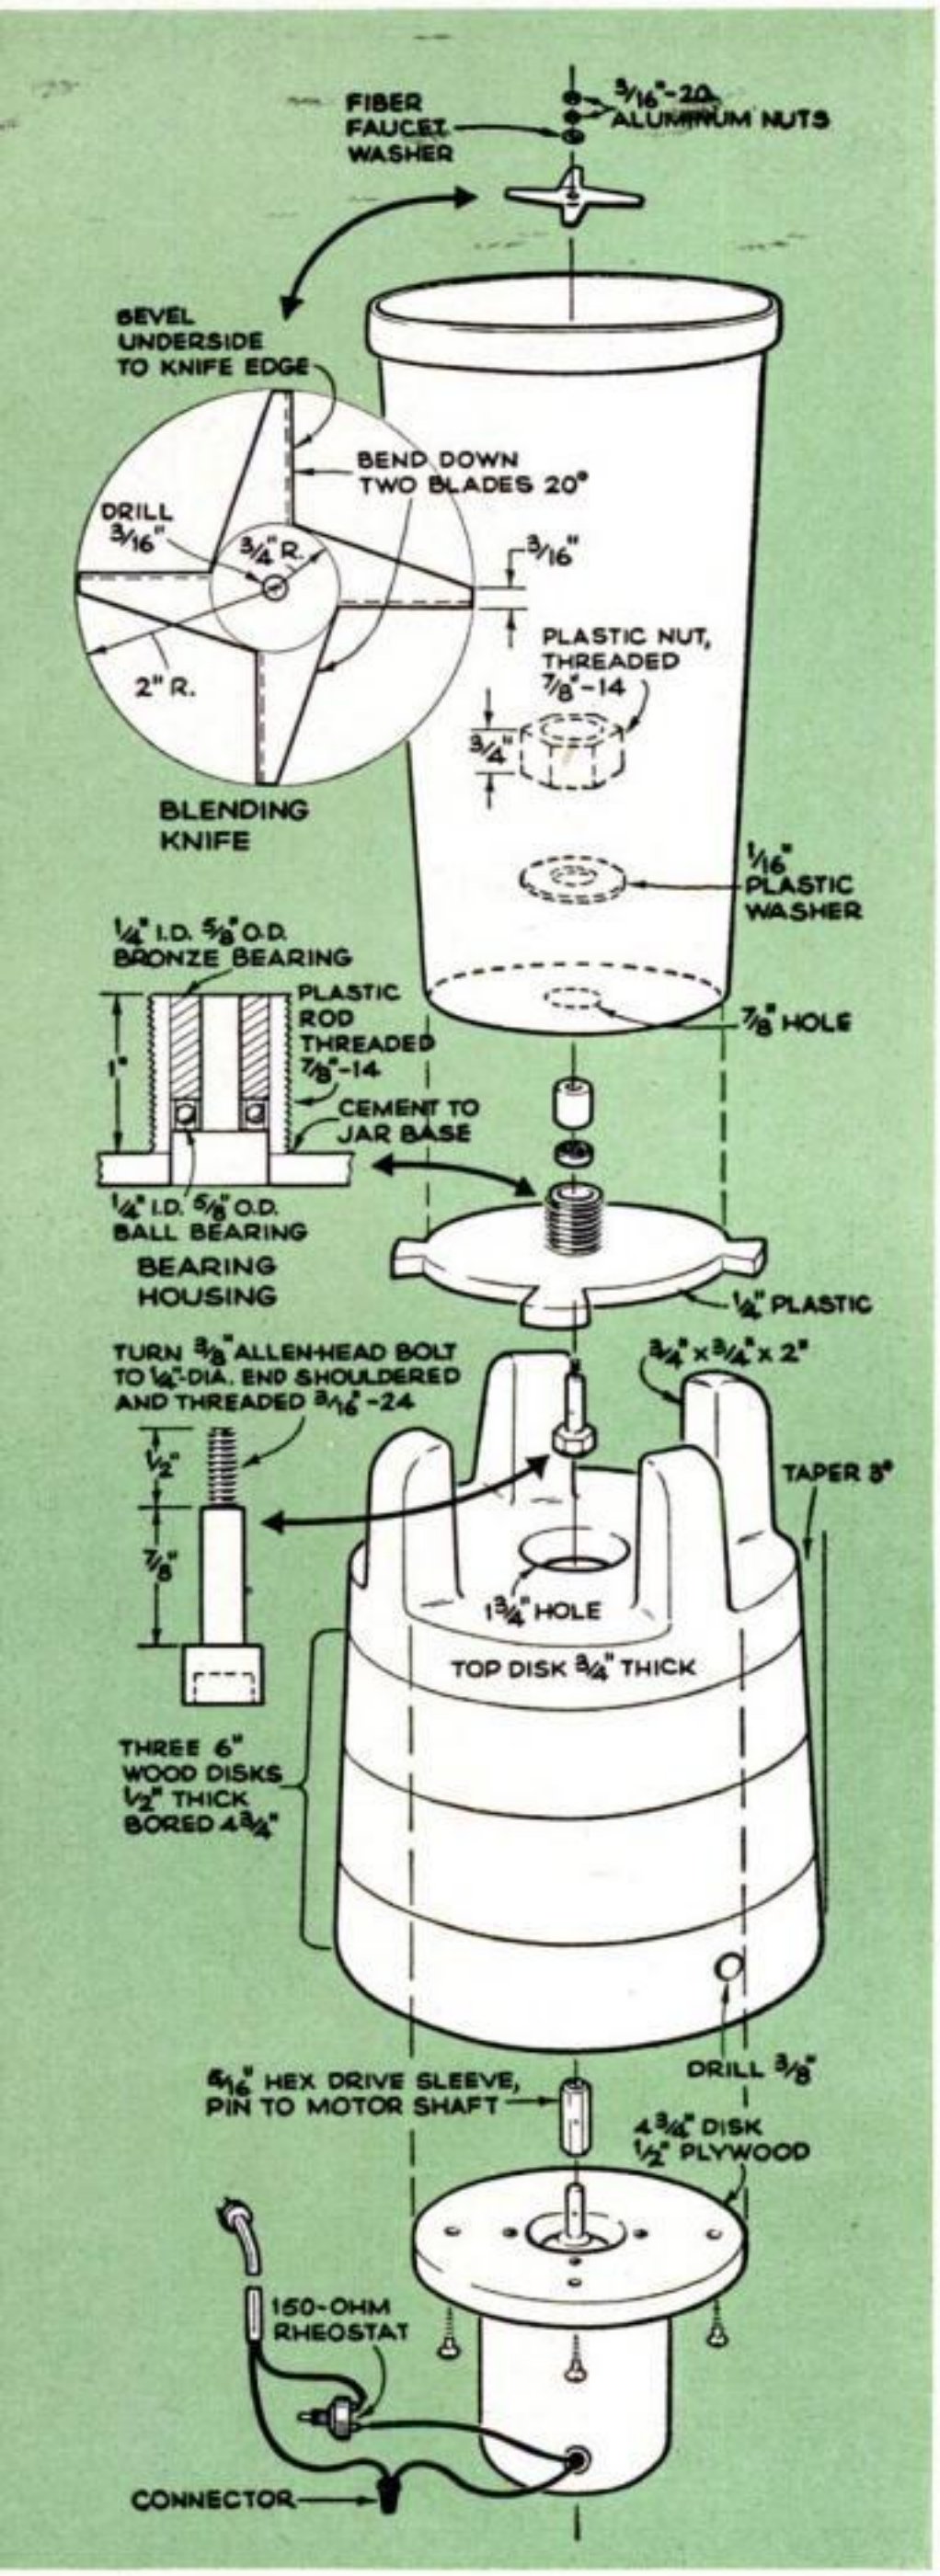




SMALL RUBBER DISKS punched from a tube patch were cemented to the top of the wood base to cushion the blending jar. Note the hex drive shaft protruding from the center hole.

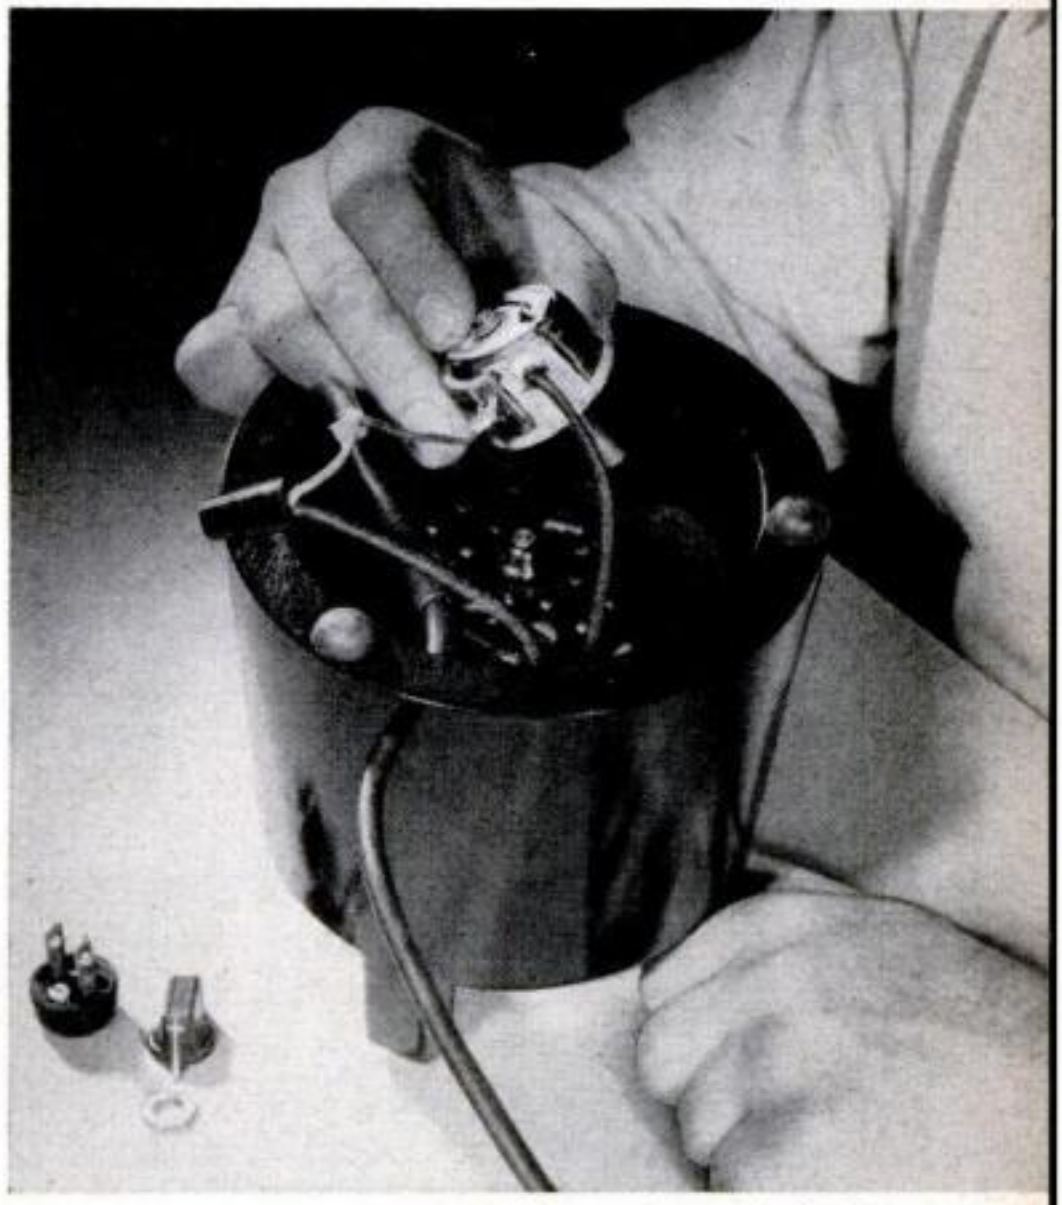


RHEOSTAT IS HOOKED UP with a piece of #18 rubber-covered cord, one leg running through the rheostat, the other direct to the motor. The base rests on three rubber-headed tacks.

Copyrighted material

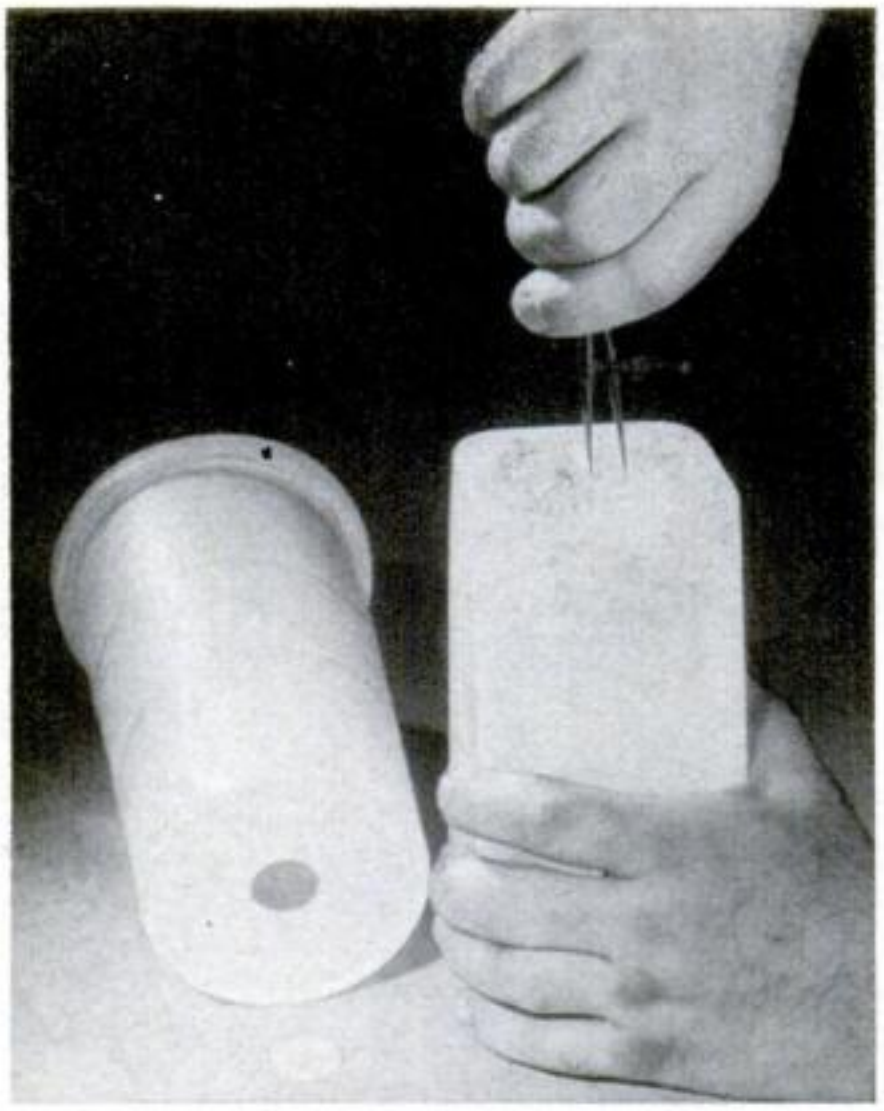

SHARP DIVIDERS set to a 7/16" radius easily cut the desired hole in bottom of blending jar. The dividers can also be used as above to cut a washer from a spare juice container.

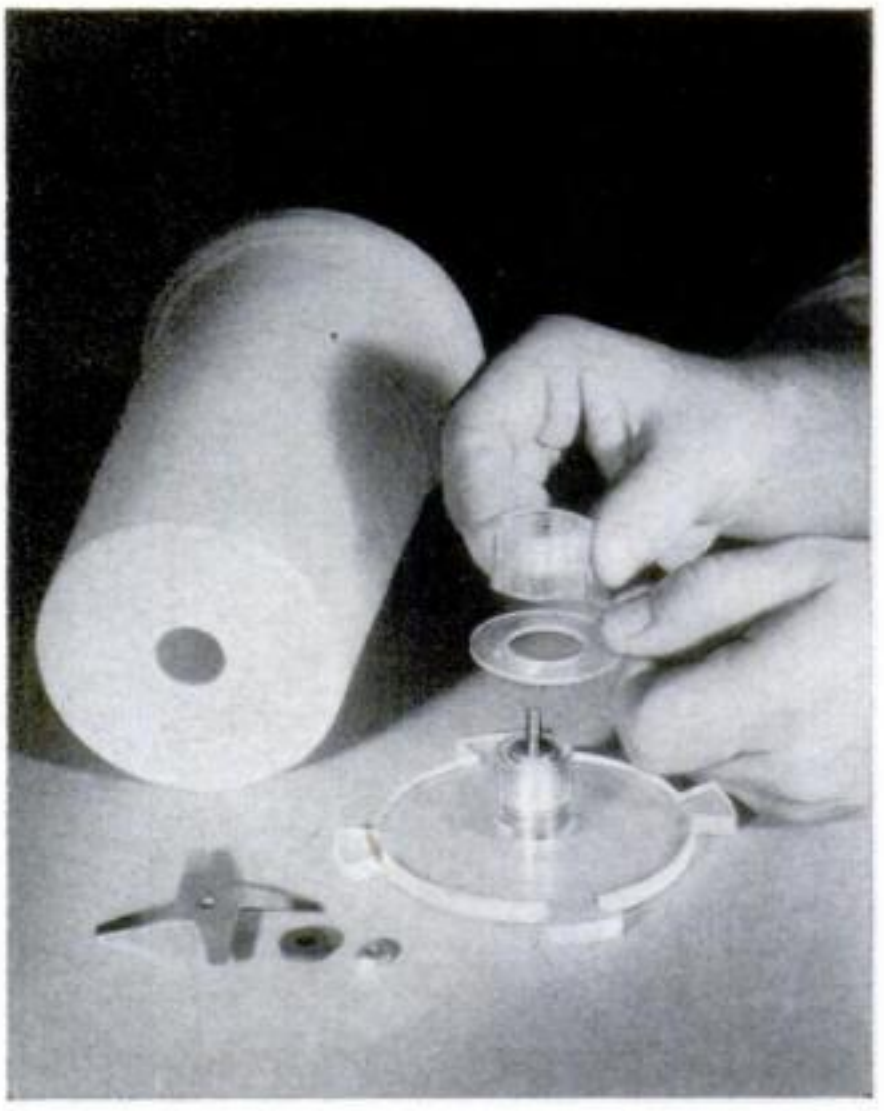

LARGE PLASTIC NUT turns down on threaded bearing housing after the latter has been thrust up through hole in bottom of jar. Aluminum nuts and a fiber washer hold the knife.

screw that serves as the blending-knife shaft.

Blending jar. This is a quart-size plastic juice container with a lock-on top. A ⅞" hole was cut in its bottom. A base for the container, cut from ¼" clear plastic, was shaped so that ears would protrude between the four wood posts of the motor housing.

After a ⅞"-14 thread had been cut in a 1" piece of ⅞" clear plastic rod, the rod was cemented to the center of the container base. Letting the cement dry, I then chucked the assembly in a lathe and made a tight ⅝" hole for a bronze bearing and ball bearing. Plastic solvent softened the bore so that the two bearings could be pressed in place. The seal nut was made from a chunk of ¾" plastic, a large steel nut serving as a template for cutting the hexagon sides. The seal nut was then threaded to fit the bearing housing.

Blending knife and shaft. The knife was hacksawed from a 2½" square of $\frac{1}{16}$" stainless steel. The leading edge of each blade was filed to a sharp bevel. Two blades were bent downward about 10° to agitate food at the bottom of the container.

It was necessary to check several ⅜" Allen-head bolts to find one with the hex socket well centered in the head. The threaded part was turned down to .250" diameter, the end shouldered and threaded $\frac{3}{16}$"-24. A fiber faucet washer and two $\frac{3}{16}$"-24 nuts hold the knife on the shaft.

Operation. Before using the blender, I packed the ball bearing with petroleum jelly. Each time it is used, we put one or two drops of light oil beside the shaft head and stand the container upside down so the oil penetrates the shaft.


When we mix cold drinks, the use of shaved ice or broken-up ice cubes avoids bending the knife blades. It helps to cut foods into pieces the size of lump sugar and run the blender at medium speed for a minute, then turn it up to high speed and keep it churning until all lumps disappear.

To wash the blender, we half-fill the container with warm water, add a small amount of detergent and run it at high speed for a few seconds. END

Copyrighted material




Hints from the Model Garage

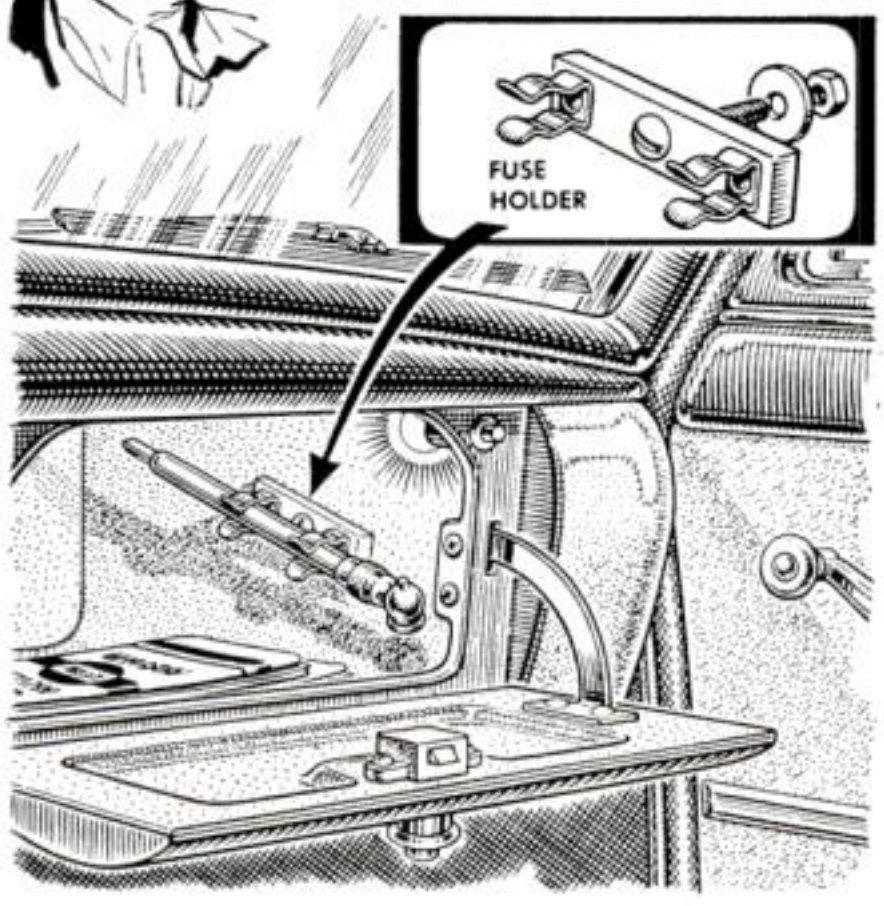


Want to store a tire gauge in a safe and convenient spot? Mount a suitable fuse holder inside the glove compartment and you've got it. The holder can usually be bolted to the side of the compartment.



Removing a window channel to replace the glass is often a tough job, especially if rust has formed on the metal. To save time and temper, apply heat to the bottom side of the channel with a torch.

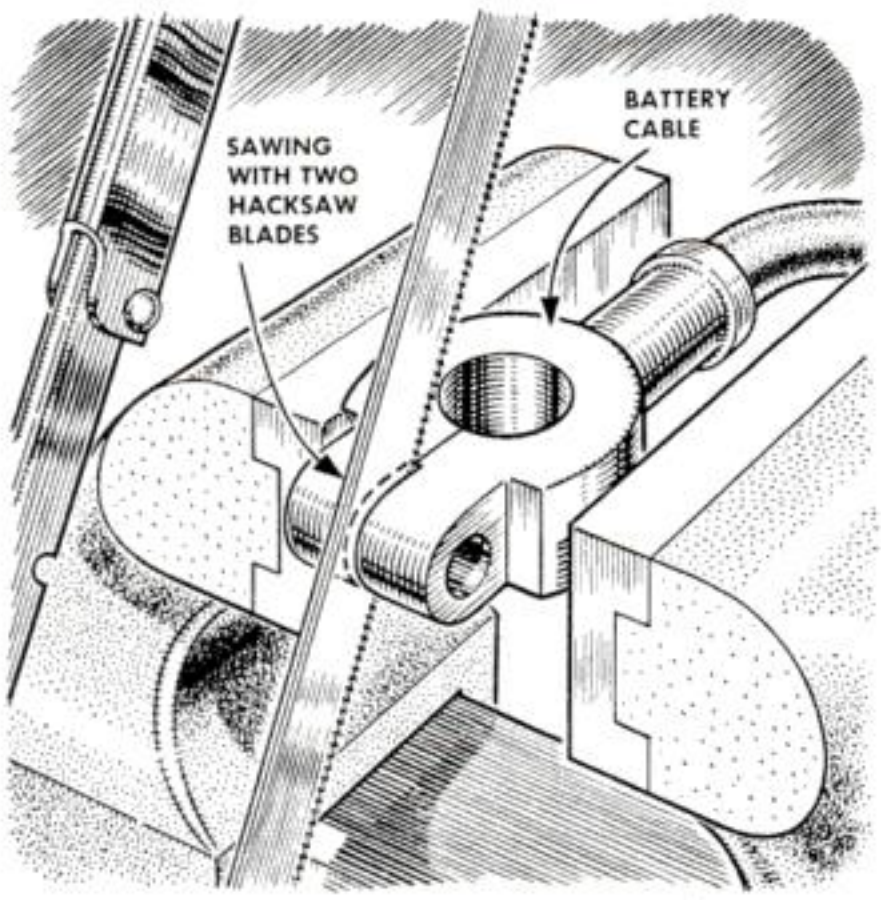


If the hole of a battery clamp is too big to fit snugly on the post, remove the cable from the car, clamp the terminal in a vise, and hacksaw along the lips with two blades. This removes enough metal to fit the clamp to the post.

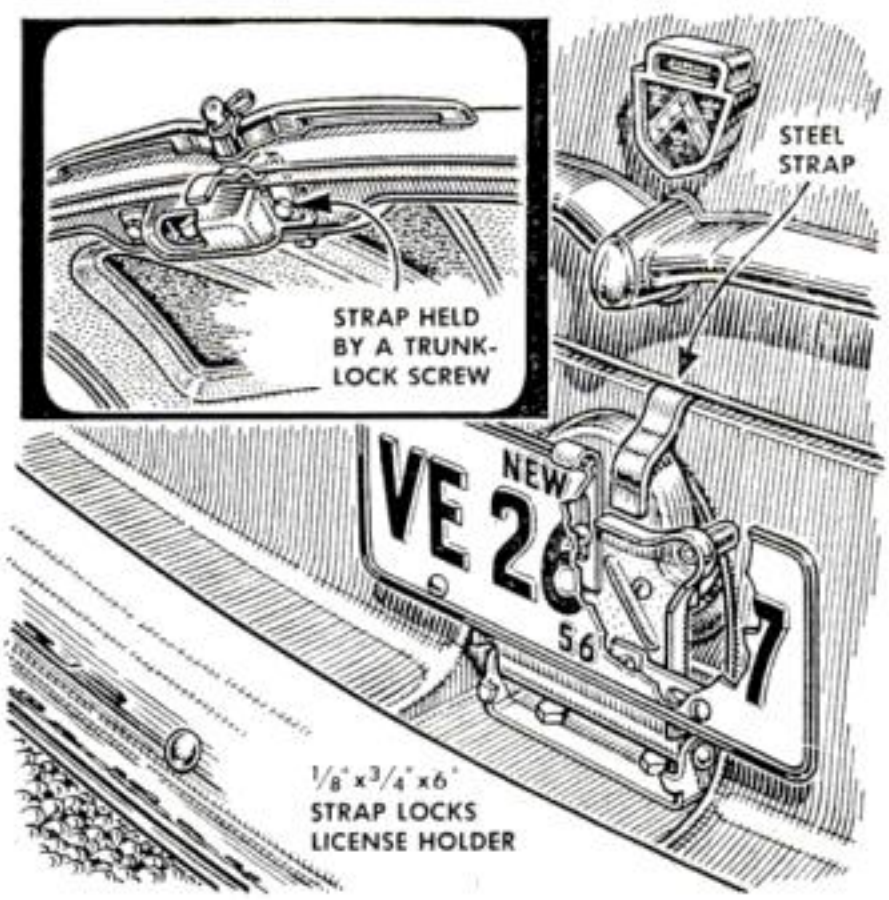


A rear trunk key also serves as a gas-cap key in this setup for a car that has the filler pipe hidden behind a tilt-down license plate. A steel strap projecting from the deck lid prevents access to the gas cap until the lid is lifted.

Please turn the page for more auto hints


More Hints from the Model Garage

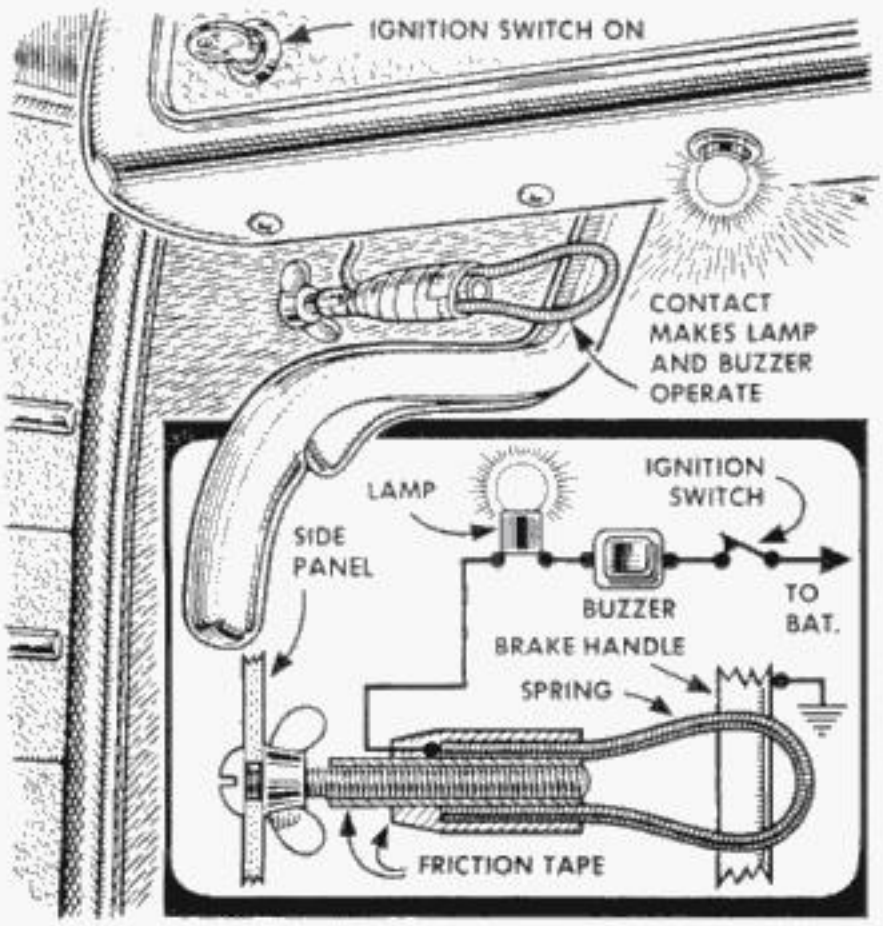

A parking-brake signal will cure the absent-minded who tend to start off with the brake set. A buzzer buzzes and a light stays on until you push the brake handle away from the coil spring, breaking the circuit that is set up when the ignition switch is turned on. Tape insulates the spring from its mounting bolt.

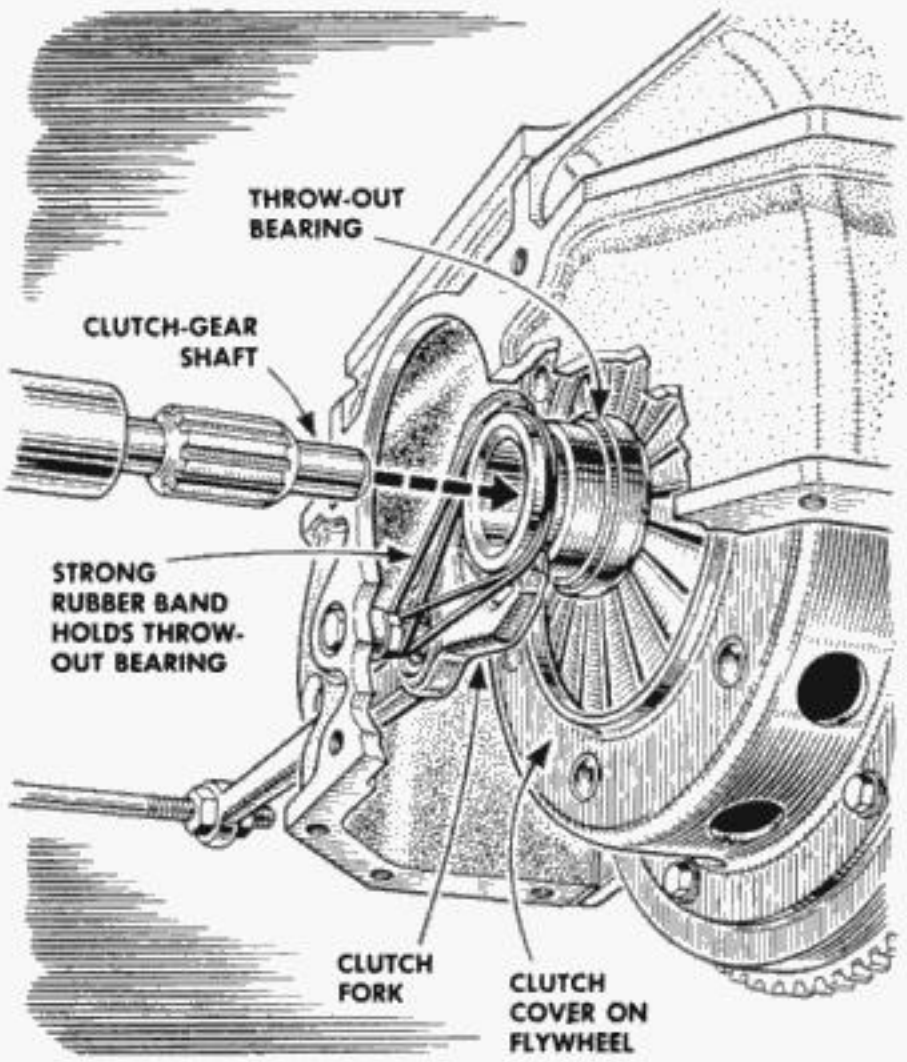

In reassembling a clutch, one mechanic uses a rubber band to keep the throw-out bearing in its yoke while he pushes the transmission clutch-gear shaft through it. Left in place, the band soon breaks and falls out of the way. The idea is especially good for Chevvy clutches but can also be used on some others.

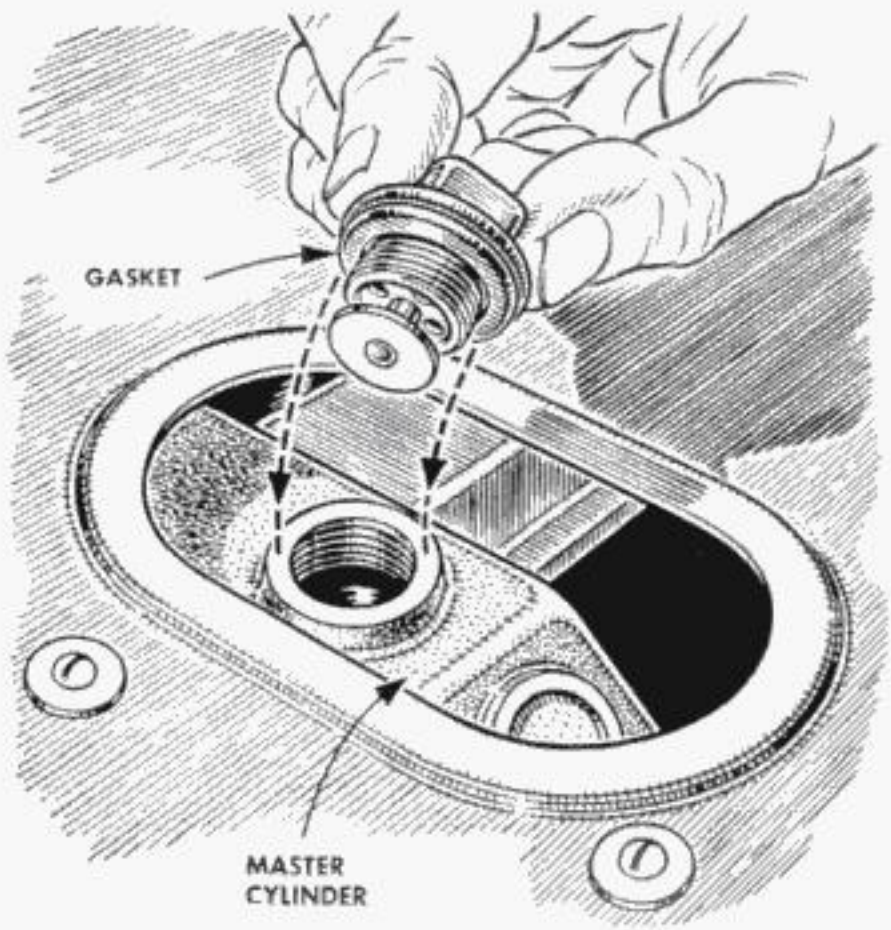

When adding brake fluid to the master cylinder, be sure that there's a gasket under the cap—or it may stick the next time you try to remove it. And don't tighten too hard. Caps sometimes break.




Exhaust gases tend to swirl forward into a station wagon when it is driven with the tailgate down. If you must keep it open, remember to open all the windows and ventilators while you drive.




New for Your Car

1. Store-Away Snack Bar. This metal tray hooks into the car-window channels and serves as a food counter for either the front or rear seat. You can telescope it for storage, expand it to 70″, adjust its height 5″ and level it with the turn of a knob.

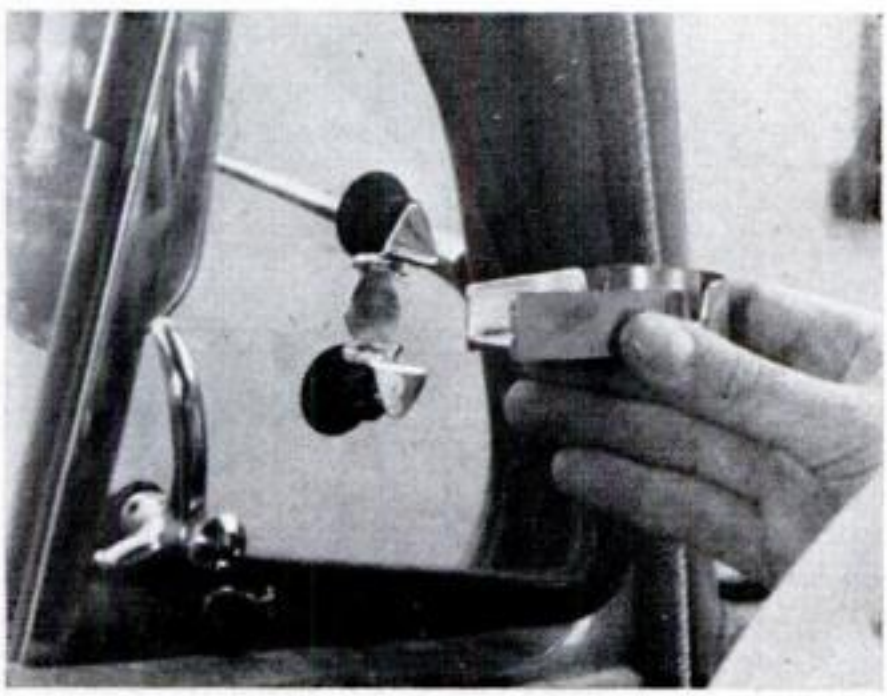



2. Ash Tray Sticks to Vent Window. A driver can flick cigarette ashes into this ash tray without taking his eyes off the road. Suction cups hold it to the vent window. The tray slides in and out.

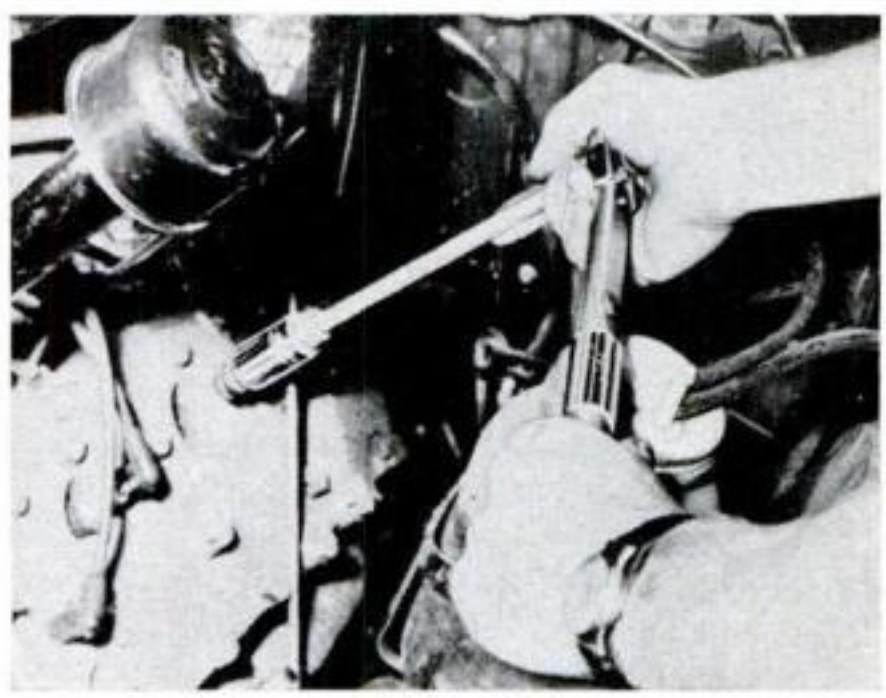

3. Socket Removes Spark Plugs. A new socket with a special rubber insert unscrews hard-to-reach spark plugs. It comes in sizes to fit ⅜″- and ½″-drive socket wrenches with $\frac{13}{16}$″ hex holes.

4. Pencil Measures Distance. Roll the revolving head over a route map, and a mechanism in the pencil below registers inches on the side scale. Take this and the fraction shown on the head, and convert it to miles from the map scale.

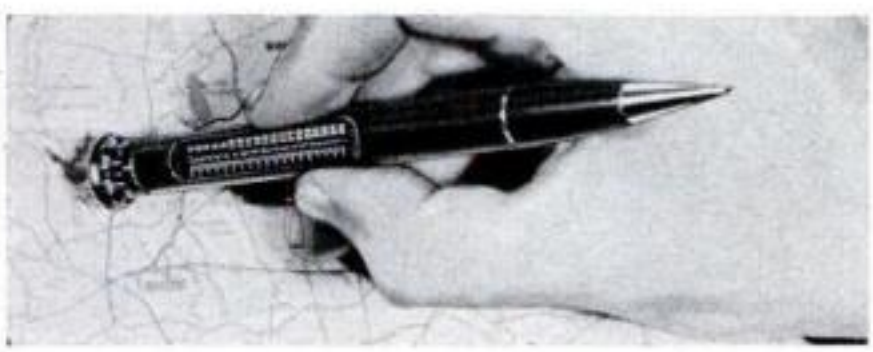

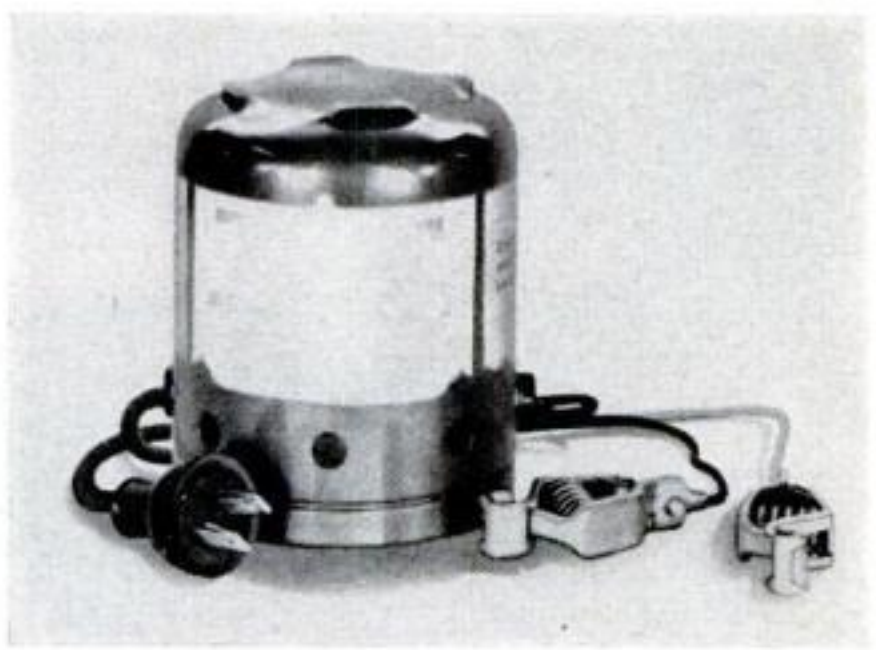

5. Low-Cost Battery Charger. This unit uses house current to bring a weak 6- or 12-volt battery up to starting strength within a few hours. The juice cuts off when the battery is charged.

Further information on these new car products can be obtained from: 1. Cartra Mfg. Co., 1924 Edgewater Terrace, Topeka, Kan.; 2. Petoskey Mfg. Co., 505 Liberty St., Petoskey, Mich.; 3. P & C Tool Co., Box 5926, Portland 22, Ore.; 4. Gift Horizons, 475 Fifth Ave., New York City 17; 5. Buckeye Stamping Co., 555 Marion Road, Columbus 7, Ohio.

Copyrighted material



Overhauling

By J. W. Rocke Jr.

ROLLING out my power mower that Saturday morning, I spotted Cam Evans hauling his own out of the storage shed and waved to him.

Cam waved back and, pointing to his mower, did a quick pantomime of a fellow rolling up his sleeves to go to work. Having just overhauled mine, I nonchalantly wound up the starting cord and gave it a yank. I had just test-run the engine, so it caught immediately.

"JUST PUT IN NEW RINGS," I yelled. "DID THE JOB IN THREE HOURS ON A BET . . ."

Right there my engine quit with a couple of sharp knocks. Shaking his head in mock sympathy, Cam lowered his machine into his basement. I yanked the starting cord. And yanked. And yanked . . .

A ring job backfires. "So I bought this wrench set," I explained to Cam 10 minutes later, "and Madge kidded me about them. I said they'd save us money —bet her the price of a new hat that I'd have the mower engine overhauled before she got back from a matinee."

Cam was brushing off his mower. "You've won, haven't you?"

"Yeah. Only it won't start, and she'll never admit I won if it isn't running."

"Want me to come look at it?"

"Sure do. The trouble is," I said as we went up, "there's no compression. Maybe the new rings aren't seated yet."

"It may help to squirt some oil through the spark-plug hole," offered Cam. "That may give enough compression for starting. You have an oil can with you. Might as well try it."

"Good idea." I unscrewed the plug and, squirting oil in, turned the starting pulley while watching the top of the piston through the hole.


It didn't budge.


"Hey, the piston just stays up!"


Cam peered over my shoulder. "Afraid

Copyrighted material

Your Lawn-Mower Engine

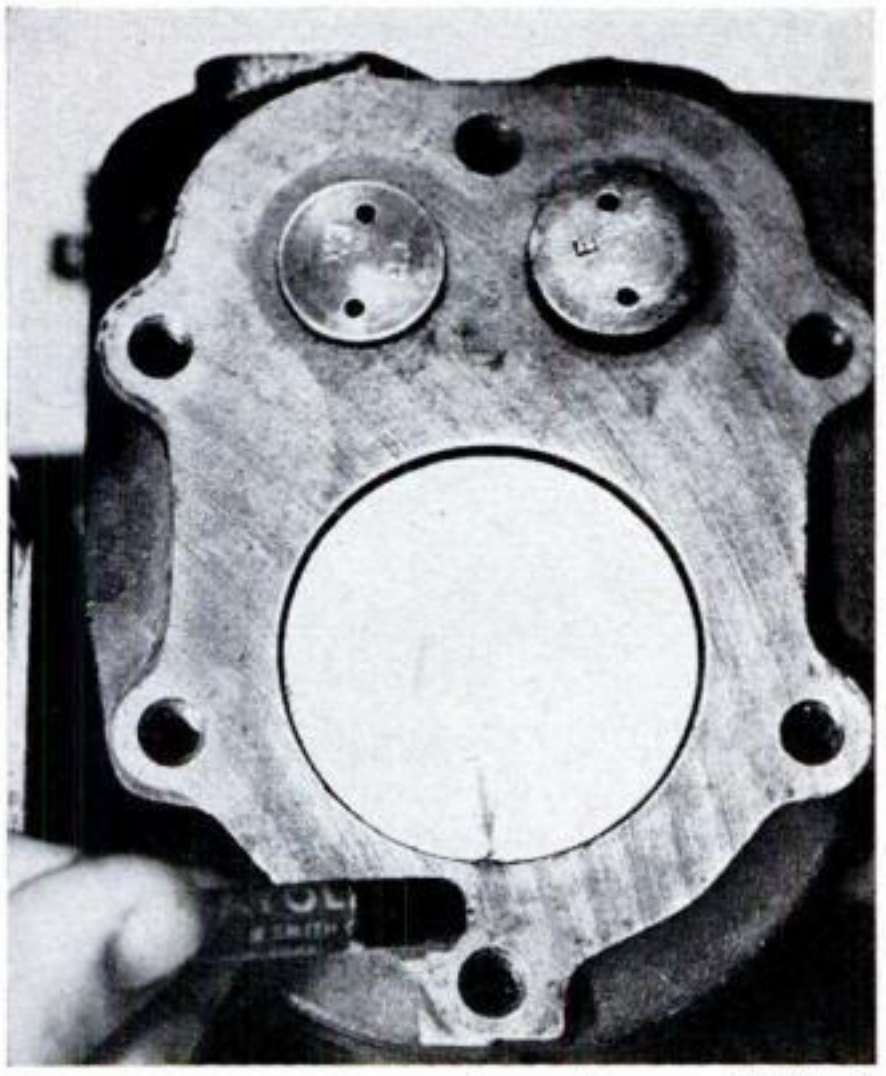

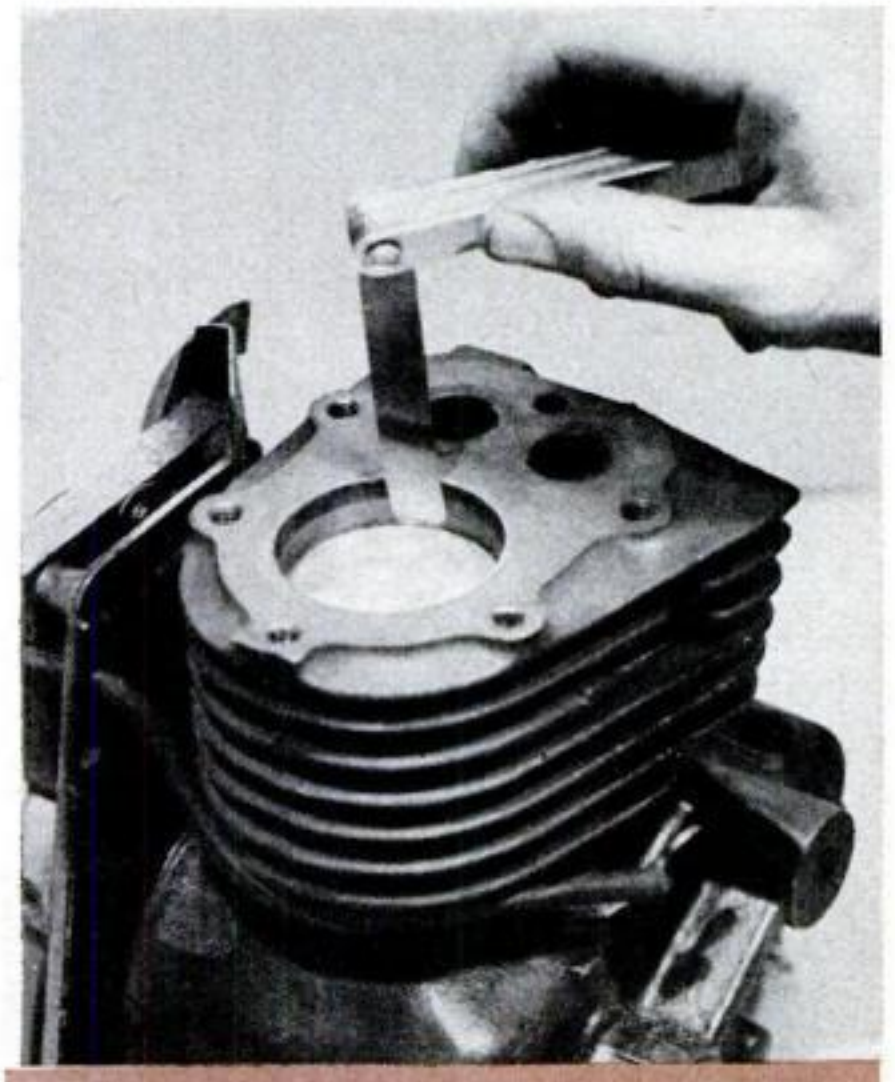

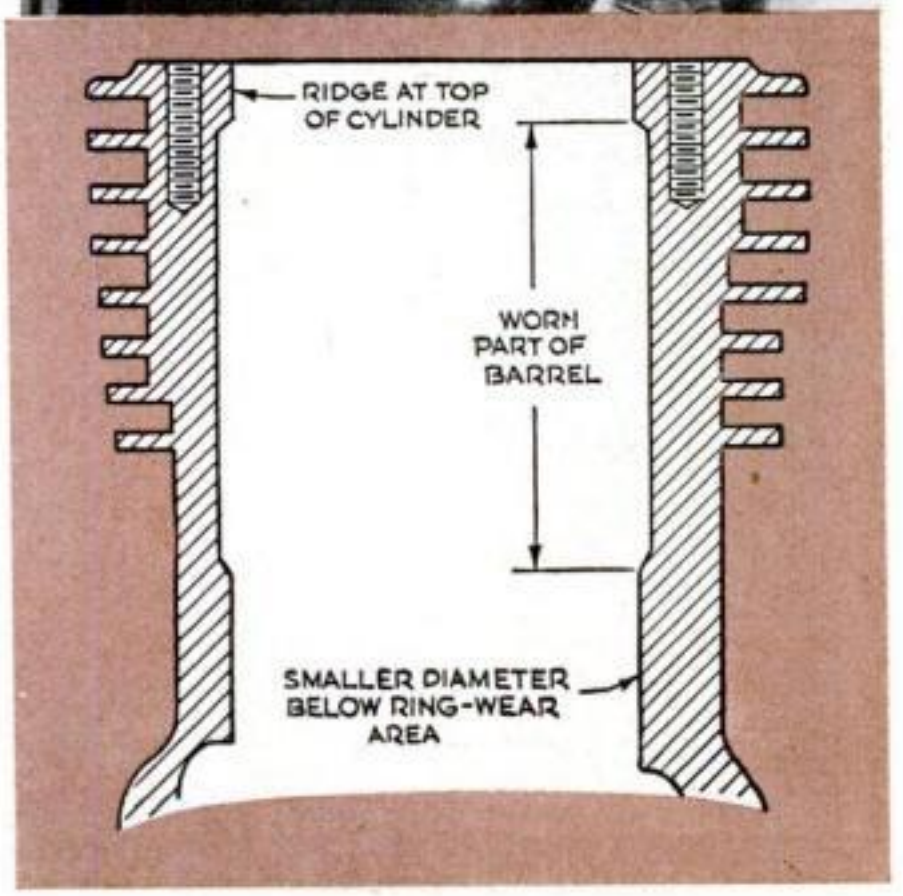

A CRAYON MARK on the piston and block (above) helps orient the piston the same way on reassembly. Thickness gauge (above right) indicates bore wear. Caution: if fitting a new piston, push gauge and piston down to bottom of stroke, where it is tightest. Drawing shows characteristic pattern of cylinder wear.

you're right. Better take the head off."

We wrestled the mower into Cam's shop. After taking the head off, I turned the shaft over. The piston stayed almost flush with the top of the block.

Shoving it down with a hammer handle, I gave the pulley another twist. With a sharp click the piston head popped up —and fell out on the bench.

Cam picked it up and turned it over. You could see that the head had broken off in the top ring groove.

"How much ring gap did you leave?" Cam asked. "A thousandth or two?"

I shook my head. "I got oversize rings. The salesman said they'd be best for a worn engine. They were so tight I could hardly get them in. So I'm sure there was no gap."


"But there should have been," said Cam. "You better rush downtown for a new piston. I'll explain later."

Why the piston broke. In 30 minutes I was back with an oversize piston that the clerk said would fit.


"He's probably right. But why not check and make sure?" asked Cam, handing me a thickness gauge.

With the new piston down to its lowest

Copyrighted material

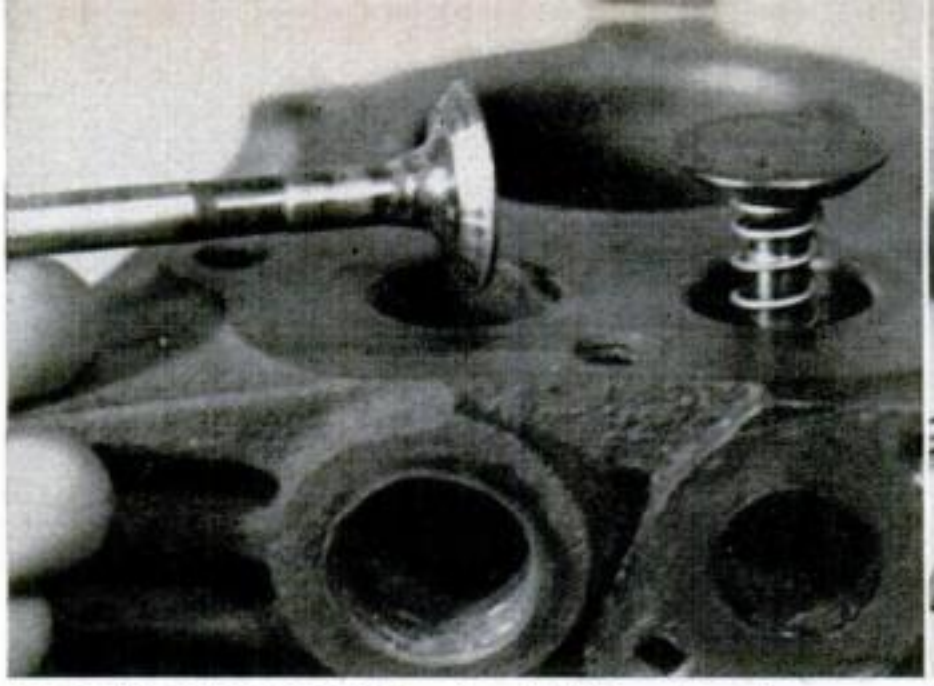

IN GRINDING VALVES, put a light spring temporarily under valve. Twist the valve back and forth but don't make complete turns. Let spring lift valve frequently to allow fresh compound to flow in. To check job, make soft-pencil lines across seat. Drop valve in place and twist one-eighth of a turn. Marks should be wiped away evenly all around on seating area.

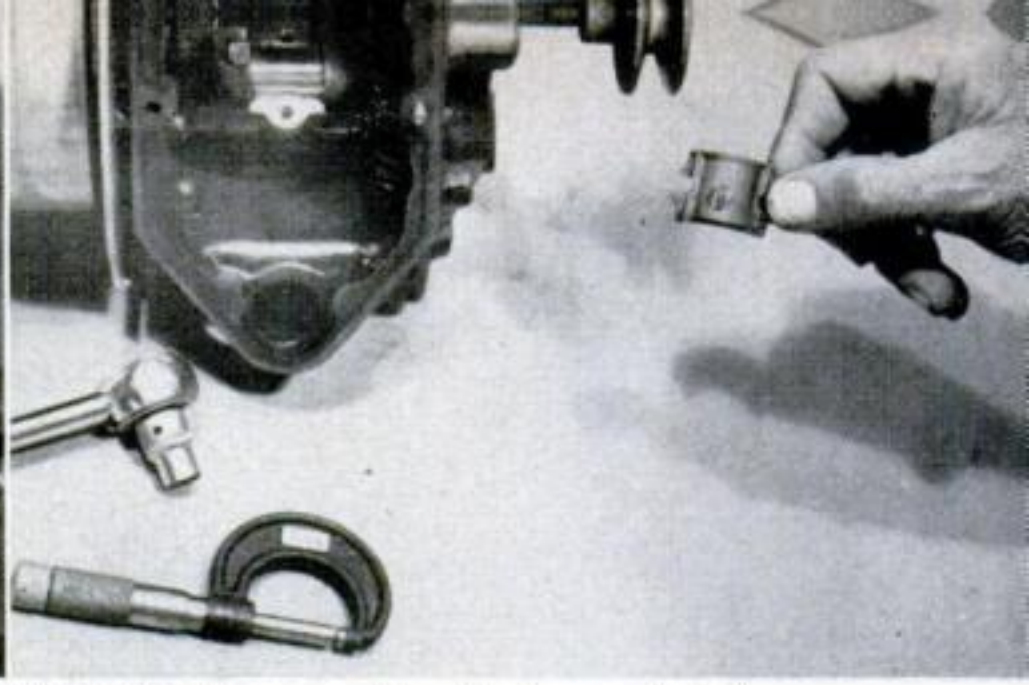

BIG-END CAP may already be marked for reassembly; if not, put punch marks on it and the rod. Bearing clearance can be checked by putting a shot-sized bit of rosin-core solder under the cap and tightening it. Remove and measure flattened solder with a micrometer. If clearance is excessive, dress off flat surfaces of the cap and, in extreme cases, of the rod big end also.

position, I could just get the gauge in alongside it.

"That's okay," Cam pronounced.

"Now to snap on the new rings before Madge gets back," I said.

Cam said nothing until I was flexing my thumbs for the job of wangling them on. Then he came over.

"Want to check ring gaps first?"

"Guess this is where I went wrong before," I admitted. "What is ring gap?"

"Well, a ring is a rolled-up length of metal. When hot, it expands. There has to be a small gap between the ends to let it stretch. Otherwise, it will jam in the cylinder."

"Uh-huh. So that's what happened."

"That's right. To check the gap, push the top ring into the cylinder."

Wear leaves ridges. The ring was a tight squeeze in the top of the bore.

"Shove it down," said Cam. "The cylinder isn't worn up there because ring travel never goes that high."

Because the ring was cocked in the cylinder, I pushed it down with the piston to straighten it.

"Good dodge," Cam nodded. "Now try the thickness gauge in the gap."

"Three thousandths," I reported.

"Not enough for the top ring. You want at least seven thousandths. File it with this." Cam gave me an ignition-point file.

While he returned to his own job, I fitted all three rings. Then I noticed he was using a tool that I had never seen.

"It's a ridge reamer," he explained on noticing my interest. "I borrowed it, and it's a good thing I did. Look at this."

He pointed to the top of the cylinder bore, from which he had removed the piston.

"Mine's an older engine, so the cylinder is worn. See that ridge a little way down? That's where the upper ring stops at top dead center. Above, the cylinder is its original diameter. Below, it's so worn you can see the step."

"But if the top ring never goes past it, what does the ridge matter?"

"A new ring may hit it. Besides, the oversize rings I'll have to use are bigger than the original ones. They'd never go past this part. So I'll ream it out."

Cam turned the tool slowly. When he was done, there was no sign of a ridge.

"Nice work," I said. "Well, I'd better get my rings on before Madge shows up."

"It's easier to check side clearance," Cam said mildly, "before they're on."


"Guess I was cutting corners again. What's side clearance?"


Cam laughed. "It's the elbow room each ring has in its groove. Too much causes early wear or breakage. Too little may make it seize in the groove so that it can't seal against the cylinder wall. Look, I'll fit one."

Smearing valve-grinding compound on a piece of plate glass, he laid the ring flat and rubbed it about with a circular motion. Then, he washed the ring in ker-


Copyrighted material

How to fit new piston rings

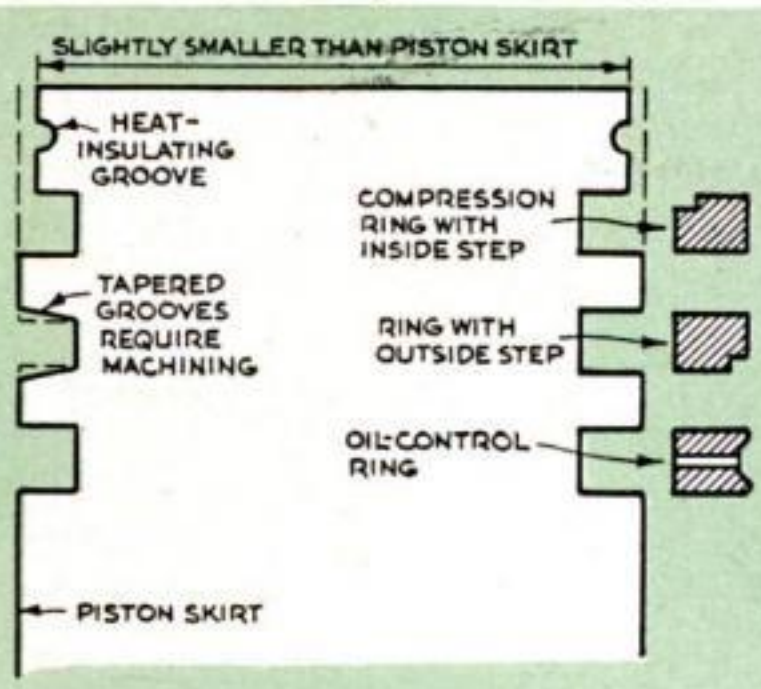

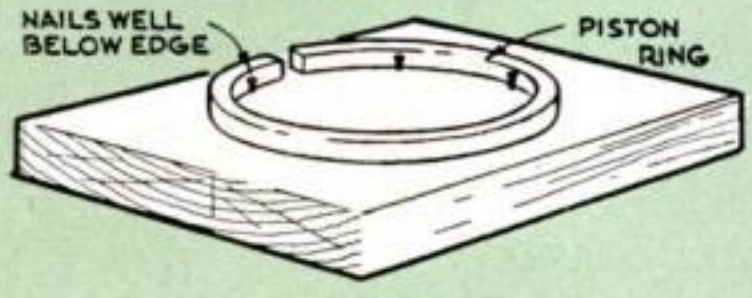


WORN PISTON GROOVES or excessive side clearance can lead to ring breakage. Too little clearance can make a ring seize in groove or cylinder. A holding board with the ring sprung over a circle of nails provides even lapping pressure.

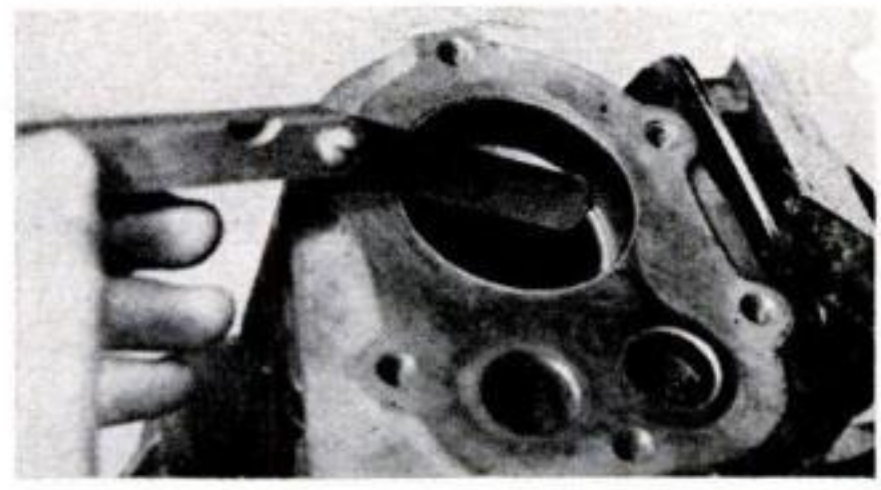


PUSH RING DOWN with the piston to insure having it square to the cylinder axis. Then insert gauge leaf to check the end gap as shown above. The top ring requires the biggest gap.



TO ENLARGE END GAP, use an auto ignition-point file like this. Take care to keep the ring ends square and parallel. Recheck the gap frequently as shown in the top photograph.

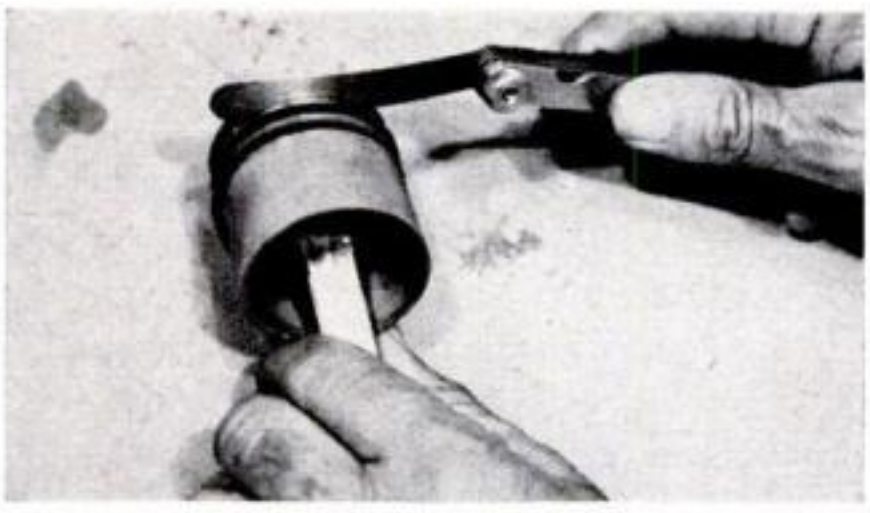

MEASURE SIDE CLEARANCE with ring in groove as above, or held in the groove from outside. Even clearance too small to admit .0015" gauge is all right provided ring is free in its groove.

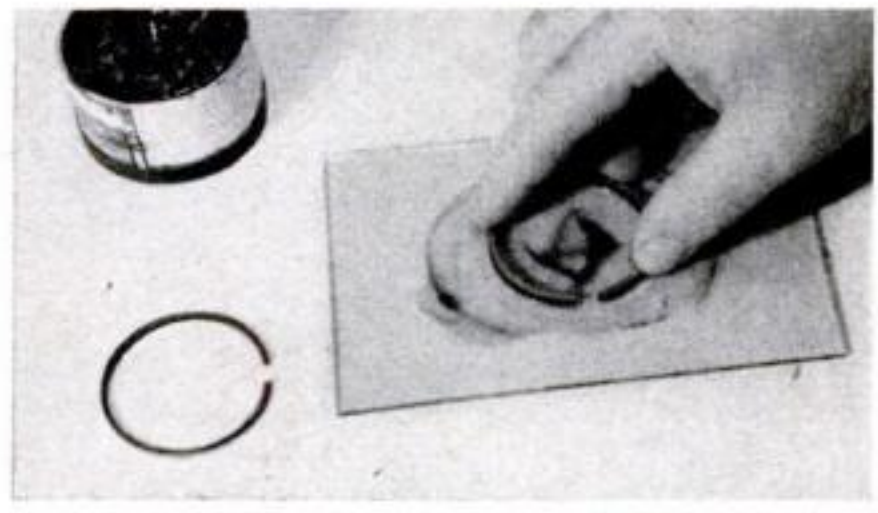

LAP PISTON RINGS, if they are a tight fit in their grooves. Use either valve-grinding compound on a piece of plate glass (above) or fine abrasive cloth tacked face up on a perfectly flat board.

osene and tried it in the piston groove.

"One-and-a-half thousandths is okay," he said. "Or even less if it's not tight."

My rings were tight. I lapped them until the thinnest gauge would just fit into the groove with them.

"Hope I don't break any getting them on," I said. "I busted one last time."

Cam nodded. "It's a touchy job." He gave me three strips of thin, stiff sheet metal. "Try pushing the rings down over these. Slide the strips out when each ring is over its groove."


It took care, but the job was easier than the first time. I had all three rings on when a heavy body seemed to fall down the cellar steps. It was Bud Nolan.

"Hi, Mr. Evans. Hi, Mr. Foster."


Cam looked at me. "Bud's record from the front door to where he stands is three seconds flat. What's up, Bud?"

The teen-ager's brow wrinkled. "I'm


Copyrighted material

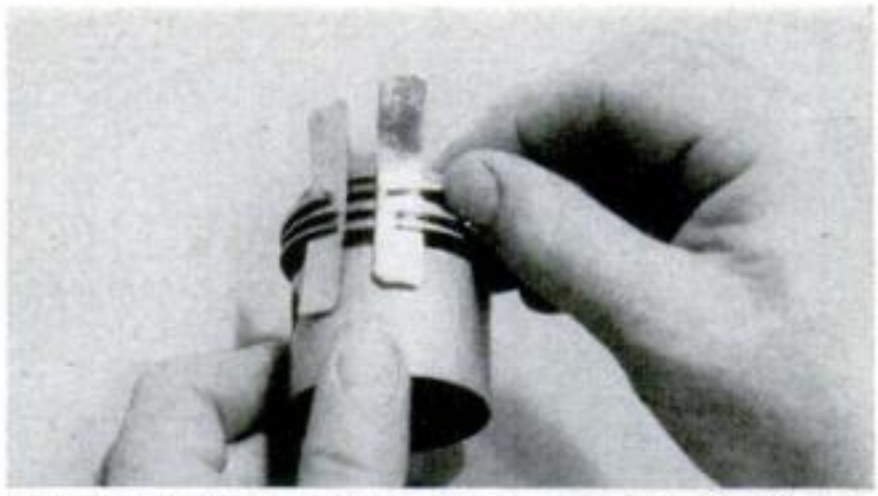

BEING BRITTLE, piston rings may break if you spring them too much on reassembly. Thin metal slides will help prevent this breakage.

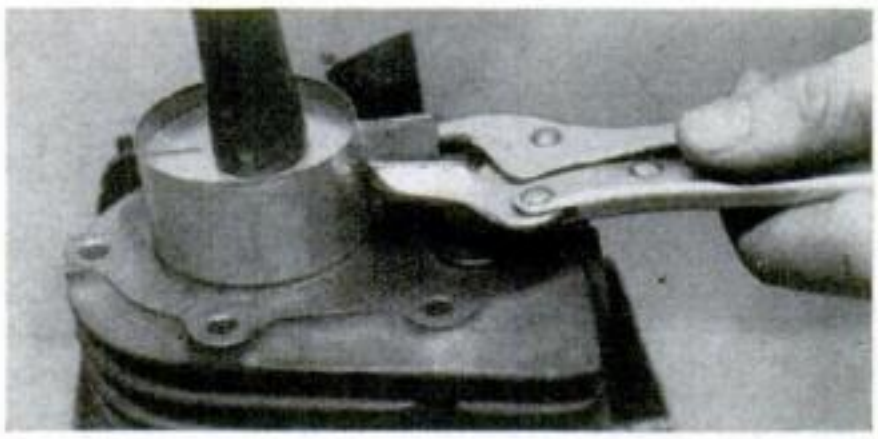

A RING COMPRESSOR snipped from tin-can stock simplifies the task of sliding the piston in. Tap piston top with a wooden hammer handle.

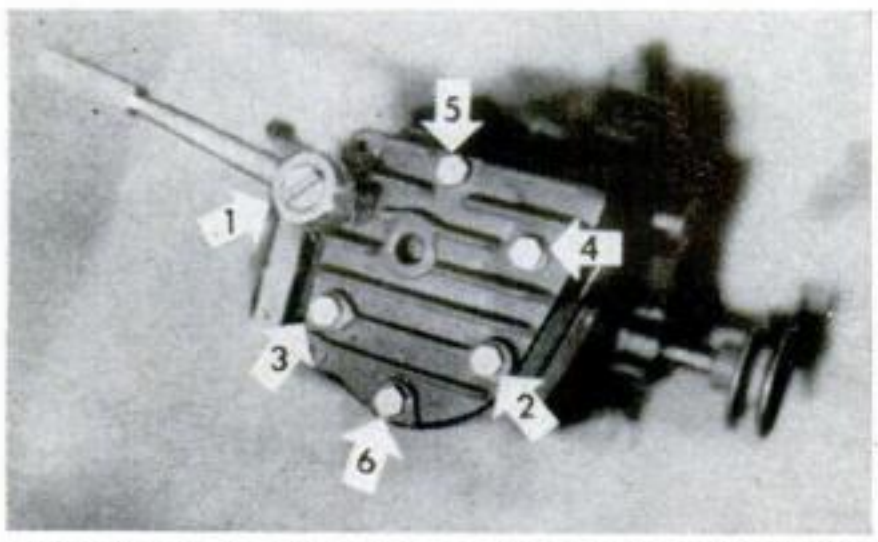

TIGHTEN THE HEAD evenly, drawing up the bolts a little at a time. If your engine manual doesn't give the sequence, the one shown will do.

either in business, or in plenty trouble."

"Bud found a bargain in a power mower," Cam explained. "He's planning to buy it to earn money mowing lawns."

"I did buy it," said Bud. "But Mr. Bellefont wouldn't let me try it—I had to take it as is. And now it won't start."

Cam frowned. "Must be that two-cycle job he bought three years ago. He swore it was a lemon, and switched to a four-cycle machine."

"I got stung, huh?" quavered Bud.

"No, I think the trouble is Mr. Bellefont, not the engine. Let's see."

While they carried Bud's job into the cellar, I oiled the rings on mine, put the bearing cap back, and replaced the head. Then Cam helped me get the machine outside. I restarted it, and that staccato pop sounded like Beethoven's Fifth to me. I let it warm up, then shut it off and returned to Cam's workshop.

"Works fine," I reported.

Hunched over Bud's machine, Cam only nodded. "These two-cycles start fine," he said, "if you keep 'em clean. This one has reed valves in the intake. The air cleaner is all choked up and the chances are the valves are, too. Take them off, Bud, and rinse them in gas."

Back at his own engine, Cam laid a tiny bit of solder in the big-end cap, tightened it, and took it right off again. With a micrometer, he measured the flattened pellet. Then he stroked the bearing cap along a wide file.

"No wonder the bearing was a bit noisy," he said. "This will quiet it."

Off with its head. His engine reassembled, Bud was spinning it madly.

"Hold it," said Cam, and Bud paused, panting. "Did you try the spark?"

"Sure—look." Bud held a hammer head to the plug and twisted the engine. A spark snapped over. "But those valves had grass in them all right."

Cam nodded. "Is it getting gas?"

"Oh sure, the tank was half full."

"That gas-and-oil mixture causes clogging if it's left in all winter. Drain the tank, Bud. Blow out the gas line, and clean out the sediment bowl."

From outside I heard our car. "Madge is back," I said. "Thanks again, Cam."

Going upstairs, I spun the starting pulley over. There was only a sigh from the engine. As I spun it again, the engine wheezed over the compression stroke. I turned to see Cam watching.

"Sounds like a leaking head gasket."

"But I used a new one, and pulled the cap screws down hard, all alike."

"Spin it," Cam said, and while I did so he squirted oil along the head joint. It bubbled madly. "Better yank the head again," said Cam.

With the ratchet wrench, I set a record


[*Continued on page 268*]

Copyrighted material


7 PROJECTS FOR THE Gardener




RUBBER-TIRED HOE. A garden cultivator becomes a lot easier to use if you replace the iron wheel with a bicycle wheel. Inflate the tire just enough to give it a slight springiness.

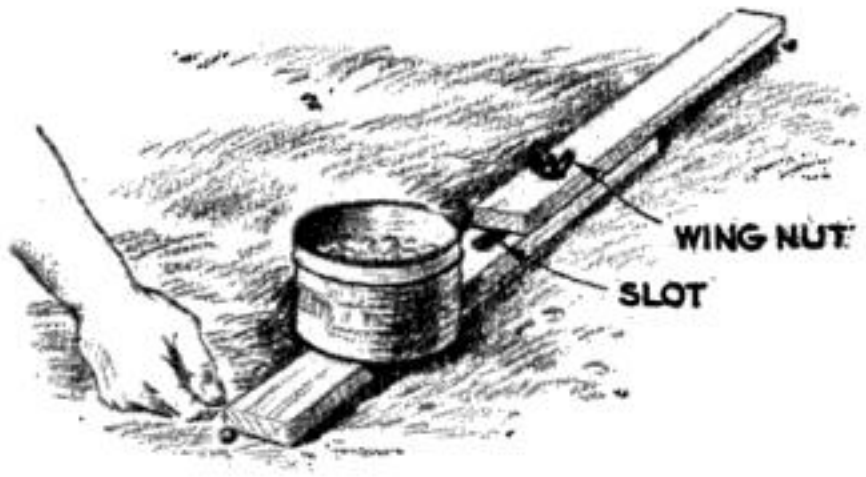


SEED SPACER. This adjustable spacer eliminates guesswork in spacing seeds in the row. Set it with a ruler to the spacing given on the seed packet. Carry your seed supply in the can.

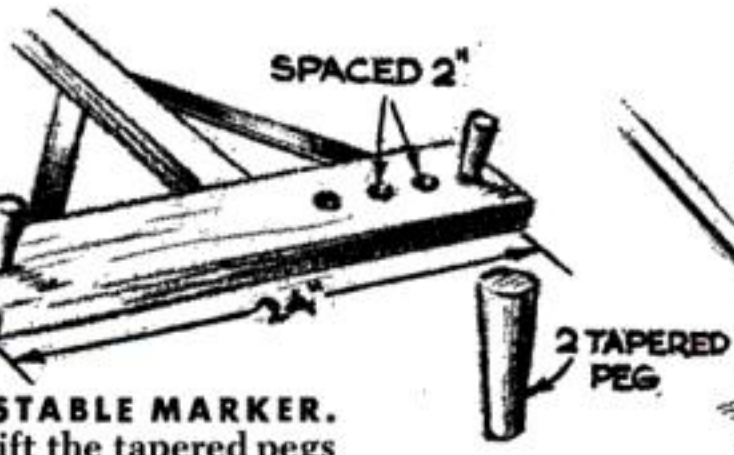

ADJUSTABLE MARKER. You shift the tapered pegs in this rake-like marker to vary the distance between rows as specified to suit different vegetables or flowers. Make it of pieces of scrap wood. Use stakes and a cord to mark off the first row.

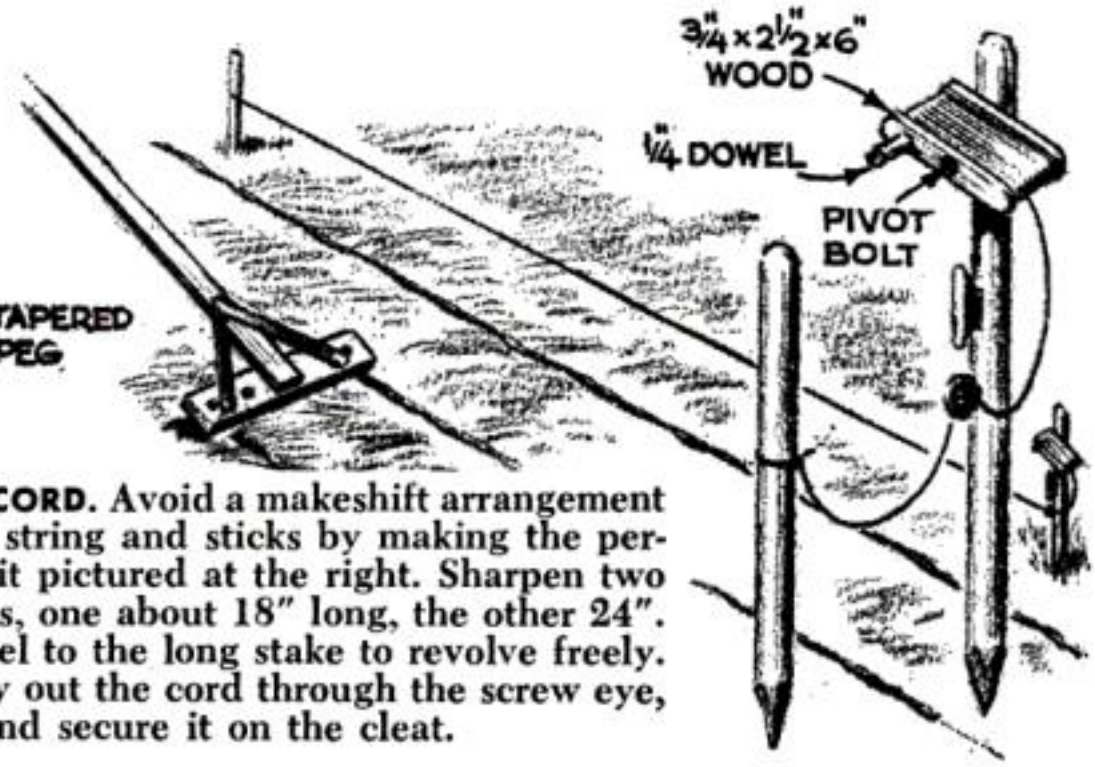


MARKING CORD. Avoid a makeshift arrangement of tangled string and sticks by making the permanent unit pictured at the right. Sharpen two broomsticks, one about 18" long, the other 24". Bolt the reel to the long stake to revolve freely. To use, pay out the cord through the screw eye, pull taut and secure it on the cleat.

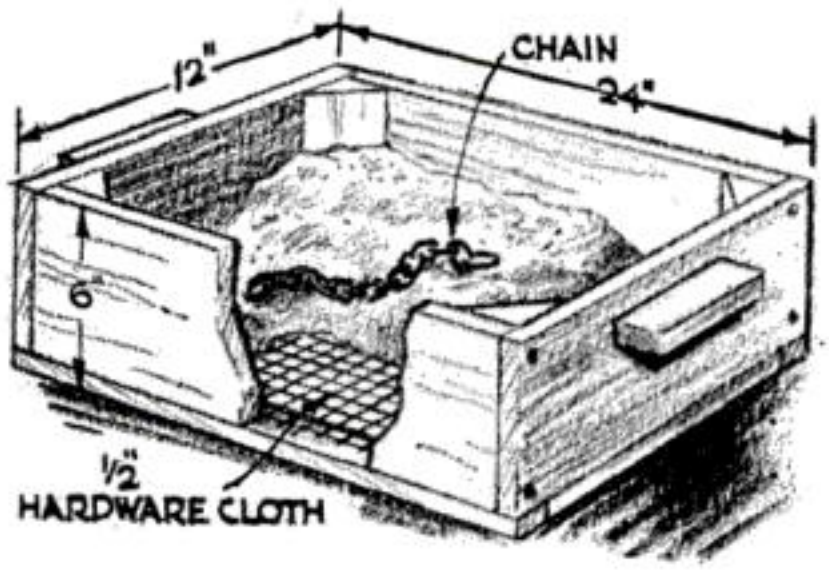

COMPOST SIFTER. This box is handy for removing the larger chunks remaining in composted material. A piece of fairly heavy chain helps force the compost through the sieve as you shake the box. Wood strips hold the hardware cloth to the bottom of the box.

GRADUATED PAIL. Mixing liquid fertilizer will be easier if you paint on the markings. Use a quart measure and water to find the levels.

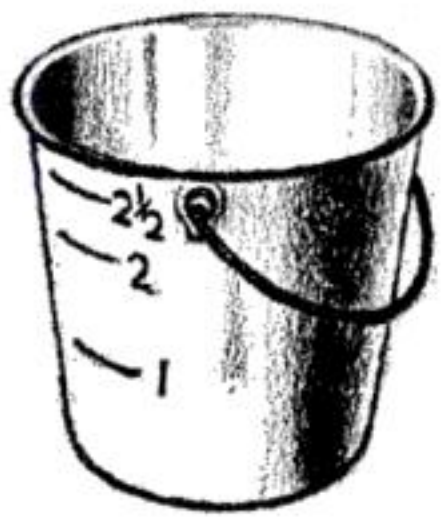



SCOOP. A wood disk, a broomstick and a tin can are what you need. Use it for fertilizer.

Copyrighted material




Blocks Hold Builder's Sand Pile

A CIRCLE of cinder blocks around a pile of sand and stone will keep your concrete aggregate from spreading and mixing with the surrounding dirt.

Hose Makes a Fountain

THE bent end of a washing-machine drain hose is a ready-made drinking fountain. Next time you put on a new hose, salvage the old tube and screw it onto an outside faucet; or you can find one at a service shop.

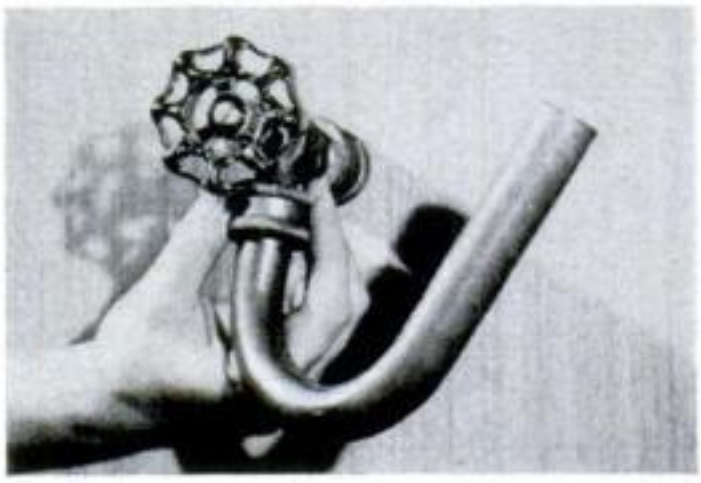



DO IT THE EASY WAY



PING-PONG BALL DENTED? Hold it under boiling water with a stick. Expanding inside air will cause the dent to pop out.


BEND THE TAPE END at a diagonal like this after cutting a piece from the roll. Next time you'll have no trouble starting it.

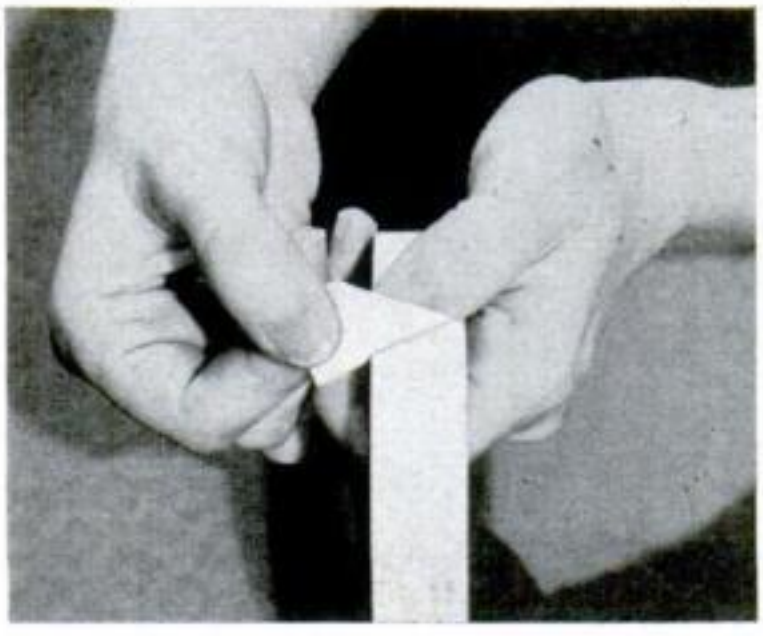

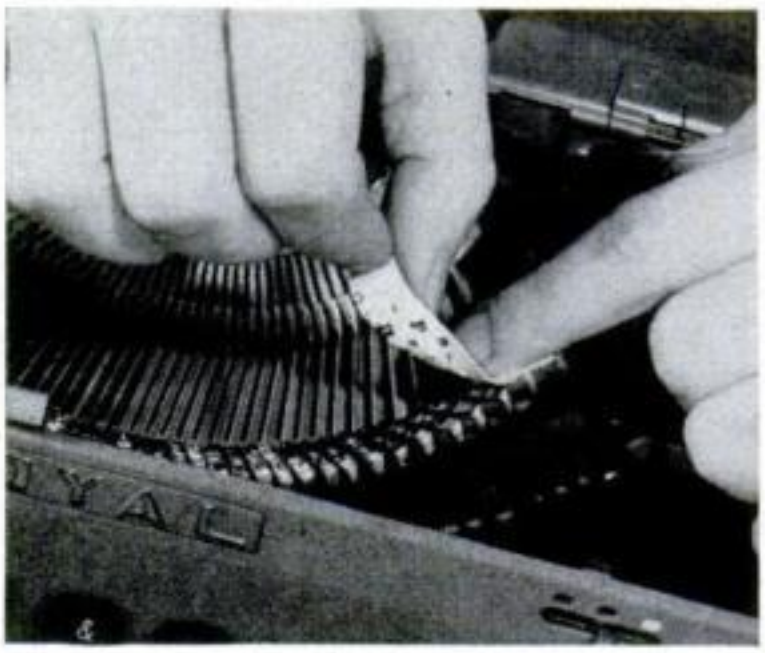


TO CLEAN THE LETTERS on a typewriter, press some adhesive tape on them. Lift the tape and the dirt will come with it.

CUT A NARROW V SLOT in one side of a can, screw the can to a shop shelf, and you have an easy-to-use string dispenser.

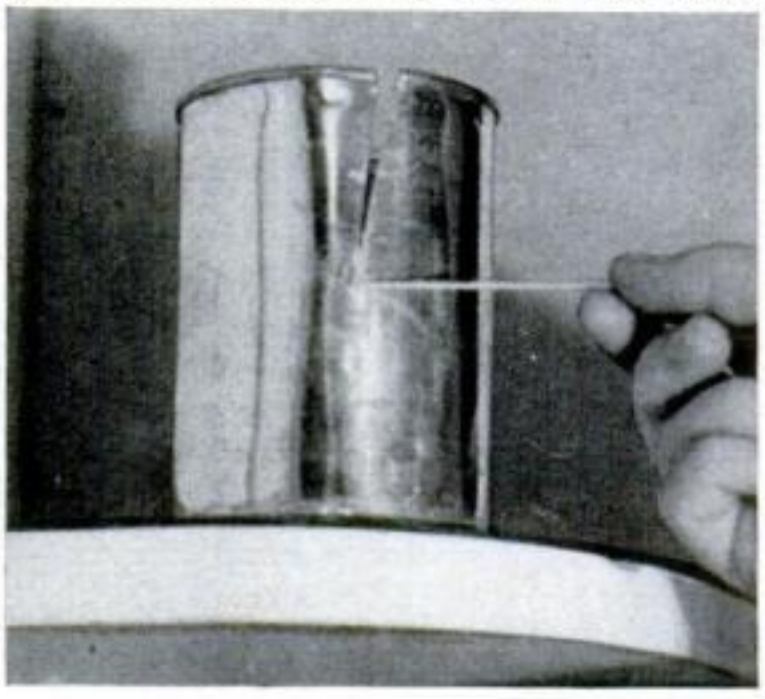


Copyrighted material

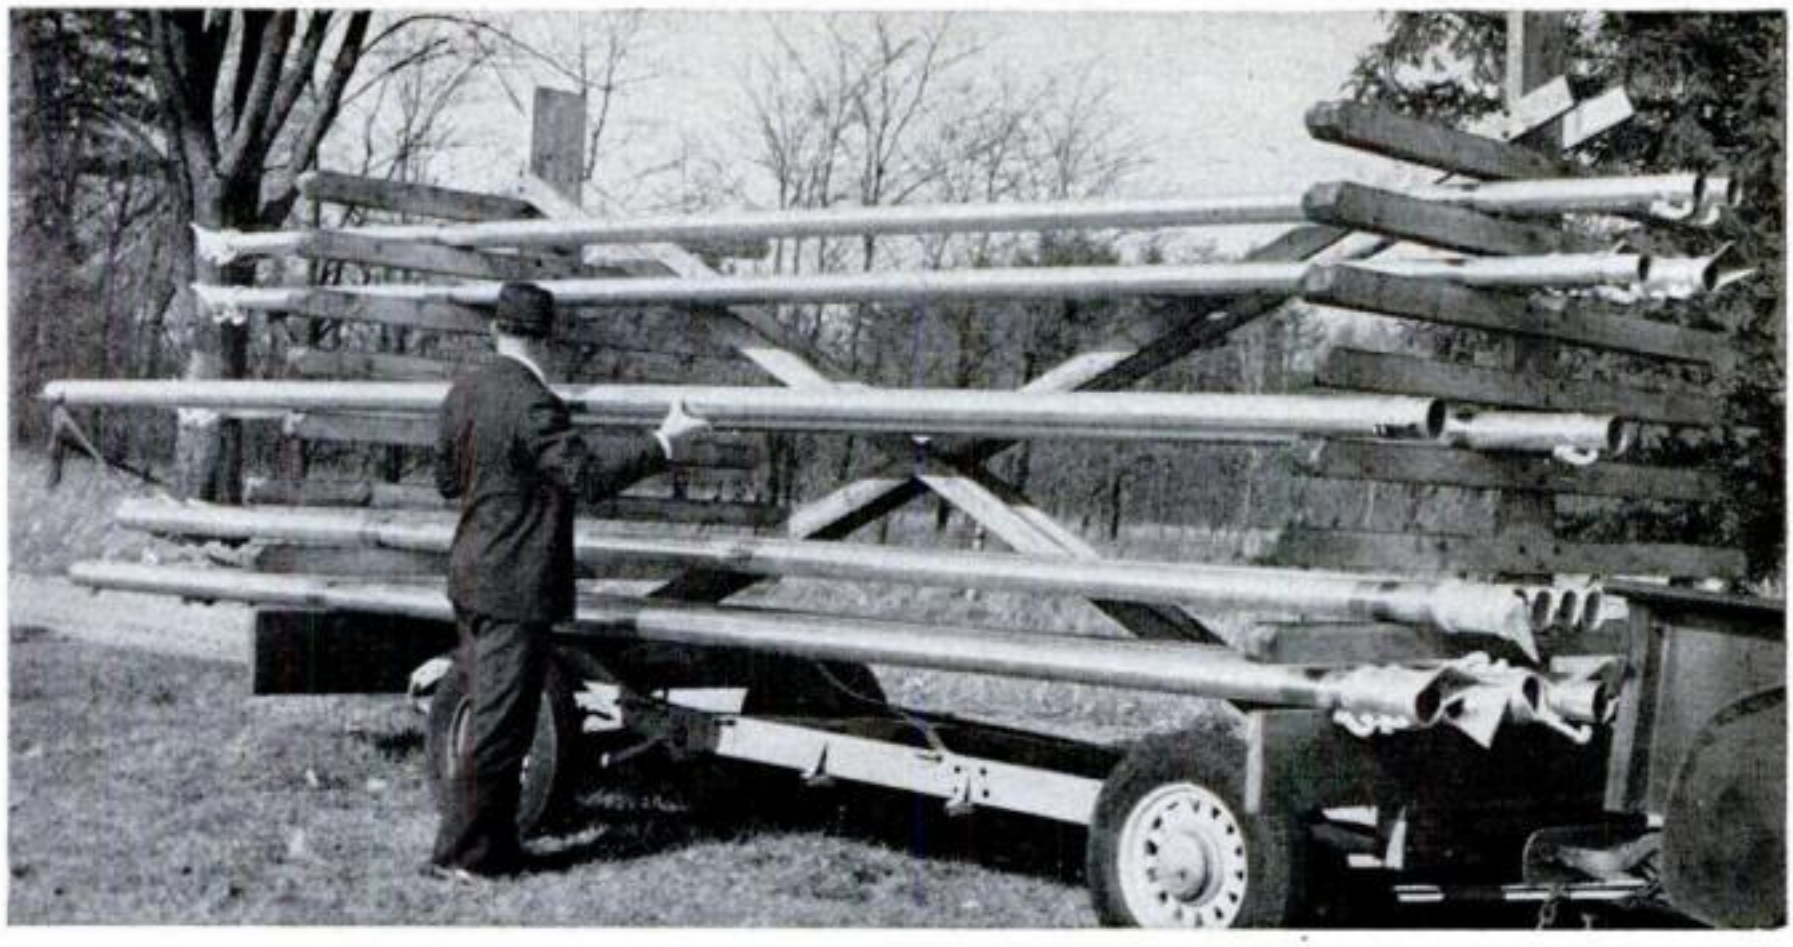

Mobile Rack Carries Sorted Irrigation Pipe to the Job

FOR transporting irrigation pipe on his farm near Sarasota, Fla., James Whitaker built this mobile rack. To an old car chassis, he bolted heavy lumber uprights and attached arms that hold the pipe according to size. He tows it to a work site at the back of a truck. The rack handles about 3,000′ of 20′ sections.

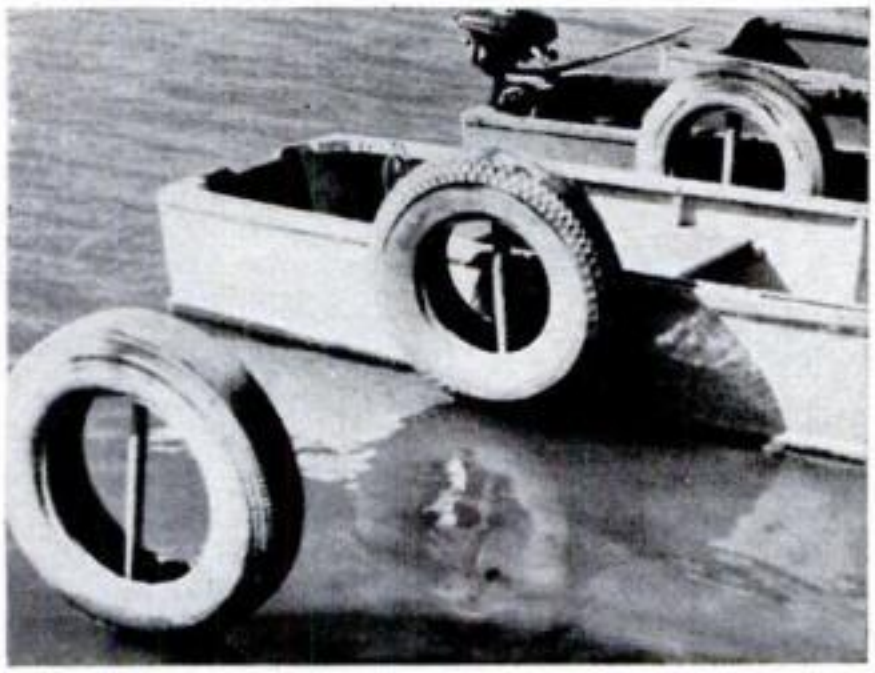


Tires Form a No-Chafe Boat Slip

A BOAT slip like this, made with discarded tire casings and some lengths of pipe, won't chafe the paint on your hull. Mount the casings by driving the pipe through a hole cut in the tire tread and space the casings a foot or two farther apart than the width of your boat.

Paintbrush Becomes a Scraper

USING a worn-out paintbrush and hardware cloth, you can make a wire brush for scraping off paint and varnish. Just replace the bristles with the screen, folded into layers in the ferrule.

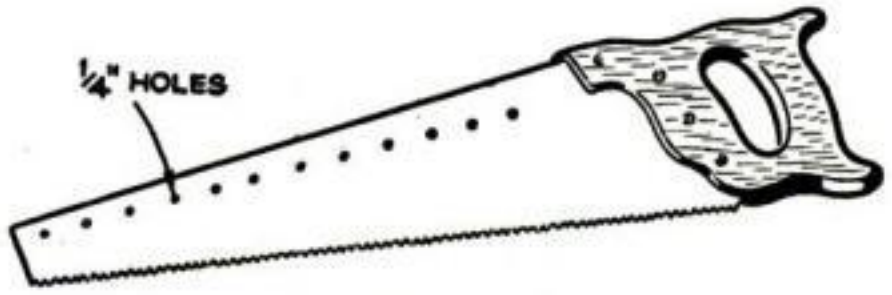

Grease "Cups" Speed Sawing

SAWING wet logs is less of a chore if you drill several ¼" holes in the blade and pack them with heavy grease. As the saw heats up, the grease melts and lubricates the blade. One way to drill the holes is with a high-speed twist bit in a hand drill, using cutting oil generously, or you can punch them on a lead block.—*George H. Holden, Chesterfield, England.*



Copyrighted material

Every woodworker ought to know the technique of

Gluing Up a Table Top

By Warner G. Tilsher

PLYWOOD is wonderful stuff and none of us would want to be without it. But for real class in certain projects there's just nothing like solid wood. Jointing the edges and gluing up narrow boards gives you solid wood in any width.


Let's see how you should do the job, for instance, when you want a wide board for a table top or other cabinetmaking job where plywood would present an edging problem. Done right, jointing overcomes the warping that's sure to occur in a single piece of solid stock.

Saw off the stock an inch or two longer than you want the finished top. Rip the boards (if necessary) so they are at most 5″ or 6″ wide and add up to the total width that you want.

Look over the boards and decide which is the better side of each. Lay them side by side the way they match up best. Make every effort to assemble the pieces so that the growth rings on their ends change direction, one up, the next down and so on *(Fig. 1)*. In that way each piece helps counteract the strains imposed by its neighbor and the finished board will stay flatter.

Now number each piece at one end with matching numbers *(Fig. 1)* and you are ready to carry the stock to the jointer and joint the edges straight.

On each cut, *keep the numbers to the front (Fig. 2)*. By doing this you need not worry whether the jointer fence is dead square with the table. The reversal of each board with each cut automatically gives an angle supplementary to its mate and you wind up with a 180° joint and a perfectly flat finished board. Bear down on the back table and ease off as you near the end. This tends to give you a slightly concave edge that makes for a tight joint.

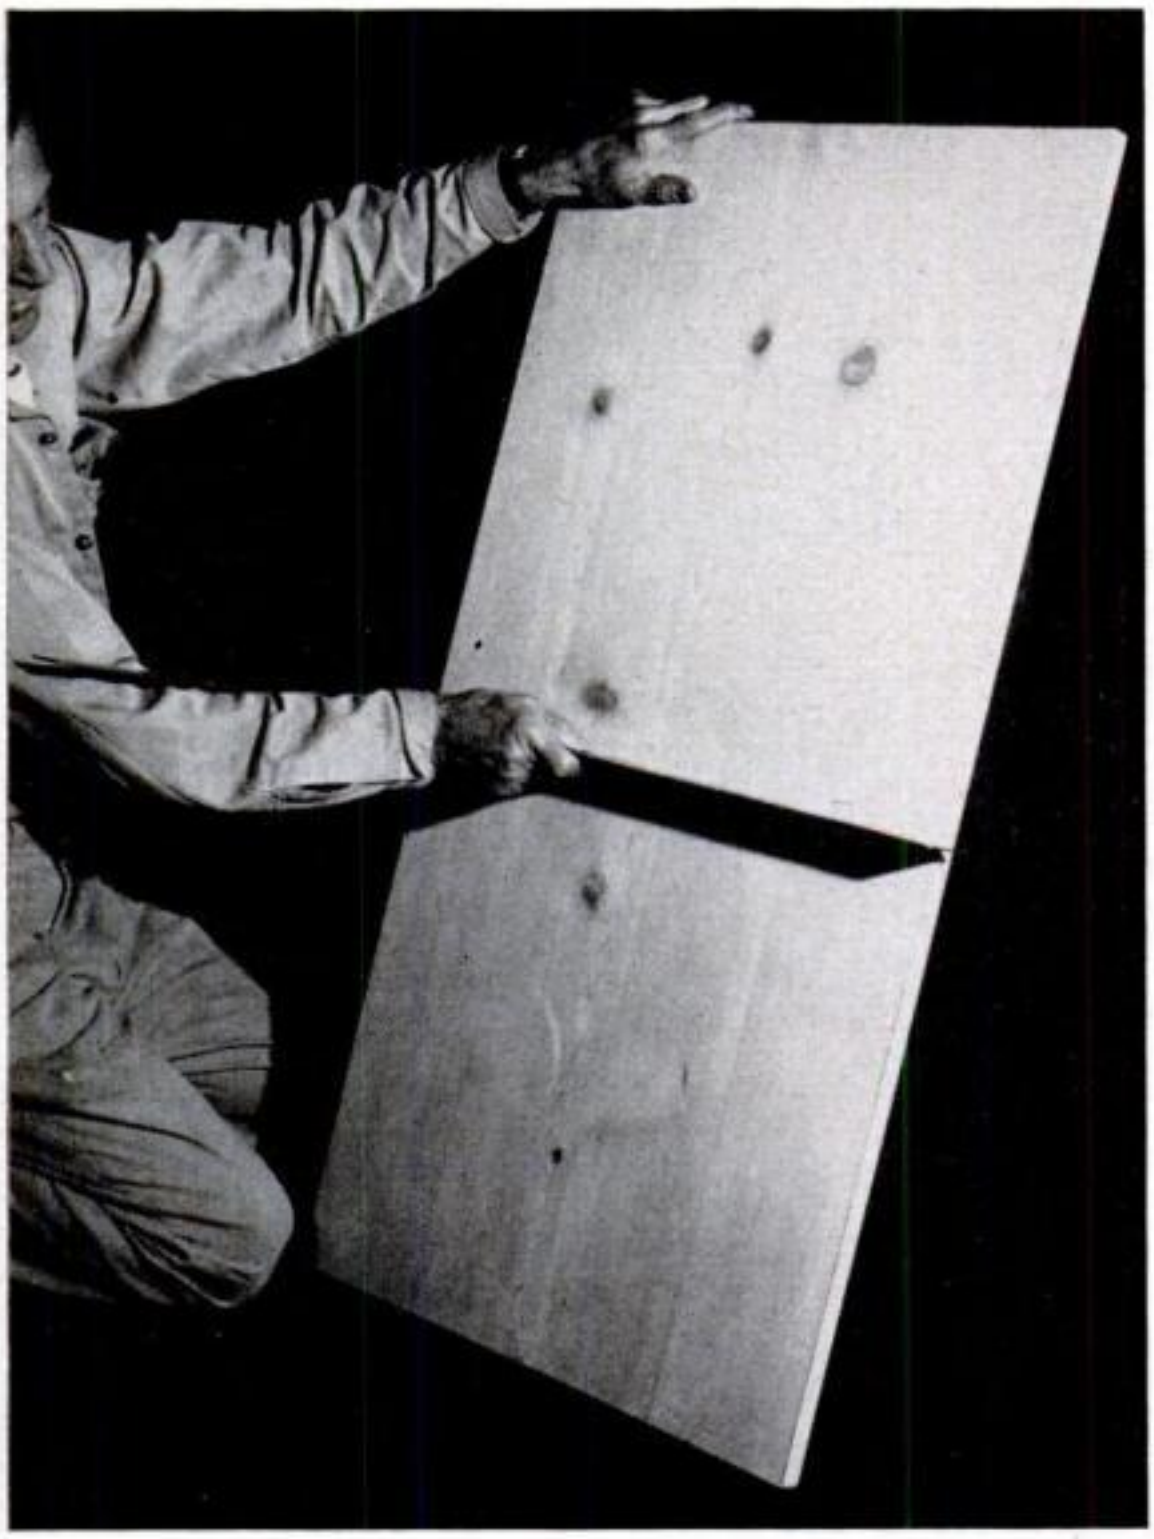

SOLID WOOD AND WIDE AS YOU WANT. That's what you get by jointing and gluing together stock narrow pieces. Here the writer tests surface of completed piece with a straightedge.

Copyrighted material

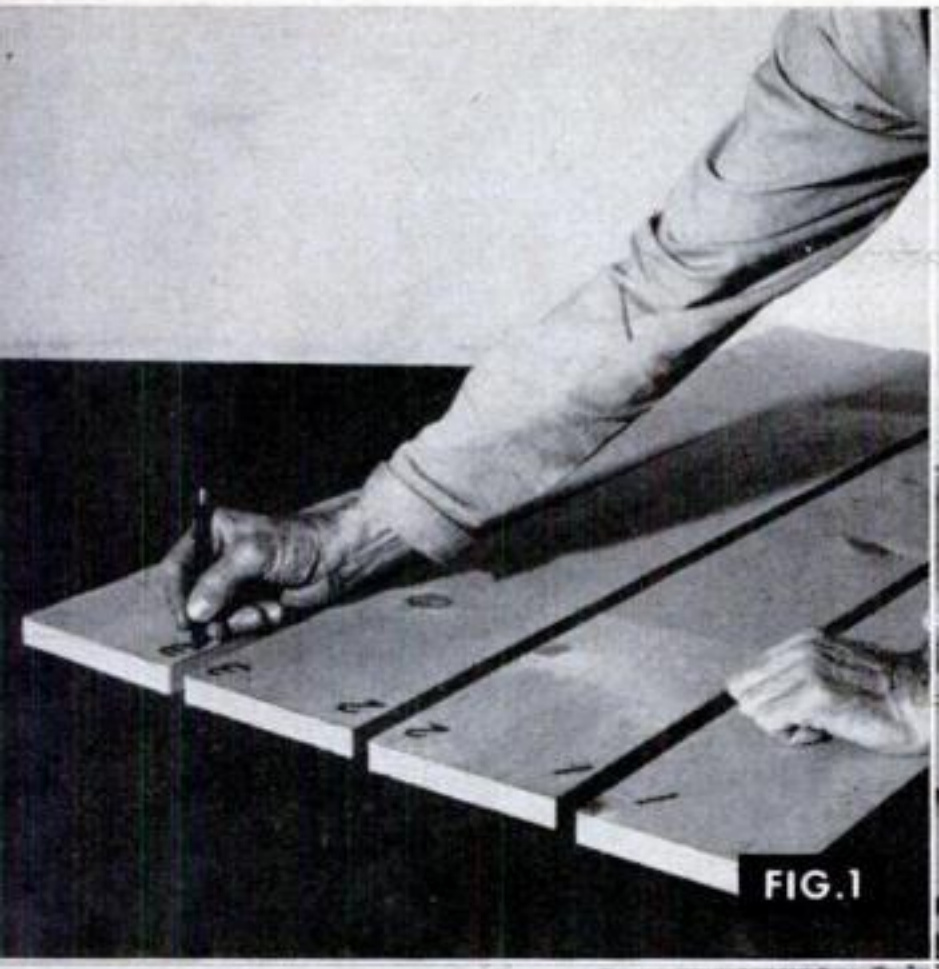


FIG. 1

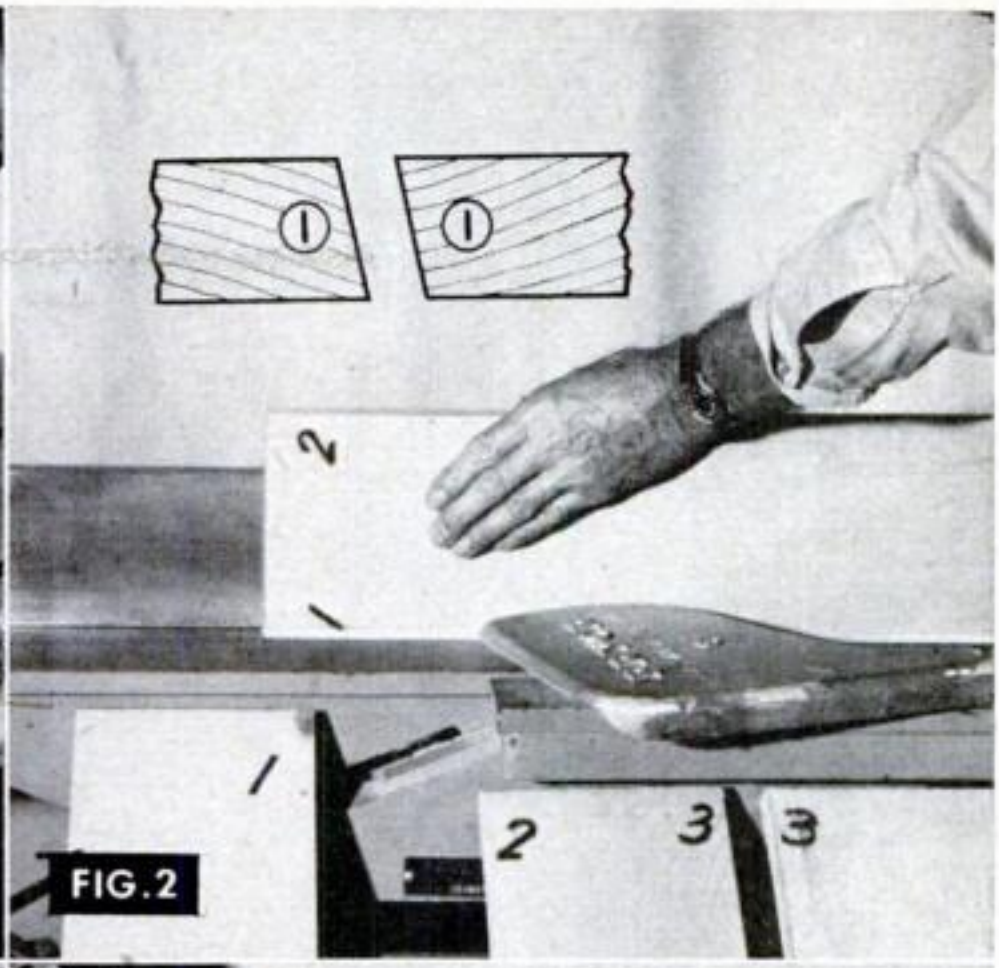


FIG. 2

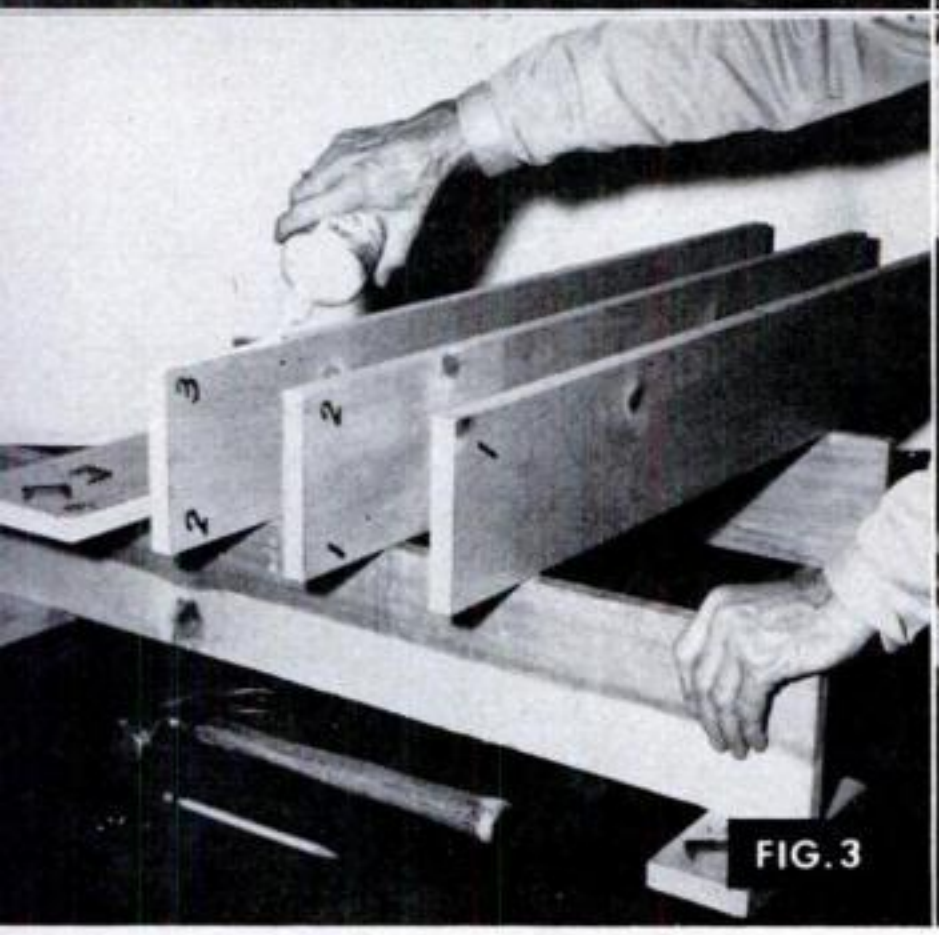


FIG. 3

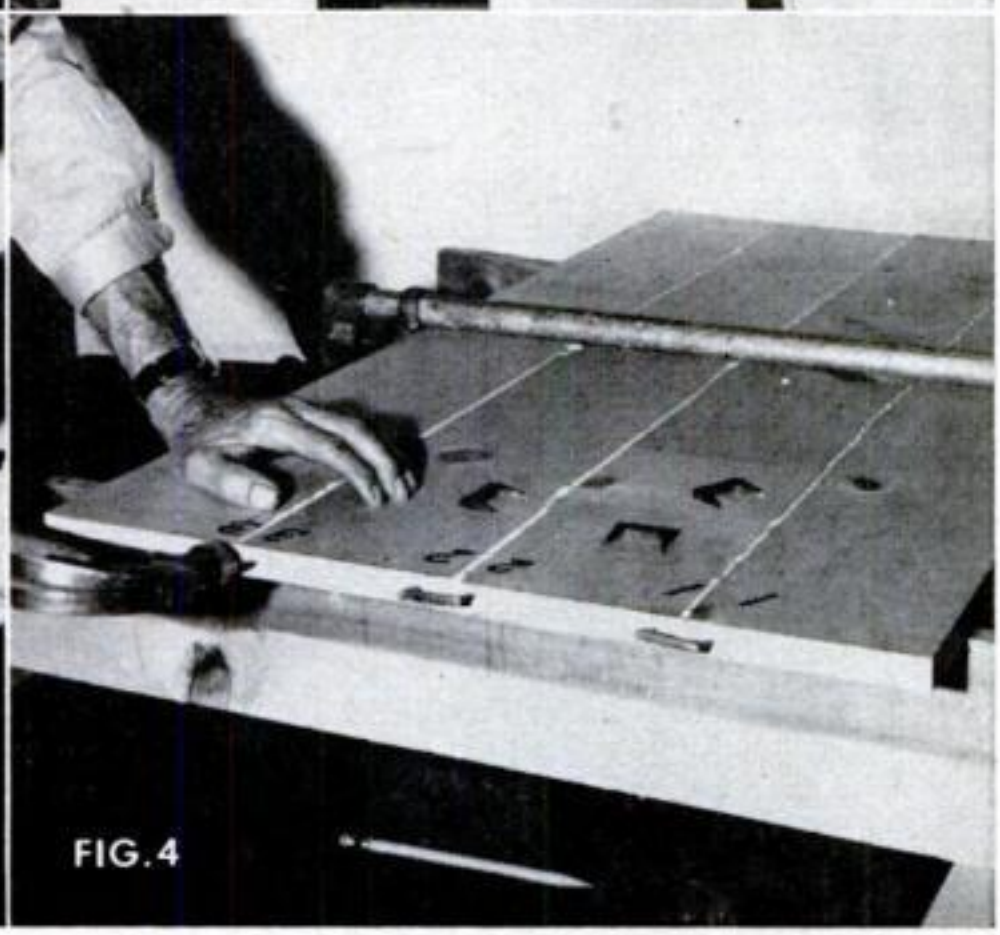


FIG. 4

Next lay the boards on gluing supports. These should be 5″ or 6″ high so that you can turn the clamp handles easily—and they must of course be level. Turn all except the first board on edge and run a bead of glue along each edge *(Fig. 3)*. Some workers make a habit of applying glue to both surfaces, but I have found that one fair-sized bead is sufficient. Even with only one bead, the glue squeezes out on both sides.


Rub adjacent joints endways a bit to get good contact. Apply a clamp about in the middle, checking to see that the edges line up. Then hammer in pinch dogs *(Fig. 4)*, one straddling each joint.

A couple of dozen of these pinch dogs (you can get them at patternmaker's supply stores) make unnecessary a heavy investment in clamps. The angled inner edges draw the joint tightly together as the dog is driven. Drive them either into the ends or backs of pieces being joined. Using them, you can get by with a clamp every three or four feet. Set the clamps alternately at top and bottom to balance their pull.

Wipe off excess glue when the dogs have been driven. After the glue has set pry out the dogs and clean up the piece.


And right about then, you'll feel that you really have built something. END

Copyrighted material

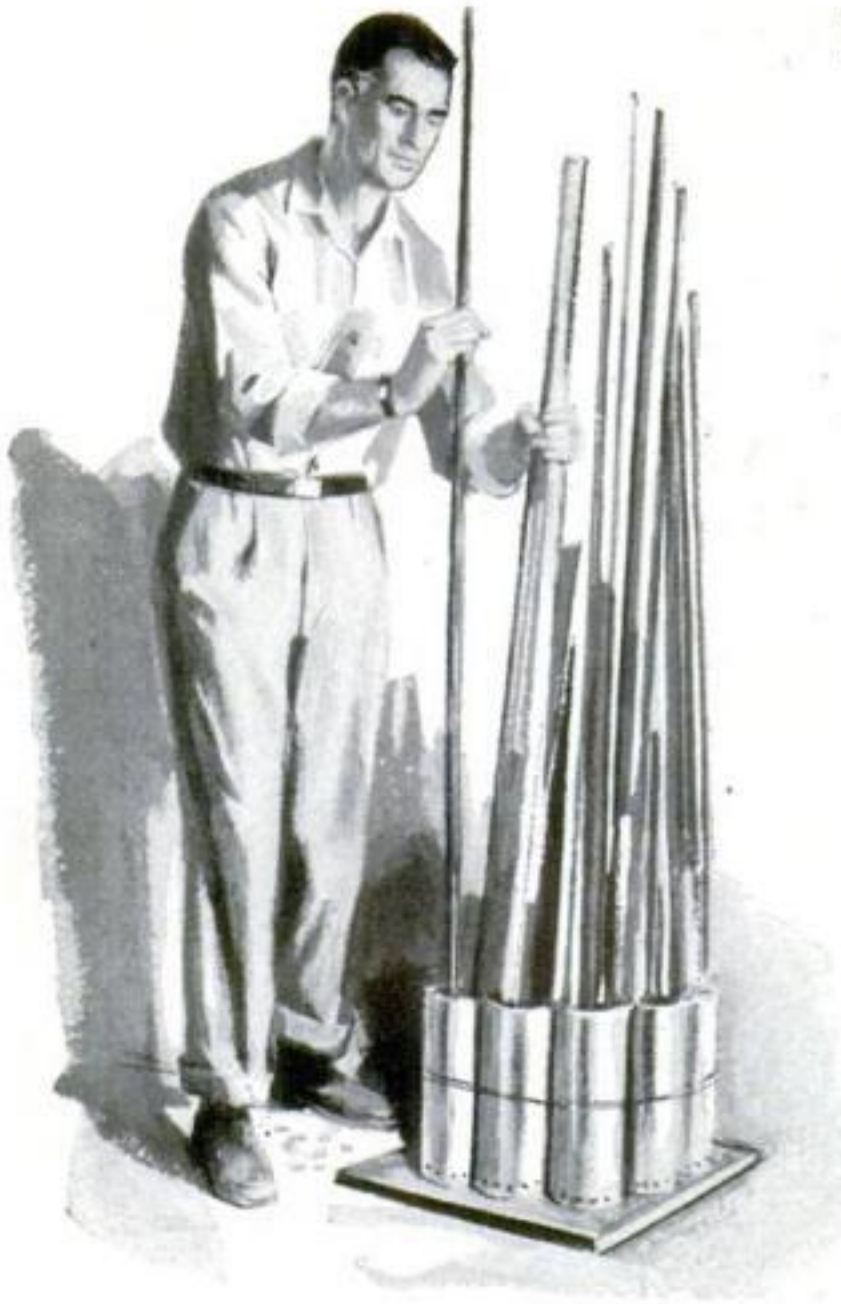

Downspouts Form a Supply Rack


You can make a holder for dowels, drill and welding rods by nailing several lengths of downspout to a square of ¾" plywood. Fit and nail a disk of wood in the bottom of each tube and screw them to the square base. Bind the tops together with a length or two of wire.—*Daniel I. Hadley, New Castle, Del.*

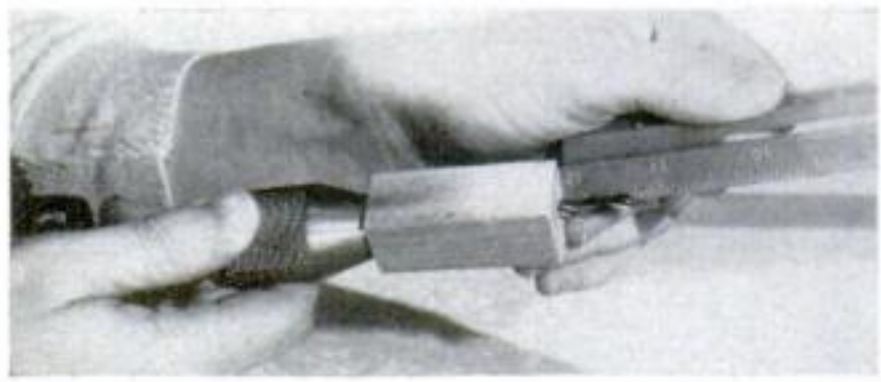

Wood Block Gauges Depth


A BLOCK of wood slipped over a bit enables you to drill holes of uniform depth. The projecting end of the bit will determine the depth of the holes.

How to Make Jig for Bending Hose Clamps Out of Wire

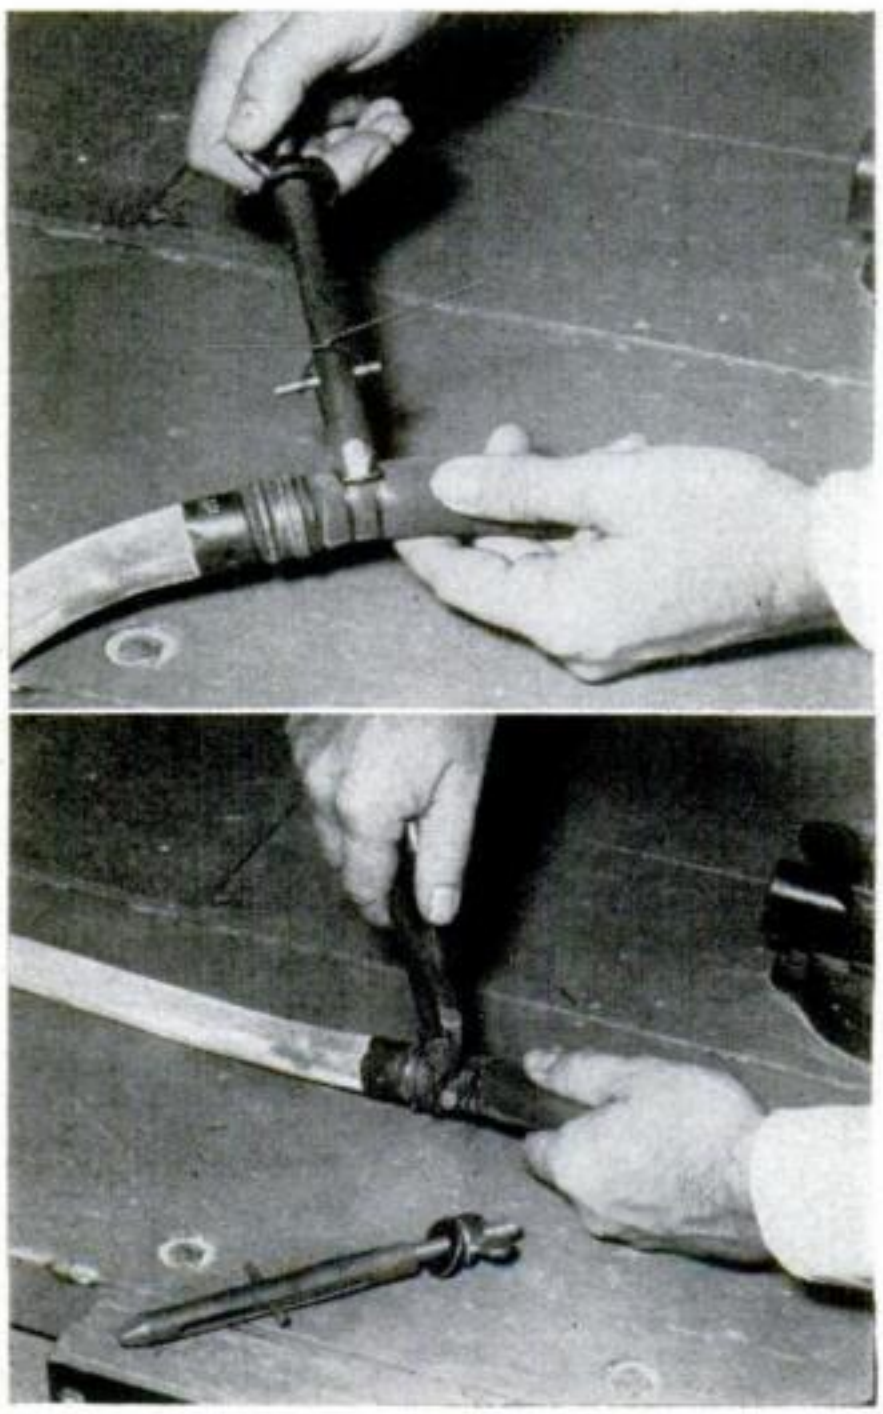


USING a homemade jig, you can bend hose clamps out of wire. Shape ⅝" bar stock to form a notched tip, as shown in the drawing, and weld or braze it to ⅝" steel tubing which has been slotted to take a sliding pin. Cut the head from a ⅜"-16 bolt and drill that end for a drive fit for the pin. Then assemble in the tubing, drive the pin in, and thread on a washer and wing nut.

In use, wire shaped into an elongated U is twisted around the hose and the ends passed through the loop. While the notched nose of the jig engages the loop, the wire ends are twisted around the pin and each other (upper left). Turn the wing nut to put on tension, bend the jig around the loop, snip off the wire ends (bottom), and flatten with a hammer.—*M.C. Anderson, San Lorenzo, Calif.*

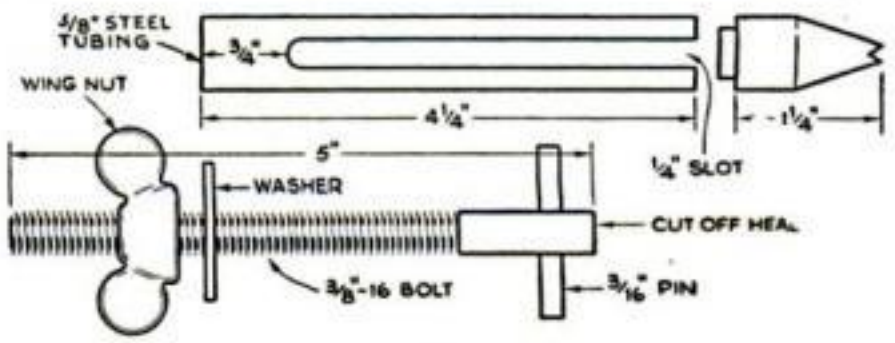

Copyrighted material

New Shop Ideas

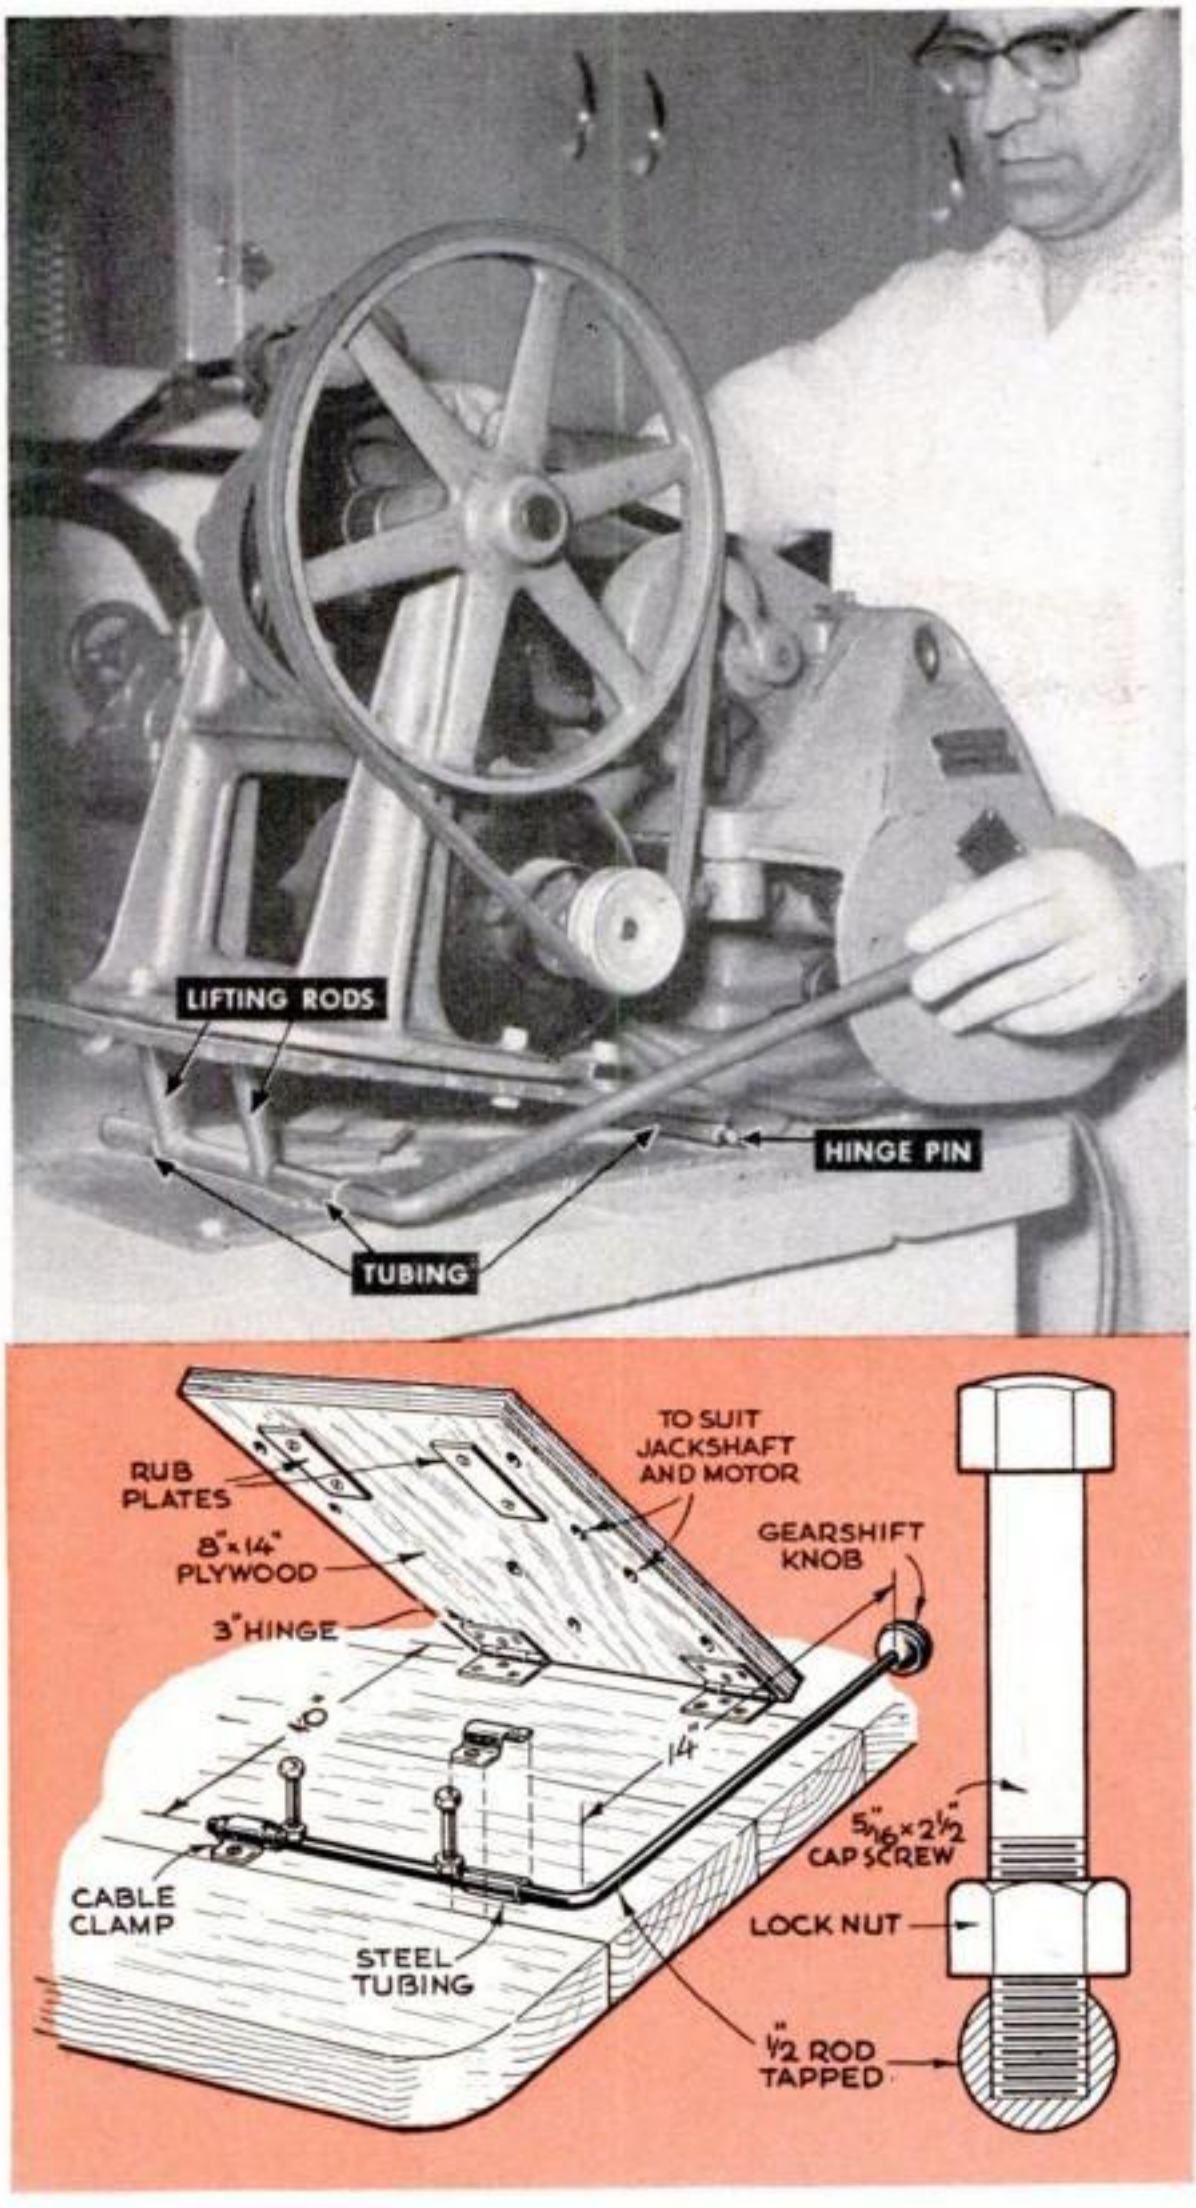


Tilting Base Is Lathe Clutch. This tilting jackshaft base provides a clutch by which a lathe can be stopped without shutting off the motor. It also makes it easy to shift the belt, and maintains driving tension even after the belt has stretched.

The base shown consists of two ¼" steel plates, with bits of steel tubing welded on to form the hinge and the lever mount. Two 2" pieces welded to the lever lift the top plate. They are rounded at the ends so as not to gouge it.

As shown in the drawing, a base of ¾" plywood could be hinged directly to the bench top, and the operating lever could be built up instead of welded. The weight of the jackshaft supplies belt tension. To lessen it and dampen vibration, place some sponge-rubber padding beneath.—*M. C. Anderson, San Lorenzo, Calif.*

C Clamp Drives Out Pins. By taking the foot off a C clamp, you can adapt it to press out taper pins. Countersink the screw end with a small drill and grind or turn it smaller than the little end of the pin. Drill a hole through the solid jaw of the clamp so the pin will have an exit to pass through.—*Hugh Lineback, Stillwater, Okla.*

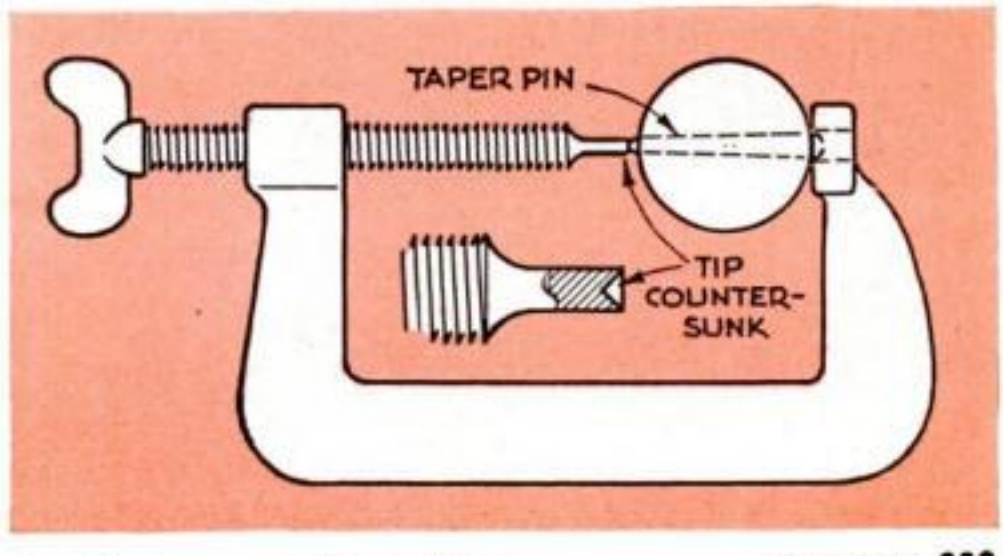


Please turn the page for more shop tips

Copyrighted material

More Shop Tips



Rubber Grips Save Hands. The sharp knurling on die stocks and tap wrenches can be rough on the hands if the tools are used for long periods. Ordinary tricycle handle-bar grips make comfortable nonslip handles for such tools. The grips are available in several different sizes.—*H. J. Gerber, Stillwater, Okla.*

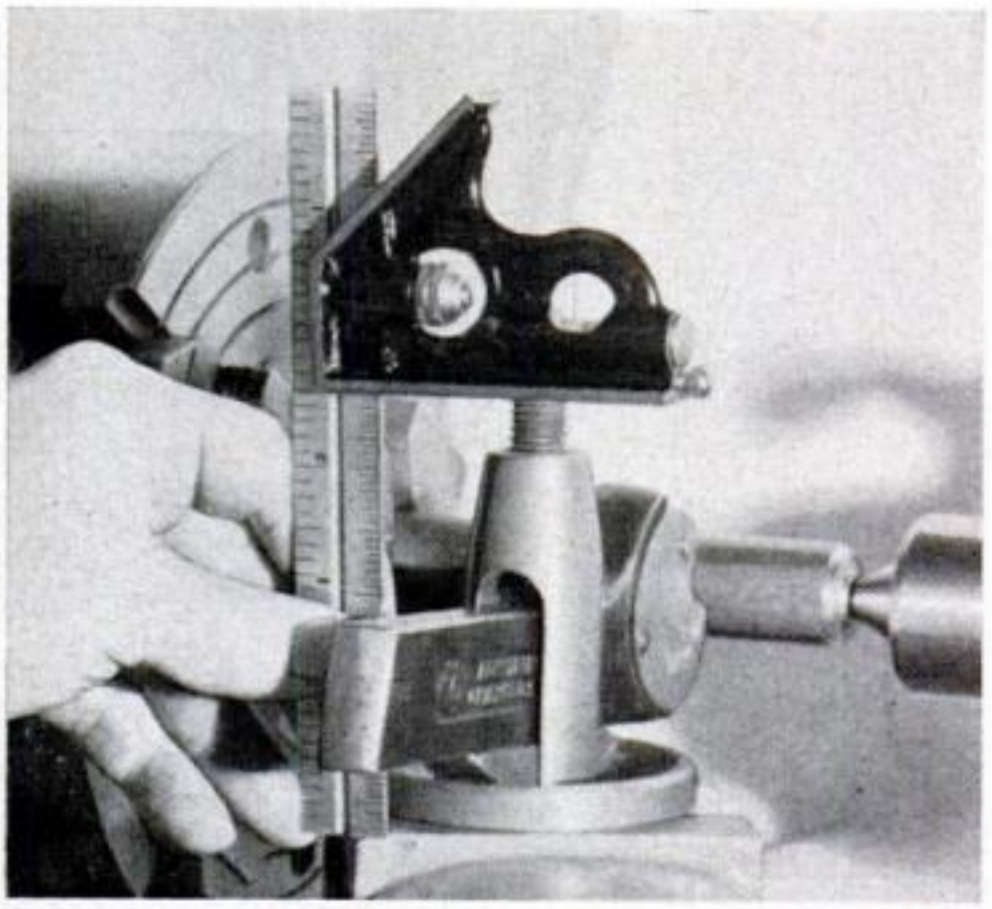



Level Checks Tool-Holder Tilt. A common cause of imperfect knurls, poor threads and rough cut-off jobs is a leaning tool holder. Wear or warpage in the rocker or tool-post washer will pull the tool holder out of plumb.

Provided the lathe is properly leveled, you can use a combination square to check this. Hold the blade against a smooth portion of the holder. If the bubble in the head is not centered, replace bad tool-post parts or use a piece of bar stock to replace the rocker and washer for work requiring a plumb setting.—*Glen M. Larsen, Santa Ana, Calif.*

Pencil Acts as Depth Gauge. A good-quality mechanical pencil, loaded with stiff wire instead of graphite, makes a direct-reading depth gauge (below) that you can carry in a pocket. Solder a small washer on the tip as a gauging stop.

Measure the distance that the wire moves in one turn of the cap. Scale off the circumference of the barrel in suitable divisions of this distance, and put an index line on the part that turns. Count the full turns; then add the partial one that is indicated by the scale.—*Phil McCafferty, Stanwood, Iowa.*

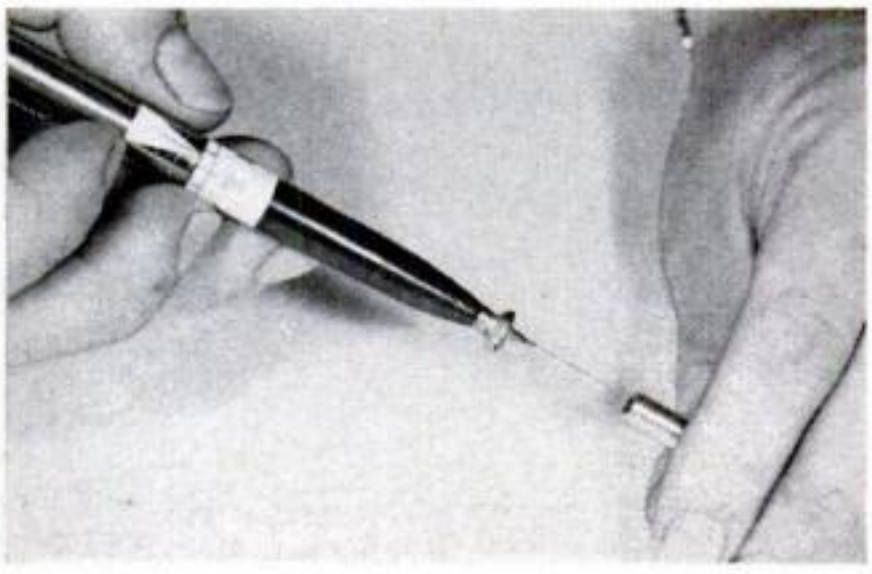

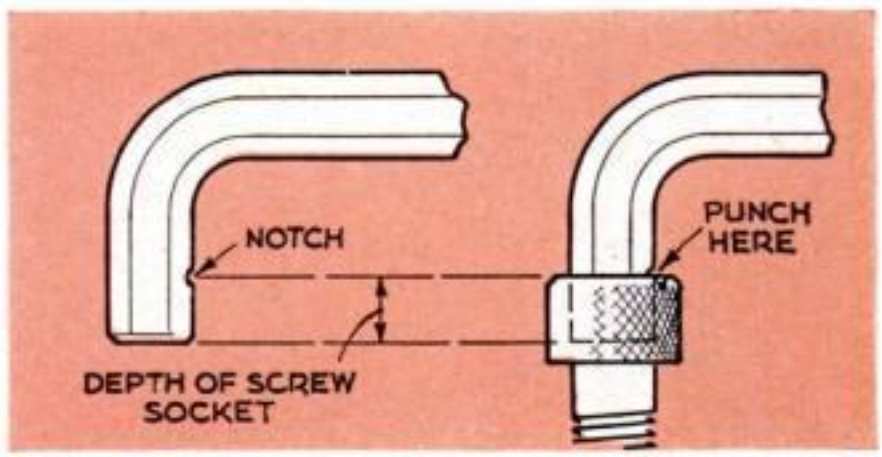

Notch Holds Wrench in Socket. On production work, it saves time to leave a wrench in a socket-head screw that must be repeatedly loosened and tightened. To keep the wrench from falling out, grind a notch in it as above, and center-punch the top of the screw into the notch. —*Frank LaSaracina, New York City.*

Wax Identifies Screws. In many drill jigs and fixtures, some screws hold integral parts together, while others must be repeatedly loosened to insert work. Turning the wrong ones wastes time and may impair accuracy. To prevent this, fill the heads of permanent screws with wax.

Copyrighted material

Every AC Fuel Pump is precision-made like a *fine watch*

Here's the INSIDE story

1. Accurate control of spring tension and temper insures maintenance of pre-determined operation limits to secure efficiency and long life.

2. Patented multiple-layer, specially processed cloth diaphragms endure millions of flexing actions, are resistant to all chemicals found in fuels, and operate effectively at extremely high and low temperatures.


3. Uniform pull rod hardness at the linkage slots prevents uneven wear that would impair efficiency.

4. High, controlled pin hardness at this point of constant contact makes possibility of wear a negligible factor.

5. Specially hardened rocker arm pads centering on camshaft eccentric are engineered to durability standards necessary for this constant moving contact.

6. Rocker arm and link contact surfaces are precision-ground and hardened for long life.

7. Hot oil vapors are kept from contact with the diaphragm by protective seals.

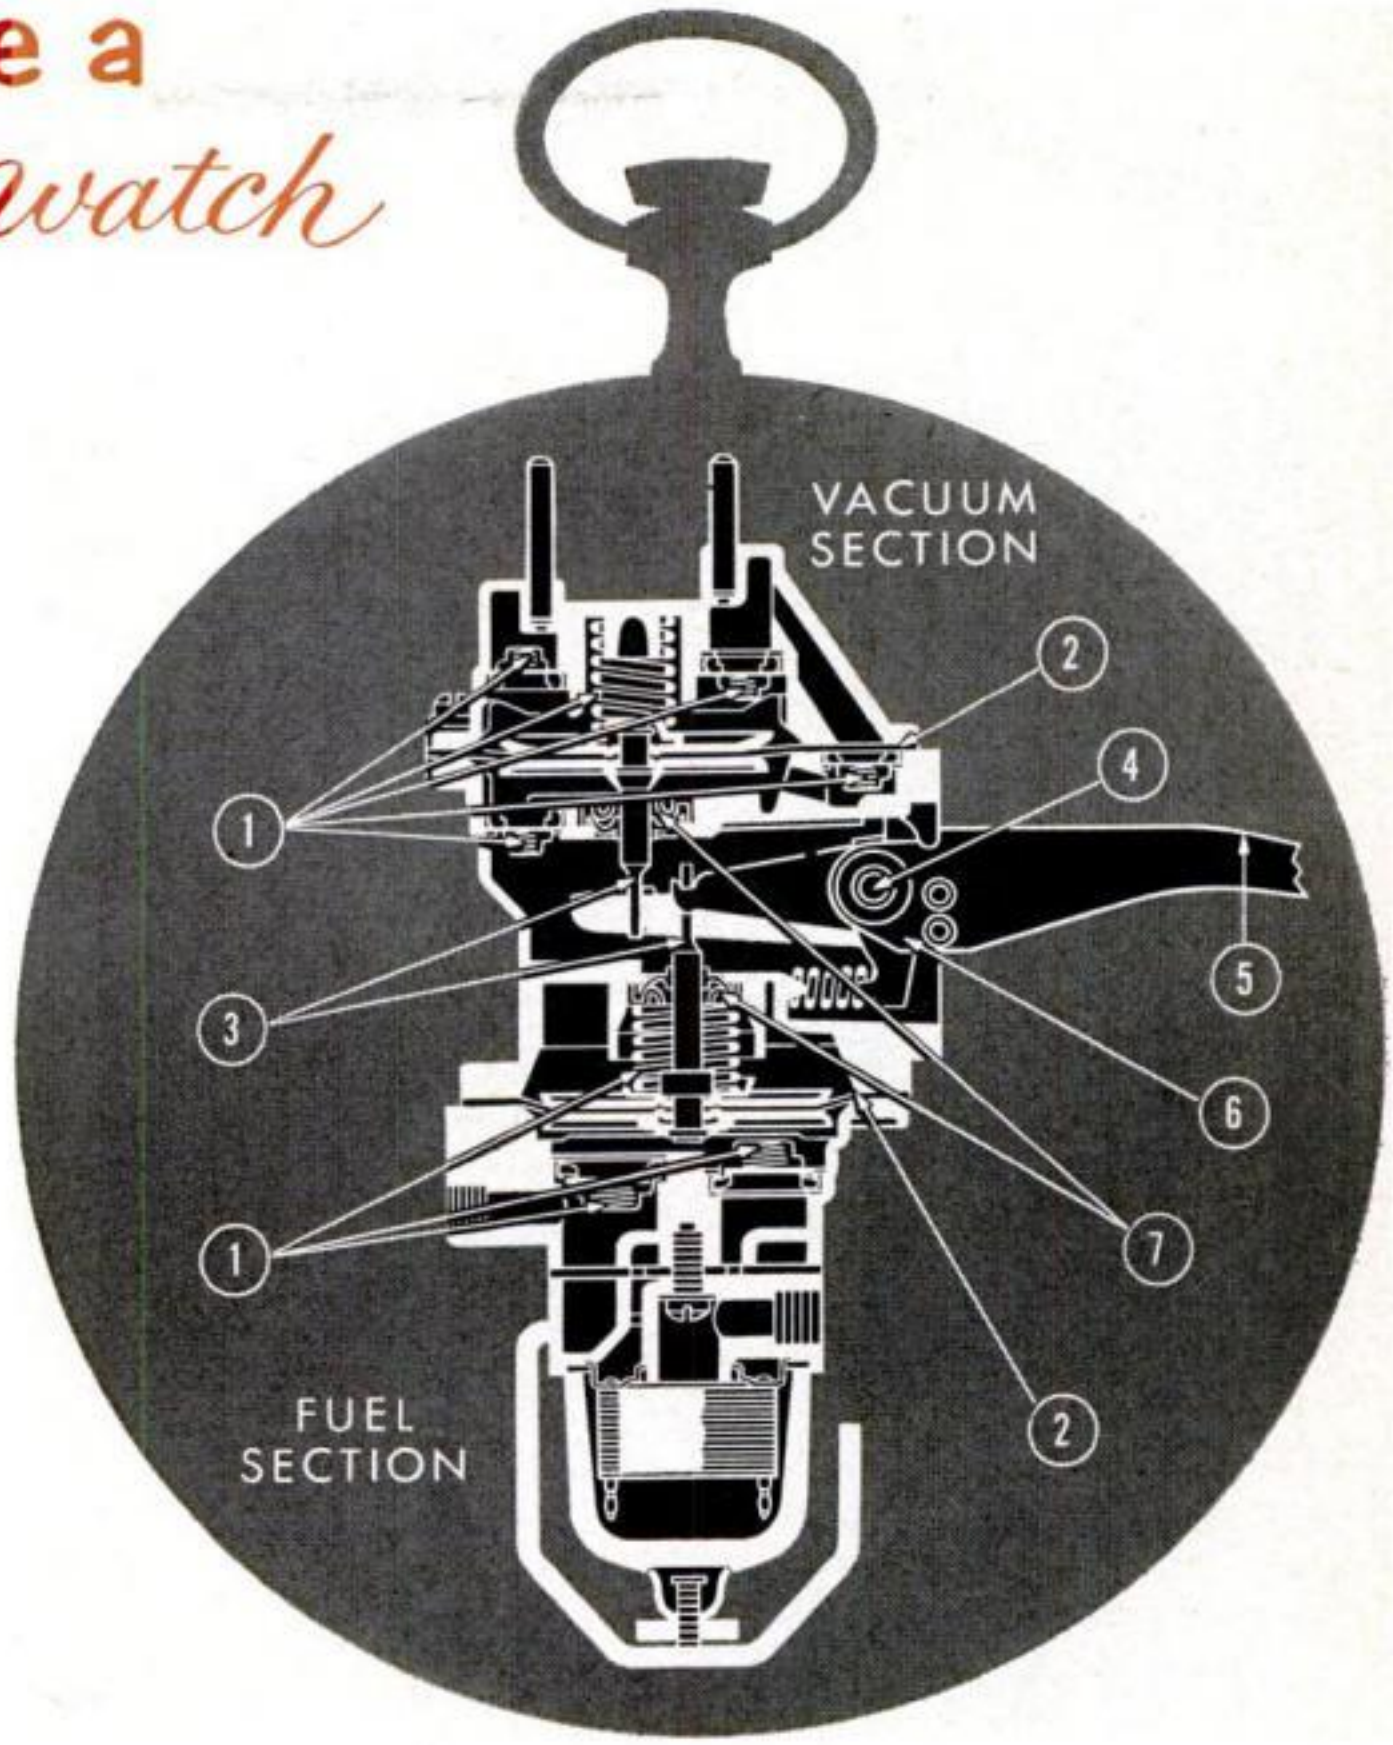

Two jobs superbly done — fuel delivered, wiper action boosted!



In the diagram cutaway above you see an AC Combination Fuel and Vacuum Booster Pump. Not only does this fine mechanism *pump* gasoline and *control* gasoline flow to the carburetor; it also assists in building up *extra* vacuum power to assure smooth windshield wiper operation. When the manifold vacuum drops off during acceleration, this AC Vacuum Booster Pump cuts in and helps keep wiper action strong and steady so you can see safely. Should you ever need fuel pump service or replacement, be sure to call on an AC dealer.

AC SPARK PLUG — THE ELECTRONICS DIVISION OF GENERAL MOTORS

Copyrighted material

ANNOUNCING:

6 major changes

to bring great new scope



Copyrighted material

in Kodak Films

to your picture taking!

KODAK BLACK-AND-WHITE FILMS

1. Verichrome goes panchromatic!

Kodak Verichrome Pan and Plus-X Films—For all-around picture making, amateur or professional, indoors or out. *Verichrome Pan* has a brand-new emulsion which yields crisp snapshots, attractive enlargements. *Plus-X* (in 35mm size only) has also been improved. Both Verichrome Pan and Plus-X render *all* colors in pleasingly natural tones of black-and-white . . . both have been given extra speed without sacrificing fine grain or sharpness. Try them—they'll become your favorites for everyday use!

2. Panatomic-X is back again—and finer than ever!

Kodak Panatomic-X Film—For ultra-fine grain and extra sharpness. This all-new, thin-emulsion, micro-fine-grain film yields top quality prints and *big* enlargements of extra-image sharpness. Of special interest to those who process their own negatives is its wide latitude, rapid developing time. In the recommended Kodak developer, fixer, and hypo clearing agent, total processing time, including wash, is less than 20 minutes! Dries faster, too.

3. New Kodak Tri-X Film—fastest black-and-white roll film ever!

Kodak Tri-X Film—For true s-p-e-e-d when you need it! Perfect for getting fully exposed negatives under the toughest available light situations. Permits faster shutter speeds for action shots, smaller lens openings for depth of field. Kodak Tri-X negatives yield prints with high definition and a full tonal range throughout the shadow, middle, and highlight areas.

KODAK COLOR FILMS

4. Kodacolor now works indoors and out!

Kodacolor Film—For big, full-color album prints. New dual-purpose Kodacolor Film is sharper, faster, easier than ever to use. You can shoot outdoor pictures in daylight, or indoor pictures by clear flash, on the same roll of film—without filters! Produces pleasing color prints even in simple cameras—as well as in cameras with adjustable shutters. Available in all popular roll-film sizes.

5. New Kodak Ektachrome—three times faster than ever!

Kodak Ektachrome Film—Produces brilliant color transparencies for hand-viewing or projection. Extra speed makes it ideal for shooting under difficult light conditions . . . or when you need extra shutter speed to stop fast action. Your dealer can have your Ektachrome Film processed into transparencies, or you can do it yourself with a Kodak E-2 Processing Kit. Color prints from Ektachrome transparencies can be ordered through your dealer. Available in miniature and popular roll-film sizes in both Daylight Type and new Type F.

6. New Type F for both Kodachrome and Ektachrome.

Kodachrome Film—For crisp, sparkling transparencies of finest image quality. Traditionally a favorite for making color slides to be hand-viewed or projected, Kodachrome Film, Type F, is now balanced for use with clear flash. Color prints from Kodachrome transparencies can be ordered through your dealer.

Kodak Color Films above are now priced without the cost of processing included.

Eastman Kodak Company, Rochester 4, N. Y.

Kodak
TRADEMARK

Copyrighted material

[*Continued from page 192*]

shove the front end around, or push it up the incline if they did, for a glance at the rear springs had told him that the enclosed body was heavily loaded.

"Take it easy, mister," Gus said to the driver. "These folks just want to get home."

"Have them stand clear then," the driver growled.

Gus stood in the shelter of the underpass watching the trucker try to start the motor. He hopped back and forth between the upflung hood and the cab, standing on the starter frantically to no avail.

"You polliwog," the irrepressible Tom Hanratty told him. "Why not let Gus work on the thing—he's the best mechanic in the valley."

"Is that so," the trucker said warily. "Maybe you think you can do better—eh, Wilson?"

"Maybe so," Gus told him, stepping forward. "Maybe not."

Looking at the motor with his flash beam Gus realized that he was going to have a time getting it started. The spark-plug depressions were brimful of water.

Water glistened at spark plug, coil and distributor terminals. What worried Gus the most was the cracked and weathered condition of the old ignition cables.

HE BLEW away all the water he could with his tire pump, made a mental note of the positioning of No. 1 wire in the distributor cap and then yanked the wires loose. He carefully wiped the primary and secondary wires as dry as possible, forced a dry corner of his cloth down into terminal connection cups on plugs, coil and distributor cap, wrung it around with a small screwdriver blade. Fearing condensation, he held the flame of a match inside the distributor cap itself. Replacing the wires in proper firing order he backed out from the hood. He moved swiftly and was behind the wheel, reaching for the ignition key before the trucker realized it.

"Climb out of there," the trucker snapped at Gus. "I'll try her myself."

"It's your baby," Gus said, shrugging his shoulders and getting down.

When the motor didn't start, Gus lifted the hood with his light off. He saw a telltale wriggling of spark flame at the distributor cap and where the wires went through a bracket at the block. A man could work on this motor all night in this rain, he told himself grimly, and not get it dry enough to start.

"So," the driver said, coming down out of the cab to waggle a finger under the startled nose of Tom Hanratty, "this Wilson character is so good? Now both of you clear out before I—"

"You blue-nosed idiot," Hanratty yelled. "Why don't you keep your fool trap shut long enough for Gus to think?"

FOR a moment there, Gus thought that the trucker was going to commit assault and battery on the irate old codger. Gus hesitated long enough to see that he wasn't and then ducked under the hood again. Let's see now, he thought, electricity always follows the least line of resistance. That spark jump at the wires indicates it is finding it easier to jump there than across the gap of the spark-plug electrodes. There's no chance of getting the wires any drier. Now how about reducing the spark-plug gap to make it easier for the spark to flow there? It seemed a good thought to Gus, so he took out the plugs and reduced the gap from the factory-recommended 25 thousandths of an inch to a bare eight or ten thousandths.

"Try her now," he told the trucker, after replacing the plugs.

The motor turned a few times, backfired, ran raggedly, then settled down to work.

"Now," Gus said, and his words carried a note of command, "if you can weasel her out, we'll pull the Chrysler out before you take off."

By the time the truck driver had the truck lined out Gus had his tow cable

[*Continued on page 246*]

Copyrighted material





MECHANICAL SKILLS CAN GET YOU AHEAD IN THE U. S. AIR FORCE

Here's why —

If you're interested in mechanics, join the U. S. Air Force. As an Airman you may develop your technical ability and learn a skill that will pay well...and win you extra stripes. Such interesting career fields as Aircraft and Engine Maintenance, Rocket Propulsion and Intricate Equipment Maintenance are open to you, if you qualify. Don't delay—see your local Air Force Recruiter or mail the coupon.



YOU GO PLACES *FASTER* IN THE U.S. AIR FORCE

PASTE COUPON ON POSTCARD M-19-PS3
and mail to

AIRMAN RECRUITING INFORMATION BRANCH
BOX 2202, WRIGHT-PATTERSON AFB, OHIO

Please send more information on my opportunities for enlisting in the U. S. Air Force. I am between the ages of 17-34 and reside in U. S. A. or possessions.

NAME_____

ADDRESS_____ AGE_____


CITY_____ ZONE_____ STATE_____

Copyrighted material



Mite Puts Out 10,000 R.P.M.

HITCHED to flashlight batteries or to a 1.4-volt dry cell, this midget Japanese motor will deliver up to 10,000 r.p.m. to run hobby models, games or displays. Moen Trading Co., 225 West 34th St., New York City, prices it at 89 cents.

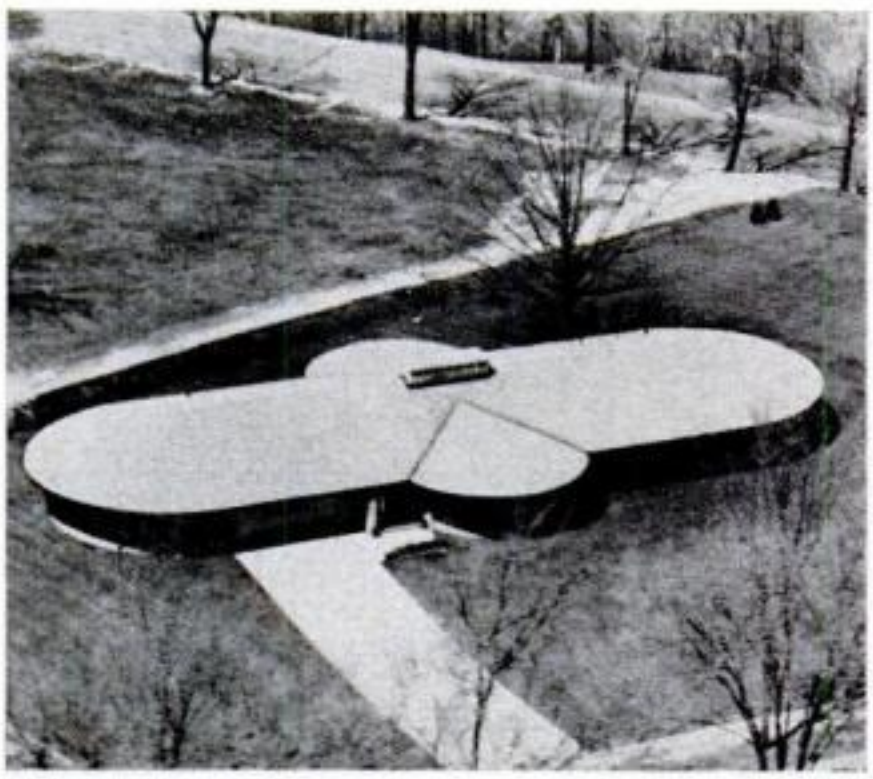

Plane Shadow Blueprints House

AS HE was flying in an airliner some years ago, Talbert Abrams of Lansing, Mich., watched the plane's shadow speed over the ground. "What an idea for a house," he mused. Today it is a reality. It even has curved plastic windows.

Gus Meets a Flood of Trouble

[Continued from page 244]

attached to the Chrysler, so that the trucker had no choice. The Chrysler started as it was towed out, and a few minutes later was on its way toward town. The Ford started under its own power. Soon the remaining cars were easing through the two feet of water and a highway crew arrived to take over the situation.

WHEN Gus came to the first street lights of town he saw that the truck had been stopped by Jerry Corcoran's police car. As Gus pulled up, Corcoran greeted him with a smile.

"The Chrysler driver," he told Gus, "gave me your message. What gets me, Gus, is how you knew that this truck had been stolen."

"I didn't know," Gus told him. "In fact, I wouldn't have even suspected it if the driver hadn't acted so peculiar. When you do a man a favor you expect him to be sort of appreciative. When he isn't, something smells suspicious. When I nosed around and found a jump wire on the primary circuit and no key in the ignition switch, I thought maybe you'd better take a look at it. What gets me, Jerry, is why should a man bother to steal an old-model truck like this?"

"That's easy to answer," Corcoran said. "The truck isn't worth stealing, perhaps, but the cargo is. That van is loaded with expensive electric appliances from an upstate wholesaler, on their way to market."

"What do you know!" Gus exclaimed. "And this character would have gotten away with it if he had just thought to use a little courtesy."

"And I suppose," the trucker said sarcastically to Gus as Corcoran slipped the handcuffs on him, "you're always courteous."

"You said a mouthful then, mister," Corcoran told him. "You look awfully wet. Suppose we take a ride down to our nice, dry jail. We've been on the lookout for you for some time." END

NEXT MONTH: Gus cools off a hot rodder.

Copyrighted material

Texaco Tips On Car Care



If one of your lamps burns out at night...

and there isn't a nearby station to replace it, put white reflecting tape across the lamp in a criss-cross position. By reflecting the rays of oncoming lights, it indicates the outline of your car. Carry a small quantity of this tape with you for such an emergency. Another good tip—be sure to keep your headlights clean. Surprisingly, a single day's accumulation of dirt may cut their effectiveness as much as 50 per cent.

If your car feels like this...



it's time for *Marfak* chassis lubrication. *Marfak* is what you get—always, at no extra cost—when you get your car lubricated by a Texaco Dealer. It's the famous lubricant that lasts for a thousand miles or more — delivers more miles of *cushiony*, comfortable driving. So forget rough going! Get *Marfak* chassis lubrication today. See your Texaco Dealer, *the best friend your car has ever had!*

MARFAK Lubrication

TEXACO

TEXACO DEALERS IN ALL 48 STATES

Texaco Products are also distributed in Canada and in Latin America

THE TEXAS COMPANY

TUNE IN: TEXACO STAR THEATER starring JIMMY DURANTE, on TV Saturday nights, NBC. Metropolitan Opera radio broadcasts Saturday afternoons, ABC. See newspaper for time and station.

Copyrighted material

[Continued from page 104]

and are following up promising ideas: freezing the foods first, excluding oxygen during irradiation, or adding various preservatives.

Whether or not they eventually succeed in totally sterilizing a beefsteak, they see early and interesting possibilities short of that:

Plans are nearing realization to give meat, fish and vegetables a "pasteurizing" dose of 50,000 to 1,000,000 roentgens of radiation. This wouldn't be enough to affect the food's flavor, or totally sterilize it either, but it would knock off the bacteria that were on the surface.

Then a piece of meat would keep, in a refrigerator, five or 10 times as long as usual. There's a chance that meat irradiated this way may be on the market before the year is out.

Radiation in still smaller doses suffices for special applications that look nearest of all: destroying trichina parasites in pork, ridding grain of insect pests, checking stored potatoes' sprouting.

Irradiation may also be linked with other processes. Natural enzymes of meat and vegetables adversely affect a few foods' keeping qualities. While the enzymes are immune to radiation, a supplementary treatment—mild heat or blanching—inactivates them.

Irradiated foods may be sold in heat-sealed bags of polyethylene plastic, ray-treated right through the bags. No doubt they'll also be put up in cans, and any other containers that can be hermetically sealed to keep bacteria out.

Which source of radiation will win out, no one knows yet—they're trying them all.

Trials have used deep-penetrating gamma rays from reactors' uranium-fuel rods, from radioactive cobalt and from waste fission products, the "ashes" of atomic furnaces. Now the Department of Defense, with AEC help, is building a special atomic reactor to irradiate food. You can't do it with existing reactors because their neutrons could make the food radioactive; but there are several ways to design a new one that will expose food to gamma rays only. Neither these, nor electrons of not-too-high energy, induce radioactivity in food.

Electron beams penetrate less deeply than gamma rays, but have points in their favor. You can turn them off at day's end, or to make repairs—something you can't do with radioactive sources—and less shielding is needed for protection. They come from a million-volt General Electric machine called a resonant transformer; from others with such names as Van de Graaf, Capacitron, Genetron. A relatively new concern, Applied Radiation Corp. of Walnut Creek, Calif., has come up with an interesting type called a linear accelerator. Recently Arco completed one that will fit right into a regular processing plant, where heat is used now, for a Rockford, Ill., maker of food-processing machinery. It can totally sterilize two tons of food an hour, or pasteurize from 20 tons to several hundred hourly.

You know that a woman still loves her husband if she suggests that he can use more room in her clothes closet.
—THE SIDEWALK SUPERINTENDENT

The Defense Department itself plans a 1,000-ton-a-month food-irradiating plant by 1958—a pilot-scale prototype for commercial ones. The idea is that near to becoming big-time.

The green light for such projects will be approval of irradiated food by the Pure Food and Drug Administration. First it must be absolutely satisfied that no hazard, known or unknown, lurks in food exposed to radiation. To that end, the experimenters have fed irradiated food to mice, rats, chickens, dogs and monkeys. All thrived. Now volunteer human subjects have been living on irradiated-food diets for nearly a year. To date, the reports are favorable, with the final ones due soon. END

Copyrighted material

Why grope your way like this in fog?



Get a pair of G-E *All-Weather* Headlamps... see better in any weather

NEW General Electric *All-Weather* Headlamps are so revolutionary they make all ordinary headlamps obsolete.

With ordinary headlamps, upward light is uncontrolled. This light is reflected back into your eyes by millions of tiny moisture particles —that is why seeing at night in fog, rain, or snow, is so difficult. New G-E *All-Weather* Headlamps have a special shield over the lower beam filament that blocks out uncontrolled upward light. Kick-back glare is reduced to a minimum . . . you can see the road ahead more clearly.

On clear nights, the upper beam filament which is purposely not shielded, puts light farther down the road. You can see curves, dips and obstacles in time to slow down.

With a pair of G-E *All-Weather* Headlamps you get 25% more light. Passing oncoming cars is easier, too, because the light is concentrated where you need it — on the right-hand side of the road.



Ordinary Headlamps: Uncontrolled upward light bounces off moisture particles, causes kick-back glare, blinds driver.



G-E *All-Weather* Headlamps: G-E filament shield controls upward light, reduces kick-back glare, makes seeing easier.

Replace your present headlamps with a pair of new G-E *All-Weather* headlamps. They can be quickly installed and accurately aimed for a surprisingly modest cost. Ask for them by name: G-E *All-Weather* Headlamps.


Miniature Lamp Dept., General Electric Co., Nela Park, Cleveland 12, Ohio

Progress Is Our Most Important Product


GENERAL ELECTRIC

Copyrighted material

Roll-Away Square Benches Provide Extra Work Space

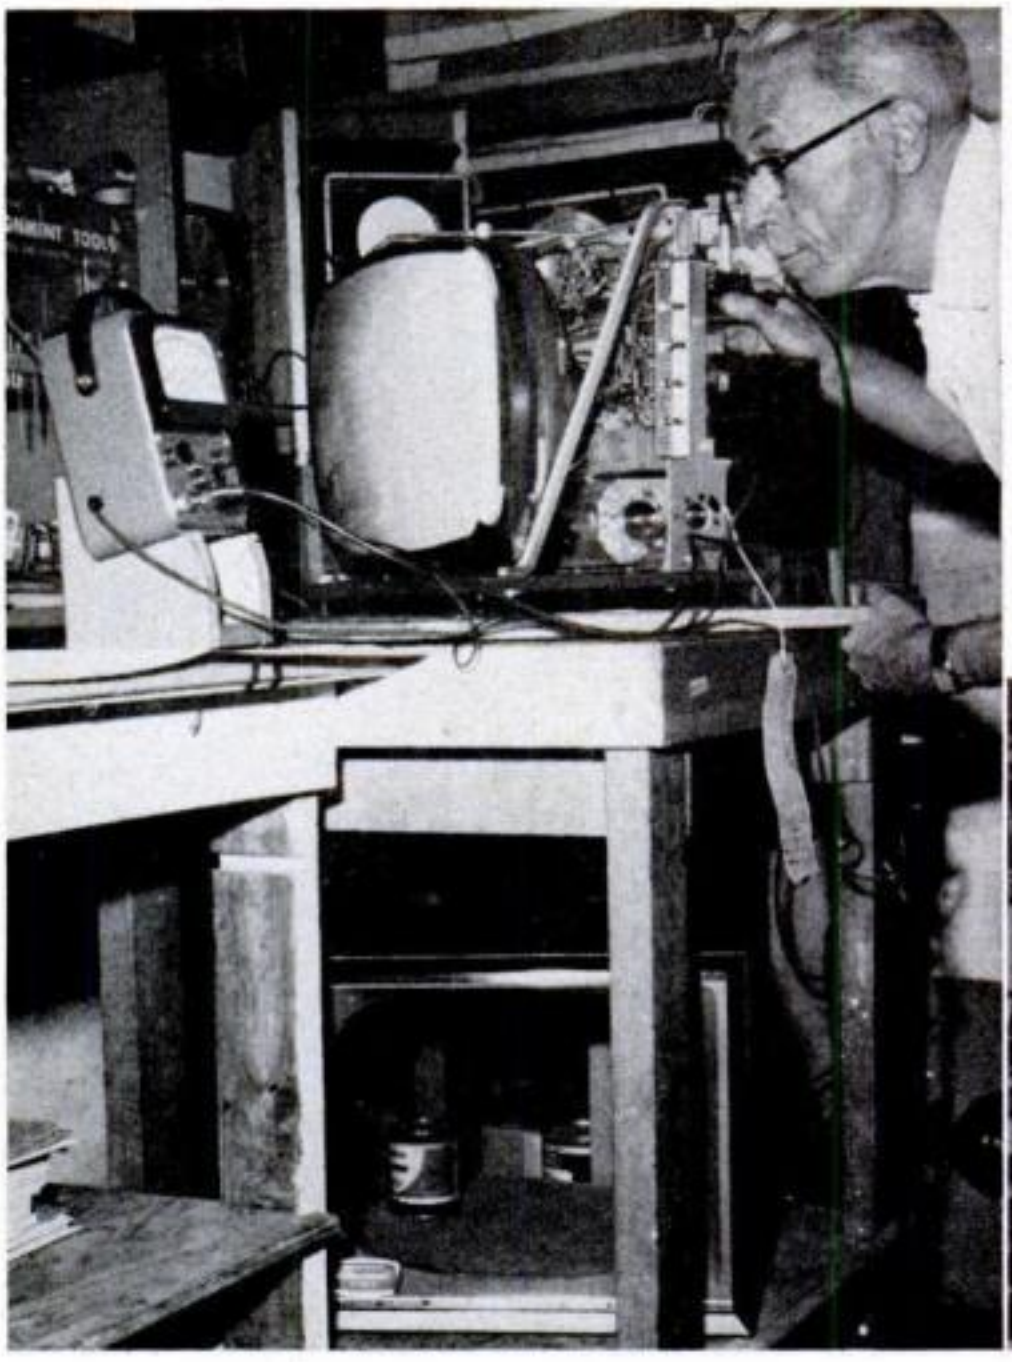


By dividing his workbench into 3′-square sections mounted on casters, this TV repairman always has a bench available for a television set. When one is tied up, he rolls it out of the way. Each table top is fitted with a revolving plywood platform, as shown below. A bolt serves as a top shaft and four casters act as bearings. When he wants a long workbench, he just rolls them together.—*Don Stanley, Sarasota, Fla.*

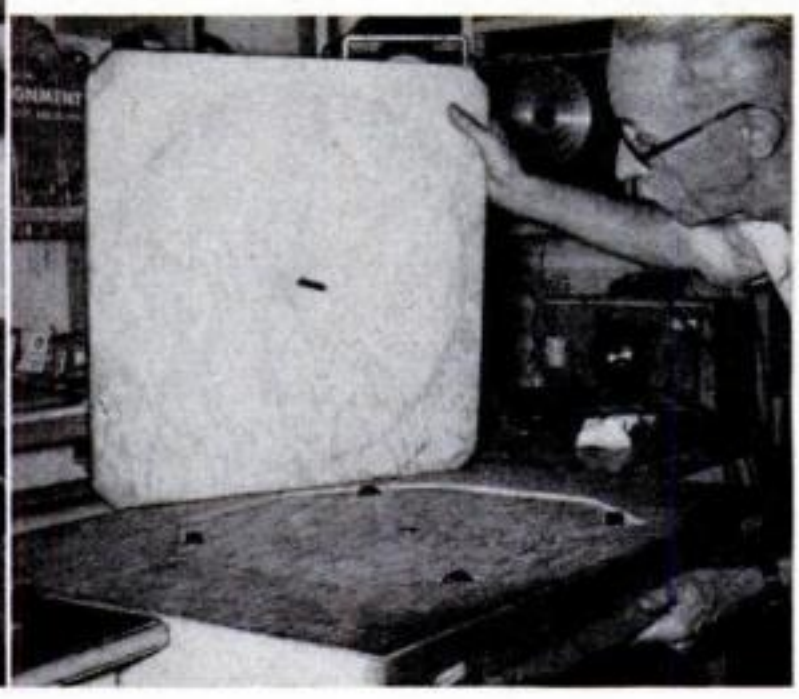

Heated Dowels Make Tight Fit

Heating a wood dowel with an ordinary infrared lamp, or in an oven to about 300° F., will drive out moisture and shrink it enough to fit into a slightly undersize hole. It's a faster method than sanding and, besides, reswelling after a dowel has been glued into its hole will give you a much tighter fit.

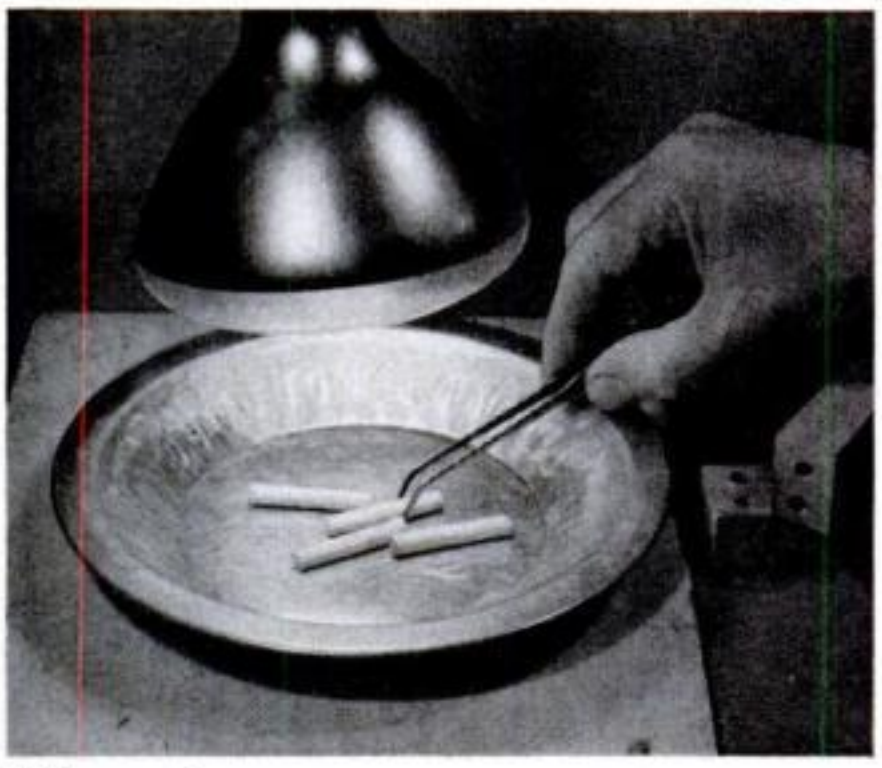

Fertilizer Bags Protect Plants

Each fertilizer or phosphate bag you empty can protect two young plants. Cut open the bottom and divide the bag in two; then set each half around a plant, digging it about 4″ under the soil and propping the corners with stakes. Any plant food left will wash into the earth.—*E. V. Reyner, Townsend, Mont.*



Copyrighted material

WARNING !



Today's high-powered engines need frequent spark plug checks to prevent dilution of oil

Don't change to summer oil without a spark plug check!

If you haven't checked your plugs in the last 5000 miles, they may be misfiring—and will dilute your new oil with gasoline.

Do you realize that every time a spark plug misses, raw gasoline remains in the cylinder and drains into your crankcase? This thins the oil so it can't properly protect costly engine parts . . . and may put you in line for a big repair bill.

So replace winter-worn plugs with new 5-rib Champions *before you change to summer-grade oil!* Champions will protect your oil from dilution. What's more — they'll give you greater horsepower and better gasoline mileage.

Ask your serviceman to check your spark plugs today. If you need new ones, insist on 5-rib Champions — the finest money can buy.




Care and Feeding of Engines



BY S. P CORP

CONCERNING PISTONS

The piston's job is to transfer the force of combustion into rotary motion through connecting rod and crankshaft. To do this, it must support the rings that seal combustion. Most pistons today are of aluminum alloy, to reduce the load on connecting rod bearing.

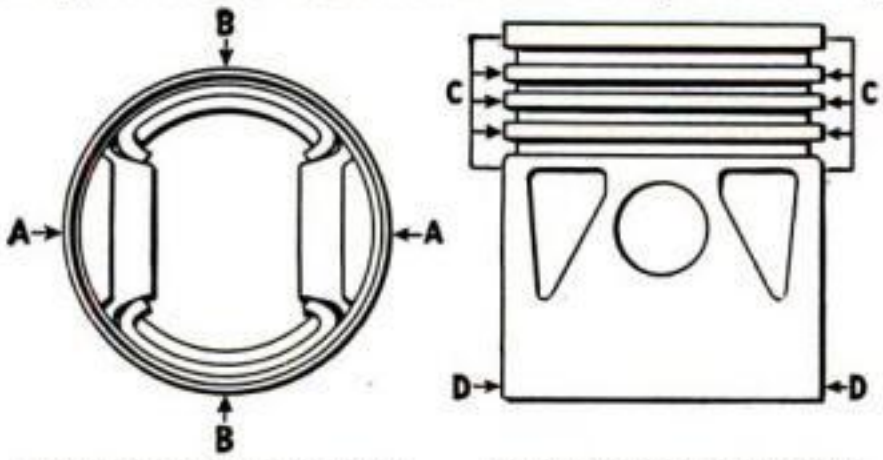

Diameter A should be .010" to .012" less than diameter B.

Diameter C should be .0005" to .0015" less than diameter D.

The piston is elliptical in shape to allow for expansion and to control side thrust on cylinder wall as piston gets hot in operation, when it becomes round. All pistons must be fitted to specifications, using a feeler gauge on the B dimension. The top is narrower than the bottom; always measure about ½" up from bottom.

When fitting new rings to old pistons, inspect to see that ring lands are square. A worn top land will prevent a new top ring from sealing properly. The Sealed Power GI-60 Insert is the best means of correcting this condition, permanently and economically.

CARBURETOR AIR LEAKS


A carburetor air leak may cause hard starting by making mixture too lean. To check, connect a vacuum gauge to intake manifold, removing air cleaner from carburetor and high tension wire from coil. Have someone step on starter. Place hand over carburetor so air can't enter. Gauge should show 12 to 14 inches of vacuum. If less, remove carburetor and repeat test with hand over intake manifold. If reading is still low, replace manifold gaskets. If second reading is above first, look for leaks in carburetor body or at throttle valve shaft. Check all gaskets—between air horn and float body, between float body and throttle body, and the main gasket at bottom of carburetor.



FREE BOOKLET FOR YOU

This illustrated booklet contains a world of valuable facts about car care. It's yours for the asking. And be sure to use Sealed Power KromeX Ring Sets when you re-ring—for easier starting, for greater oil economy, and for double ring life. Your dealer has them or can get them for you. Sealed Power, Dept. H-4, Muskegon, Michigan

Sealed Power
PISTON RINGS

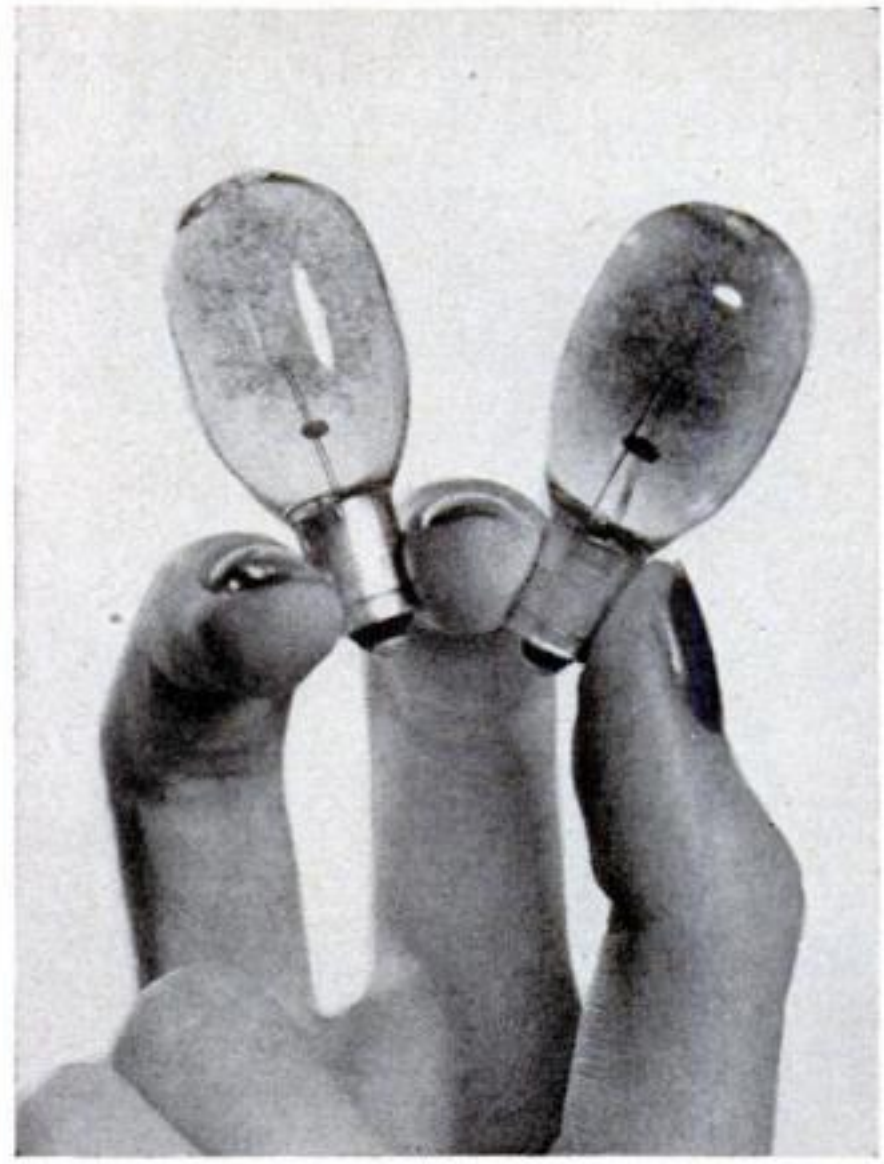

Peanut Bulbs Pack More Light

MORE oxygen inside gives these two new tiny bulbs for the box-camera amateur increased light for his flash shots. The clear GE PowerMite M2 at left will light subjects up to 36 feet away for fast black-and-white film. The blue bulb at right is for color, at up to 12 feet.



Sky Railroad Tests Rockets


SMALL test sleds skimming along this aerial track at supersonic speeds represent jet planes. When they near the end of the 600-foot run, experimental aircraft rockets are launched—slamming into a hill six miles away from the installation at Redstone Arsenal, Ala.

Copyrighted material



See what Weldwood V-Plank can do! Warm cherry transformed the drab scene (below) into this picture-book family room. And all the V-Plank shown, including facing those practical built-ins, costs only $105.

See how you and wood panels can make a room lie about its age

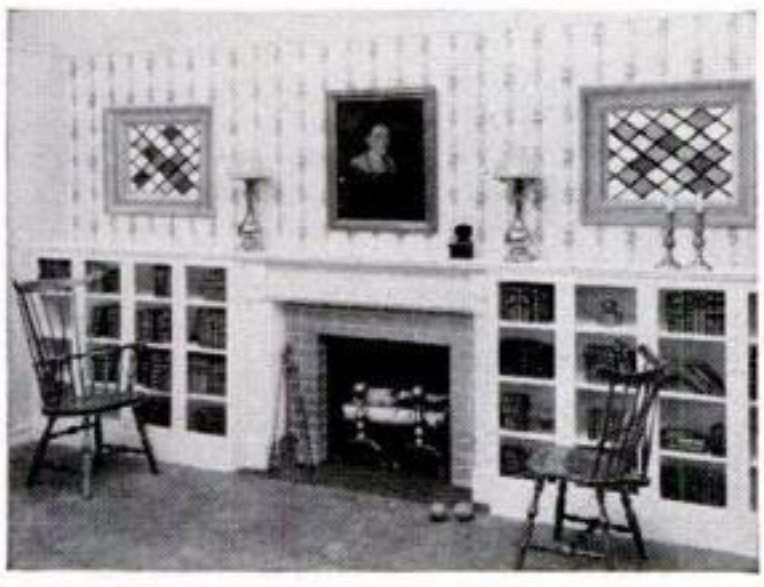

Before Weldwood, here's what this fireplace wall of a 35-year-old house looked like.

Here's a 1920 living room with 1956 ideas. Look how Weldwood Cherry V-Plank panels helped make it warm, cheerful and more livable. New built-ins tell you this is a room for *today's* living. At right: a handy desk-bookcase unit. At left: a neat nook for kindling and logs, plus a home entertainment center.

You and Weldwood paneling can do the same in your home. See pre-finished V-Plank and other paneling at your lumber dealer's, or at any of our 87 offices in principal cities. Or send coupon for booklets.

Choose from 6 fine woods in Weldwood V-Plank*: walnut, $85; Korina®, $79; mahogany, $79; Samara*, $52; cherry, $79; prices are for a wall 12′ x 8′.

Weldwood® Paneling

A product of

United States Plywood Corporation

WELDWOOD—The Best Known Name in Plywood

In Canada—Weldwood Plywood, Ltd.

*Trademark

United States Plywood Corporation
Box 61, New York 46, N. Y.

( ) Enclosed is 10¢ for full-color 20-page book of home decorating ideas, "Beautify Your Home with Weldwood Paneling."

( ) Enclosed is 25¢ for 40-page book "Do It Yourself with Weldwood Plywood," plus directions for making desk and turntable compartments shown above. PS-4-56

Name.....

Address.....

City.....State.....

Copyrighted material

[Continued from page 209]

flanges smaller than 2". You can keep the point in mind when buying a portable electric saw. Their flanges are fine for saw blades, but too small by code standards for a cutoff wheel.

At present the right flanges for home workshop machines are almost impossible to come by. Don't improvise by using flat washers. Never use two flanges of different size. Until better flanges are available, better use the ones provided and minimize their defects by careful attention to other details.

Blotters, for example, are meant to act as cushions, absorbing minor roughnesses in the clamping surfaces. They must be bigger than the flanges. If they are too small, frayed, or torn, carefully peel off every scrap and paste on new ones cut from a thin desk blotter.

Tighten the arbor nut snugly, but don't lean on it. Excessive tightening can distort the flanges, as shown in one of the drawings. If you can slip a thin feeler gauge under the outer edge of a flange, then the arbor nut is probably turned too tight.

Keep your guard up. If a wheel should burst, nothing may stand between you and serious injury except the guard. This unexciting piece of equipment is usually a drum or band surrounding all but 90° of the wheel, with end covers.

Polishing heads, being meant for wire brushes and cloth wheels, have no guards. Resist the temptation to mount grinding wheels on such heads. Do not improvise guards out of coffee cans, sheet metal and similar materials that aren't husky enough to contain the flying pieces of a shattered wheel.

You can buy arbors for wood lathes and combination tools, but not guards that would make it safe to use a grinding wheel on them. The accompanying photos show two sturdy homemade guards that will provide protection. Be watchful of wheel speed on machines with belt shifts; their top speed may be too high for abrasive wheels.

If you must use an electric drill, a flexible shaft, or any other wheel mount without a guard, protect yourself by limiting such use to a 3" wheel (not the popular 4" size) run at no more than 3,700 r.p.m. Wear goggles; be careful not to exert side pressure on the wheel. Stand aside, out of line with the wheel.

Make safety a habit. Don't use a grinding wheel that you know has been dropped. Never stand directly in front of a wheel just after you start it. Be sure tool rests and guards are securely clamped. Avoiding jamming work into or bumping a wheel.

Where to use cutoff wheels. Buy only reinforced cutoff wheels for home use. These are strengthened by cloth, glass fiber or nylon pressed into a resinoid bond. Do not confuse them with the older non-reinforced wheels or the depressed-center wheel designed for use with a special backing plate.

Reinforced cutoff wheels are so useful that the temptation to mount them without precautions may lead to trouble. Here are the tools you can use them on:

The portable saw. Although its flanges are rather smaller and its guard lighter than the ASA code approves, this is probably the best home tool for the purpose. It is especially good for cutting wide and bulky materials, such as corrugated sheets and masonry blocks. Guide it with two hands if possible. Don't let it wander or twist in the cut.

Saw attachments for electric drills, on the other hand, are worse than useless. Neither power nor speed is adequate, and the guard will not fit the wheel.

Bench grinder. If it has a proper guard and rest, a small cutoff wheel can be used on this for cutting rod or tubing, or for slitting plate stock. Take care to feed straight in, without twist. Never grind on the side.

Radial-arm saw. These are well guarded and the wheel is automatically kept in line with the cut. Clear away all sawdust before cutting metal (the spark stream is hot and heavy). A metal fence

[Continued on page 258]

Copyrighted material

NOW— A POWER WORKSHOP WITH REAL GUTS

at a price you can afford!



Built around this

DYNO-MITE

NO. 888 POWER UNIT

Complete with 3/8" Jacobs Geared Key Chuck, 6" Rubber Pad, three 6" Sanding Discs, 6" Polishing Bonnet, Wheel Arbor, and Reversible Side Handle.

ONLY $44.95

Add these rugged, inexpensive attachments as you need them



Jig Saw Table
No. 887 $1.95





6" Portable Saw
No. 8811 $17.95

6¼" Bench Saw
No. 883 $26.40



Portable Jig Saw
No. 886 $11.45
(with 4 blades)



4" Bench Grinder
No. 8810 $6.80

Orbital Sander
No. 882 $15.95





7-to-1 Speed Reducer
No. 8815 $12.45



Bench Stand
No. 881 $3.40

Drill Press Vise
No. 8816 $5.95





6" Bench Sander
No. 889 $8.95

Drill Press Stand
No. 8814 $19.95

No need now to choose between weak, under-powered attachment-type tools — and complicated, high-priced stationary units. In the remarkable Millers Falls "888" you get a really powerful (4.0 amp., 1/3 h.p.), fully portable power unit that drills, sands, polishes. Then, by adding beautifully engineered attachments, you can have all the power tools necessary for practically any job. And at a *fraction* of the cost of individually powered tools. See — and try — the "888" at your dealer's.

Millers Falls

Finest Power Tools Made

MILLERS FALLS TOOLS SINCE 1868 ®



FREE FOLDERS on the "888", its attachments, and the complete "Dyno-Mite" Line of power tools. Ask for them at your dealer's, or write

MILLERS FALLS COMPANY
Dept. PS-13, Greenfield, Mass.

DON'T MISS THESE HARDWARE WEEK SPECIALS — April 12-21



POWER BIT SET

High-speed steel blades stay sharp 10 times longer than ordinary bits. 3/8" to 1". Fit any 1/4" electric drill. Regular $6.45.
SPECIAL . . . $5.79

COMBINATION SQUARE


12-inch — professional quality. Deeply etched graduations. Precisely milled working faces. With scriber, level and plumb. Regular price $1.80.



SPECIAL $1.59

Copyrighted material

How FORD has upped V-8 h.p.

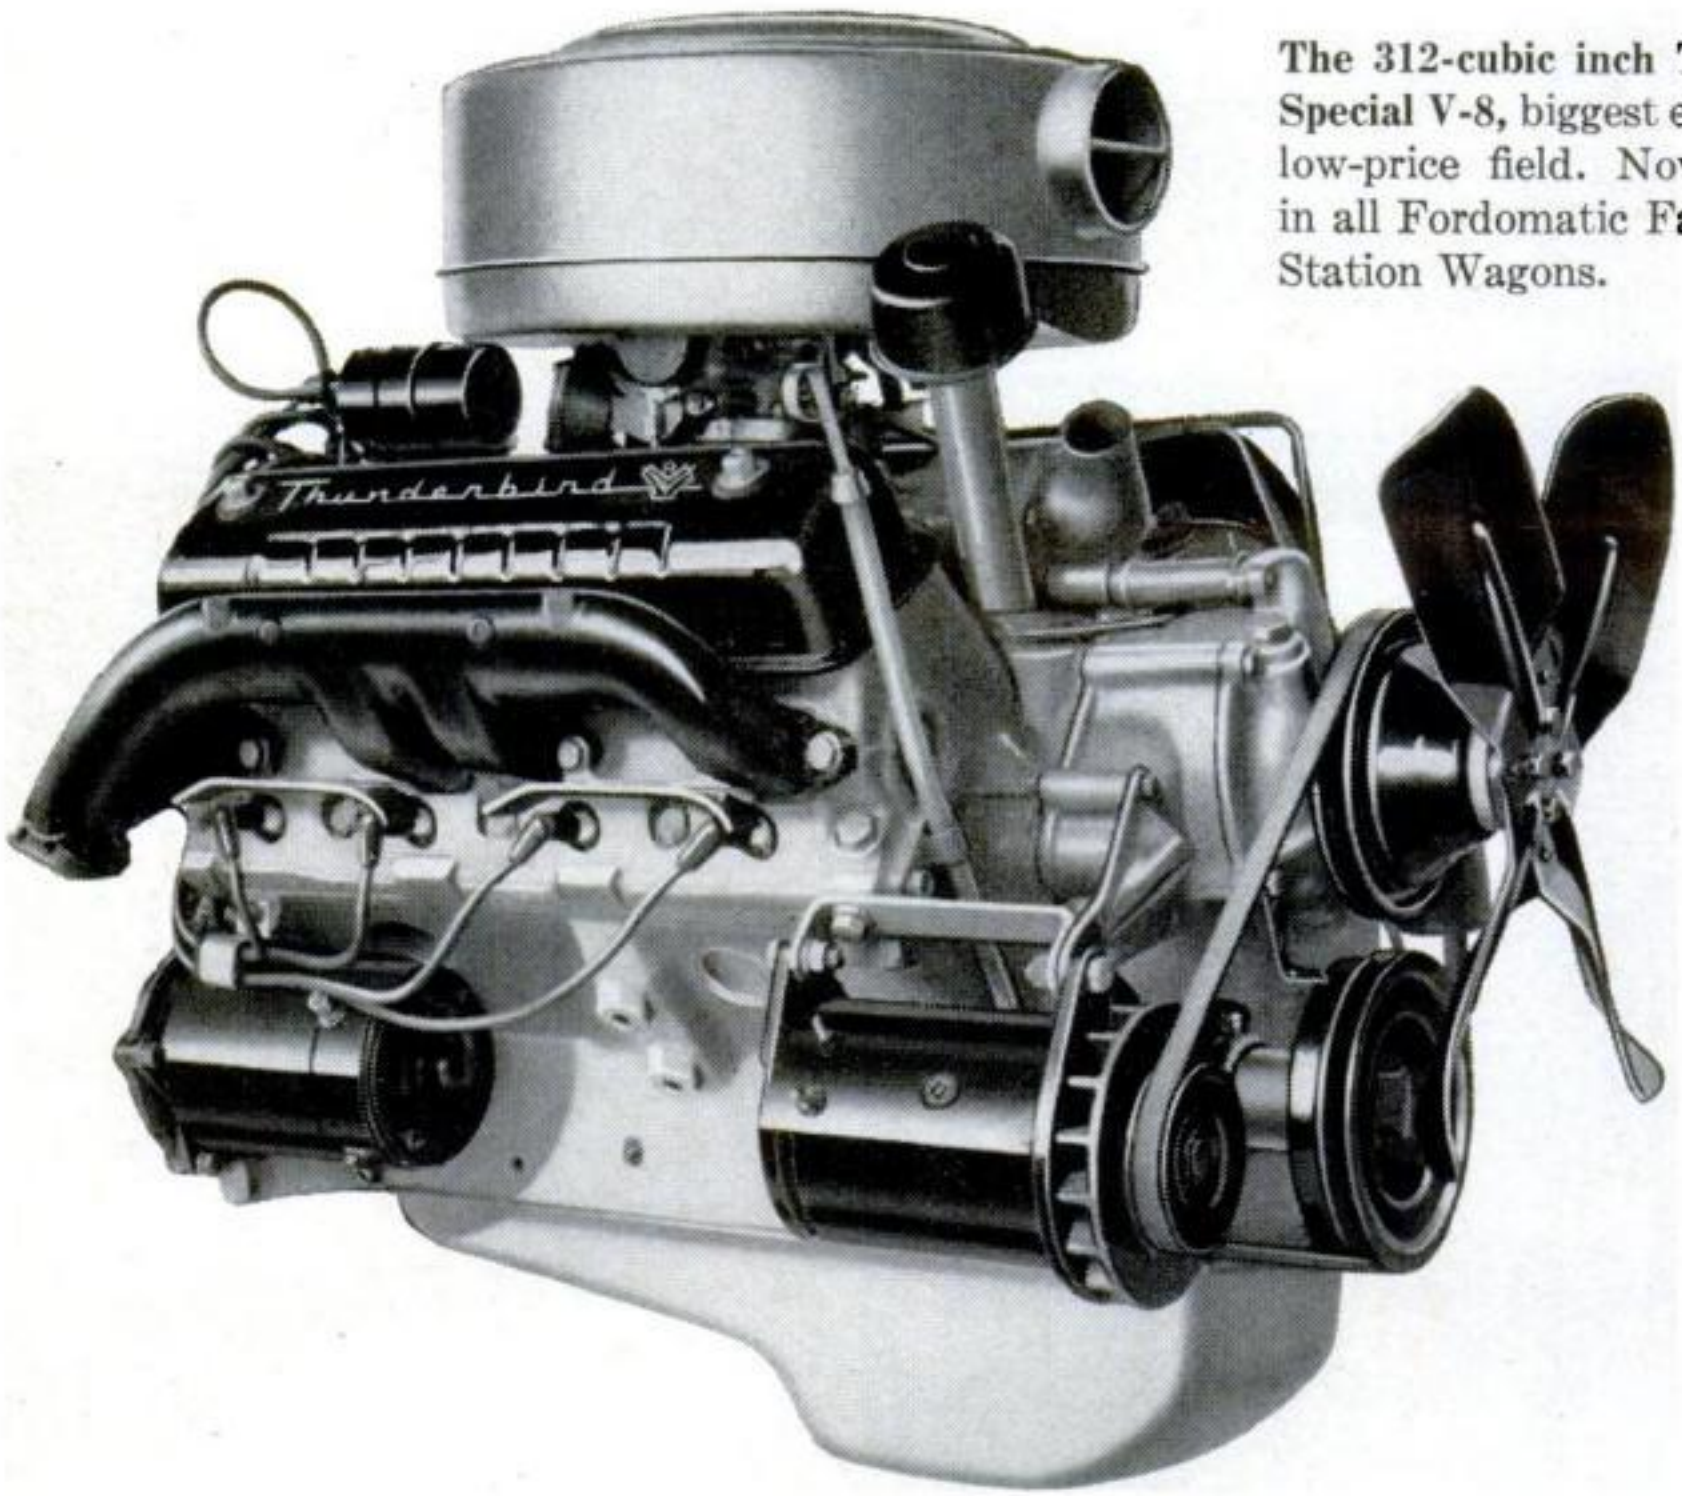

The 312-cubic inch Thunderbird Special V-8, biggest **engine in the** low-price field. Now **available** in all Fordomatic **Fairlanes and** Station Wagons.

The world's leading maker of V-8's now offers up to ***225 h.p.***

Copyrighted material

There is good news from Detroit for the man who appreciates the exciting feel of a lot of "horses" under the hood of his family automobile.


The management at Ford announced recently that its Thunderbird *Special* V-8, the job that revs up 225 h.p. and powers the mighty Fordomatic Thunderbird, now is available in Fairlane and Station Wagon models with Fordomatic Drive. This is the *biggest* engine in the entire low-price field with a displacement of 312 cubic inches! And it's number *one* in *torque*, too, which means you get top performance—for the kind of driving *you* do.

The standard V-8 engine for Fairlane and Station Wagon models already is the most powerful *standard* "eight" in the low-price field. It's the Thunderbird V-8 that develops 202 h.p. with Fordomatic. This is up to 32 *more* horsepower than other standard V-8's in Ford's field. What's more, this same engine has been made available in all Customline and Mainline model Fords, too.

What all of these power boosts amount to was perhaps best expressed by the automobile mechanic who, upon hearing of these new Ford engines said, "Looks to me like Ford means to stay Number *One* on the 'Git' Parade!"



The 292-cubic inch Thunderbird V-8, the standard eight for all Fairlanes and Station Wagons, is now available in all Customline and Mainline models, too. Has 4-barrel carburetor, dual exhausts.

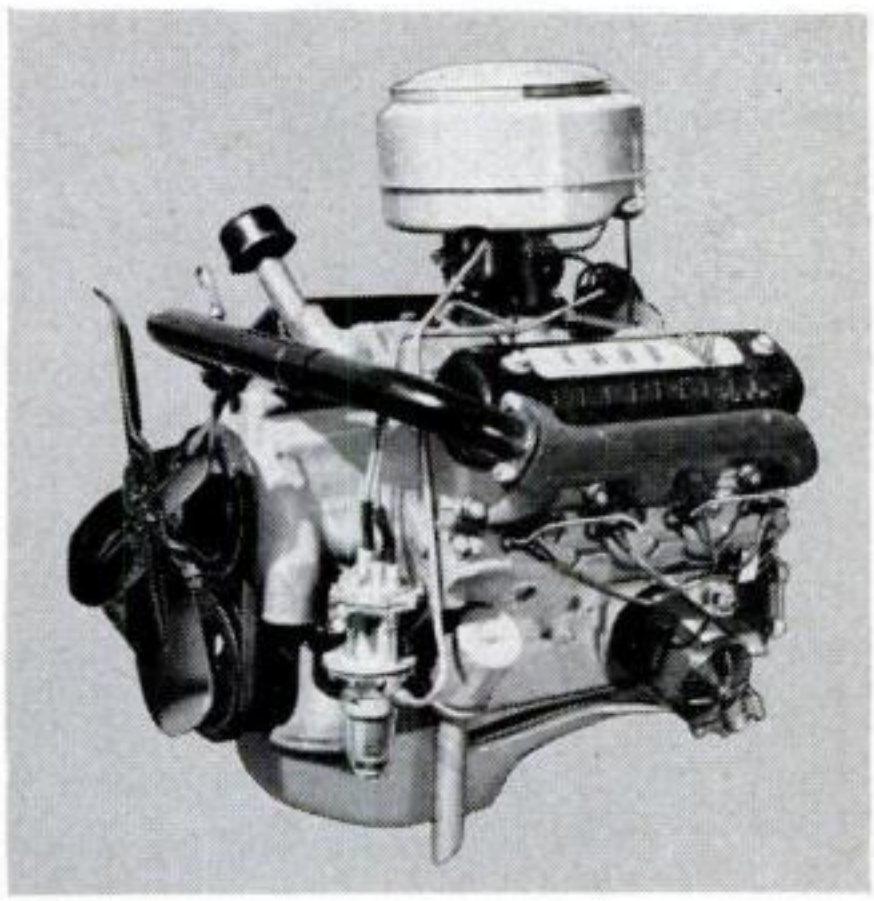

The 272-cubic inch Ford V-8, the standard eight for all Customline and Mainline Fords. Has modern dual carburetor, automatic choke, single exhaust.

FORD Division of FORD MOTOR COMPANY

Copyrighted material

Hardware Week Special

NICHOLSON HANDY FILE only

69¢

(regularly 86¢)



You'll find it one of your most-used hand tools

- For household fix-ups
- For fast filing, smooth finishing on aluminum, other metals, wood, plastics

One side single-cut for sharpening, finishing

Other side double-cut for fast filing

Colorful, comfortable forged steel handle with hang-up hole

Buy several—for household, garage, workshop, sharpening garden tools—at this special low price during Hardware Week (April 12-21). Available at good hardware stores.

NICHOLSON FILE CO.
Providence, R.I.

(In Canada: Nicholson File Company of Canada Ltd., Port Hope, Ontario)

NICHOLSON FILES

A FILE FOR EVERY PURPOSE

How to Use Abrasive Wheels Safely

[*Continued from page 254*]

and asbestos table pad as shown in a photo are desirable. If the saw has a two-position switch, be sure it's turned on so that the exposed bottom part of the wheel turns *away* from you.

Circular saw. Grinding engineers shudder at this, for the circular saw is basically all wrong for abrasive cutting. The exposed part of the wheel turns toward the user. The guard is usually too light, open at the sides, or lifted too high when work slides under it.

What can be done to make it safe? The photos show how large concave washers, sold by a mail-order house for stiffening thin saw blades, can be adapted to a cutoff wheel. Although they reduce the depth of cut you can take, they are preferable to the regular saw flanges.

A husky guard deflector made from ordinary angle iron is also shown. It gives just about all the protection possible while leaving the wheel accessible.

An optimist is a man who idles the motor in front of his house while he waits for his wife.

—THE SIDEWALK SUPERINTENDENT

Check your own saw, if you intend to use it, for exposure to the wheel under and behind the table. Some tilt-arbor castings virtually enclose the wheel underneath. Keep onlookers away while you do abrasive cutting.

A flat "don't" is the only good answer to using cutoff wheels on a drill press, flexible shaft, electric disk sander and other portable tools. It is almost impossible to provide a guard on such machines, and being hand-held, they impose severe side pressure on a wheel.

For the same reason, no grinding should ever be done on the side of cutoff wheels even if they are mounted on a rigid spindle. Inspect the edge of cutoff wheels occasionally during use; if they wear to a taper, they may bind in a cut. Dress the edge square with a piece of an old wheel or a dressing stick. END

Copyrighted material



"Rochester Carburetors Treat Us Right!"


Any "fuel" knows it . . . you can't beat a Rochester Carburetor for feeding fuel to a modern engine. Every gallon's a long gallon—every gallon's a "go" gallon—when Rochester is the go-between. So stretch out your mileage between station stops—specify a gas-saving, money-saving Rochester Carburetor every time. Original equipment for Cadillac, Buick, Oldsmobile, Pontiac and Chevrolet cars.

CARBURETORS BY ROCHESTER PRODUCTS

ROCHESTER
PRODUCTS
DIVISION OF
GENERAL MOTORS
CORPORATION
ROCHESTER N.Y.

Copyrighted material

Turn your basement into a FUN-AND-HOBBY ROOM for only 16^{00} a month!*

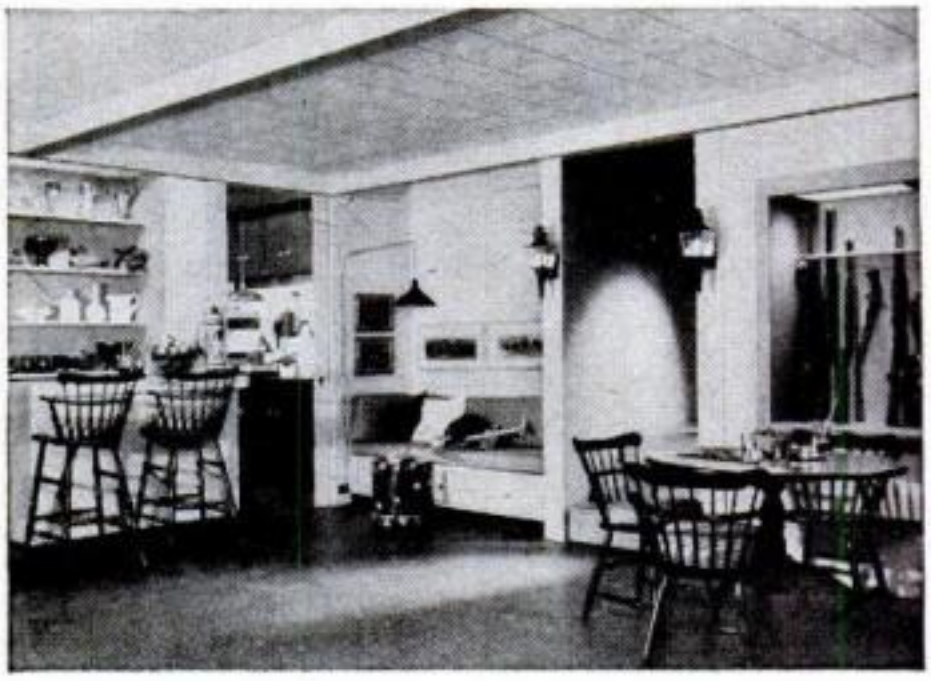

It's easy to do with Gold Bond Building Products



Build a room like this in your basement—or in *any* waste space. It's a cinch with Gold Bond Building Products . . . made to *work together.*

Strong, sturdy walls are Gold Bond Gypsum Wallboard. Big, lightweight panels are easy to apply. Simply saw like lumber, or score with a knife and snap off. Conceal joints with Gold Bond Tape Joint Treatment.



On the ceilings use Gold Bond Insulation Tiles. Quickly applied; interlocking edges hide nails or staples.

Finish with Gold Bond Velvet—world's finest latex paint. Goes on with brush or roller, dries in minutes, washable. Clean equipment with water.

See your local Gold Bond Dealer for all building, remodeling materials.

NATIONAL GYPSUM COMPANY

Buffalo 2, N. Y.

* Based on cost of materials spread over 36 months. Prices vary slightly in some localities.



MAIL COUPON TODAY

National Gypsum Company,
Dept. PS 46, Buffalo 2, N. Y.

Please send me Gold Bond "How-to-Do-It" Plan #18 showing me how to build a basement fun-and-hobby room. Enclosed is 10¢ to cover mailing.

Name_____

Address_____

City_____ Zone____ State_____

[*Continued from page 141*]

activities transferred to the do-it-yourself room and family room, the living room is likely to be in good order for any unexpected visitors. If it isn't, the living room can always be picked up quickly and the other rooms left alone. You can't see them from the living room.

None of the windows or doors is over six feet eight inches high—low enough for washing without a stepladder.

Plenty of storage. This home has eight clothes closets, plus a broom closet, linen closet for bath linen and a second linen closet for bedclothes.

Plenty of baths. Counting the lavatory off the do-it-yourself room, there are three in this plan. They are convenient to living room, bedrooms and (for guests) the front hall.

Companionship for your wife. While you can have the boys in the workshop, Mom's kitchen is so planned that she can be with, or watch, the children. They may be in the play yard, which she sees through her kitchen windows. Or they can be in the family room, in plain sight over her kitchen counter top.

Quiet sleeping areas. No matter what's going on in this home, there is peace and quiet in the bedrooms. Halls, walls, closets and distance insulate the sleeping wing from noise.

Glass walls. When they can't get outdoors, Americans like to look out. The PSM house has a glass wall across the dining and living rooms, facing your garden, as in the best modern houses.

Matern expects people to ask about excessive sun heat admitted by this long glass wall. He points out that there is an eight-foot roof overhang to reduce the temperature—and glare, as well.

The cost of the house is difficult to predict, Matern says, because building is twice as expensive in some areas as in others. But he estimates that this house, containing about 1,500 square feet of living space, might range between $19,000 and $35,000. END

NEXT MONTH: How to replace those broken sash cords.

Copyrighted material









Save $3.00

$19.95

Reg. $22.95

Special during Hardware Week—April 12-21

this NEW Black & Decker ¼" Drill... makes your home repair jobs easy!



NEW Orbital Sanding Attachment

for B&D ¼" Drills . . . gives professional finishes! **Only $16.95**

Use this new orbital sanding attachment . . . with, across or against the grain! Get a satin-smooth finish like never before. Big bottom plate extends beyond housing —sands right up to obstructions. No swirl marks; no chance to ruin the job! Amateurs do perfect work with this wonderful new sanding attachment. And any B&D ¼" Utility Drill has plenty of power to get your sanding done faster!

Over 2,500,000 homeowners now do *their own* repair and building jobs with Black & Decker ¼" Drills—world's most famous do-it-yourself tool! This new, powerful, lower priced drill handles like a charm—with attachments to drill, saw, sand, drive screws, mix paint —any home application you can think of. Make your own lawn chairs, end tables, children's furniture! Polish tables easily, quickly—sharpen garden tools—clean rust off metal railings!

For help with your home jobs write for "Handy Tips" booklet. Send 25 cents to: Bob Davis, Home Director, THE BLACK & DECKER MFG. Co., Dept. S-46, Towson 4, Maryland.

LOOK IN THE YELLOW PAGES UNDER "TOOLS-ELECTRIC"

B&D Black & Decker®

WORLD'S LARGEST MAKER OF PORTABLE ELECTRIC TOOLS

Copyrighted material



Money-saving warning from **Purolator**

It's oil filter check time—now!

Save costly engine repairs! With your Spring oil change, ask for a FREE OIL FILTER CHECK!

A dirty, choked-up old oil filter can't protect your new summer-weight oil! So, ask your serviceman to check it *before* he puts in that new oil! If you need a new refill . . . insist on a genuine Purolator Refill.

The Purolator Micronic is up to 10 times more efficient than many oil filters . . . stops grit as tiny as 39 millionths of an inch! There's one engineered specifically for *your car*. Refills installed in minutes. Cost as little as $1.60.

© 1956, Purolator Products, Inc., Rahway, N. J.; Toronto, Canada.

"Purolator" and "Micronic" Reg. U. S. Pat. Off.

Proved best for every make of car

PurOlator

OIL FILTERS

Plastic House

[*Continued from page 146*]

cracks, patch the roof, mend the floor covering and do other repair jobs.

A major problem still worrying the designers is what plastic to use for the wings. It may be a plastic sandwich with a core of styrene or urethane foam between two layers of fiber-glass-reinforced polyester. But they are not sure yet. A house may have to last 30 years; no structural plastic has been around that long, and nobody knows how plastic will take decades of sun or cold.

Joints pose another tricky question. Some plastics are easy to join to each other. The halves of the wing can probably be fused together on the site. Some parts can be molded without joints. But at MIT they are still trying to find the best methods of joining plastics to other materials. Also, some plastics "creep" and expand under heat. Elastic joints, special gaskets, nonhardening calking compounds or adhesive tapes may be needed to prevent the house from springing leaks on a hot day.

Some men who enjoy running things around the house are mighty proud of their power mowers.

—THE SIDEWALK SUPERINTENDENT

Will the plastic house be cheaper than conventional ones? That depends greatly on the materials. The house is designed for mass production, and the basic half-wing unit might be produced as efficiently as an automobile fender. And, as architect Goody puts it: "About 50 percent of the cost of a conventional house comes from labor on the site. With our design, we believe that we can reduce this item to about 15 percent."

Both Monsanto and MIT are emphatic about one point: The design is experimental. The first plastic house is most of all an "idea" house. Its main purposes are to find answers to questions that people will ask about plastic houses, and to demonstrate plastics as standard building materials. END

Copyrighted material


Before you buy...try the

"feather touch"

ball-bearing rip-fence

on the

Yates-American Saw-Jointer-Sander Combination

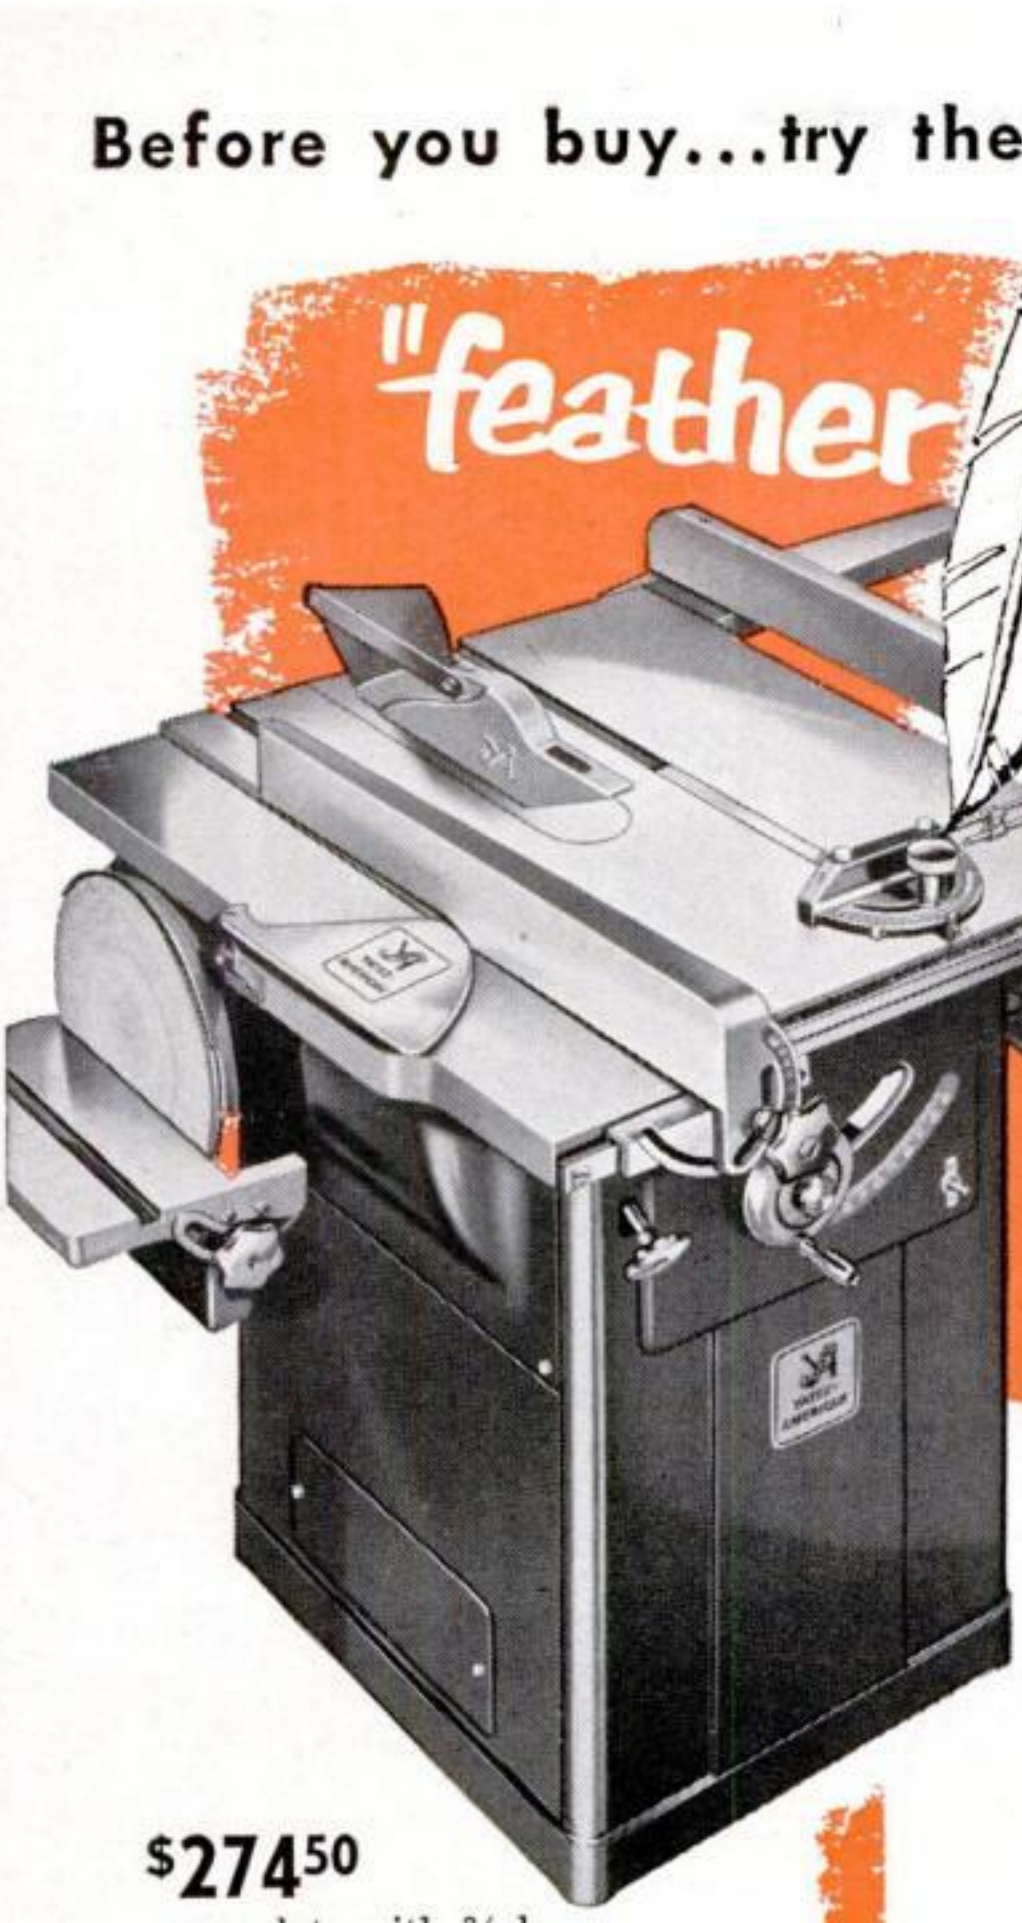

$274.50

complete with ¾-hp, totally enclosed, dust-proof motor that runs everything

(Less saw-guard and table extensions)

It's just one of many revolutionary improvements in design that you get in this new Yates-American Saw-Jointer-Sander Combination.

There's nothing else like the Yates-American — absolutely nothing! It's an entirely different combination of the three woodworking power tools you use most often.

Only the Yates-American gives you the extra safety of "see-saw" operation . . . the extra convenience of instant changeover . . . the extra usefulness of a power take-off.

You've got to see it, to believe it! Stop in to see your Yates-American dealer today.



Free!

Illustrated catalog and interesting booklet, "Short Talks on Wood." Send coupon for your copies.

Yates-American

Dept. D, 783 North Fourth Street, Beloit, Wisconsin PT-7

Send me catalog on Saw-Jointer-Sander Combination and free booklet, "Short Talks on Wood."

Name_____

Address_____

City_____ Zone_____ State_____

Copyrighted material

now the

DELTA . . . world's most complete power tool line
53 machines . . . 246 models . . . over 1300 accessories

Copyrighted material

ROCKWELL-BUILT

new DELTA

"900" radial saw

. . . for small shops and home workshops

Delta's new "900" is the most powerful, most useful 9" radial saw ever built at any price! It's big, it's rugged—it does every job you ever wanted a radial saw to do. And it's the only 9" radial saw that gives you all these Delta "big saw" extras:

Exclusive "Turret Arm" Action—The *only* 9" radial saw with the double over arm construction preferred in large industrial saws. Pivot point always stays over the center of the work table for greater versatility, accuracy—and safety.

True ¾ H. P. Motor—Guaranteed for a full year! The most powerful motor on *any* 9" radial saw—you make heavy cuts faster, easier.

Select Edge Grain Fir Table—Only the *finest* grade prime wood is used to guarantee freedom from warpage or distortion.

Exclusive "Wide Bearing" Construction—Carriage rolls on extra wide spaced bearings for greater rigidity, years of more accurate service.

NATIONAL DELTA BUDGET PLAN

Get all the facts about the new Delta "900"! And get all the facts about the easy Delta Budget Plan:
As Little As 10% Down...As Long As 24 Months To Pay!
At all Delta Dealers' (under "TOOLS" in the yellow pages), and leading hardware stores.

DELTA ROCKWELL

DELTA QUALITY POWER TOOLS

Another Product by **Rockwell**

Send The Coupon for Catalog—TODAY!

Delta Power Tool Division, Rockwell Manufacturing Co.
504-D N. Lexington Ave., Pittsburgh 8, Pa.

☐ Please send name of my nearest Delta Dealer.
☐ Please send me Catalog on the new Delta "900" Radial Saw.


Name_____

Address_____

OPERATION HOME IMPROVEMENT — So the more to Fix

DELTA QUALITY COSTS NO MORE

Copyrighted material

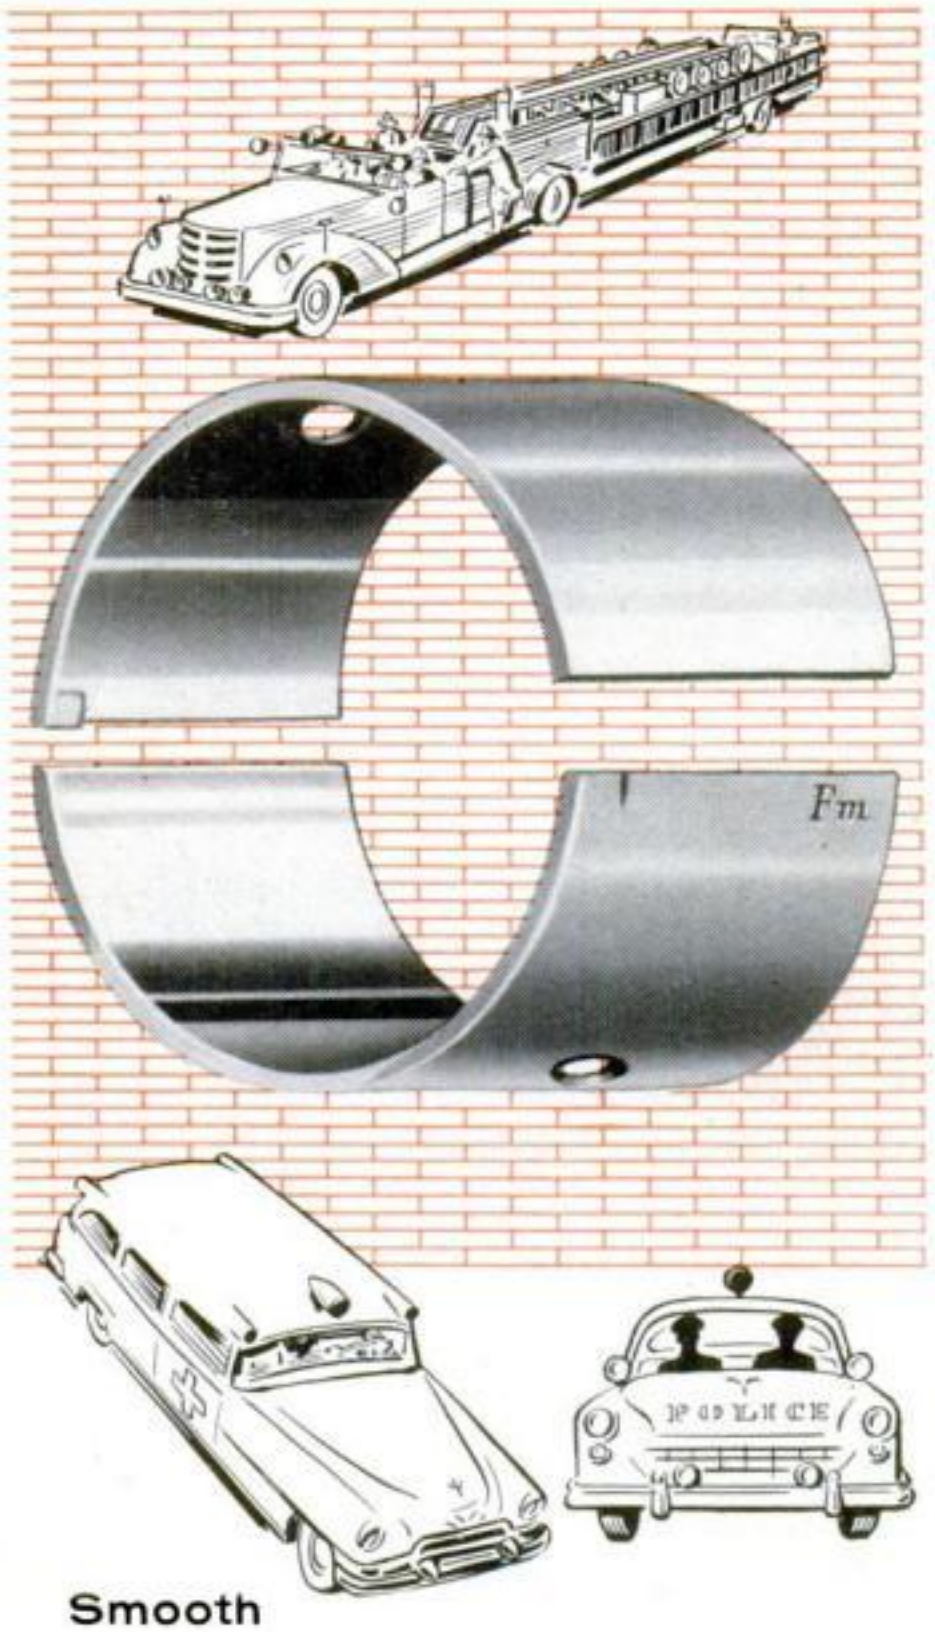

Smooth
Engine Power
calls for Quality Bearings . . .

FEDERAL-MOGUL QUALITY!

You, too, can have the same lively, dependable power vital for emergency vehicles, when you replace worn engine bearings with Federal-Mogul QUALITY bearings. They are *engineered* to stand up under heavy explosive impact loads and to restore snappy power, pick-up and economy!

FEDERAL-MOGUL SERVICE

Federal - Mogul - Bower Bearings, Inc.

Ask your Mechanic!

RESEARCH • DESIGN • METALLURGY
PRECISION MANUFACTURING • SERVICE

Installing New Appliances

[*Continued from page 163*]

tions are waiting. Installation requires elementary plumbing and wiring skill, but not more than that if you select a machine that can be hooked up easily—the type that pumps out waste is simplest to connect to the drain, for example. The pictures on pages 160 and 161 show you a typical installation.

If your dishwasher has an electric water-heating element, it needs a separate 110-volt line. Otherwise it can share a circuit.

Clothes washers (\$150 up) involve the simplest plumbing of all. It is all rubber hose, and you can get extra-long pieces if need be. The drain hose just hooks over a tub or sink.

A woman never realizes how badly she needs an automatic dishwasher until her husband gets an unexpected raise.
—THE SIDEWALK SUPERINTENDENT

You will have less trouble if you give a clothes washer its own circuit—its starting load is high.


Clothes dryers come either as separate units or in washer-dryer combinations (which save space). The cost adds up to about the same. An electric dryer may cost from \$125 up. A gas dryer costs \$25 to \$50 more, but heats up faster.

Electric dryers generally need 220 volts; some also run on 110 volts but dry more slowly. A gas dryer has a ⅓-hp. electric motor that runs the blower and turns the drum. This calls for 110-volt service.

If your dryer isn't the new type that vents both moisture and lint down the drain, find out what does become of the discharge. Some dryers blow more than a gallon of water into the air every hour. This often condenses in walls and causes outside paint to peel.

All dryers can be converted for outside venting. Knockouts in cabinets permit quick attachment of a flexible duct made for this job. You run the duct through a wall to the outdoors and cover it with a cap that comes with it. END

Copyrighted material

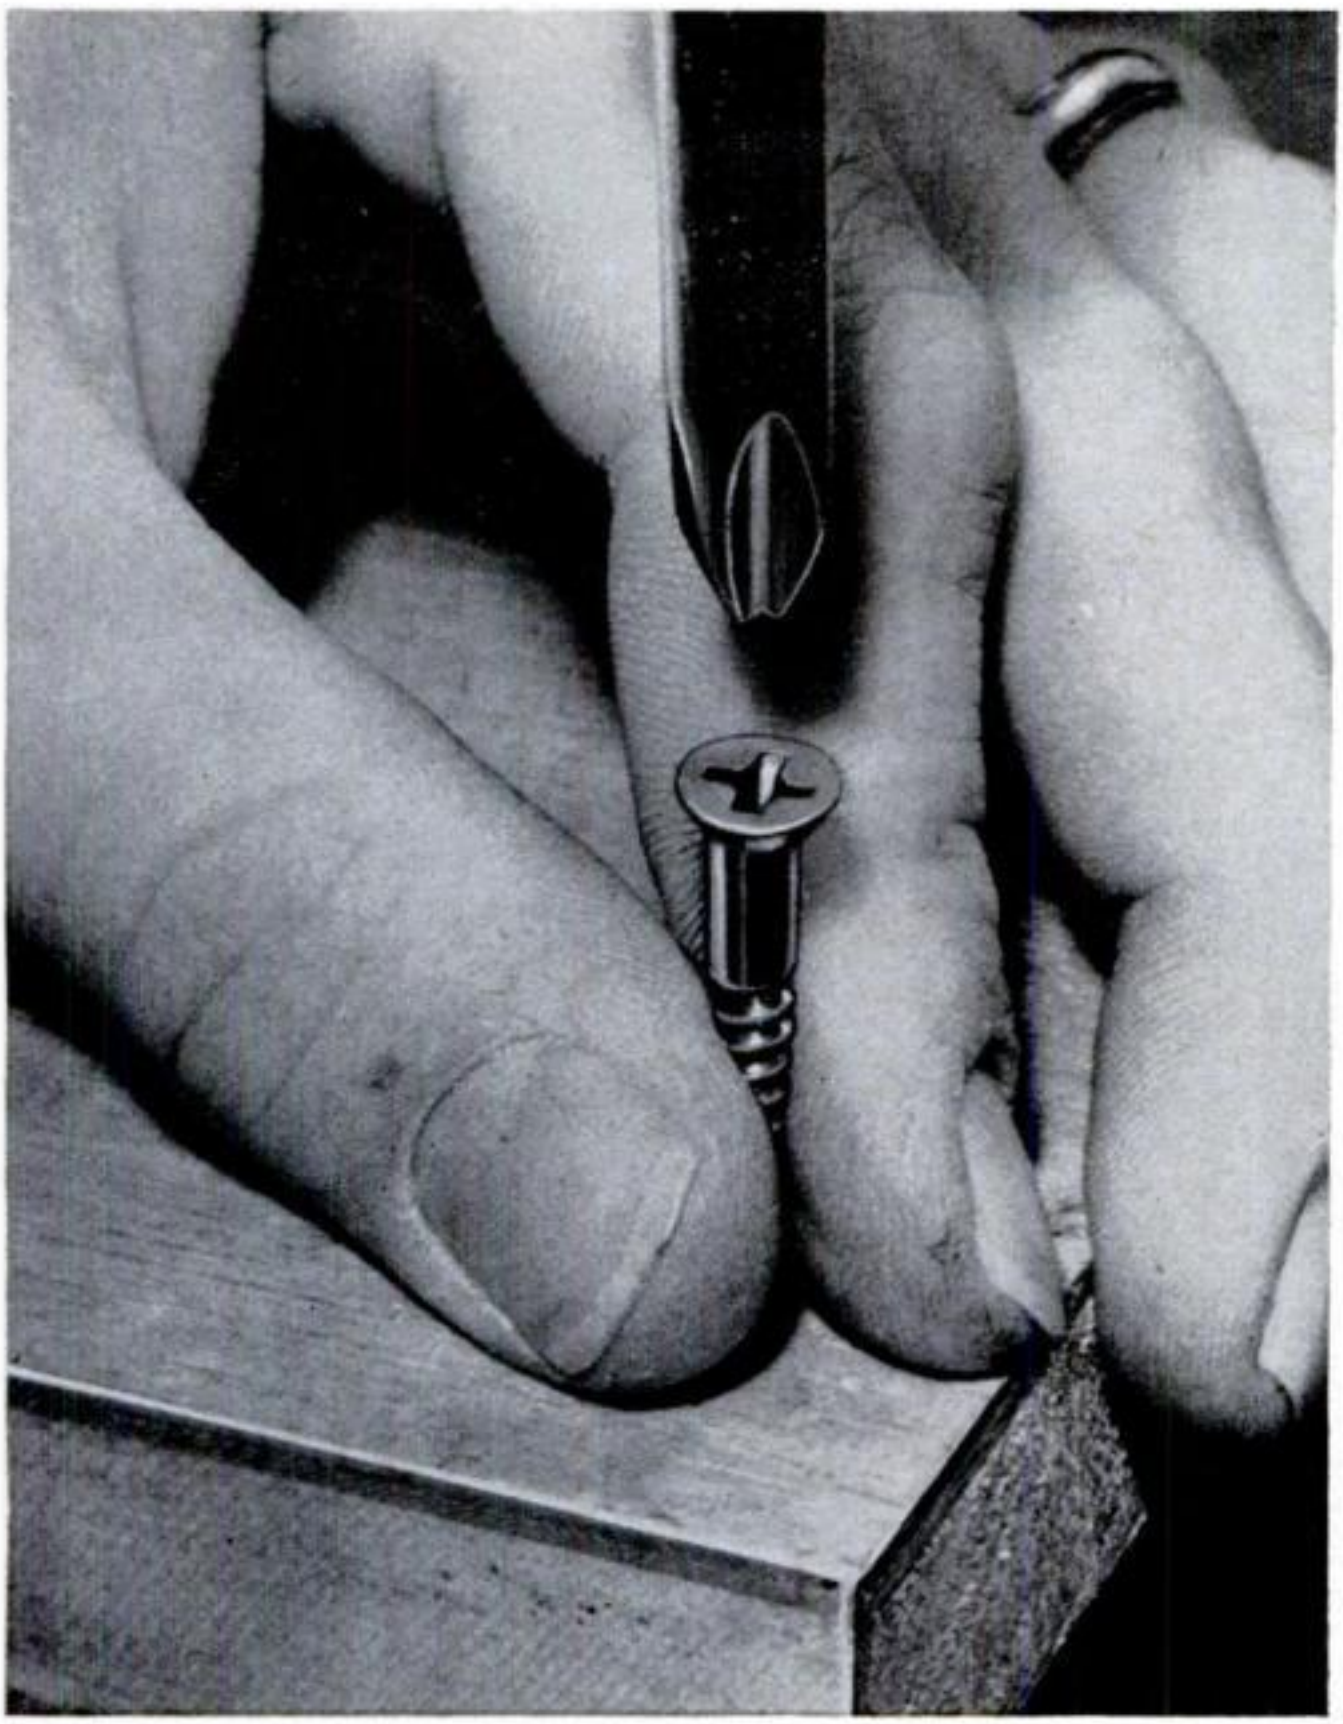

Make it fast.. Make it last with SOUTHERN Screws

. . . headed, pointed, threaded, tested, and inspected to assure a quick start and a permanent fit. Give your home or factory project that important last "finishing touch" of quality.

Ask your dealer for SOUTHERN by name . . . the brand with built-in *Quality Economy Dependability.*

Phillips or slotted in all popular head styles; steel, brass, silicon bronze, aluminum and stainless steel. All standard plated finishes.

With FREE Technical Chart, you can ask your dealer for the specific screw your job requires. For your copy of this chart, just add your name and address and *mail coupon today.*



Southern Screw Company
Box 1360-P24
Statesville, North Carolina

Please send free Technical Chart, also the illustrated booklet "How Are Wood Screws Made?"

Name_____

Address_____

City_____ State_____

Sold Through Leading Wholesale Distributors • Warehouses: New York • Chicago • Dallas • Los Angeles

Copyrighted material

Kitty Kimsul says:

"Here's the easiest insulation of all to cut, measure and install!"



• KIMSUL Insulation is designed to cut winter fuel bills up to 33%—to keep your house up to 20° cooler in summer.

• And KIMSUL is clean—free of irritating dust and slivers.

• So light and compact even a woman can carry a 200 ft. roll—or take home enough in the car to insulate an entire attic.

At your Kimsul lumber dealer's—this denim cobbler's apron. Regular $2.50 value—only 89¢



Perfect for hobby work, gardening, barbecuing. Has three large pockets, adjustable waist and neck bands. Only at your KIMSUL lumber dealer's and only for a limited time.

KIMSUL A PRODUCT OF Kimberly-Clark

INSULATION

Kimberly-Clark Corporation • Neenah, Wisconsin

Overhauling Your Lawn-Mower Engine

[Continued from page 232]

for removing head bolts. There seemed nothing wrong with the gasket. Putting it aside, Cam put the head on the block and tried to slip the thickness gauge in between at various points.

"Not warped," was his verdict. "Put grease on that gasket and try it again."

Smearing both sides lightly, I replaced gasket and head, put the torque wrench on, and tightened the first cap screw. Then I tackled the next.

"Hold it!" snapped Cam. "That how you tightened it last time?" I nodded.

"That'll do it," Cam went on. "Tightening head bolts circlewise puts uneven stresses on the head. It can't expand evenly when hot, and you get leakage."

A bet pays off. Skipping across from bolt to bolt as Cam showed me, I had the head tight and the engine running in five minutes. Shortly after, a muted roar from the cellar signaled Bud's success in starting his two-cycle.

That evening I went to Cam's to return a can of grease I'd borrowed.

"Bud just phoned," said Cam. "He's got his first contract customer."

"Good for Bud," I said glumly.

"What's eating you? You won that bet with Madge, didn't you?"

"Well—not exactly. Madge stopped in a store after leaving the theater. She says if she *had* come right home instead of shopping. I wouldn't have had the mower running. Which is true."

"So what? You have some new tools, learned some tricks and got the mower started. Isn't that worth the price of the new hat you bet her?"

"Guess so," I admitted. "What hurts is that it was a millinery shop she stopped at. She wore the hat home." END

A Word to the Wives

A man was suing his wife for divorce. The judge asked what grounds he had.

"Judge," he answered, "she just talks and talks—all day."

The judge inquired, "What does she talk about?"

The reply was, "She don't say."

Copyrighted material

Now You Can Own A Basic Home Workshop for Only $49.95



Not Just a Drill with Kit of Attachments, but Two Separate SKIL Power Tools!

- **SKIL 4¼" Power Saw**
- **SKIL ¼" Power Drill**
- **Plus 13 SKIL Accessories**

NEW 15-PIECE SKIL JACK-OF-ALL-KITS



A Saw When You Need It!

Genuine SKIL 4¼" Saw has *3 times more power* than most drill and saw attachment kits! No motor burn-out due to lack of power. Cuts plywood, lumber, wallboard with power to spare.



A Drill When You Need It!

Never used for powering a saw! And SKIL Drill has the right power and speed to sand, polish, buff, with included accessories!

PLUS combination blade, sturdy rip fence, 7 high-speed twist bits, and 4 sanding-polishing accessories!

SKIL offers America's greatest workshop value! Imagine! For little more than the cost of a drill and saw attachment kit, you can own *two* separate SKIL Power Tools, *plus* 13 useful accessories!

Don't *under-power* your workshop with a drill and saw attachment! Now you can get a fully-powered SKIL 4¼" Saw and quality SKIL ¼" drill. Each has the *right* power and speed for its job . . . and you never have the inconvenience of changing from a drill to a saw, then back to a drill.

Genuine SKIL Power Tools save you money on home repair and improvements . . . equip you for a hundred workshop and household jobs. The SKIL JACK-OF-ALL-KITS is a $58.85 value for only $49.95!

See the SKIL Jack-Of-All-Kits today — at your hardware dealer, appliance dealer or department store.

SKIL
BUILDERS TOOLS

Made only by SKIL Corporation
formerly SKILSAW, Inc.
5033 Elston Avenue, Chicago 30, Illinois
3601 Dundas Street West, Toronto 9, Ont.
Factory Branches in All Leading Cities

Copyrighted material

NOW IT'S EASY TO HAVE

Beautiful Oak Floors



Bruce Prefinished Flooring

IS ALREADY SANDED AND FINISHED

- Lay right over your old floors . . . ready for use immediately without sanding or finishing
- Ideal for attic rooms and additions, too . . . install over wood subfloor or concrete slab
- Finish is baked in the wood for beauty and easy upkeep . . . won't scratch, chip or mar
- Select from four distinctive styles . . . Block, Ranch Plank, Fireside Plank and Strip
- Economical . . . Bruce Prefinished Floor costs less than a good rug or carpet
- Ask your lumber dealer for a cost estimate . . . mail coupon below for color literature

SEND FOR COLOR FOLDER



E. L. Bruce Co.
P.O. Box 397-H, Memphis 1, Tenn.
Send complete information on Bruce Prefinished Oak Floors

Name_____

Address_____

Bruce PREFINISHED Oak Floors

By the world's largest hardwood flooring maker

Dripless Paint

[Continued from page 184]

and stir until they turn into liquid and are thoroughly mixed. You can also tint white and colored paints with ordinary oil colors in tubes. The one exception is a new white dripless exterior house paint (made by Superior) that is not intended to be tinted.

Some makers offer their dripless paints in "low odor" varieties, just as they do standard types. You also have a choice of standard finishes—flat, semi-gloss or gloss enamel. You can even get special trim and sash paints.

Prices run about the same as for similar standard paints. The alkyd wall paint that we used on our living-room walls cost about $5 a gallon.

Using the paint. In hot weather, you may have to put the can in the refrigerator for a few hours overnight to make sure that the paint is firmly jelled. In any case, keep it stored in the coolest part of the house.

Under very warm conditions, you may also notice a thin layer of oil on top. Give the paint a good stirring, then let it jell again. Don't thin the paint unless you happen to leave the lid off and it becomes excessively thick.

If old surfaces are firm and smooth, you can paint right over them. If not, prepare them as for ordinary paints. Prime new wood surfaces with a regular undercoater.

The only tip in applying the paint is to be gentle when you load the brush. Dip it straight in and pull it straight out, without splashing the paint or letting the brush touch the can. This keeps excessive motion from "melting" the paint before you start spreading it.


You can also spray dripless paints, and the non-settling feature is a real advantage here. Once the paints are on, they behave much the same as ordinary ones. The alkyd we used, for example, has the same tough, washable qualities as its drippier brother. END

NEXT MONTH: Read how to lick that summer bugaboo, watering your lawn and garden, by installing an underground system.

Copyrighted material

Glidden Announces . . .

New GLID-TONE products specially made for do-it-yourself wood finishing

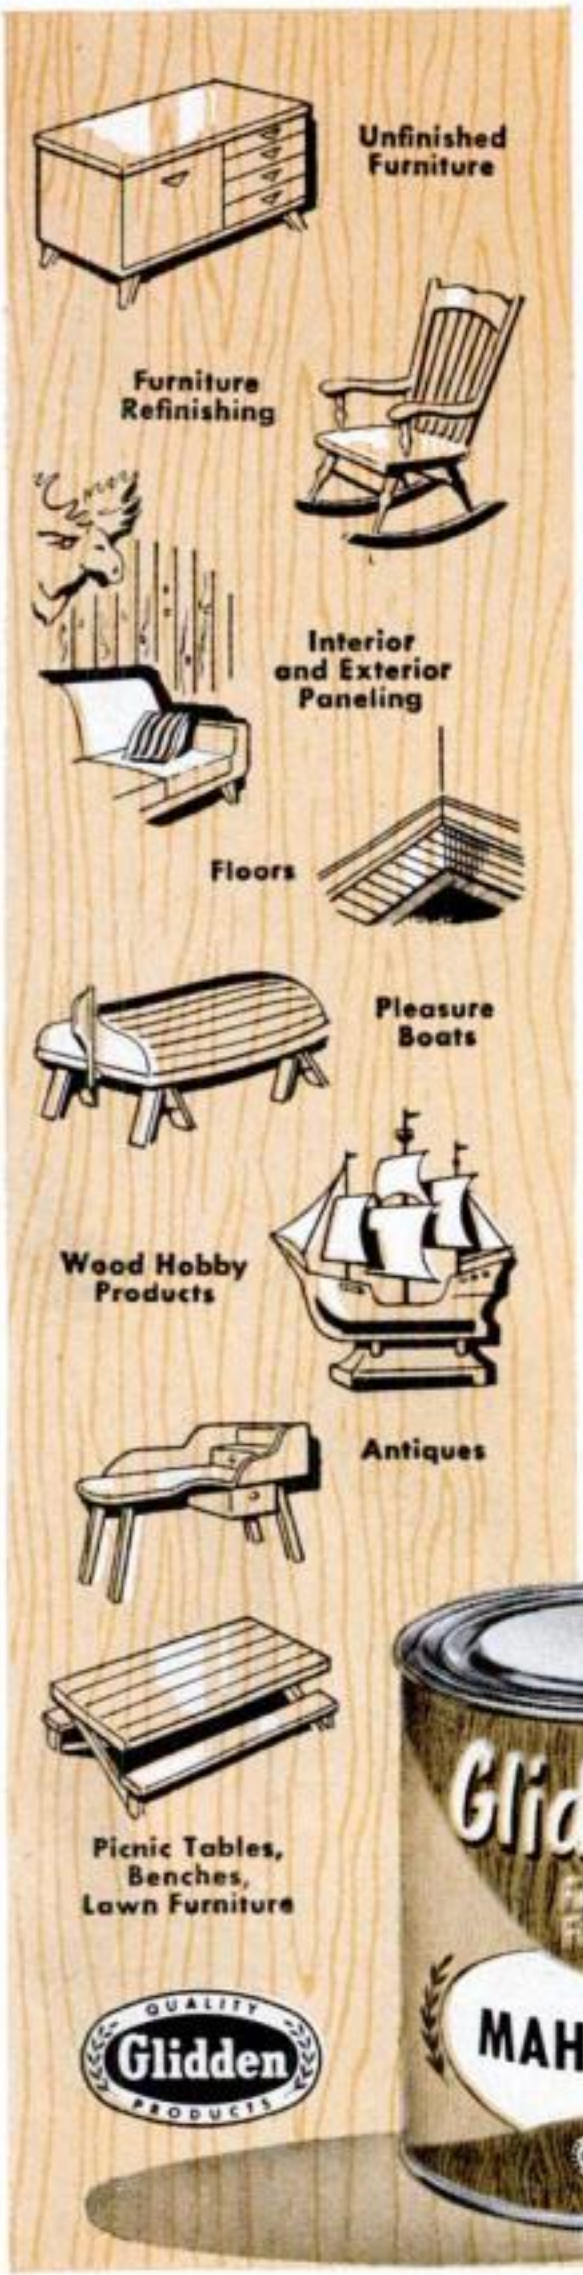

Now Glidden takes the "mystery" out of wood finishing, staining. The new array of Glid-Tone products have "built-in" features for amateur use; give *professional results.* Look for the Glid-Tone label at your paint store.



New, easy-to-use stains in color! Use *Glid-Tone Stains* either inside or out. Seals, does not raise grain. Extremely easy to use—just wipe or brush on, wipe off!



For high gloss and highest resistance to alcohol, acid, heat and abrasion, use all-purpose *Glid-Tone Gloss Varnish* . . . for floors, furniture, table tops, bars, cabinets!



For exterior trim, paneling, boats and marine uses—*Glid-Tone Spar Varnish* is extremely tough, withstands effects of water, salt spray, heat, sun, cold.



For modern, hand-rubbed effects without laborious rubbing, use Glid-Tone Satin Sheen Varnish. Self-priming. No thinners or other extras required.

Glid-Strip—a safe, effective paint and varnish remover. Lets you work larger areas because it stays wet longer. Non-flammable. Cleans up with water!

Glid-Tone Natural Wood Filler—for filling open-grained woods . . . oak, chestnut, walnut, mahogany, pine, fir, redwood.

Glid-Tone Crystalacq—an all-purpose, crystal-clear brushing lacquer coat for beautifully grained light woods. Dries in only 20 minutes, provides lasting protection. Non-yellowing.

Glidden

Pacemaker in Paints

FREE! Write for Glidden Service Sheet PS-4 . . . complete wood finishing directions!

THE GLIDDEN COMPANY • Cleveland 2, Ohio
In Canada: The Glidden Company, Limited, Toronto

Copyrighted material




A fastener that grips fixtures to walls quickly, securely...

★STAR WALLGRIPS

Guaranteed by Good Housekeeping — Replacement or Refund of Money if not as advertised therein

makes any fixture-hanging job a simple task. Fixtures can be quickly removed or replaced when redecorating without disturbing the WALLGRIP. Send for new booklet "The Hang of Things", showing how to fasten all kinds of fixtures to any type of wall.

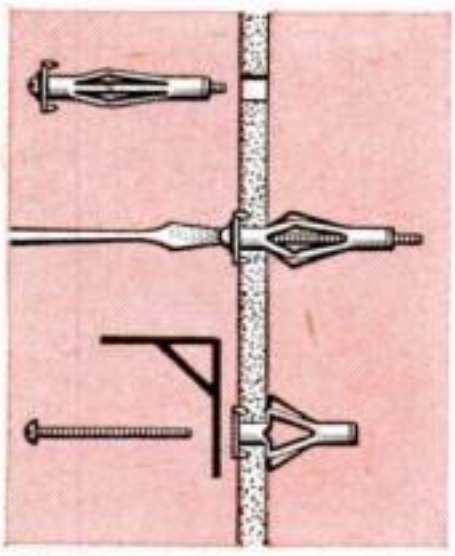

How WALLGRIPS work in hollow walls:

1. Insert in Hole. Wings spread as bolt is tightened.
2. Positive Stop tells WALLGRIP is set.
3. Remove bolt and replace through fixture and tighten.

★STAR EXPANSION
Fasteners for Home and Industry
Dept. PS-4, 142 Liberty Street
New York 6, N. Y.
Please send me a FREE copy of the book "The Hang of Things".

Name_____

Address_____

City_____ Zone____ State____

How They Exposed the Piltdown Hoax

[*Continued from page 123*]

The hoax must have been an inside job—by someone, says Weiner, who "can hardly fail to be among those whose names we know."

In search of clues, he set out to reconstruct every possible detail of the original happenings. He traveled around the countryside to talk with living eyewitnesses of the famous events, and with relatives and friends of others no longer living. He pored through yellowed journals of the time and, besides the scientific reports of the discoverers, all that was preserved of their correspondence. To Weiner, the resulting mass of evidence clearly exonerates every figure in the Piltdown case but one.


The hoaxer could not possibly have been Woodward, the distinguished British Museum scientist, Weiner concludes; nor Father Teilhard de Chardin, a young Jesuit priest who took part in the excavating. Eliminated are a myriad of less prominent figures—not forgetting the aged and bewhiskered laborer Hargreaves, with the improbable first name of Venus, who was hired by Dawson and Woodward to ply pick and shovel in the gravel pit.

There remains only Charles Dawson, original "discoverer" of Piltdown, who died in 1916 at the age of 52 and at the height of his fame. And while Weiner will not, for lack of "positive and final proof," flatly accuse him, all the circumstantial evidence points to Dawson as the author of the hoax.

A successful lawyer, married, living in the little "county town" of Lewes in a part of southern England rich in fossils, Charles Dawson had pursued his hobby of hunting them with notable success. He had sent Woodward many unusual specimens, including fossils of a dinosaur and a prehistoric mammal of species new to science, which Woodward named after him. So he was already well known and highly regarded in the scientific world at the time of the Piltdown affair.

[*Continued on page 274*]

Copyrighted material

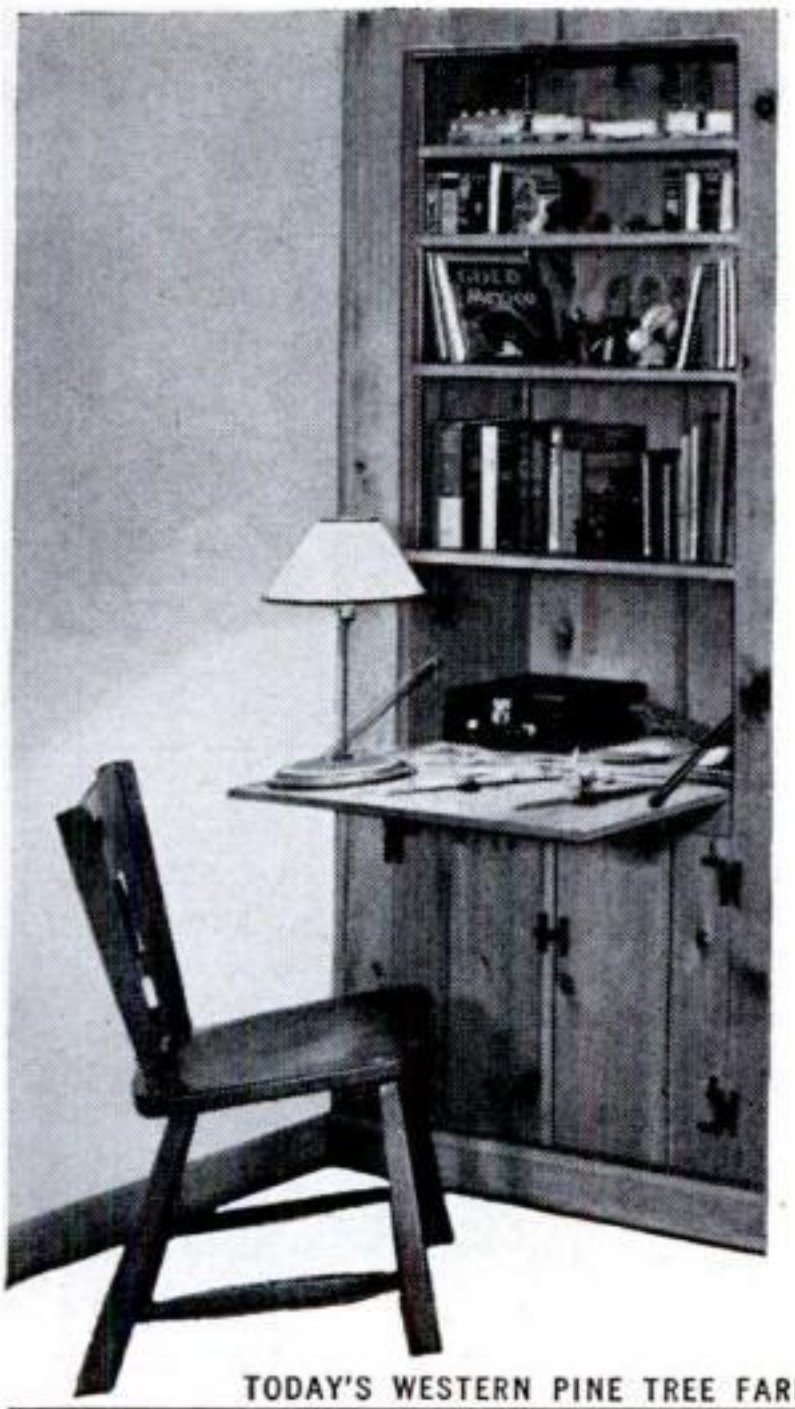

A handsome, useful desk you'll be proud to build!

This attractive study corner, built with mellow Western Pine* woods, makes a satisfying project. Compact, convenient desk, book shelves and cabinets fit beautifully into living room, den or child's room.

You'll enjoy using these even-grained, smooth-surfaced Western Pines. They cut cleanly and accurately with hand or machine tools, take any finish, and *cost so little.* See these well-seasoned, carefully selected woods at your local lumber dealer's—ask him for an estimate.



FREE—"INSTALLING AND COLORING YOUR WALLS OF WESTERN PINES." Also, "FRIENDLY HOME IDEAS IN WESTERN PINE," a new booklet of building and remodeling ideas—88 pictures! Write to Western Pine Association, Dept. 502-L, Yeon Building, Portland 4, Oregon.

the Western Pines

- *IDAHO WHITE PINE
- *PONDEROSA PINE
- *SUGAR PINE

TODAY'S WESTERN PINE TREE FARMING GUARANTEES LUMBER TOMORROW

FACTORY · HOME · SHOP



UTICA® is your best buy *in quality tools*

UTICA's process of electronic induction hardening on cutting-pliers and wrenches gives you top quality tools that last up to ten times longer for that added service.

UTICA® Remember the name Tools

UTICA DROP FORGE & TOOL CORP., UTICA 4, N. Y.



MIDGET RACERS' 1st CHOICE ...Continental Air-Cooled POWER




AU Series 2, 2-½, 3 hp

Finest power for racers, scooters, lawnmowers, garden tractors—any job within their capacity—is one of today's Red Seal heavy-duty air-cooled models. They're built to get up and go, and backed by engine experience dating from 1902. Greater piston displacement gives power in excess of rating, plus low-speed lugging ability that eliminates stalls. Exclusive Contex ignition system speeds and simplifies adjustment, doubles life of points and plug. Optional low oil level ignition cutoff ends hazards of running dry. NOW AVAILABLE with built-in flywheel generator for charging batteries or lighting lights. For name of Red Seal dealer nearest you, write TODAY.

CONTINENTAL MOTORS · Powerful as the Nation · AMERICA'S STANDARD ®

Continental Motors Corporation
INDUSTRIAL AIR-COOLED ENGINE DIVISION
12800 KERCHEVAL AVE., DETROIT 15, MICH.

Copyrighted material

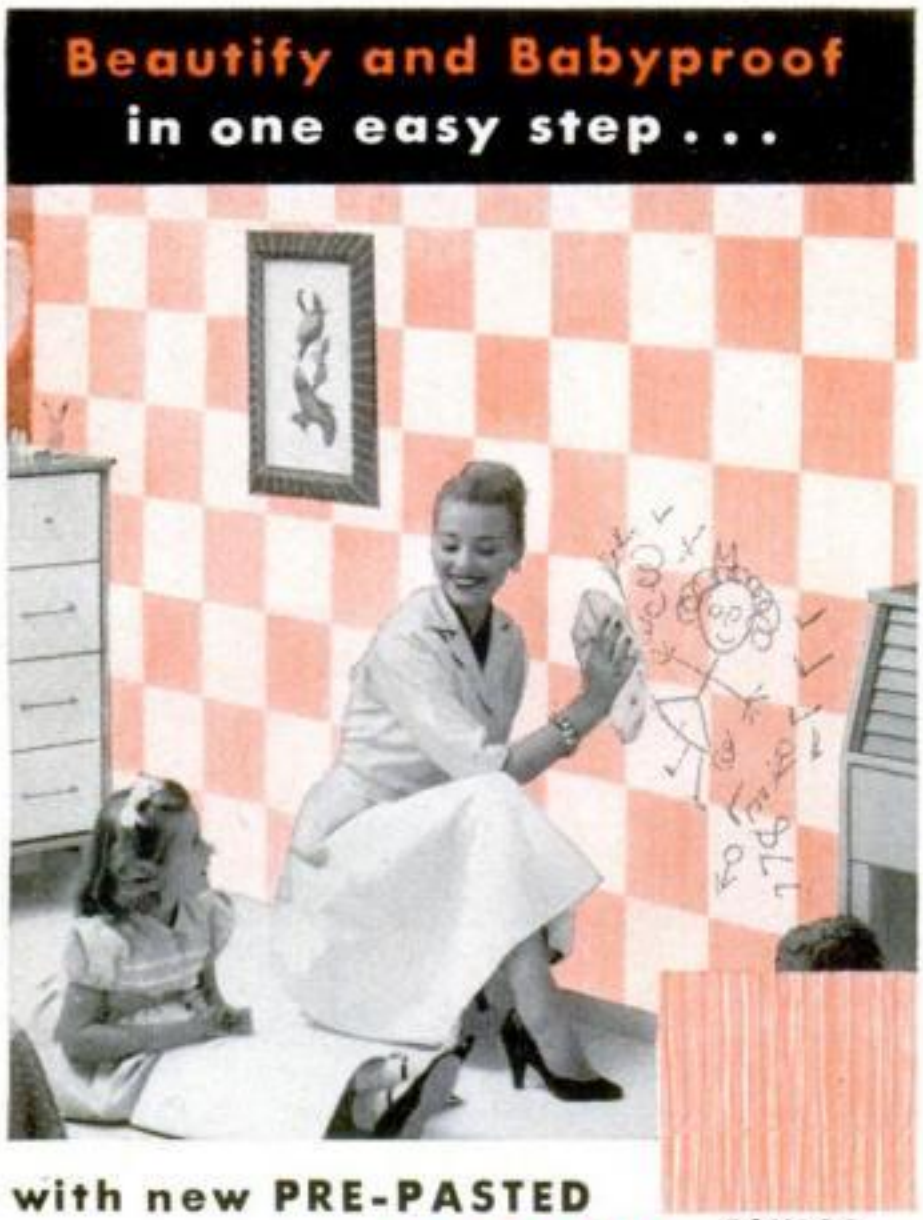

with new PRE-PASTED

Bolta-Wall
VINYL TILE

DO IT YOURSELF AND SAVE!


BAMBOO

MAHOGANY


WET THE BACK

PUT IN PLACE


CUTS WITH SCISSORS

Beautiful, washable Bolta-Wall vinyl tile is stain and scuff resistant . . . the perfect wall covering for all the busy heap-of-living areas in your home. The pre-pasted adhesive backing makes it easy to install . . . no messy pastes, just wet the back and stick it on! Bolta-Wall tile is available in rich Mahogany or Bamboo patterns, in colors that work beautifully with all decors.

Redecorate your home this easy low cost way. Ask your flooring or building supply dealer for Bolta-Wall pre-pasted vinyl tile.



The General Tire & Rubber Co.
BOLTA PRODUCTS Division, Lawrence, Mass. P.S.-4

Please send me free sample, an illustrated folder and the name of my nearest Bolta-Wall dealer

Name_____

Address_____

City_____ Zone____ State_____

How They Exposed the Piltdown Hoax

[Continued from page 272]

By Dawson's own account, he was walking along a country road leading to a farmhouse near Piltdown Common, when he noticed that the road had been mended with brown flints unusual to the district. He found that they came from a small pit about 100 yards short of the farmhouse, between the road and a hedge, where gravel was dug for road repairs. Finding two farm hands at work there, he asked them if they had come upon any bones or other fossils. They hadn't. He urged them to keep a lookout for such things, and save them for him. On another visit, one of the men handed Dawson a thick fragment of human skull —the first of the "Piltdown" pieces. Later, Dawson says, he returned to the pit and found a larger piece himself. In May, 1912, he journeyed to London and showed Woodward what he'd "found" in the pit by then: skull fragments, fossil-animal teeth, prehistoric flint tools. The extreme antiquity of the animal remains supported a similar date for the human ones.

Woodward's eyes popped. He didn't know that all the principal items Dawson had brought him were faked.

Actually, there was chromium in the skull pieces—telltale evidence of artificial staining with bichromate, for the Piltdown gravel contains no chromium. A fossil-rhino tooth came, not from Piltdown, but from East Anglia where such teeth are not uncommon. A fossil-elephant tooth must have traveled all the way from Tunisia.

Any established fossil collector, Dawson included, would have had little difficulty in assembling these and subsequently found "Piltdown" specimens. The hoaxer could have found some himself, obtained others by trading, or bought specimens in shops catering to collectors. Late Ice Age human skulls aren't exactly common, it's true; but Dawson, for one, is known to have possessed some unusual skulls.

The unsuspecting Woodward, and de


[Continued on page 276]

Copyrighted material

WANT A COOLER SMOKE? ...DISCOVER EDGEWORTH!

No other tobacco manufacturer can duplicate the Edgeworth cut—because it's actually "ready-rubbed" by an exclusive process. See in the picture what a difference this makes. Those even, slow burning chunks of cool smoking white burley are packed fresh in a special heat-sealed wrap-around pouch. Edgeworth smokes 8 to 10 degrees cooler by actual test. Famous for over 50 years as America's Finest Pipe Tobacco.



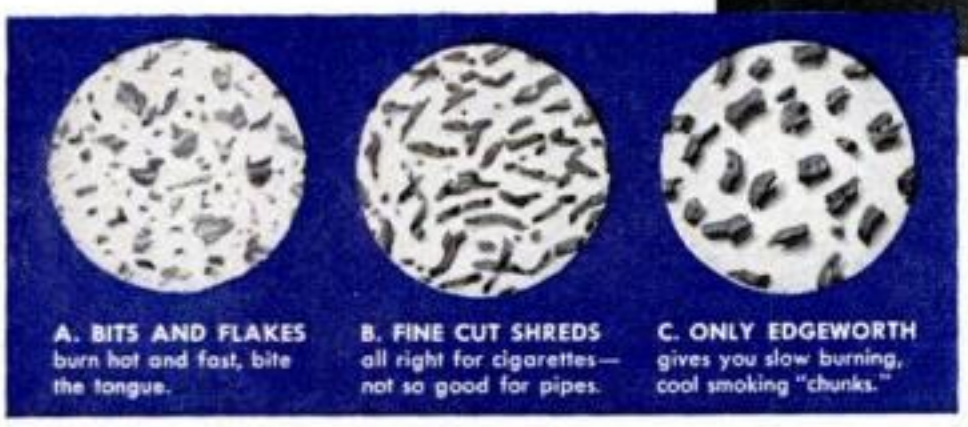

EDGEWORTH'S EXCLUSIVE wrap-around pouch is heat-sealed. Moisture can't get in . . . freshness can't get out.

Made by
Larus & Brother Co., Inc.
Richmond, Virginia



EDGEWORTH AMERICA'S FINEST PIPE TOBACCO... CANADA'S FINEST TOO!

New HEAVY DUTY Tape Rule

makes measurement easier and faster



LUFKIN

WHITE CLAD SUPER MEZURALL

CHECK THESE "SUPER" FEATURES—16-inch centers indicated. Wide ¾" steel line is flexible, yet extends farther unsupported. Long lasting snow-white line has bold, jet black figures. Top edge graduated feet and inches, bottom edge consecutive inches. Long, wide adjustable end hook permits accurate measurement, hooks securely. Feather-weight Magic Metal case is light yet very strong. Packed in beautiful, two-color re-usable plastic box with hinged cover and snap fastener.

A Perfect Gift for Craftsmen



10 FT. ONLY $2.39
12 FT. $2.89

BUY LUFKIN 334

TAPES • RULES • PRECISION TOOLS
AT YOUR HARDWARE OR TOOL STORE

THE LUFKIN RULE CO., Saginaw, Mich.

Powered with the MODERN RECIPROCATING MOTOR

SEE AT STORES DURING SYNCRO HARDWARE WEEK (Apr. 12-21)



SANDER MODEL 504

The

*Multi-Motion Finish Sander

Sand the modern way with this light, powerful Syncro finish sander . . . powered by the modern new Syncro Reciprocating Motor—today's greatest achievement of all electro-mechanical research! Catalog Free!

Exclusive

SYNCRO SANDERS

CORPORATION
DEPT. 2-46
OXFORD, MICHIGAN

WORLD'S LARGEST MANUFACTURER OF RECIPROCATING MOTORS

Copyrighted material

TRUE TEMPER®
Hammer News



HOME OWNER'S SIZE

Here's a 13-oz. ROCKET hammer made specially for the 1001 handyman jobs around your home. It's smaller than the 16-oz. carpenter's-size ROCKET, and it's the sweetest-swinging hammer you ever laid your hands on.

That chrome-plated hollow steel handle won't bend or break. Polished head is locked on forever. Cushion grip soaks up shocks and won't slip even if your hands are wet or if you have gloves on.

One word of caution: Men—hide this hammer from the lady of the house, or buy her one of her own! At your hardware or building supply store. See all the other ROCKET tools and our fine hickory-handled hammers, too. *True Temper Corp., Cleveland 15, Ohio.*

TRUE TEMPER®

Finest quality in Hammers, hatchets, axes • Garden, lawn and farm tools • Shovels • Shears • Fishing tackle • Golf-club shafts

How They Exposed the Piltdown Hoax

[*Continued from page 274*]

Chardin, joined Dawson in excavating at the gravel pit—with success, if they'd only known it, too good to be true. One summer evening a pick struck the ground, and the faked jaw flew out. First public announcement of the "discoveries" followed, in December, 1912.

Miraculous luck continued to favor the diggers. The last spectacular discovery was no less than a "second" Piltdown man, found, according to Dawson, in a Sheffield Park field two miles from the first site, in 1915. Like Piltdown I, Piltdown II was artificially stained with iron and bichromate.

During this period no one publicly questioned Dawson's honesty. But some of his fellow amateurs, in his home town of Lewes, expressed the opinion among themselves that he was "salting the mine." And a visitor who entered Dawson's office without knocking found him in the midst of some experiment, with bones immersed in crucibles of colored and pungent liquids spread out on his desk. Dawson admitted with apparent embarrassment that he was staining fossils—as he explained it, to find out how natural staining occurred.

The Piltdown "discoveries" ended with Dawson's death in 1916. Undiscourageable, always hopeful, Woodward kept on digging at Piltdown for many years. He never found anything more.

Nevertheless a "new" Piltdown find was to turn up only recently. It was located by Weiner himself—and to some it may furnish the most direct evidence of the hoaxer's identity.

Harry Morris, a bank clerk and flint collector of Lewes, had somehow obtained from Dawson a "Piltdown" flint tool that never reached the British Museum—and had discovered for himself that it was spurious. So A. P. Pollard, a Lewes surveyor and one of Weiner's informants, told Weiner. Morris had died and left his flint collection, including the "Piltdown" flint and notes about it, to Pollard.

[*Continued on page 278*]



Fast, Safe
No Wash
Non-inflammable

Peels Off Paint

How you can get perfect paint jobs every time!

Klean-Strip is totally unlike ordinary paint removers that dissolve the finish and are so messy to use. Klean-Strip actually breaks the bond between finish and surface . . . removes many coats with one application. It's clean, fast-acting and easy to use . . . leaves the surface smooth and dry, ready to paint without neutralizing or afterwash.

Use Klean-Strip on furniture, woodwork, walls, metal. Klean-Strip peels off any finish. Buy it when and where you buy paint.



KLEAN-STRIP

Paint Remover

THE KLEAN-STRIP CO., INC.
2340 S. Lauderdale, Memphis 6, Tenn.

NOW! SAW STEEL • 2x4's PLYWOOD • PLASTICS • ON ONE SAW!

ONLY $34.95 with Motor and Blade



FAMOUS BURGESS electric TOTE-SAW with built-in motor

MAKES STRAIGHT OR CURVED CUTS
Handiest tool ever! Sturdy, compact Tote-Saw weighs only 15 lbs. . . . carry right to job anywhere.

Built of cast aluminum and steel. Blower-cooled motor is built right in. Cuts to center of pieces 24" wide . . . any length!

SAWS AN INCH A MINUTE THROUGH ½" STEEL!



Saws 20 inches a minute through 3/4" plywood, 4 inches a minute through 1/4" brass, 12 inches a minute through 1/16" steel! Use Tote-Saw also for cutting plastics, wall tile, aluminum, cast or wrought iron. 2-speed adjustment for cutting various materials. Variety of special-purpose blades available.



PORTABLE!

See these fine Burgess tools at your favorite dealer
WRITE DEPT. A-20 FOR COMPLETE CATALOG


BURGESS VIBROCRAFTERS, INC.
GRAYSLAKE, ILLINOIS

For stronger, smoother gypsum board walls!



PERF-A-BEAD* Metal Corner Reinforcement

Strong, fibrous, *open* wings speed application; assure solid bond to gypsum board. Exposed steel nose fortifies corners; guards against knocks, gouges, chipping.

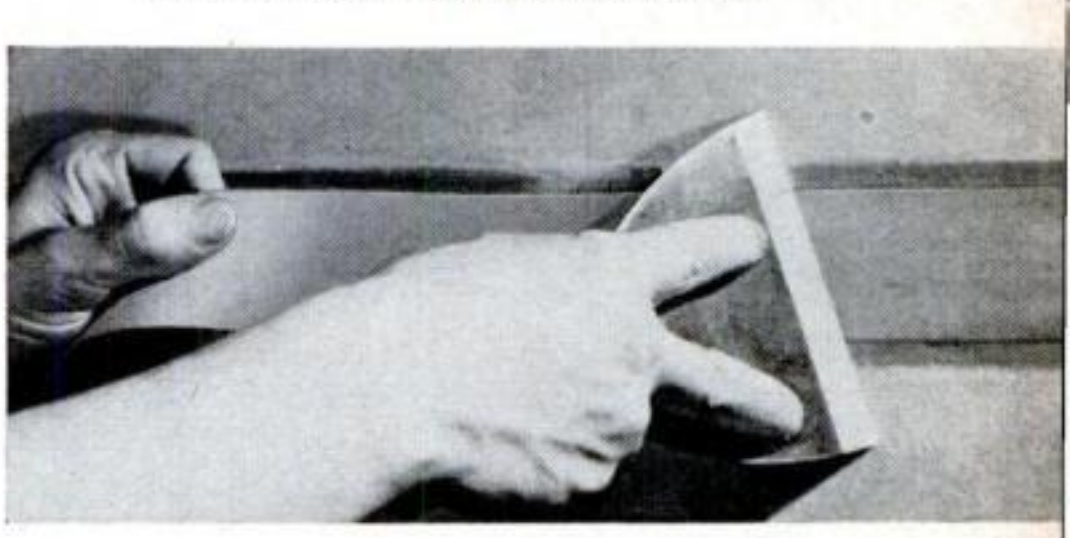

PERF-A-TAPE* Joint Finishing System

Special cement and strong fiber reinforcing tape smoothly conceal and "weld" gypsum wallboard joints—easier, better, faster.

See your paint or building materials dealer for details, or write Dept. PS-2, 300 W. Adams St., Chicago 6. *T. M. Reg. U. S. Pat. Off.


USG UNITED STATES GYPSUM

OPERATION 56 HOME IMPROVEMENT

UNITED STATES GYPSUM

The Greatest Name in Building

Copyrighted material

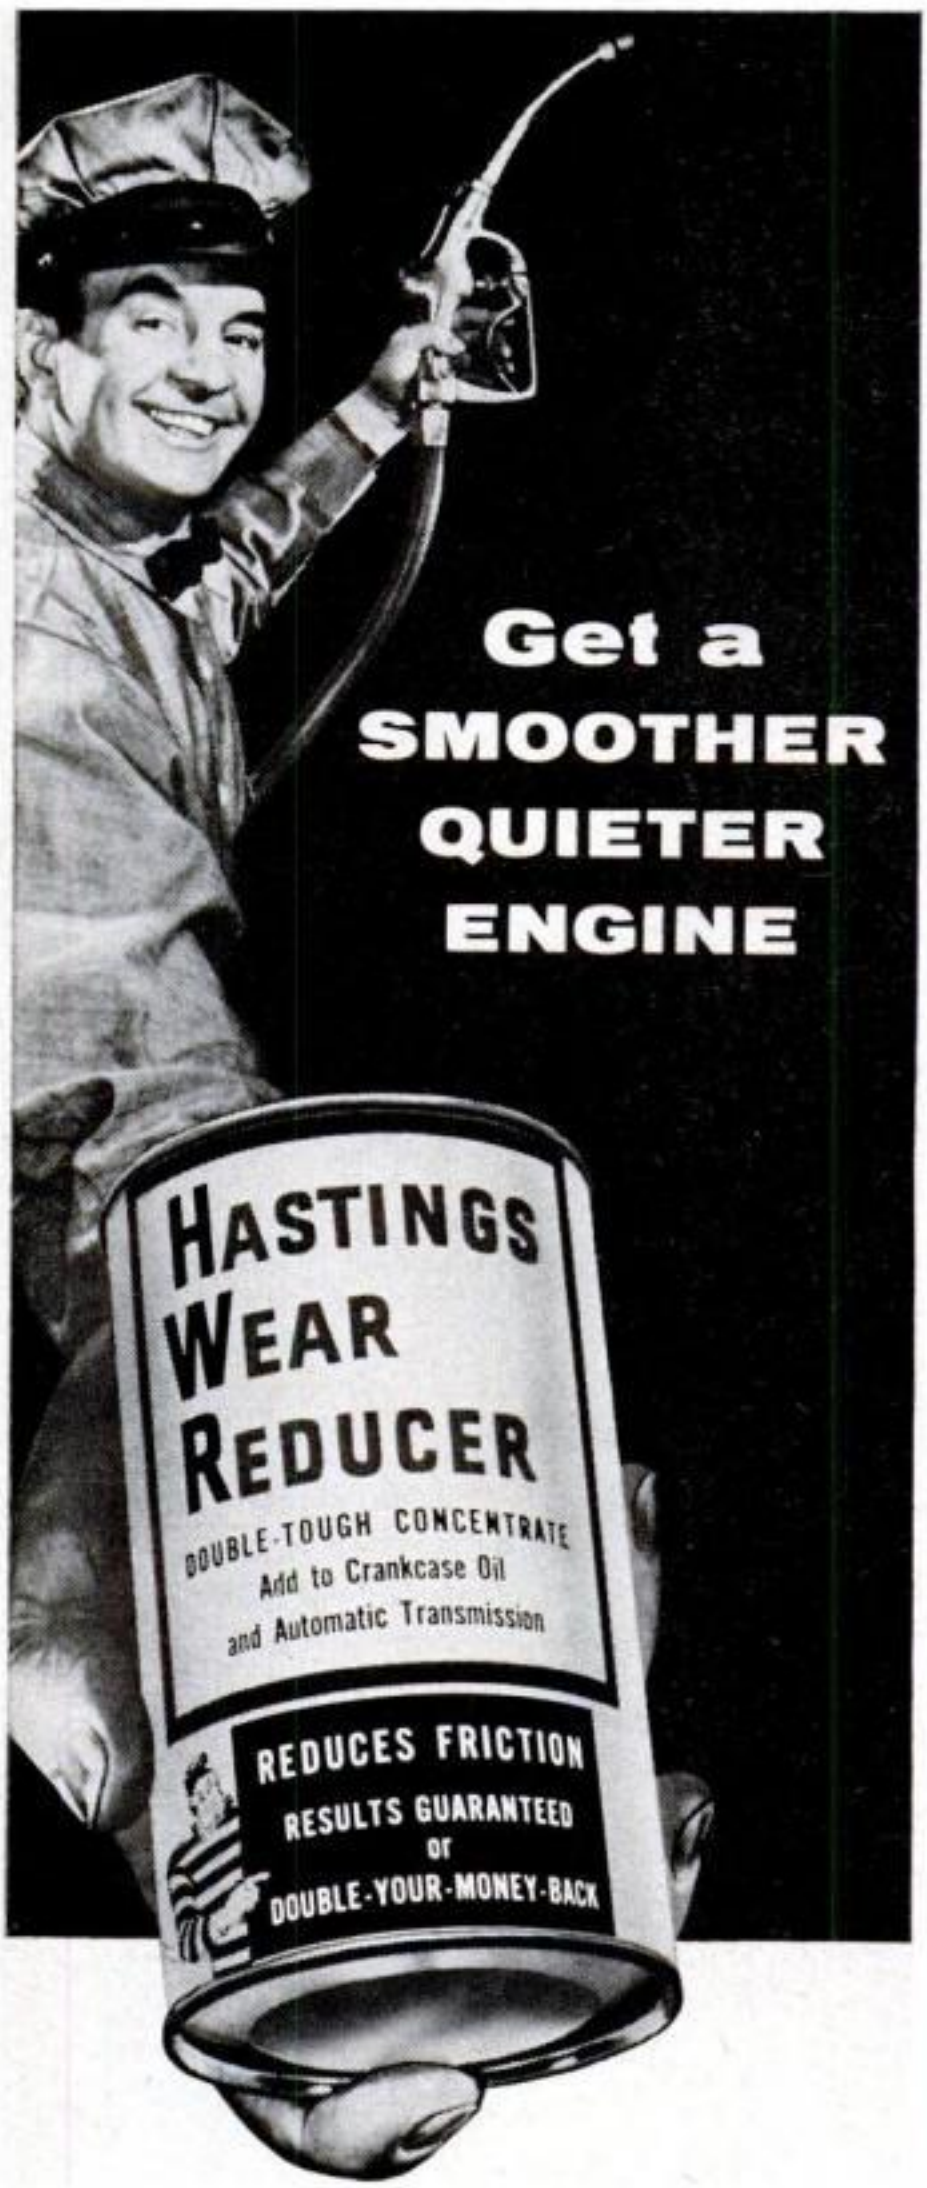

H-W-R keeps engines clean, restores power . . . stops hydraulic valve lifter noise . . . rids your automatic transmission of jar and jerk, too. Results guaranteed or *Double-Your-Money-Back!*

HASTINGS

HASTINGS MANUFACTURING CO., HASTINGS, MICHIGAN
Wear Reducer, Casite, Piston Rings
Oil Filters, Spark Plugs

How They Exposed the Piltdown Hoax

[Continued from page 276]

Where was the flint now? Pollard had traded the cabinetful of flints to Frederick Wood of Ditchling for a collection of birds' eggs. And Wood, too, had died. But Mrs. Wood still lived in Ditchling; perhaps she still had the missing cabinet.

With a colleague, Weiner hastened to Ditchling. Luck was with them and they found the cabinet, holding 12 drawerfuls of neatly labeled flints. They started with the top one and worked down, their anxiety increasing as they proceeded. The twelfth and last drawer yielded the Piltdown flint. It bore an inscription in Morris' handwriting:

"Stained by C. Dawson with intent to defraud (all).—H. M."

An accompanying note of Morris' repeated the accusation, indignantly adding: ". . . and exchanged by D. for my most valued specimen!"

A second note declared that hydrochloric acid would remove the brown color, leaving one of the relatively common white flints found on the Chalk Downs of Lewes. Morris was right about that, Weiner found.

And whatever the merits of Morris' direct accusation of Dawson, it has become a part of the official record of the case—for the "Morris flint," inscription and all, now reposes in the British Museum.

The fantastic Piltdown case seems closed—except for the puzzle of the hoaxer's motive. He gained nothing in money; the specimens were presented to the British Museum. Was fame his object? Was the deception an intended joke that went too far? Whatever prompted the impostor lies beyond reach of chemical and physical tests—and perhaps must remain always a mystery. END

TV Hazard

Television has certainly done things to people. We heard of a friend who turned his radio on by mistake and thought he'd gone blind.—*Youngstown Kitchens Merchandiser.*

Copyrighted material

Shop by MAIL and

FOR HOME, FARM & FACTORY

Save SURPLUS & NEW MANUFACTURE EQUIPMENT

at GROBAN'S

All Items Unconditionally Guaranteed

BRAND NEW 1 H.P.

12 Volt Electric Motor



ITEM NO. 308


- For electric wheel chairs (Pop. Mech. design—Mar.-'53).
- For electric golf carts.
- For self-propelled scooters, children's midget cars.

Rated 1 H.P.,—100 amps., 5600 R.P.M., 12 volts, D.C.—This double shaft motor of ball-bearing construction may be run on 6 volts for lower horsepower requirements.—Standard ⅝" shafts, flange mountings — Dimensions: 9"x4½"x4½". Ship. wt. 19 lbs. A real value at..... **12.50** F.O.B. Chicago

PESCO GEAR TYPE

HYDRAULIC PUMP

Compact — Powerful — Reliable




ITEM #160—Especially designed for belt drive from fan belt, power take-off, drive pulley, electric motor or small gas engine. Equally suitable for direct coupling. Pedestal type mounting with two bolt holes for ⅜" hold-down bolts. Standard ½" pipe thread inlet and outlet ports. Delivers 4.5 GPM at 1000 PSI at 2800 RPM with 4 HP. Hardened steel gears turn in dense oilite bronze bearings. Rotation—clockwise facing shaft. Guaranteed trouble-free service. Ship. wt. 6 lbs. F.O.B. Chicago **22.50**

SAVE $30.30 ON THIS PESCO

HYDRAULIC CONTROL VALVE

ITEM #371V



FOR SAFE POSITIVE CONTROL OF HYDRAULIC CYLINDERS AND MOTORS — • BUILT-IN RELIEF VALVE — factory set at 1200 P.S.I. • FOUR-WAY VALVE—to operate one double acting cylinder • OPEN CENTER—with valve in neutral, cylinder is locked in position and pump is unloaded. • SPRING RETURN TO NEUTRAL • FULLY BALANCED PLUNGER • EASILY STACKED INTO 2, 3, or 4 valve combinations for multiple cylinder operation. • 8 gal. per min. capacity, at 1500 P.S.I.—⅜" pipe ports • CONNECT PUSH RODS TO HANDLE FOR REMOTE CONTROL • EASY MOUNTING. • LIST PRICE — $46.80. • YOU SAVE $30.30. • DIMENSIONS—9"x4½"x2½"—Ship. Wt.—8 lbs. F.O.B. Chicago... **16.50**

HYDRAULIC


LIFT CYLINDERS

- For Fork Lift Trucks • For Presses • Loading Ramps • Lifts 12500 lbs.

Heavy duty hydraulic cylinders, at big savings.


ITEM #502—4" Bore—36" Stroke—1¾" Piston Rod. Wt. 95 lbs. F.O.B. Chicago..... **72.00**

ITEM #503—4" Bore—54" Stroke—1¾" Piston Rod. Wt. 135 lbs. F.O.B. Chicago..... **96.00**



FACTORY-TO-YOU-VALUE

PORTABLE ELECTRIC LIGHT PLANTS

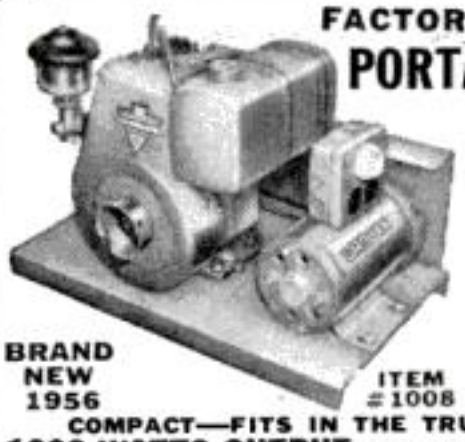

BRAND NEW 1956

ITEM #1008

POWER TO OPERATE:

- Electric Saw, Electric Drills, Pipe Bender.
- Refrigerator, Deep Freezer, Incubator.
- Water Pump, Radio, Lights, Air-conditioner.

COMPACT—FITS IN THE TRUNK OF YOUR CAR

1000 WATTS OUTPUT, continuous duty. 115 Volts A.C. 60 cycles, 9 amps. Powered by husky, easy starting Clinton engine. Engine and generator operate at 3600 R.P.M. for maximum efficiency at minimum weight. Both units are mounted on steel base, with heavy sheet metal belt guard. Generator is self regulating, and is equipped with outlet box containing fuse and 2 A.C. convenience receptacles. Cost only 5c an hour to operate. Dimensions: Length 20½", Width 12", Height 16". Shipping wt. 100 lbs. F.O.B. Chicago..... **149.50**

700 WATT—GENERATOR SET—same as above, slightly smaller—with Briggs-Stratton Engine—Model 708—F.O.B. Chicago..... **129.50**

ITEM #2008 2000 WATTS 115 V. A.C. generator set, powered by husky, fast starting Briggs-Stratton engine. Mounted on portable steel carrying base for easy handling.—Just right for small cottage and cabins needing inexpensive 2000 Watts of electricity. Ship. Wt. 190 lbs. F.O.B. Chicago **295.00**

MASTER & SLAVE

HYDRAULIC REMOTE CONTROL SET



Item #415—Designed for remote operation of controls on engines, boats, special machinery, etc. Eliminates complicated mechanical linkages, cables, pulleys, etc. The master unit connects to the slave unit with a single ¼" tube.

When master control lever is moved, slave lever follows exactly. Light, compact, aluminum alloy construction.

Dim. of both units: 5¼ W, 9" H, 1¾" D, (exclusive of handle) Ship. Wt. 8 lbs. F.O.B. Chicago.. **27.50** per pair

(Note—tubing not supplied)

GROBAN HYDRAULIC SPEED REDUCER with **FINGERTIP CONTROL**



ITEM #115

USE FOR: • Reamer Drives • Midget Cars • Feed Mills • Canning Machines • Conveyors • Lathes • Milling Machines • Motor Boats • Cream Separators • Garden Tractors • Pumps.

Variable output speeds from 0 to input speed available by moving control handle. Locking handle maintains setting. Use input power of ¼ to 1½ H.P. Shafts ⅝" diam. Input rotation counter-clockwise facing shaft. Input speed 750 R.P.M. 7⅛" x 7½" x 11⅛" Output rotation reversible. Shpg. wt. 31 lbs. Complete with 2 qts. of oil and full instructions. F.O.B. Chicago. **54.50**

ORDER DIRECT FROM AD
SATISFACTION GUARANTEED
Send Payment Or Purchase Order Today

FREE! — NEW CATALOG
1956 EDITION, 52 PAGES, chuck-full of unsurpassed War Surplus Equipment Bargains for farm, home, factory, Workshop. Write letter today.

To place phone orders call WEbster 9-3793

GROBAN SUPPLY CO. Dept. PS-4
1139 S. WABASH AVE., CHICAGO 5, ILL.

BELT DRIVEN

A. C. GENERATORS

ITEM #700




Ideal for powering electric tools, oil burner, refrigerator, lights, or other appliances requiring up to 700 watts of power. **700 WATTS,** 115 Volts, 60 cycles A.C. 3600 R.P.M. Compact, self-regulating generator with V Belt pulley and double outlet receptacle. Rotation counter-clockwise. May be driven by tractor or auxiliary gasoline engine. Requires 2 HP minimum. Dimensions: 10" long x 8" high x 6" wide. Shipping wt. 27 lbs. F.O.B. Chicago **59.50**

Model 1010, 1000 WATTS
Same as above.
F.O.B. Chicago..... **79.50**

SELF-PRIMING

ROTARY PUMP

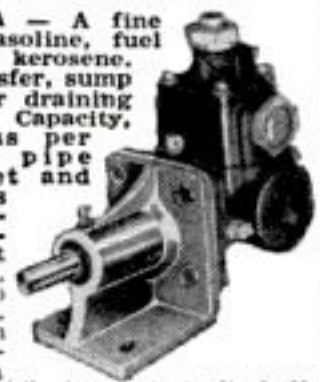

Item #104A — A fine pump for gasoline, fuel oil, water, kerosene. For fuel transfer, sump pumping, for draining basements. Capacity, 400 gallons per hour. ¾" pipe thread inlet and outlet. Has built-in, adjustable relief valve, set at 30 P.S.I. Adjustable to 100 P. S. I. Rotation in either direction; use ¼ Hp. motor; ½" standard shaft, ball-bearing supported. Dimensions: 5½" x3⅛x10". Shipping weight 8 lbs.
A $55.00 VALUE
F.O.B. Chicago **16.50**

U.S. NAVY ALL BRONZE CENTRIFUGAL PUMP



ITEM #384

These all bronze Centrifugal Pumps are ideal for use as marine bilge pumps, circulating pumps, fire protection or irrigation, car-washing, dewatering, basement sump pumping, lawn sprinkling. Will pump water, oil, brine, gasoline, DDT and sulphur compounds. Equipped with 6" adjustable 'V' pulley, 2" dia. inlet and outlet, 180 GPM capacity. Inlet and outlet take hose with 2¼" inside diameter. Dimensions: 11" x 8" x 11".

Total head-feet	Speed	H.P.	GPM
25	3600 RPM	3	180
35	3000 RPM	1¼	90
20	2400 RPM	½	75

Back plate may be rotated for most convenient inlet position. Gov't acquisition cost $96.00. Shipping weight 31 lbs. F.O.B. Chicago.... **29.50**

MAKE BIG CASH PROFITS

ASSEMBLE YOUR OWN LAWN TRACTOR



When your neighbors see the fun you have mowing your lawn with RIDE-TRAC, they'll want one too. Make Big Cash Profits in your own neighborhood with our Rider Agent Plan. Complete RIDE-TRAC kit goes together quickly with wrench and screwdriver. RIDE-TRAC makes fun out of all your lawn work. Write today for details of Rider Agent discount. **BELSAW RIDE-TRAC DIVISION**

586 Field Bldg., 315 Westport Rd., Kansas City 11, Mo.

NEW! Giant AUTOMOTIVE CATALOG



1956 Edition! Everything for car, truck, custom-styled car, hot rod . . . at LOWEST PRICES!

SAVE UP TO 50% on all parts, accessories! Only complete automotive buying guide . . . 75,000 items . . . 180 pages! Thousands of **hard-to-find parts;** equipment, parts for 1920 to 1956 models; **Hollywood accessories** never before offered; **hi-speed parts.** Send your name and address and 25c (refundable with first $5.00 order) to:

J. C. Whitney & Co. 1917 Archer, Dept. T-4, Chicago 16, Ill.

Copyrighted material

AT LAST! Make Floors, Patios, Driveways and Walks Look Different — use ROX



TESTED FOR YEARS



Something *new* and *exciting* in decorating! Now Rox shows you how to design a shuffleboard, a hopscotch block and many other interesting or decorative patterns for porches, basement floors, driveways and patios. Or, if you are tiling your floor, seal out moisture with Rox first. And remember . . . *Rox is guaranteed not to blister or peel!*

Beautiful, Durable Exteriors with ROX



Before



After

Masonry walls absorb tons of water—this water, if not kept out, can deteriorate masonry. Rox becomes part of the masonry surface itself as it seals this surface and protects against water even in gale driven rains. Rox adds distinctive exterior beauty.

Guaranteed Protection Against Water Leakage!



Before



After

Rox *guarantees* to protect your basement against water leakage. Convert it to a usable recreation room or workshop where tools are safe from moisture with Rox.

Helpful Booklet

Illustrated in color to help you apply that professional decorator touch as you protect and beautify your basement and masonry surfaces. Diagrams and explanations to make shuffleboard and other games or decorative designs on floors, patios, driveways, walks, etc., and give new interest to masonry walls. Send 15c for handling. *Available in 5 colors and white at authorized Rox dealers in U. S. and Canada or write Rox Products Co., Dept. S-4, Detroit 27, Michigan.*



© ROX PRODUCTS CO.

Why They Want to Shift the Keyboard

[Continued from page 135]

much as 95 percent over the old board.

Tonnage. To carry those roving fingers 20 miles, today's girl actually moves 500 tons a day. When she jumps between rows, Tom Booz tells her, she pushes not a few ounces—but 6½ pounds (finger, hand, and part of her forearm). Most of this lifting is done as her fingers move from one row to another. But on the simplified keyboard, with all the most-used letters on one line, there is very little moving from line to line. The girl's weight-lifting for her eight hours, therefore, shrinks from 500 tons to 60 or 70 tons—a reduction of up to 70 percent.

These things, together with the virtual elimination of leapfrogging from the bottom line of letters to the top one, mean that at the end of a day a girl's arm and back muscles and tendons are not so tired.

If this isn't enough, Booz tells of women who have already been reformed by the new keyboard:

Mrs. Lenore Fenton MacLain. She has done 165 net words per minute on an electric typewriter with the Dvorak arrangement of letters, and has maintained this average for an hour. She won so many speed contests a while back that she canceled a lot of other contests. There was no point in holding them.

Mrs. Mary V. Kerzner of Hollis, N.Y. A public stenographer, she first switched her portable from standard to Dvorak keyboard. She liked it so much that she had her electric switched over. Her first job thereafter was typing a 90-page thesis on electronics. "It was tough," she says. "But I was stubborn." By now she has increased her words per minute from 77 (standard electric) to 130 (Dvorak electric), virtually doubling her income.

Mrs. Kerzner's present electric machine, with Dvorak keyboard, is a Chinese red in color with pearl-gray keys. "I have to work for a living," she says, "so I have done everything possible to my machine to enjoy it."

The U.S. Navy took 14 girl typists (who knew the standard keyboard),

[Continued on page 282]

Copyrighted material

HEATING & VENTILATING FAN



(Item 10) Easily installed in furnace pipes. Forces even heat to all rooms. Over range removes kitchen smoke and odors. Powerful, continuous duty motor, 110-120v. AC. Mount in wall or ceiling to ventilate any area. Quiet, super-efficient fan moves huge volume of air. (400 to 600 CFM).

8" Pipe, wt. 5 lb. $6.85
9" Pipe, wt. 6 lb. $7.85
10" Pipe, wt. 7 lb. $8.85
12" Pipe, wt. 8 lb. $9.85

HEAVY DUTY FAN. Semi-enclosed motor suitable for spray booths, restaurant exhausts, poultry houses, etc. 10" Fan, wt. 8 lbs. (Item 10E) $11.95
12" Fan, wt. 10 lbs. (Item 10D) $12.85

FUEL OIL FILTER



Stop 90% of all oil burner & heater troubles with this big capacity fuel filter made by American Bosch. Removes every last trace of rust, dirt, tank scale and water! Easily installed—inlet and outlet have standard ¼" pipe thread opening (tubing adapters included if requested). Easily cleaned by opening drain plug and flushing through—lasts for years. Saves service calls. Ideal for filtering fuel on Diesel engines too. (Item 793). Wt. 3 lbs. Regularly $9.95 **$4.95**
A Master Mechanic Special .....




HEAVY DUTY D-C ARC WELDER

with mounting flange (item 38)

Use as portable or shop welder. Up to 300 amps. Senior model. Made for years of trouble-free, continuous service. Will handle light or heavy jobs. Easily welds up to ¾" plate using ¼" rods. Built-in air cooling system. Arc is easy to strike and hold, because of specially designed arc stabilizer. Hi-lo switch and dial control gives wide range of welding heats. Run welder at 2600 rpm, with tractor, jeep or 15 hp. gas engine, or 7 hp. elec. motor. Complete with instructions, guar. and triple V belt or flat pulley. You can pay more, but you can't buy a better welder. Wt. 110 lbs. $400 value **$119.50**

WELDING KIT Two 10 ft. leads, welding helmet, electrode holder, ground clamp. Sold only with welder at.. **$10.50**

SAVE middleman profits... get MASTER MECHANIC'S bedrock factory prices

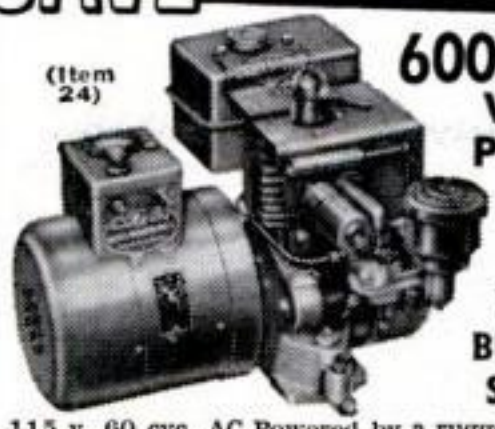

(Item 24)

600-700 WATT PLANT

PUSH BUTTON START

115 v. 60 cyc. AC Powered by a rugged 2 HP, easy starting Briggs engine. No wiring necessary; just plug in and operate. Plenty of current for any oil burner, freezer, brooder, emergency lights, etc. which require up to 700 watts. Ideal for television and radios. Complete with voltmeter and built-in winding to charge 6 v. auto batteries. (Item 24) Wt. 75 lbs. Easily fits in car trunk. Be prepared if storm knocks out power lines. Regular $275.00 value **$143.50**

1000-1200 Watt Plant (Item 45) same as Item 24 but larger generator and engine with 50% greater output **$199.50**

1300-1500 WATT PLANT



115v. 60 cyc. AC Push Button Start. Powered by a 3½ HP. Clinton engine. Combines big output with easy portability. Provides emergency power for operating any oil burner, sump pump, freezer, television, lights, communications systems, etc. which require up to 1500 watts. (Item 22). Wt. 110 lbs. Reg. $475 value, Factory price... **$239.50**


1750 Watt Plant Powered by 4.5 Briggs engine. Electric starting & battery charging built-in! Factory price... **$279.50**

Dual Voltage 110/220 available for above plants for $30.00 additional.

We make every type and size of light plants —Write, giving us your requirements!

PORTABLE LIGHT PLANTS

GIANT 2000-2500 WATT PLANT



110-120 v. 60 cyc. AC. absolutely the best made — exclusive dynamically balanced armature; heavy windings develop up to 5000 watt overload for motor starting. Skid mounted — portable. Powered by an easy starting Briggs or Wisconsin 6 HP engine—complete with all accessories; engine easily disconnected for other uses. Big outlet box, voltmeter, no wiring necessary. Ample current for all purposes. Factory warranty. (Item 31) Wt. 210 lb.
Reg. price $585. Special at..... **$299.50**



EXTENSION CORD

Heavy duty and very flexible. Neoprene 14-2 cable. 20 year quality. Wt. 12 lbs. (Item 185) 100 ft. Complete with rubber plug and outlet. A terrific buy at only **$8.95**

JET STEAM MASTER



Now, a super efficient portable steam generator that produces live steam at 100 lbs. pressure in 60 seconds from a cold start! Produces large volume of high pressure steam on 2 pints of fuel oil. Instantly cleans sticky grease, dirt, rust, old paint, etc. off implements and road machinery. Pays for itself in a few weeks. Sterilizes soil. Sterilizes as it cleans—milk equipment, etc. Fully automatic—oil fired with new, built-in lifetime bronze water circulating pump. Draws water from faucet or bucket. Simple and safe—anyone can use it; built-in safety valve. Complete with 12 ft. of hi-pressure steam hose and new triple efficiency steam gun that automatically mixes in soap solution if desired. Wt. 250 lbs. Item 463. Special factory price..... **$329.50**


Send check or M.O. Prices f.o.b. Factory. 10 day Money back guarantee. SEND 10c for ... BIG 1956 Catalog


MASTER MECHANIC MFG. CO., DEPT. 44-M Burlington, Wis.


NEW Easy-to-Use SOLDER*



Solders in ONE operation... just apply Swif and heat







SWIF is a real 50/50 tin-lead solder in paste form with flux combined. Just apply Swif and heat. All extra preparatory steps are eliminated by its one-step cleaning, tinning and soldering action. It makes perfect soldered connections with the heat of a match, torch, or soldering iron. Tube holds enough Swif for hundreds of jobs. Swif has been used by professional plumbers for years. At hardware, hobby, plumbing and auto stores. 59¢ per tube.

Send For Free Literature

HERCULES CHEMICAL CO., Inc.
416 B'way., New York 13, N. Y.





4x8 or 14x8?

BIG SHEETS mean BIG SAVINGS

When you cover an 8′ x 14′ area with *one* sheet of board, you obviously have ¼ as many handling operations, ½ as many nailing operations, as if you had used 3½ 4′ x 8′ boards. And you have 3 fewer joints to cover.

This is one of 100 basic facts about home construction presented in the new 64-page Homasote Handbook. It shows you how to get lasting values in both new construction and modernization. It gives the don'ts as well as the do's—for every part of the house—indoors and out.

Homasote is different—in its sizes, densities, strength, insulating and sound-deadening qualities. The Handbook shows you why—and how to use it. Mail the coupon to secure your copy—plus 3 fully illustrated folders suggesting 18 interesting and practical make-it-at-home projects, including furniture.

MAKE IT AT HOME—WITH HOMASOTE

HOMASOTE COMPANY—
Department D-4, Trenton 3, N. J.

☐ I enclose 10¢ for Homasote Handbook.
☐ I enclose 10¢ for 3 Make-It-At-Home Folders.

Name_____
Address_____
City_____ Zone_____ State_____

Copyrighted material



Why They Want to Shift the Keyboard

[Continued from page 280]

gave them an average of 83 hours of training on the Dvorak, and increased their net words—that includes subtraction for errors—per minute from 33 to 57.1, or well above the average of all U.S. typists. The Navy girls had a 25 percent increase in gross speed, a 68 percent reduction in errors, and a whopping 74 percent increase in net words per minute.

Dr. Dvorak today is using his royalties to get the new keyboard into schools, where children will be exposed to it from first grade up. This means that the girls and boys will get it before they are exposed to the standard keyboard, and therefore before they build up resistance to the simplified version. Results so far are good:

First-grade school children (who were tested on the Dvorak keyboard in 20 cities) quickly learned to type simple words with it. This is mainly because they can make so many words from the single home row of letters. The youngsters are fascinated by the keyboard, because, Booz thinks, of their ability to use it so quickly, and they stay with it—they want to keep typing throughout early grades.

Tacoma, Wash., junior high schoolers in one year attained faster typing speeds with the Dvorak keyboard than their classmates did in three years with standard machines. And, like the first graders, they stick with the simplified typewriter, while, over the U.S., 45 percent of the high schoolers in regulation typing courses give up.

If they get the girls young enough, Booz figures, they will reform the nation's secretaries; if they catch the boys young enough, they will also—which will please today's secretaries—reform the boss.—*Gardner Soule.*

• •

Experience is never more valuable to a man than when it permits him to do a tough job right the first time.

—THE SIDEWALK SUPERINTENDENT

• •

BIG NEW YANKEE HANDYMAN Spiral Screw Driver ®

No. 633H



$5.98

Just Push... Drive Screws Fast

Here's a new "Yankee" Tool with a built-in formula for faster, easier work — 1 push and you turn the screw a number of times — yes, every stroke turns the screw a number of times, and with the quick-return action you are ready for the next stroke immediately.

This Spiral Ratchet Screw Driver does more than drive and draw screws. It drills holes in wood, plastic or plaster, and countersinks for head of screw. In addition to Screw Driver Bit in chuck, 3 Drills and a Countersink come in magazine handle. A "Yankee" tool from the Tool Box of the World. At your hardware store now.

N.B. Special Price for Hardware Week (April 12-21) — $5.69

STANLEY



Super-honed wheel and special axle, perfect design and workmanship guaranteed. Long life and perfect, easy cuts. Factory-sealed packaging for your protection.

Red Devil GLASS CUTTERS

FREE How To Cut Glass. Illustrated instructions on tools and methods of cutting glass.

Red Devil Tools. Dept. 123
130 Coit Street, Irvington, N. J.
Please send FREE copy of "HOW TO CUT GLASS."

NAME_____

ADDRESS_____

CITY_____ ZONE_____ STATE_____

1663



Pete Penn asks:

"What's $3,500?"

It's what a new car costs, on the average . . . and you'll agree with Pete Penn that it's an investment worth protecting.

Naturally, *the best protection* for the highest precision, hardest working part of your car is Pennsylvania motor oil in the crankcase. Every brand of Pennsylvania motor oil is made from *Nature's finest crude* . . . Pennsylvania.

At your next oil change, refill with a brand of Pennsylvania motor oil . . . *naturally* the finest oil in the world. Carried by good dealers everywhere.

Today's BEST Oils
Start with Nature's BEST Crude
...and that means Pennsylvania!


INSIST ON A BRAND OF **PENNSYLVANIA Motor Oil**

100% PURE PENNSYLVANIA OIL © 1956

PENNSYLVANIA GRADE CRUDE OIL ASSOCIATION, Oil City, Pa.

Copyrighted material


no other plier
does so many jobs
SO WELL

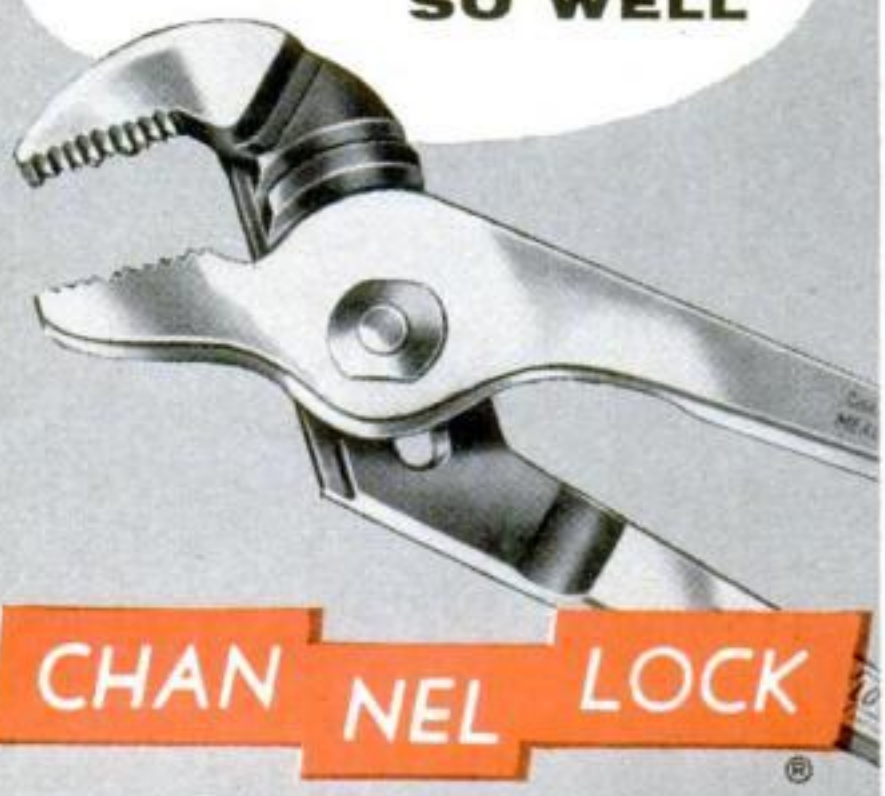

CHANNELLOCK®

No. 420

GRIPS LIKE A PIPE WRENCH

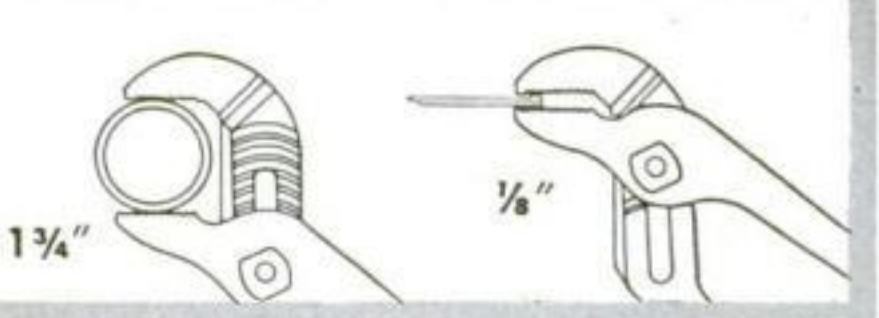

Help yourself to a Channellock No. 420 . . . the handiest plier of them all. With this handy plier, you can grip anything from a cotter pin to a 1¾" hex nut. And what gripping power! Just like a pipe wrench. What's more, Channellock is streamlined . . . easy to use in hard-to-get-at places. This all 'round usefulness is the reason why Channellock is the favorite plier of craftsmen everywhere. It'll be your favorite, too . . . for the same reason. Ask your hardware man for a Channellock No. 420.

BE SURE IT'S A GENUINE CHANNELLOCK



CHAMPION DEARMENT TOOL CO. MEADVILLE, PA.

SUPREME
Versamatic
REVERSIBLE SCREW DRIVER
AND SPEED REDUCER



First time ever! It REVERSES!



Drive *and remove* screws with Supreme Versamatic. Versamatic reduces speed 7 to 1, increases power 7-fold. *Reverses* with one twist. Handles even the largest screws with ease. Also for nut running (adapter furnished); tapping; and all heavy duty drilling where speed reduction is needed. Fingertip control means safe, fast work. Complete set $14.95. (½" chuck extra). At better hardware stores.

SUPREME PRODUCTS, Inc., 2222 S. Calumet, Chicago 16

SENSATIONAL NEW HIGH SPEED DRILLMASTER

NOW turns the ordinary shop drill into HIGH SPEED DRILL PRESS at a big saving. When DRILLMASTER is used on a 5,000 rpm drill press its top speed will be 20,000 rpm. Does the work of expensive high speed drill presses on brass, aluminum, plastics and cast iron where high speed drilling is necessary. Available for work of any size runs. Fits any ½" chuck, holding drills from 5/32 to #80. Shafts are heat treated and ground. Ball bearings and oil impregnated bearings and gear train are housed in cast aluminum. Precision made through-out. MAIL ORDER TODAY only. . . . . $62.50 Fob. Chgo.



ON C.O.D. ORDERS WE REQUIRE A 10% DEPOSIT. Wt. 2#

DIRZIUS MACHINE SHOP "M", 1423-25 So. 52nd Ave., Cicero 50, Ill.

PAINTING IS EASY!
WITH THE FAMOUS
BURGESS *electric*
SPRAYER



Just plug in and Spray

SPRAYS:
PAINT • VARNISH • ENAMEL • SHELLAC • MOTHPROOFERS • GARDEN SPRAYS • WATER • INSECTICIDES

1,000 USES IN EVERY HOME!

For the fastest, smoothest painting or spraying job you ever saw, try the Burgess Sprayer. Completely self-contained . . . just plug into regular household outlet, pull the trigger, and paint furniture, floors, walls, screens, cabinets, fences. Fine for mothproofing and garden spraying, too. New sapphire nozzle, handy spray-adjuster. 25-oz. graduated jar. Easier to clean than a brush. Get your Burgess Sprayer today!

only $12.95 AT YOUR FAVORITE DEALER

If not available locally, send $12.95 for post-paid delivery. Money-back guarantee.

SEND FOR FREE BOOKLET
"HOW TO PAINT THE EASY WAY"


BURGESS VIBROCRAFTERS, INC.
DEPT. A-15 • GRAYSLAKE, ILLINOIS

Copyrighted material

new screens for a whole house...

Do-It-Yourself with Reynolds Aluminum

(not one will ever rust, warp or rot)

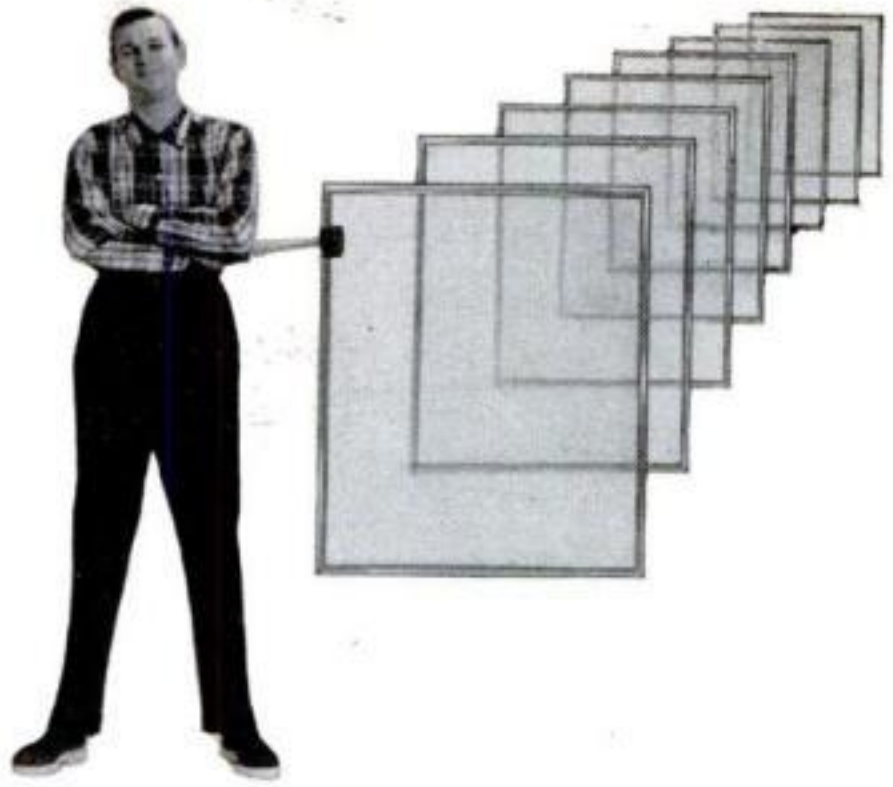



Available in Canada


You start with Reynolds *Do-It-Yourself* Aluminum screen sections. Then—ONE—you measure and cut—TWO—you *snap* the frames together—THREE—you put in screen cloth. And, honestly, you *can* make all the screens for your house in a single weekend. To put it another way—it's quick and it's easy! Best of all you'll have screens that are light weight, rust and warp-proof . . . ready for a lifetime of aluminum service. Interchangeable with storm sash, too.

Ask Western Union Operator No. 25 for the name of the Reynolds *Do-It-Yourself* Aluminum dealer nearest you. Or see your favorite lumber or hardware dealer. He has complete materials and free instruction sheets.

By the way—the only tools you'll need are a mallet, saw and a file to smooth cut edges. Try a **Black Diamond** or **Nicholson** file—there's one for every purpose.

REYNOLDS *Do-It-Yourself* ALUMINUM

Reynolds Metals Company, 2493 South Third St., Louisville 1, Ky.

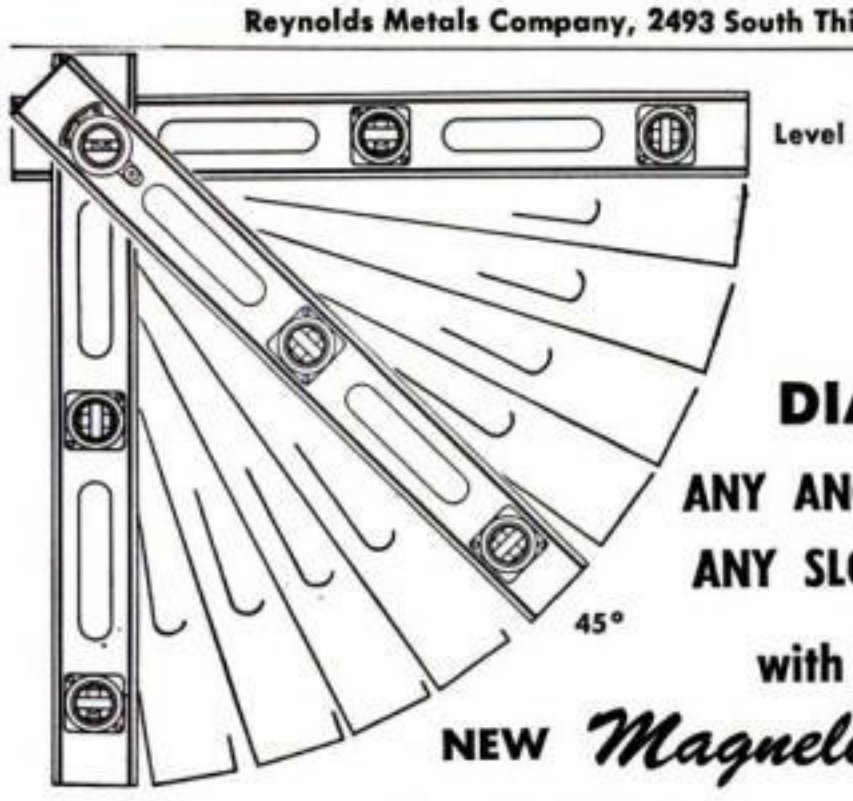

DIAL

ANY ANGLE

ANY SLOPE

with the

NEW *Magnelite*

PROTRACTOR LEVEL

LIGHTWEIGHT, UNBREAKABLE MAGNESIUM

NOW, Magnelite . . . the original extruded magnesium I-beam level . . . is available with an exclusive protractor dial allowing you to measure or set any angle from 0° to 90° . . . with a "quick" setting for ¼" per foot drop. Plumb and level positions feature replaceable vial assemblies with easy-to-read, cat's-eye, pyrex vials behind extra-large glass windows. A highly accurate tool of professional quality, in your choice of 5 sizes . . . 18, 24, 28, 30 or 48-inches.

Prices start at $6.60

ASK YOUR DEALER, or write

J. H. SCHARF MFG. CO.

6120 Binney Omaha, Nebraska



NEW SIOUX

¼" DRILL KIT



Here's the powerful SIOUX ¼" electric drill with accessories for sanding, drilling, grinding, sharpening, wire brushing, polishing, cleaning, etc., all in a handsome, fitted metal case that hangs on the wall or goes to the job...$41.75 Complete

Drill only $24.95



WRITE TODAY FOR MORE INFORMATION

ALBERTSON & CO., INC., SIOUX CITY, IOWA, U.S.A.

Copyrighted material

Arc Welding plus AC Power

for lights, tools, appliances, etc.

. . . a real profit maker for emergency repair jobs


TWO machines in ONE



AC Power-AC Welding Combination

Easy Portability! Take it ANYWHERE. See how it PAYS!

This rugged AC welder-AC power combination with 4 cylinder air-cooled engine gives you 250 amp. welding current and 5000 watt AC power alternately—it's **the** welder you need for "cashing in" on "big pay" jobs that call for on-the-spot service. Can be loaded on truck or trailer on a moment's notice.



"Husky Boy"

AC Welder-AC Power Combination—save money—just connect this low cost generator only—to an old auto engine. It's ideal for 200 to 300 amp. welding operations, where power lines are unavailable, or for furnishing emergency power for lights, tools, etc.

"Husky Boy" 200 amp. welder driven by a 2 cylinder air-cooled engine. Perfect for outside or in and around the shop welding. Handles the big pay jobs.



AC Transformer

Transformer Type AC Welder 200 amp. a real welder for production and repair work in shops that have only single phase power available.

Investigate these MONEY MAKERS today!

"Pipeliner" 250 amp, gasoline engine driven welder with plenty of power to maintain a hot, fast, dependable arc. Also equipped with a 1 KW DC auxiliary power receptacle.



"Pipeliner"

Learn arc welding quickly by actual on-the-job experience at the non-profit Hobart Trade School. Complete or partial courses. G. I. approved.

Modern Arc Welding Lessons 200 fully illustrated pages. Learn practical arc welding in your spare time . . . Only $1.00.



MAIL Coupon today

HOBART BROTHERS CO., BOX P-46
Troy, Ohio, Phone 21223
"One of the world's largest builders of arc welding equipment"

HOBART BROTHERS CO., Box P-46, Troy, Ohio
Please send me additional data on items checked.
☐ AC Power—AC Welding ☐ "Husky Boy"
☐ AC Transformer ☐ "Pipeliner" ☐ Hobart Welding School ☐ Welding Lessons, $1.00.

free ☐ Weldor's Vest Pocket Guide

NAME _____
ADDRESS _____
CITY _____ STATE _____

Speedy Sprayer

mobile paint sprayer



FREE!
Write for "How to Spray" Booklet and Literature.

Choice of craftsmen for 35 years! Saves time, paint and money. Quickly gives flawless finish to walls, furniture, screens, fences and handiwork. Sprays all materials; ¼ H.P. motor. Diaphragm principle assures clean, oil-free air. Never needs lubrication. With gun, less motor.

No. 890 Speedy Sprayer $38.50

Add wheels with Wheel Kit No. 909. Includes 6" wheels, handle, fittings. **$6.95**

At dealers everywhere

W. R. BROWN CORPORATION
2637 N. NORMANDY AVE., CHICAGO 35, ILLINOIS

½-HP Motor SPEED REDUCER



Reduces Speed at a 20-1 Ratio

Brand New! *Mfr'd. for Army radar equipment, this reducer is*

Guaranteed! *a masterpiece of design and precision workmanship*

For experimental and laboratory uses . . . for building special equipment that saves valuable man hours. Ratio of 20-1 gives approximately 90-RPM with 1750 motor, direct drive . . . or can be belt driven to give ANY DESIRED SPEED! Use with any size motor up to ½-HP. Case is cast of aluminum alloy (not die cast) and has BALL BEARINGS throughout. Heavy duty, double reduction, spur gear drive built for continuous duty. Smooth, quiet running. Base to shaft is 4¾" high. Comes complete with couplings. Operates: conveyors, timing devices, revolving window displays and signs, tumbling equipment and machine tool drives . . . 1,001 uses!

Gov. Cost $86

Only $16.50 Prepaid

Order From AD! We Pay Shipping!


FREE CATALOG OF OTHER ELECTRICAL BUYS

ROBERTS ELECTRIC CO., Dept. PS-423, 849 W. Grand, Chicago 22, Ill.

Insist on Evans TAPES POCKET SIZE

At Your Hardware Store

6, 8, 10, 12-ft. lengths from **98¢** with FREE plastic utility case.

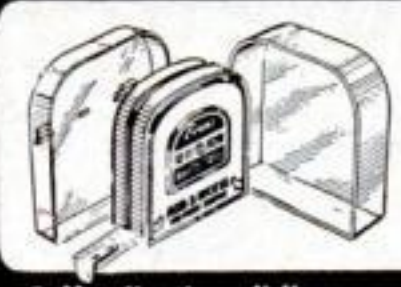



Self-adjusting sliding hook starts you at zero for accurate inside or outside measuring.

EVANS RULE CO., Elizabeth, N. J. 3067

Copyrighted material




WHO SAID IT WAS EASY?

We know hand sanding isn't easy—it's a back-breaking chore. With a power sander, even the beginner—even Mrs. DO-IT-YOURSELF can become a sanding expert at once. Refinishing becomes a snap. When you select your power sander, be sure you choose the *right* one. Just select *straight-line action*—the only sanding motion recognized by professional woodworkers. Here is the Dremel principle:

To do a real sanding job, you must sand with-the-grain of the wood. Any cross grain action produces scratches and swirl marks, spoiling the finished appearance of your wood. With Dremel *Straight-Line Action*, even the inexperienced is guaranteed professional sanding results.

Compare DREMEL'S **Straight-Line Action** SANDERS with all other brands. See for yourself why the Dremel line has become the fastest selling line in the sander industry. Try Dremel and you'll buy Dremel.

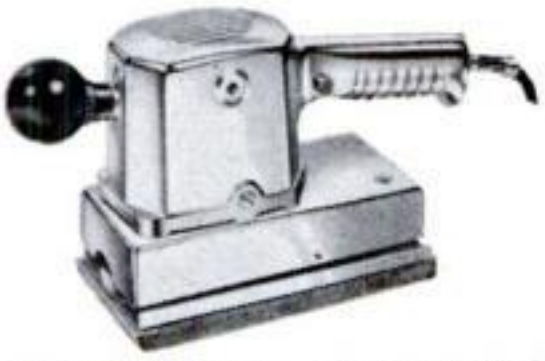

Model 53 Sander. Heavy-duty, rotary motor. 24 sq. in. detachable sanding pad **$34.85**



Model 2000 Sander— with steel carrying case. 21 sq. in. sanding, polishing, surface **$24.50**




Model B — 3 tools in 1; sander, polisher, massager. High-speed motor, 12 sq. in. sanding surface **$14.85**

ELECTRIC DREMEL POWER TOOLS

Write For Free Catalog

DREMEL MANUFACTURING CO., Dept. 126-D, Racine, Wis.

SEE YOUR DEALER.
If he cannot supply, order direct on 5 day trial, money-back guarantee. Remit in full for postpaid shipment; or send $2.00, pay postman balance plus C.O.D. fee.

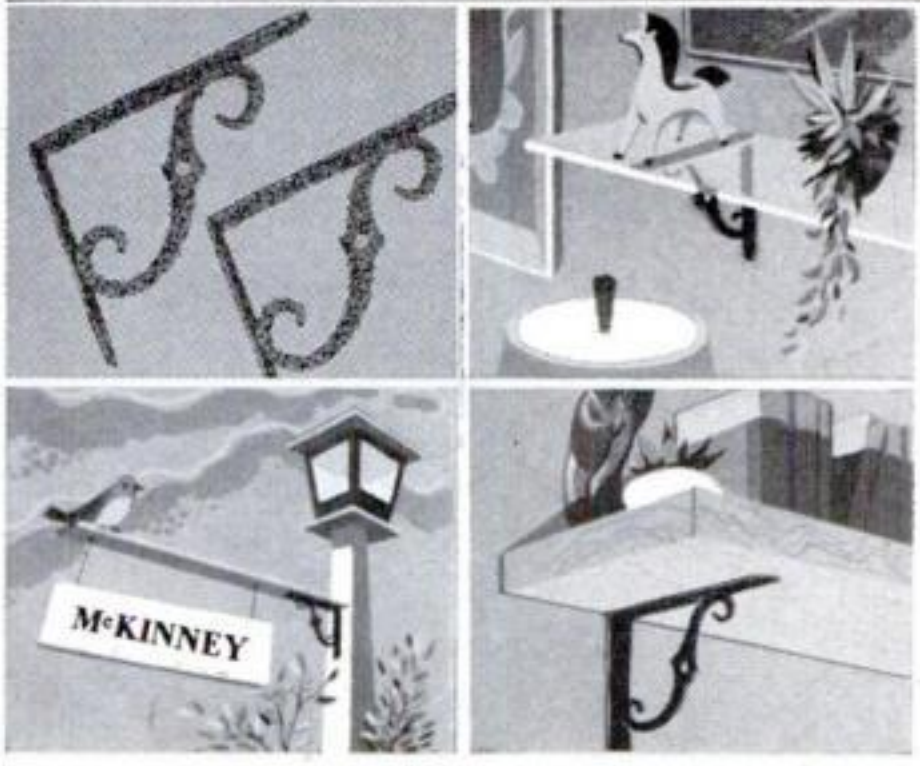

McKINNEY FORGED IRON

Ornamental Brackets

You will want a pair or two of these artistic forged iron ornamental brackets. You can use them in a hundred different ways around your home—inside and outside. They are sturdy and durable—made of heavy gauge metal—with beautiful, textured, rust-resisting, dull black finish. Available in three sizes: 8" x 6"; 6" x 4½"; 4" x 3". Buy them at your local Hardware, Lumber or Building Supply Dealer. Make sure they're "McKINNEY."

Write for the Folder—"McKinney Forged Iron Hardware."

McKINNEY MANUFACTURING CO. • Pittsburgh 33, Pa.

MARLITE-IT-YOURSELF



You can afford beautiful ideas with economical MARLITE walls

Guaranteed by Good Housekeeping

A few days ago this was an unused porch! But a little imagination and Marlite Plank and Block made the difference. So easy to install you can do it yourself, this beautiful paneling has a tongue and groove joint. Fitting is easy. All fastenings are concealed. And Marlite's soilproof melamine plastic finish cleans with a damp cloth; never needs painting.

NEW! Send 10c for do-it-yourself instructions and full-color folder with over 40 "idea" rooms using Marlite "Companion Colors" and distinctive wood and marble patterns . . . or see your lumber dealer. Marsh Wall Products, Inc., Dept. 426 Dover, Ohio.

Another Quality Product of Masonite® Research

Marlite®
plastic-finished
WALL and CEILING PANELING

Copyrighted material

now! assemble your own

ALUMINUM SCREENS



save up to **50%**

LIFETIME PROTECTION—

YET IT'S ONLY *MINUTES* FROM PARTS TO FINISH WITH

HOMESHIELD

easy-to-make SCREEN KITS

Make your work shop pay off! Assemble these maintenance-free aluminum window screens for your home, cabin, or shop and save money...make 'em for neighbors, apartment houses or businesses, and make money! It's a simple assembly job that requires no special tools.

No more repairing or repainting! Replace heavy, old-type screens or screen your new home with sparkling Homeshield screens that'll dress up your home for life.

Eliminates rust and stained walls. Lightweight—install or remove in a jiffy. No ladders needed.

Kits are complete with sturdy aluminum frames, easy-to-handle Fiberglas® screening, corner locks, installation hardware — even a miter box. Sizes for full screens and sliding half screens (and storm sash, too!) Ask your department store, hardware or lumber yard dealer, or mail coupon for folder and name of nearest Homeshield distributor.



AMERICAN SCREEN PRODUCTS CO.
Dept. PSK-4, 807 N.W. 20th Street, Miami, Florida

Name.....

Street.....

City..... **State**.....

deft-finish it yourself

IT'S SO EASY



Dries in 30 Minutes

DEFT WOOD FINISH FOR ALL INTERIOR WOOD SURFACES

Clear, semi-gloss bar top finish. Deft seals, primes, finishes. Nothing else to use. Will not darken. No thinning, no brush marks. Get a professional finish every time. Use on paneling, floors, cabinets, furniture, etc. Insist on Deft, wherever paints are sold. Or write for free booklet. P.S.

DESMOND BROS., 1826 W. 54th St., Los Angeles 62, Calif.

More Fun AND BOATS

Standout light-weight design
Choice of 6 trim models

Save nearly 20%

Buy Direct-Get More-Pay Less!

WRITE FOR COMPLETE DETAILS TODAY!

SAFE ★ RUGGED ★ STYLISH CAR-TOPPERS!

Modified Vee hull, full keel and runners, rub-rails, reinforced ribs and special transom for top outboard performance; rivet-locked aluminum, seams lapped and sealed; seats Styrofoam filled; greatest safety; lowest upkeep; no caulking.



AQUALINE BOAT Corporation
YORKLYN 4, DELAWARE • CEdar 9-7549

115 VOLT A.C. GENERATOR

SAVE 91% ON WAR SURPLUS!

MAKES A GOOD LIGHT PLANT



Buy of the Year! Brand New Bendix generators in original cartons. Perfect—Guaranteed! A.C. output 115 V., 10.4 AMP. 1000 Watts, sing. Phase, 800 cyc., 2400-4200 R.P.M. or D.C. output 30 V., 60 AMP. Splined drive shaft. Self excited. Aux. light plant or standby unit for farm, cottage, camp, boat or floodlight use. Drive from any power take-off. D. C. powers motors—charges batteries. A.C. powers lights and heaters but not motors. Shp. WT. 50#.

Brand New (order #325A)..... **$24.95** Good, Used (order #326A)..... **$14.95**

Prices are F.O.B. YORK. Send dime for big bargain Catalogue

KARL ORT, Dept. PS-4, York, Pa.

send for FREE tool catalog



A big, fact-packed catalog full of pictures and tool information . . . yours for the asking.

- *Snap-on* tools help you handle repair jobs faster, easier, better.
- *Snap-on* tools LAST . . . pay for themselves over and over.
- Used and endorsed by America's top-earning mechanics in all fields.
- Start building your *Snap-on* set with basic units . . . add other tools any time.

SNAP-ON TOOLS CORPORATION
8060-D 28th Avenue, Kenosha, Wis.

Send me free catalog.

OCCUPATION .....
NAME .....
ADDRESS .....
CITY .....ZONE .....STATE .....

Snap-on Tools
THE CHOICE OF BETTER MECHANICS

Copyrighted material

KEEP ALL SAWS SHARP



SO EASY: With this new filing jig and jointer anyone can now sharpen any handsaw like new! When file hits hardened steel rollers teeth are finished and EXACTLY SAME HEIGHT. All teeth cut and saw runs true and smooth. Jig and instructions **$2.95** postpaid. Free literature.

SAVE TIME AND $$$

JOINT & SHARPEN CIRCULAR SAWS



Sensational New Super Filer No. 11 joints and sharpens both **hand** and **circular** saws 6" to 10" with all teeth the correct height, depth, pitch and bevel. Easy to use—when file hits hardened steel roller, teeth are finished. Saw runs true and smooth with no side pull. Complete with special 8" file **$9.95 ppd.** **"TRU-CIRCLE"** saw set automatically sets teeth at 10° or more **$2.95.**



SUPER SAW FILER NO. 6

Automatically controls

DEPTH
ANGLE
PITCH

Automatic DEPTH CONTROL Rollers



IT'S NEW

Perfect bevel and angle maintained, and fool-proof depth control for all Rip, Crosscut and Handsaws. Precision made and calibrated for instant setting at desired angle. Can be used in any vise or clamp. Complete with file, only **$6.50 PPD.**

SUPER DRILL GRINDER



Sharpens round shank drills from 3/32" to ½" in diameter, up to 6" long. Grinds old drills like new in 4 different point angles, using hand or power grinding wheels $2.95

SEND FOR FREE CATALOG

A. D. McBURNEY, 5908 Hollywood Blvd., Hollywood 28, Cal., Dept. S-46



The Modern PLASTIC for lasting Home Repairs

PERMANENTLY mends cracks or holes in wood, tile, stone or plaster. Sticks and stays put—Does not chip, shrink or fall out. Easy to use. Economical. Mold it, chisel it, polish or paint it. The big 4-lb. can is obtainable from your lumber, paint or hardware dealer at $1.25; or will be shipped direct postpaid (in U. S.) for $1.50. Complete satisfaction guaranteed or your money refunded. Order now.

DONALD DURHAM CO.

Box 804-U Des Moines, Iowa



ELECTRIC WELDER

AC or DC 110 Volt

The "Little Marvel" all-metal welder. 5-year written guarantee. Welds ⅛" metal or money back. Repairs tanks, tools, fenders, **machine parts, etc. Complete with everything—rods, unit, eye shield, directions. $6.95 plus 50c postage.** Flame torch accessory for soldering, cutting, brazing $3.95 complete with carbons, brass rods, flux. **$2.00 deposit on C.O.D. 75 Ampere ¼ inch Transformer Welder $21.95 F.O.B.**

$6.95 Complete

ESSAY MFG. CO., Dept. 47, Quincy 69, Mass.



Heavy Duty, All Steel

TOOL CHEST

$24.75 F.O.B. ST. PAUL

WHERE ELSE can you get 4 drawers with *built-in-locking system,* sliding on compound glides —at this price! Baked blue-gray enamel. 26" x 12½" x 12¼". Your money back if not satisfied! *Write for bulletin, describing 12 different models.*



HUOT MANUFACTURING CO.

532 No. Wheeler St., St. Paul 4, Minn.

Mammoth 1956 Wholesale Tool Catalog



$1.00 Puts You In Business



The opportunity now awaits you to own and operate your own business on a part time or full time basis in the lucrative field of HARDWARE, HAND TOOLS, FANS, POWER TOOLS, MOTORS, PAINTS, etc., or BUY TOOLS FOR YOUR INDUSTRIAL OR INSTITUTIONAL USES.

Buy Nationally Advertised Tools for Resale or Industrial or Institutional Use

NO INVESTMENT REQUIRED, BUY AS YOU NEED IT. A MILLION DOLLAR INVENTORY AT YOUR FINGER TIPS.

Discount UP TO 50%

$1.00 refund on first purchase or refund if you are not 100% satisfied.



JUST FILL OUT COUPON

Every one needs tools. Meet the demands of the growing "Do-it Yourself" markets. Sell direct from the jumbo buying guide—your cost is known only to you.

ENCLOSE $1.00 FOR DEALER'S 1956 MAMMOTH TOOL CATALOG.

SILVO HARDWARE COMPANY

Dept. PS-4, 108 Market St., Philadelphia 6, Pa.

I am enclosing $1.00. Rush me your dealer's Mammoth Catalog Today. If I am not completely satisfied with your plan, I understand that I can return the Dealer's Catalog for refund, and if I decide to order, my $1.00 will be deductible from my first order.

NAME .....

ADDRESS .....

CITY ..... **ZONE** ..... **STATE** .....

Copyrighted material

Build this Colonial Cobbler's Bench with

ELMER'S® GLUE-ALL

Brings compliments galore. 4 handy drawers. Use ELMER'S fast-drying plastic glue to make joints strong as wood itself. Won't stain. Handy squeeze bottle speeds job. Ideal glue for pottery, paper, cloth, too.



Colonial Cobbler's Bench. Easi-Bild* Pattern #586. Just trace, saw, assemble. Send 50¢ in cash or money order to Elmer's Pattern Dept. 46, P. O. Box 215, 350 Madison Avenue, New York 17, N. Y.
*T.M. Reg. Easi-Bild Pattern Co., Inc.



Building?
Repairing?
Indoors?
Outdoors?

glue it Best WITH ELMER'S

Build or repair outdoor furniture, boats with

ELMER'S® Waterproof Glue

Makes joints super-strong even when wood is oily or resin impregnated. Resistant to acid, alkali, solvent, fungus, rot. It's the glue that boat-building experts use.





Bond plastic laminates to plywood with

ELMER'S® CONTACT CEMENT

Does professional job quickly without clamps, nails, presses. Highly resistant to heat, water. Outperforms other contact cements in stress tests.







At hardware, lumber, paint, marine supply dealers. The Borden Company, Chemical Division ©T.B.C.

IF IT'S Borden's IT'S GOT TO BE GOOD

DO IT BETTER . . .

DO IT WITH DP®



CAULK
GLAZE
SEAL
PATCH

Now's the time to seal all cracks and openings around doors, windows, brick work, foundations, and chimneys. **D-P Caulking Compound** does it . . . so easy! Get it in bulk or in cartridge form. Does not crack . . . withstands expansion and contraction. One of many fine **D-P** products. At all good stores!

Ask your dealer for D-P Products.

THE DICKS PONTIUS CO.
5301 Huberville Ave., Dayton 3, Ohio
INSIST ON D-P BEST SINCE 1867

KING MIDGET

World's Lowest Priced Car!



NOW—32 PAGE BOOK filled with photos, drawings, specifications, records, wholesale price, and Rider Agents plan if no dealer near you. Send 25c for book, or send $1 (refunded first order) for it plus actual operating book and service manual.

MIDGET MOTORS MFG. CO., ATHENS 2, OHIO

DO MORE PLANING JOBS WITH LOW COST BELSAW

LOW DOWN PAYMENT
EASY TERMS



Exclusive MONEY-MAKING Features: Full 12¼" x 6" capacity • Power feeds at 14' to 34' a minute • Provides for Grinding Knives in the Cutterhead • Attachments for Jointing, Rabbeting, Tongue, Matching, Groove. Convert low cost rough lumber into high priced stock. Easy to make flooring and popular patterns. Send Today for FREE Literature and Prices.

Belsaw Machinery Co, 2066 Field Bldg., K.C. 11, Mo.

Insist on *Evans* TAPES KING-SIZE
At your hardware store



6-ft. only $1.49



¾" wide blade stands up straight for one-man upright measurement.

Also available in 8, 10, 12-ft. lengths with free plastic utility case.

EVANS RULE CO., Elizabeth, N. J. 3066

Copyrighted material

spray paint it yourself!



Faster . . . better . . . easier! Anyone can quickly learn to do a professional job of spray painting. Takes less skill than brush painting... 4 to 6 times faster. Pictured . . . *Pressure Maid* . . . rugged compact air compressor of castiron construction . . . single cylinder . . . direct drive . . . piston type . . . not a diaphragm. Precision built for the smaller jobs. Sprays paints, varnishes, enamels, stains, disinfectants, insect sprays. Priced so low first good-sized job pays for it. Run in on test line to make it *trouble-free*. For catalog of one and four cylinder compressors, write THE CAMPBELL-HAUSFELD CO., 151 Railroad Ave., Harrison, Ohio.

CAMPBELL-HAUSFELD

DO IT YOURSELF
It's Easy With . . .



Soldering's really a "cinch" . . . when you use time-tested, reliable KESTER . . . available everywhere.

FREE! "Soldering Simplified" . . . 16-page how-to-solder booklet. At your dealer or write direct.

KESTER SOLDER COMPANY
4254 Wrightwood Avenue Chicago 39, Illinois

WELD IT YOURSELF IN A JIFFY!

Weld, Cut, Braze, Solder
IRON, STEEL, BRONZE, BRASS, ALUMINUM & OTHER METALS

Tool and Equipment breakdowns are always annoying and costly. Don't let them bother you. Get a Dynamic Arc Welder. You can do expert work on your very first job. Welders operate from any properly wired 110 V. AC line. Also make your own wrought iron furniture, railings, fences & knick-knacks. Repair fenders, & bodies etc. with the handiest "tool" in your workshop. A Dynamic will pay for its low cost of $38.50 F.O.B. in both time and money.

EASY PAY PLAN
Low down payment. Pay as you weld. Sold on money-back guarantee. Send for details. Complete outfit only
$38.50
f.o.b. factory

DYNAMIC INDUSTRIAL type transformer Arc Welder 75 amp. output for Industrial or Workshop use.



DYNAMIC WELDER CO.
Dept. D3-D, 1808 S. Federal St. Chicago 16, Ill.

Free Details and "How to Weld"

FUN AND IT'S EASY!

PLAYHOUSE-PLAYSTORE and PACKAWAY DOLL HOUSE

Send for plans



Your girl will love this 2-bedroom Cape Cod doll house. It's 23" x 17" with slotted construction so it can be packed away in its own base-storage chest. Roof swings up, front removable for access to all rooms. Full size pattern. Easi-Bild plans just 50c.

Build this colorful, 4' x 5½' PlayHouse-PlayStore, too. Even a beginner can do the job with Easi-Bild pattern directions and plans. Sturdy Play-House-PlayStore has shelves, room for furniture, door and window, plus clever cut-out trim. Plans—60c.



Both projects made with rugged 3/16" Upson fiber board, the easy-to-work board that makes any home project a cinch to build. 3/16" Upson saws easily, is light in weight, yet is strong and durable. Edges sand smooth. Paints and finishes beautifully.

All Upson fiber board sizes and types are available at your nearby lumber dealer's. Use 3/16" indoors, ⅜" All Weather outdoors.

Send today for your Easi-Bild Patterns. Included: complete directions, step-by-step pictures and material list. Enclose 50c for Doll House, 60c for PlayHouse-PlayStore. *Mail coupon today!*

UPSON

LAMINATED FIBER BOARD

94% wood fiber laminated for great strength

PROVEN QUALITY YOU CAN TRUST

THE UPSON COMPANY
454 Upson Point, Lockport, N. Y.

UPSON

Please check Easi-Bild Pattern desired. Enclose cash with order.
☐ No. 148 PlayHouse-PlayStore 60c ☐ No. 596 Doll House 50c

Send free details on _____ (TYPE OF BOARD)

Name _____

Address _____

City _____ State _____

Copyrighted material

GIGANTIC SAVE-TO-70% **MAIL SALE** WAR SURPLUS EXCESS INVENTORY BANKRUPT STOCK

GOLF CAR BATTERY MOTOR



● Powerful direct-current, heavy duty, Timken bearing motor with built-in precision 18-to-1 gear reduction. Runs on ordinary 6, 12 or 24-volt storage battery. 200 to 400 R.P.M.
● Build your own self-propelled golf car, warehouse cart, store lift truck, electric boat winch, boy's midget auto, garage door opener, motorized invalids wheel chair, etc.
● Output shaft 1" diameter. Wt. 22 lbs. Gov't. cost over $200.
Special F.O.B. Lincoln.....**$13.46**

AIR COMPRESSORS

● **Piston Air Compressor,** 150 lbs.....**$19.95**
● **2-Cylinder Air Compressor,** 150 lbs. **$49.95**
● **Auto Pressure Switch** for motor....**$ 4.95**
● **Air Kit, Comprsr, Tank, Gun,** etc. **$39.95**
Save to 70%. FREE CATALOG.

6-Volt HYDRAULIC PUMP

● Complete hydraulic system, 6-v DC motor operates from truck battery. Drives 2,500 lb. per sq. in. pump. Has control valve, etc.
● Use for dump trucks, snow plows, jacks, lifts, special machinery, etc. Leading make. F.O.B. Wt. 48 lbs. List $121.50. SALE **$45.95**

ARMY POWER PLANTS



● Marvelous buys in new condition Govt. surplus plants and generators. We pay freight!



● 1000-w, 115-v, 60-c, **$149.50**
● 2000-w, 115-v, 60-c, **$289.50**
● 3000-w, 115-v, 60-c, **$299.50**
● 7500-w, 115-v, 60-c, **$595.00**
● 3000-w, DC generator, **$58.75**
Many others. Send for Free Bulletin.

HYDRAULIC BARGAINS

● Control **Valve,** 1 or 2 way.....**$18.00**
● **Pump,** 1000 lbs. 12 gpm.....**$45.50**
● Pressure **Gauge,** 1000, 1500, 3000 lb. Specify.....**$ 3.49**
● Cylinder, 2"x10", 3141 lbs. lift...**$17.50**
Many other types, sizes and items. All brand new. Free catalog.

IRRIGATION PUMP
2½" size, 16,500 gph



● Brand new Navy bronze ball bearing hi-capacity centrifugal. Wonderful small farm and truck irrigation, many industrial uses.
● Capacity to 280 gpm. Pressure to 65'. Speed 2100-2700. Clock-wise rotation. Complete with 6" pulley. Wt. 40 lbs. Size 10" x11"x9". Inlet 2½", outlet 2".
● 2 units driven by single engine deliver almost 600 gpm or 33,000 gph. Natl. Adv. list $98 each. SALE. Prepaid.....**$44.37**
Many other types, sizes. Free catalog.

SPECIAL OF THE MONTH
WEED SPRAY OUTFIT



● Leading make. Latest design. 5-row (17'). P.T.O. tractor-drive roller pump. T-jet nozzles, finest controls, gauges, hose. Complete. Only 48 units. List $175. Ppd. in U.S.A..... **$97.65**
Everything in weed spray outfits. FREE big weed spray catalog.

SPECIALS FROM PREVIOUS ADS

● **AC-DC Power Rectifiers** (F.O.B.)..**$15.61**
● **Electric Drills** 110-V ½" (842)..**$31.95**
● **Campers Power Plant** 28-V (8425) **$69.50**
● **Robot Control Cylinder**.....**$ 3.89**
● **Auto Trouble Safety Light**.....**$ 2.71**
● **Govt. Steel Tower,** 30' F.O.B. Ky. **$31.95**
● **Automatic Remote Control Switch**..**$13.71**
● **Air Power Tree Trimmer**.....**$15.37**
● **Surveyors Level and Tripod**.....**$42.95**
● **Surveyors Transit and Tripod**.....**$79.50**
● **Giant Flood Light**.....**$49.50**
● **Navy Bomb Hoist** (150 lbs.).....**$29.95**
● **Boat Winch,** 150 lbs.....**$ 8.95**
● **Finest Tractor Nitrogen Spray Pump** **$54.50**
● **Electric Chain Saw,** 12".....**$99.50**
● **Farm Wall Phone**.....**$ 9.95**
● **Portable Govt. Air and Spraying Tank** **$13.49**

ORDER FROM AD or write us for big FREE CATALOG 1000s of items! Motors, sporting goods, hand and electric tools, watches, tarps, etc., etc. We pay freight except where stated "F.O.B."

FREE CAT. ALOG **BURDEN SALES COMPANY**
826 "O" St., LINCOLN, NEBR.

NEW Catalog



x-acto
KNIVES • TOOLS • KITS
for every hobby, art & handicraft
Designed by craftsmen and precision-made to the highest quality standards.
Write today for our 28-page, fully illustrated catalog—only 25c.

x-acto, Inc.
48-47 Van Dam Street, L.I.C. 1, New York

WELD **BRAZE** **SOLDER** **CUT**



4 WAY
ONLY **$14.75** f.o.b. factory
WELDER
Complete with Twin Carbon Arc Torch and accessories . . . to handle all metal-craft work.

Acclaimed by thousands of Homeowners, Mechanics and Hobbyists as the welder of 1001 uses. Easily operated from properly wired 110 volt AC or DC line. **The ideal gift with a life-long use** . . . Order today on 10 day money back guarantee.


FOUR-WAY WELDER CO., Dept. F3-D
1810 S. Federal St. • Chicago 16, Ill.

TOOLS & HARDWARE WHOLESALE

MAKE EXTRA MONEY

START A BUYING SERVICE AT HOME. Get nationally advertised tools for self and clients at a wholesale DISCOUNT UP TO 50% off! Sales easy as you can give sizeable discounts. Still make fat commissions. A MILLION DOLLAR INVENTORY AT YOUR FINGERTIPS. Buy as you need it! You sell merchandise that is pre-sold for you through national advertising by the country's leading tool manufacturers. Send $1.00 (refundable) for dealers card and giant WHOLESALE CATALOG. Write TOOL DISCOUNT HOUSE, DEPT. #49, 318 MARKET STREET, NEWARK, NEW JERSEY.

SHEET METAL BRAKES

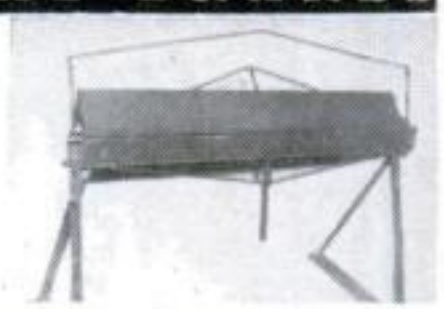

Forms angles, locks, pans, etc. New eccentric clamps. All steel construction. Size 15"—16 gauge steel. **$23.50;** 36"—22 ga. **$35.50;** 48"—24 ga. **$52.00.** Stand **$8.00.**

16 ga. Metal Bender 49" size, **$42.00**
½" x 12" Angle Former **$15.50**
14 ga. 6" Compound lever shear **$29.00**
SEND FOR FREE CATALOG

VYKE MFG. CO., 4158-N Jason St., Denver 11, Colo.

KAKEST MORTAR PLANE


"Amazing New Mason's Tool"

Makes it easy for amateurs to build masonry block walls. Lays smooth ribbon of mortar. Saves time and money. No waste of mortar. Send for FREE Folder.



KAKEST COMPANY Dept. 3
Curwensville, Penna.

$13.95 Money Back Guarantee



128 PAGES
Many in full color
packed with rare, fancy & imported woods... veneers, plywoods, patterns, tools, ornaments, hardware ...everything for the woodworker.


Get This NEW Catalog of WOOD & WOODWORKING EQUIPMENT

WORLD'S LARGEST SELECTION OF FINEST DOMESTIC AND IMPORTED WOODS . . . MOULDINGS, HARDWARE, TOOLS,—ALL AT LOW MONEY SAVING PRICES!

Your complete wood buying guide and project book. Craftsman is your best, most complete source of finest kiln-dried domestic and rare imported woods, beautiful wood inlays, colorful bandings, matched plywoods, embossed mouldings, carved ornaments, newest woodworking tools, "hard to find" cabinet hardware and fittings. . . more than 1,500 items! Packed with newest scroll saw patterns, project ideas & money making plans. Enclose 25c (refunded with first order) to help pay mailing, handling cost. Write now!

Craftsman Wood Service Co., Dept. B-4
2729 S. Mary Street - Chicago 8, Ill.

SUPER-LIGHT LEVEL
HAS MAGNIFIED VIALS!



EMPIRE ACRA-LITE No. 1521

A craftsman's dream! Acra-Lite Magnesium Level is ONE THIRD Lighter — for easier, faster handling. Easier to read, too. Super-accurate vials have "Full-Vue" *magnifying* cover plates. Get YOURS today — at your dealer, or order direct.

New Empire Acra-Lite Magnesium Level No. 1521,
24" Only **$6.70** 28" **$7.60** 48" **$13.50**

EMPIRE LEVEL MFG. CO.
10930 W POTTER RD., DEPT. PS, MILWAUKEE 13, WIS.

Copyrighted material

AMERICA'S EASIEST WINDOW SCREEN



Columbia-matic TENSION SCREEN

Easy is the word for Columbia-matics. Easy to fit to the outside of your window, put up . . . take down from inside in seconds. They save you time and effort, do away with old-fashioned screen troubles. Flexible, full length Columbia-matics are made of aluminum,* are lightweight, require no fitting, no painting, cannot rust, stain your home.



Easily installed for first time . . . all you need is a screwdriver. Simply snap on slide clips at top, shown above; flip down patented tension locks at bottom, shown right.



Spring loaded bottom rail draws extra heavy selvage edges drum-tite, bug-tite to your windows, eliminate need for side rails, or any adjustment ever.

Good looking, with no ugly hardware. Columbia-matics cost no more than ordinary screens. Millions now in use. Available with regular or Kaiser Aluminum Shade Screening. Get the facts at your screen dealers, or mail coupon.

*Available with galvanized screening in some Western states.

Sold by Authorized Factory Service Dealers and Building Material Dealers from coast to coast.

The Columbia Mills, Inc.
Dept. 74, Syracuse 1, New York
Send facts on Columbia-matics

Name.....

Company.....

Address.....

City..... Zone..... State.....

In Canada write:
Cresswell Pomeroy, Ltd., Montreal 28

HOLD-E-ZEE SCREWDRIVERS

The Original AUTOMATIC GRIP



Top Quality—Plus!

Finest materials and workmanship plus exclusive, much-wanted features

—YET COST NO MORE THAN ORDINARY SCREWDRIVERS!

At Leading Dealers Everywhere

UPSON BROS., INC., ROCHESTER 14, N. Y.



UNIVERSAL MOTOR MOUNT

. . . for mounting motor and driven equipment, without bolting down to bench

20" Size

$6.95

POSTPAID

Perfect for workshop fans, farmers! Easy to align pulleys, adjust belt tension. Sturdy, lightweight. Fits all motors up to 1 HP

SEE YOUR DEALER OR WRITE TO . . .


ARCO MFG. CO.
Dept. 21 Grand Forks, N. Dak.

---

the flashing new 1956

Cushman EAGLE

America's BEST transportation BUY

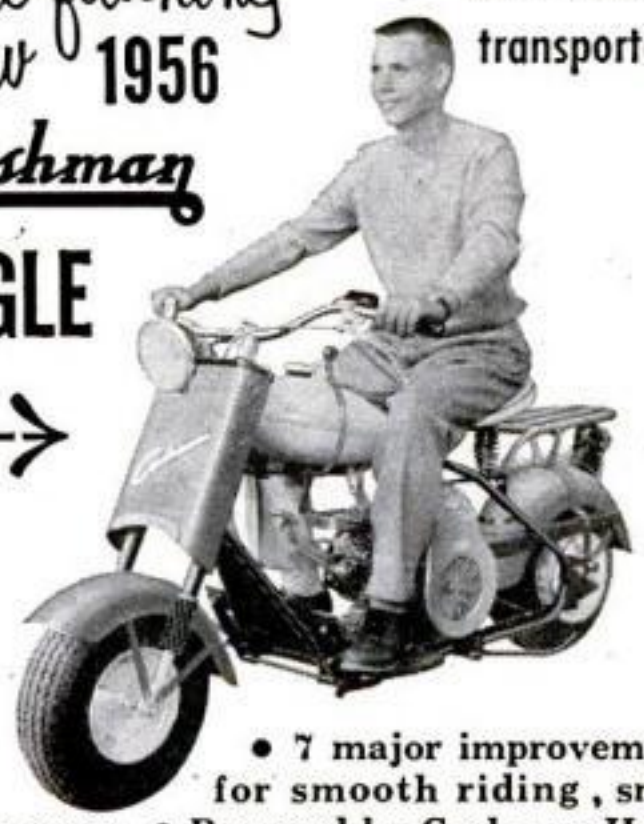

• 7 major improvements for smooth riding, smart appearance • Powered by Cushman Husky 4-cycle engine • Up to 75 miles per gallon . . . ¾c per mile total operating cost

Ask your dealer for a FREE demonstration or write for illustrated literature. Dealer inquiries invited.


930 No. 21st
Lincoln, Nebraska

CUSHMAN MOTOR WORKS, Incorporated

Copyrighted material

WAR SURPLUS AND OTHER BARGAINS SAVE UP TO 90%

GENERATOR RECTIFIER COMBINATION KIT



Consists of famous NEA 5 AC-DC Generator and Selinium Rectifier. Used to convert 110 AC, 880 cycles to straight 110 Volt DC which will run all AC-DC universal motors, power tools, radar, radios, refrigerators and TV sets. Kit also contains AC & DC voltage regulators and easy-to-follow diagram. Also makes up as an excellent 200 Amp, 24 Volt welder in conjunction with above uses. Terrific unit for trailers, cabins, farms, ships & camps. Approx. GOV. COST $650. Like new. Special, **$49.95.**

HOMELITE PORTABLE POWER PLANT




Buy power for pennies. Ideal for welding, battery charging, emergency lights for cabins, camps, trailers, aircraft or wherever power needed. Easy rope pull starting. Fully equipped, ready to start. 2000 W, 32 V, 5 HP. Complete, nothing else to buy. Like new, tested. Shock mounted. De Luxe type. Net wt. 115 lbs., gross wt. cased 200 lbs. Approx. GOVT. COST $700. While they last— **$59.95.**

PRECISION GROUND SQUARES



Production engineer's squares. Accuracy guaranteed. Mfd. by Wright & Moore, Sheffield, Eng. Square blades, hardened & tempered. Brand NEW. Fraction of original cost. 2"—**$2.75**, 3"—**$3.00**, 4"—**$3.25**, 6"—**$3.75**, 9"—**$7.00**, 12"—**$8.75.**

"HELIOS" ORIGINAL TOOLMAKERS VERNIER CALIPERS



ULTRAPRECISION — Imported. Used by machinists at Lockheed, Douglas, Bendix, GM, RCA, GE. Model 51/2E. Genuine Helios. Hardened lapped precision surfaces. 1/1000" and 1/128" graduations. Handy slide roll and thumb lock. Quick, accurate depth. A $35 value. De Luxe finish. ALL NEW. Just **$6.95.** Leather carrying case, **$1 extra.**

HIGH SPEED HAND TAPS



10 assorted, precision-ground thread. National Mfr. Like NEW. From 3/16" up. Approx. GOVT. COST $25. Now **$2.50.**

LONG-FLUTE, HIGH SPEED DRILLS



12 assorted sizes. Up to 1/2". Like NEW. Approx. GOVT. COST $23. Now **$2.50.**


ARC WELDER KIT $24.95 -build your own



Complete make-up package consisting of 1 Aircraft DC Generator, Electric Auto-Lite, 200-250 Amps, 24 Volt, RPM from 2600 up. 1 Rheostat. 1 Giant Toggle Switch. 1 Ammeter, 1 Shunt, 0 to 240 Amps. 1 Voltmeter, 0 to 30 Volts. 1 Electrode Holder. Wiring diagram chart showing conversion of Aircraft Generator to Arc Welder. Shpg. Wt. under 100 lbs. Approx. GOVT. COST $475. Buy of a lifetime. Like new, perfect. **$24.95.**


D.C. Generator—same as above, if purchased separately: $12.50.

MICROMETERS



Chrome plated, precision engineered, carefully tooled to give long life. All new 0-1" cap. **$2.25** ea., 1-2" cap. **$3.50.**

FIELD COOKING UNIT & HEATER



Terrific for hunters, ranch, home, farm, civilian defense, boat, camp, trailer, barbecue, etc. Burns any type gasoline. NEW. Wt. 95 lbs. boxed. Approx. GOVT. COST $150. Comp. with 2 spare energizers and orifice cleaner 50,000 BTU . . only **$8.95.**

NEW! 1956 CATALOG Largest ever . . . just out . . . new low prices. Send 25c for your copy today. Prices F.O.B. Culver City unless otherwise stated. Check, cash or money order. 25% deposit for C.O.D.

AIRBORNE SALES CO., INC. DEPT. PS 456
8501 Stellar Drive, Culver City, Calif.

NEW RED HEAD ROTARY PLANER



Only $2.98

Send check or money order for only $2.98

Safe, vibrationless—Designed to plane wood or plastic material to a smooth, level surface. This is the tool for every pattern cabinet and hobby shop. Fits drill presses with 1/4" or 1/2" chucks. Send for one today. Make your work easy.

Extra blades 50c—3 for $1.00

SATISFACTION GUARANTEED OR MONEY REFUNDED IF RETURNED WITHIN 5 DAYS

WINKELMAN & SPOTT INC.
Ryerson Rd., Lincoln Park, N. J.

EXCLUSIVE DOUBLE-BEARING HEAVY DUTY PUMPS




IRRIGATE • DRAIN • CIRCULATE • SPRAY

Up to 7,500 GPH; 1,000 GPH 60' high; or 3,000 GPH from 25' well. Use 1/4 to 1 HP motor. 1 1/4" inlet; 1" outlet. Stainless shaft. **TYPE X**—2 oil-less bronze bearings. Won't rust..... **$10.95**

TYPE XB—Ball bearing model. Best for belt drives..... **$12.95**

Postpaid if cash with order.
Don't delay—send for yours today!
MONEY BACK GUARANTEE
Centrifugal and Gear Pumps in All Sizes
LABAWCO PUMPS, Belle Mead 4, N. J.

DITCH-WITCH TRENCHER



Portable DITCH-WITCH digs 4 1/2" or 6" clean, even ditches to 36" depth in all types of soil. Four rugged models. Complete unit — self-propelled. OUTDIGS 8 MEN
Write for Illustrated Literature

The CHARLES MACHINE WORKS
637 B Street Perry, Oklahoma

MAGNETS

5 Assorted Size Magnets $1.00. Powerful **Pocket Magnet** W/case **$1.00. Hot Pad** Magnets—large **size** 8/$1.00. **Bulletin Board Magnets** 8/$1.00. **Slender Magnets**—pencil type 2/$1.00. **Car Compass**—accurate, useful **$1.50. Retrieving Magnets**—extra **power,** heavy duty—30 lb. pull **$4.00,** also 50-75-100 lb. pull.

Explore, learn Electricity, Magnetism, Electromagnets, complete kit and instructions with 22 experiments and models.....$3.98

Also—Rods, discs, bars, horseshoes

Send stamp for catalog—specify your requirements—100% Satisfaction Guaranteed.

PARK MAGNETS, 664, 1557 Green Bay Road, Highland Park, Ill.

REMOVE ANY FINISH QUICKLY EASILY



Make floors, furniture, wood trim, etc. like new! Strip off old paint, varnish, shellac, enamel with Wonder-Paste. Comes off easily in one scraping. Adheres to upright surfaces. At paint and hardware stores.

- ***Write for helpful Wonder-Paste leaflet and advice on your removing problem.***

Wilson-Imperial Co., 121 Chestnut St., Newark 5, N.J.

WONDER-PASTE 5 MILLION CANS SOLD

6-ft. only $1.49



Insist on Evans TAPES "KING-SIZE"

At your hardware store




STANDS UP STRAIGHT
EXCLUSIVE! Belt clip for handy carrying.

Also available in 8, 10, 12-ft. lengths with free plastic utility case.

EVANS RULE CO., Elizabeth, N. J. 3069

Copyrighted material

It's QUICKER...Works SLICKER with VISE-GRIP

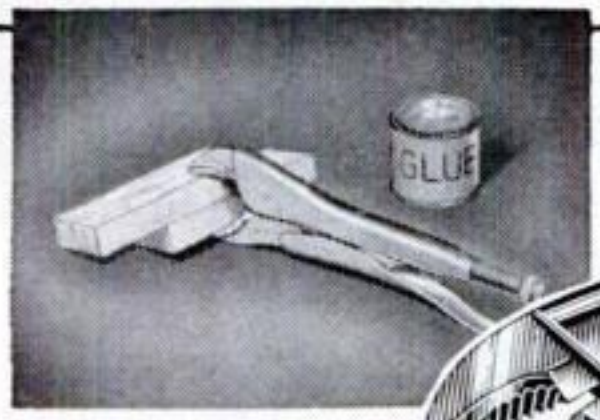

Ideal "jiffy clamp" for gluing, joining or clamping patterns to work. It HOLDS!



Does More Jobs Easier Than Any Other Tool Made!

No. 10W,10
$2.60

A squeeze of the hand **locks** jaws onto work with **ton**-pressure! Quickly adjusts for use as All-Purpose Wrench, Super-Pliers, Clamp, Wire Cutter. 7" and 10" cutter optional. $1.85 to $2.60 at your dealer.

Made By PETERSEN MFG. CO., Dept. P-4, DeWitt, Nebr.

Makes EVERY JOB EASIER



WORN ENGINE BURNING OIL!



Reduces oil bills!
Restores compression!
Increases miles per gallon!

Forms self-lubricating seal at piston top. Inserted through spark plug holes. Used by millions of motorists. Tested and approved by motoring experts.

$4.95 Tube for most cars *



Write for Full DETAILS

PISTON SEAL

See Your Neighborhood Auto Accessory and Parts Replacement Store

TREGLOWN CO. INC, FANWOOD 68, N.J

★ TRADE MARK REGD. CANADA: 1566 GREENE AVE, MONTREAL 6

Holt's HAVE THE ANSWER!

REPAIR MUFFLER AND EXHAUST LEAKS in 10 min.

The plastic gas-tight seal sets hard, withstands heat and vibration. Prevents carbon monoxide gas poisoning.





$1.69 per can

SETS LIKE A WELD — NO TOOLS NEEDED

Holt's GUN-GUM

MUFFLER PLASTIC SEAL

Here's that new MAGNA BELT SANDER


This versatile 6" Magna Belt Sander has all the built-in features and precision you'd expect from the makers of SHOPSMITH®.

* Exclusive Twin-Tube Mount for bench, Magna Power Stand, or SHOPSMITH. Timesaving *Instan-Tension* gives you convenient belt and tool height adjustment.

1. Operates horizontally or vertically—big 6" x 16½" back-up plate provides greater ease.
2. Single knob controls belt removal and tension.
3. Belt tracking controlled by single knob.
4. Table tilts 45°—side-mounts as a fence.
5. Auxiliary shaft mounts disc sander, etc.

Only $49.95. Low monthly payments on Magna-Tool-Time Plan. See the new Magna Belt Sander demonstrated at leading hardware and department stores or any Montgomery Ward Store.

For free literature, write Dept. 328-A, Magna Power Tool Corp., Box 2808, Fort Wayne, Indiana, *or* Menlo Park, California.

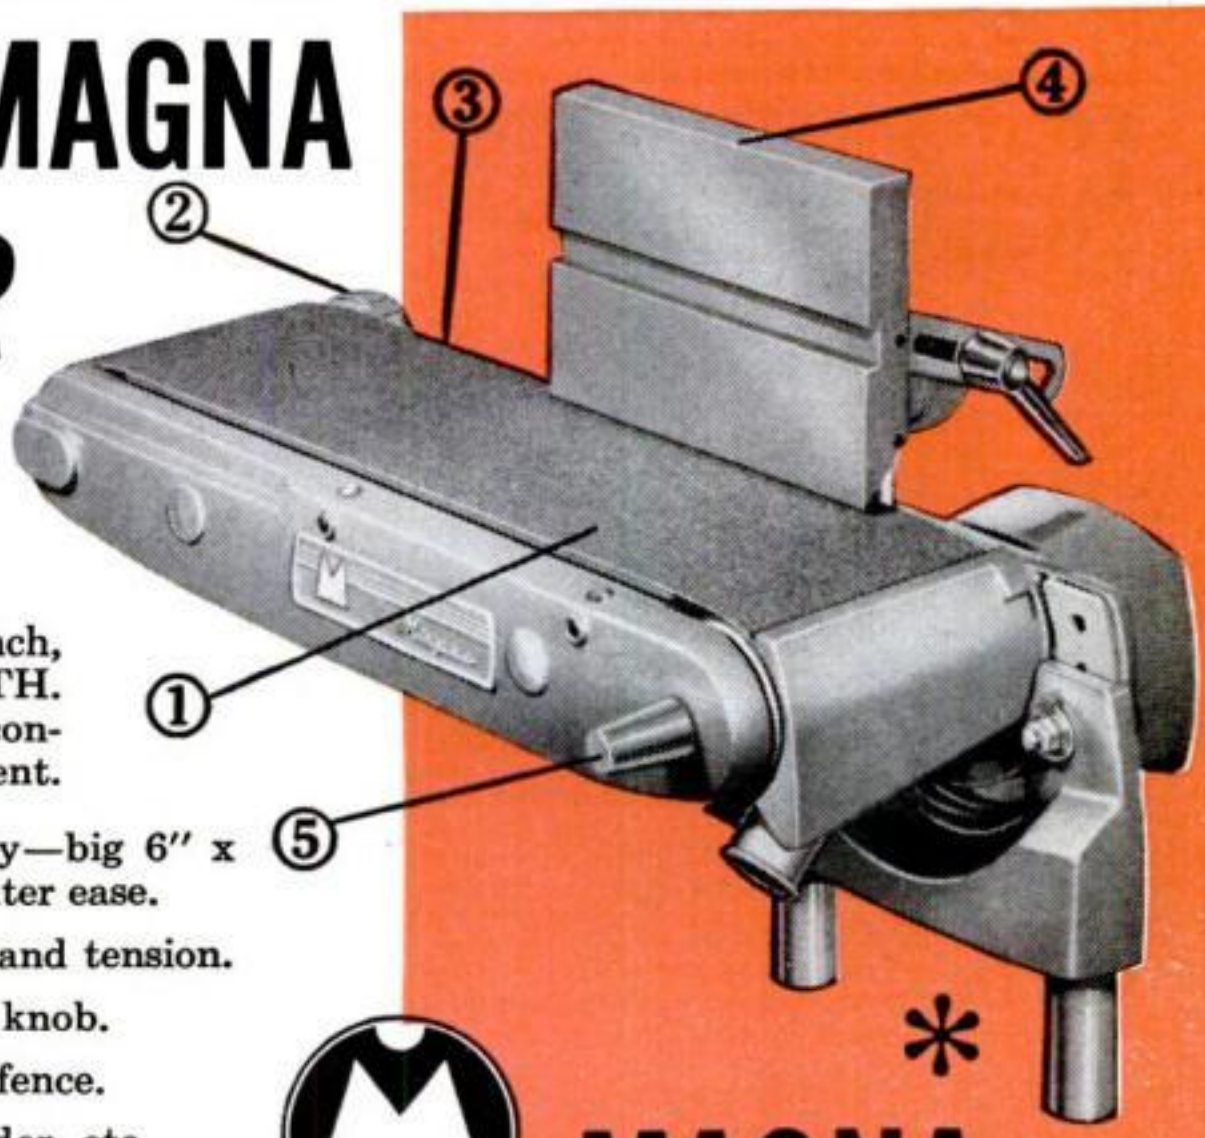

*

MAGNA

POWER TOOL CORPORATION

Manufacturers of **SHOPSMITH**



Not even a $100 Portable Saw has a dado cutter! "Arco-Saw" (guaranteed to fit **any** 1/4" electric drill) with sensational new "Dado-Arbor" adjusts easily to cut any size groove up to 1/2" wide x 1" deep in **ONE CUT!** Graduated **Depth-Bevel-Rip Gages** adjust for depth of cut up to 1 3/4", angle cuts to 45°. Amazing swivel action of "Dado-Arbor" (see sketch at right) cuts large grooves cleanly and accurately with little power. "Dado-Arbor" is easily removed to use the saw for straight ripping, crosscutting or angle cuts. Right angle steel gear drive and safety-yoke permit ONE HAND operation. Includes quick-cutting **5" Safecut Blade** **$12.95**



BLADES—5" Rip, Crosscut or Combination **$1.75**

SOLD AT BETTER HDWE. STORES EVERYWHERE. If not available, order direct and try this amazing tool on our **UNCONDITIONAL 10-DAY MONEY BACK GUARANTEE.** Send check or M.O. (ppd.) C.O.D.'s—plus post.

ARROW METAL PRODUCTS CO.
Dept. PS-4, 140 WEST BROADWAY, NEW YORK 13, N. Y.

NOW—THE QUICK-WAY TO SHARPEN ALL CIRCULAR SAWS



Model PG-12 Complete No extras to buy. **$16.50** Postage Paid

NEW Model PG-12 sharpens, joints, gums, and retooths all cross cut, rip, combination, miter, and planer blades up to 12" in diameter. Two precision index plates give versatile, accurate sharpening. Guarantees precise spacing of teeth. New safety rest prevents tilting and gouging of blade. Save time and money. Special $3.00 grinding wheel also included for use on your own power table. Fits regular or radial swing tables.

Order today. Send check, cash, or money order. We pay postage.
QUICK-WAY SAW CO.
100 Hornby Drive, Painted Post, N. Y.

A PRECISION LEVELING INSTRUMENT for only $12.95

With the New LEVELALL one man can do the work of two men and a transit, quickly, easily, accurately. All alone you can speedily level points for footings, forms, piping, batter boards, sills, lintels, floors, ceilings, roads, driveways, lawns — any type of construction work. Send for Free booklet or, better yet, order a DeLuxe Levelall today.

*Name*_____

*Street*_____

*City*_____ *Zone*____ *State*_____

☐ Mail 75' DeLuxe Levelall @ $12.95 ☐ Regular 50' model @ $9.95 ☐ Ship postpaid full price enclosed ☐ Ship C.O.D. Money-back satisfaction guaranteed.

LEVELALL 81-D Webster Street, Rockland, Mass.

ACCESSORIES FOR ELECTRIC DRILLS

HAND TOOLS—MOTOR AND FLEXIBLE SHAFTS

90 MOUNTED WHEELS, CUTTERS & BURNISHERS



For cutting and grinding on Wood, Metal and Plastics. Kit includes 30 Mounted Wheels and Points, 55 Miniature Cutters and 5 Burnishers. All on 3/32" Shanks. Made to sell for $15.00. . . . . Our price **$4.98** pp.

21 LARGE ROTARY CUTTERS
Assorted sizes mounted on 1/8" and 3/32" shanks. For cutting Wood, Plastics and Metals. Will fit all hand grinders, Electric Drills and Flexible Shafts. Reg. $12.50 value.



Our Price **$4.95** pp.



ADAPTER CHUCK
With two interchangeable collets. Openings 0 and 3/32" Price . . . . . **$1.19** pp.
Also available: 0 & 1/8" on 1/8" shank . . . . . **$1.29** pp.
Adapter chuck to hold drills from No. 60 to 80 **$1.00** pp.

No. 61 to 80 DRILL SET IN A METAL INDEX
20 drills of CHROME VANADIUM STEEL especially hardened for precision drilling very tiny holes. For Tool Makers, Hobbyists, Model Makers, Jewelers, etc. Reg. price $5.98.
Our price . . . . . **$4.25** pp.



MONEY BACK GUARANTEE

MATTHEW DAY CO., INC., Dept. PS-4, Dumont, New Jersey



SURPLUS SALE

$39.50 Less Grinding Wheel

NEW TOOL POST GRINDERS
REGULAR PRICE $125.00
1-6 H. P. MOTOR.
TAKES WHEELS UP TO 1/2" x 4"
EXTRA QUILL EXTERNAL OR INTERNAL $19.50
MONEY BACK GUARANTEE

EDWARD J. NOLAN, PULASKI, NEW YORK

DIME on a DOLLAR! Gov't Surplus Hydraulic Valves and Cylinders



#1-S: Open Center Valve for use with one double action hydraulic cylinder. Built-in relief and metering valve, 5/8" A.C. fittings. Cost gov't app. $90; **now $7.95.**

#H-3: 2-way cyl. & 5/8" shaft; bore 2 3/8", stroke 4". Cost gov't app. $86; **now $7.95.**

Order Direct; We Pay Shipping. ***WESTERN AIRCRAFT PARTS***
Dept. PS-4, 26003 S. Normandie, Harbor City, Calif.

"SPEEDY" DRILL GRINDING GUIDE

MAKE OLD DRILLS LIKE NEW...

For repointing dull and broken twist drills up to 1/2" in diameter. One piece cast Aluminum. Simple. Anyone can use it. Order yours to-day. $1.00 postpaid.



BRASS CASTING CO.
P. O. Box 3056 Memphis 9, Tenn.
$1.00 POSTPAID

When Writing to Advertisers Please Mention Popular Science

OPENS CLOGGED SINK WITH ONE STROKE

Now you can stop using strong chemicals that eat away pipes; cause high plumbing bills; ruined clothing; spattered floors and walls; plus risk of injury to eyes or skin. **DRAIN-BLO** is completely safe in use. Builds up to 60 lbs. pressure, and with one fast downward stroke instantly opens up clogged sink. Light and easy to use. Sturdy 13½" long. Fits all sinks except those with garbage disposal unit. Order **DRAIN-BLO** now to have handy when needed. Send only $3.98 for postpaid delivery. Postage added on C.O.D. orders.



ONLY $3.98 Postpaid
Money-Back Guarantee

MERIDIAN CO.
Dept. B-181
366 Madison Ave.
New York 17, N.Y.

Copyrighted material

BUILD YOUR OWN POWER TOOLS-

PLANS only $1.00 EACH POSTPAID

With GIL-BILT PARTS-PLAN KITS



10" TILT/ARBOR SAW

Sturdy wood, steel, and aluminum construction, NEW DEPARTURE ball bearings. Capacity and performance of floor saws selling for $150.00 and up. Plans, all metal parts in kit with 10" comb. blade **$25.90**, less blade **$22.95**, F.O.B. St. Louis. Detail PLANS-PATTERNS only $1.00 postpaid.



12-IN. BAND SAW

Ball bearing drive, rigid cast aluminum wheels, rubber tires. Handles stock up to 6 inches thick. Cuts to center of 24" circle. 18 x 18 inch tilt table. Capacity and performance of band saws selling for $80 and up. Plans and all metal parts in kit with ¼" blade **$23.95**. Detail PLANS-PATTERNS only $1.00 postpaid.

For shipments up to 600 miles, add 5%; over 600 add 10%. Amount in excess of actual postage will be refunded.

Also Build-it-yourself 18" Band Saw, 6" Belt Sander, Shaper, 8" Tilt-Table Saw. Simplified plans, build easily with hand tools only. Advertised and sold for 8 years, over 30,000 units in use. Money back Guarantee. FREE CATALOG.

GILLIOM POWER TOOLS Dept. 70-D, Lambert Field St. Louis 21, Missouri

---

Cut Accurate miters in . . . METAL or WOOD with MITER-ALL



With your hacksaw —cut 90° to 45° at 5° intervals up to 1¼ x 2" stock. Clamps in vise or on bench. Accurate . . . Rugged!

NOW ONLY $3.95 postpaid U.S.A. only

10 day money back guarantee. Send for complete catalog.

RIVERSIDE ENTERPRISES, Dept. 14-M6
Riverside Corning New York



GENUINE ALNICO MAGNETS

AMAZING, PERMANENT, NON-ELECTRIC. HIGHLY PRACTICAL.
Conduct interesting experiments. Hundreds of uses. Retrieve valuable steel items such as guns, tackle from fresh or salt water; tools from tanks & drains. **GUARANTEED.** Try any magnet one week. Money back if you are not well-pleased.

No. S-725	Has pull of 225 lbs. on flat steel block	$16.50
No. S-625	Has pull of 125 lbs. on flat steel block	$ 9.50
No. S-575	Has pull of 75 lbs. on flat steel block	$ 6.50
No. S-500	Has pull of 50 lbs. on flat steel block	$ 4.50
No. S-101	U-shaped Magnet. Has pull of 6½ lbs. 2 for	$ 1.50
No. S-47	Hot Pad Magnets **10 for $1.00**	50 for $ 4.87
No. S-35	Hobbyist assortment of 8 small magnets	$ 1.50

Send M.O. or check. We pay postage. Sorry no C.O.D.'s.

MIAMI MAGNET COMPANY, 3240 N. W. 27th Ave., Miami 42, Fla.

THE ORIGINAL **PACKAGED BOAT KITS**

Made ONLY by *Custom-Craft*



Top Performance, Design, Styling! Over 70 Models 8 to 21 ft

World's largest line! Over 200 Boats: Kits, Formed-Hulls, Semi & Custom-finished! All types: Prams -Cruisers! Easy to build! Flying stern, Tredronic bottom, Bulkhead construction!

Send 25¢ for KIT CATALOG

52 pages: Includes Victory Series, hardware, paint accessories, Fiberglas! Send $1.00 for Catalog Plus "Boating Handbook". DEALERS-AGENTS INQUIRE

BOAT PLANS & PATTERNS Frame-Pac Kits

World's largest selection: over 200 plans, full-size patterns, frame-pac kits! Designed strictly for ameteurs! All types: prams, kayaks, racers, runabouts, catamarans, houseboats, cruisers - inboard-outboard 6-40' wood-plywood-steel!

Send 35¢ for PLAN CATALOG

Catalog PLUS "Boatbuilding Handbook" $1.00

CUSTOM-CRAFT - BUFFALO 7, N.Y.

Makes it a cinch to

DO-IT-YOURSELF



NOW! APPLY MICARTA

or other Plastic Surfacing

WITHOUT CLAMPS OR PRESSES!



Another Weldwood Wizard

Use amazing new Weldwood® Contact Cement! Bonds instantly... permanently on contact! Makes it easy to modernize table tops, kitchen counters, bathroom surfaces!

Weldwood Contact Cement works like magic! No need for clamps or presses. Just apply . . . let dry . . . then bring laminate and surface together! Instantly you get a permanent bond!

PUT UP PLYWOOD WITHOUT NAILS! Do it yourself with Weldwood Contact Cement. Revolutionary new method —faster, easier. No nail holes to spoil finished surfaces!

1001 JOBS MADE EASIER around home, shop, garage. Weldwood Contact Cement bonds any combination of wood, glass, leather, paper, cloth, Fiberglas® and metal (including do-it-yourself aluminum).

In tubes, bottles, cans. 25¢, 35¢, 60¢ and larger sizes at hardware, paint and lumber dealers and variety stores. Mail coupon for leaflet!

United States Plywood Corporation
Box 525, New York 46 PS4-6 CC

Please send me information on Weldwood Contact Cement.

Name_____

Address_____

City_____ Zone____ State_____

Copyrighted material



need concrete use SAKRETE

Pre-mixed and packed in convenient sized bags for all home cement building, patching and repairing.

QUICK CLEAN EASY

Sand Mix . . . Gravel Mix . . . Mortar Mix. Just add water. SAKRETE MIXES are scientifically proportioned to give perfect results.






● For the SAKRETE 48-page booklet with photos, diagrams and instructions for "Do it yourself" cement jobs, see your building supply dealer, lumber dealer or hardware store or send 25 cents to —

SAKRETE, Inc.
P. O. Box 11, Dept. C
Cincinnati 17, Ohio

Hinge screws loose?

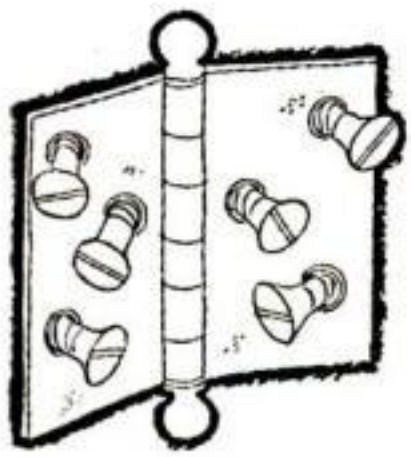

Reset them with *New* Plastic Wood. Makes a permanent fix that won't crack, chip or peel. And *New Improved* Plastic Wood has a finer grain—minimum shrinkage. Takes stain, lacquer and varnish with good results.

NEW "PLASTIC WOOD"®

Handles like putty—hardens into wood.





BUY DIRECT & SAVE 50%

NEW LOW PRICES ON FAMOUS SEA HORSE DIVING LUNGS

Demand type—Rebreather—Constant Flow—Complete—Ready to Use.....$18.95 to $99.50

SPECIAL— Build it yourself Diving Lung. Two hours underwater time. Refills only 25c. You can assemble this in one evening. Complete, New, everything included. Only..... **$39.50**

Send 10c for Big, Informative, Illustrated Catalogue

ATTENTION PROSPECTIVE DEALERS!

We have a big stock of unused Gov't surplus air compressors for refilling tanks, all sizes ½ H.P. to 50 H.P.

If it's Underwater—We have it.

DIVE-CRAFT, Inc., WILMERDING, PA.

ONE-MAN SAWMILL LOW AS... $50.00 DOWN



Take BELSAW Portable Sawmill right to the trees—turn out valuable lumber for home and farm — sell to local yards — make up to $50 a day custom sawing for neighbors. BELSAW lasts a lifetime. No crew needed. Power with tractor or auto engine. Beginners get excellent results. Send today for FREE BOOK.

FREE BOOK

BELSAW MACHINERY CO
3476 Field Bldg. Kansas City 11, Missouri



EXPLORE FOR TREASURE!

Find gold, silver, coins, jewelry, battle relics! Treasure—Metal—Mineral Detectors. M-SCOPE. Used worldwide for Treasure Hunting. Mineralights, Geiger, Scintillation Counters. Prices from $14.75. Fully GUARANTEED. Time Payment Plan. FREE Treasure and Uranium booklets. New outfitting catalog. FISHER RESEARCH LAB., INC., Dept. PS-1, Palo Alto, Calif.

Wholesale! TOOLS! GUNS! CAMERAS!

BUY TOOLS PHOTO EQUIPMENT, SPORTING GOODS, JEWELRY AND THOUSANDS OTHER NATIONALLY ADVERTISED PRODUCTS AT BIG DISCOUNTS SAVE ON OWN PURCHASES BIG PROFITS SELLING TO OTHERS. POSTCARD BRINGS FREE COPY "THE WHOLESALE PLAN"

Get up to 40% off

AMERICAN BUYERS SERVICE

HERTEL STATION, DEPT. 8, BUFFALO 16, NEW YORK

Trindl "100 TESTED" ARC WELDERS

FREE

WRITE FOR COMPLETE DETAILS AND EASY PAY PLAN

NOW! HOME CRAFTSMEN CAN OWN THIS PROFESSIONAL ARC WELDER

EASY TERMS ONLY $98.50 F. O. B.

Now you can own a Trindl full 125 amp Industrial Welder at a price far less than smaller machines. With a Trindl 125A you can weld metals up to ½ inch thick. Operates off either 110 or 220 volt line, properly wired. 16 heat stages from 20 to 125 amps. Make and repair anything of metal around the home, garage, farm or shop, like a professional. No previous experience or training needed. Full "do-it-yourself" instructions with each machine. Complete only $98.50 f.o.b. factory, or write for details. Trindl manufactures a complete line of heavy duty welding machines. Dealer inquiries invited.



TRINDL PRODUCTS Ltd., Dept. T3-D
1807 So. Clark St., Chicago 16, Ill.

Trindl "100 TESTED" ARC WELDERS

Guaranteed

12 MONTHS IN CONTINUOUS OPERATION

Copyrighted material

SUPERSHOP MAGIC POWER TOOLS Only $16 each!



5 BIG POWER TOOLS IN ONE
FACTORY TO YOU $79.95

Only SUPERSHOP can offer you a complete precision-built workshop for $16 per tool. 100% Ball Bearing. Lifetime accuracy. Rugged frame of heavy steel tubing. Handles big jobs. 8" saw. Sold direct from factory to save you $65.05. FREE trial. Easy pay plan. Free Catalog.



VERTICAL DRILL PRESS

Write for FREE Catalog

POWER TOOLS INC. 282 YATES AVE. BELOIT, WISCONSIN

Better Than Your Own

SHOE STORE AT HOME



No investment, no experience needed. Just show magic cushion comfort to friends, neighbors, co-workers. Advance commissions to $4.00 a pair, plus Cash Bonus, Paid Vacation, $25.00 Reward Offer. Outstanding values for men, women, children. Money back guarantee. Shoe samples supplied without cost. Write TODAY for FREE new 84 page catalog and full details.

TANNERS SHOE CO., 793 BROCKTON, MASS.

Two-Eyelet Hit With Cushioned Comfort

Insist on *Evans* TAPES

50 ft.-100 ft. long

At your hardware store

For building and gardening measuring.

from $4.98



each with FREE plastic utility case and

SPECIAL HOOK-RING ATTACHMENT FOR EASY ONE-MAN MEASURING

EVANS RULE CO., Elizabeth, N. J. 3068

"TWINSULATE" YOUR ATTIC NOW!



...and make your home up to 15° cooler this summer!

That man's stapling up blankets of Gold Bond TWINSULATION®. He tucks 'em in place, staples 'em up! It's *that* easy to lower summer temperatures in *your* home as much as 15°. Next winter, TWINSULATION will cut your fuel bills up to 25%!

TWINSULATION *blocks* heat with fireproof rock wool. It *reflects* heat with an all-around covering of silvery aluminum. You get *twin insulating action* that makes your home more livable all year round!

You can "Twinsulate" your attic in a few hours. See your Gold Bond dealer. He'll show you samples, supply a stapler for application.

NATIONAL GYPSUM COMPANY
Buffalo 2, N. Y.

Send for booklet that tells all about Gold Bond TWINSULATION, what it does for your home, how it cuts fuel bills.



NATIONAL GYPSUM COMPANY
Dept. PS46, Buffalo 2, N. Y.

I enclose 10¢ for "Home Insulation" booklet.

*Name*_____

*Address*_____

*City*_____ *Zone*____

*County*_____ *State*_____


Copyrighted material

How to choose a paintbrush that does faster, streak-free work



Look for **TYNEX**® on the handle

Here's why it pays you to use a brush with Du Pont TYNEX nylon bristles

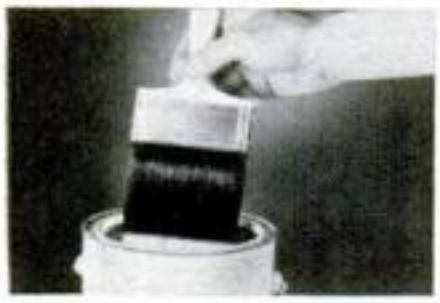

1. No break-in! You don't have to soak or flex a new brush . . . if it has "Tynex" nylon bristles.



2. Full paint pickup! Specially tipped and flagged "Tynex" bristles hold a full load of paint.



3. Smooth, even flow! Anyone can do streak-free work, because each tapered "Tynex" bristle provides better, more even flow.



4. Easier to clean! They're the easiest-to-clean bristles there are! Paint loosens quickly in any commercial cleaner, rinses out thoroughly.

FREE! 8-page booklet full of helpful painting tips. Write Du Pont Company, Polychemicals Dept. PS-4, Wilmington 98, Del.

DU PONT

"Tynex" is the registered trade-mark for Du Pont nylon bristles.

BETTER THINGS FOR BETTER LIVING . . . *THROUGH CHEMISTRY*


SAVE 50% ON THIS NEW 21" POWER MOWER

with the FAMOUS CLINTON 4-CYCLE, L-HEAD ENGINE

A $139.00 VALUE

79.50 WITH MOTOR

ENOUGH POWER TO CLIMB A 45 DEGREE HILL!! Abundantly powered for all cutting conditions and designed for simplicity of operation and service. This amazing Power Mower is built to give years of faithful service. The cutting blade is 21" wide and is adjustable for cuts from 1/2" to 2-1/2". Can easily be re-sharpened by user. Motor is the Famous CLINTON 'L'-Head used in thousands of portable installations. Cutting reel is mounted on BALL BEARINGS. Large rubber tires on wheels. Comes complete including all instructions for easy assembly, operation and maintenance. Makes you WANT to mow the grass.

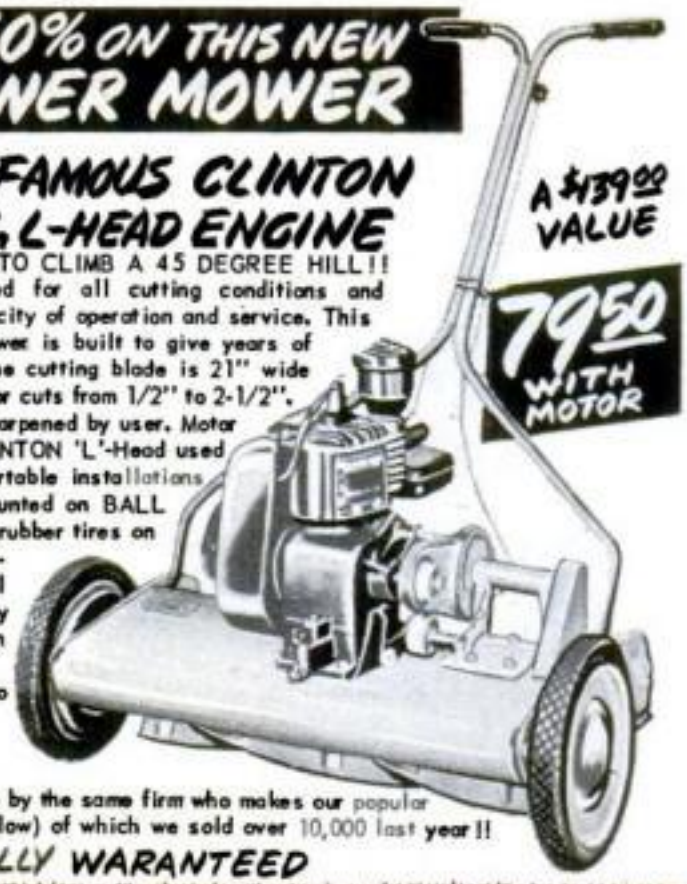

This mower is made by the same firm who makes our popular Power Saw (see below) of which we sold over 10,000 last year!!

FULLY WARANTEED

OVER 1000 AUTHORIZED SERVICE CENTERS



3400 RPM ½HP **POWER SAW**

COMPARES TO SAWS SELLING UP TO $49.50 WITH A 5½" BLADE **ONLY 19.98**

RIPS - CROSSCUTS

CUTS A FINISHED 2x4 LIKE A KNIFE THROUGH BUTTER

A rugged, professional type, adjustable saw. Will cut any angle from 0 to 45°. Has an adjustable (0 to 6") rip fence. Safety-trigger switch on handle. Full ½ HP Universal AC-DC, 110-120 Volt, 60 cycle motor. Weighs only 6½ lbs.



NEW OUTDOOR BUBBLER

CONVERT ANY OUTDOOR FAUCET TO A DRINKING FOUNTAIN

Now you can have a convenient drinking fountain in your yard or patio! Attaches directly to your regular faucet and you enjoy a cool, refreshing drink by pressing a button. DOES NOT INTERFERE with the use of your garden hose. Made of polished nickel-plated bronze and brass with a durable Styrene Plastic Bowl.

ONLY 3.95

FOR CHILDREN & ADULTS



SAVE 50% ON TRANSLUCENT FIBERGLAS PANELS

Use it for patio covers, interior decor, walls, partitions and many other uses. Ideal for the home, office, shop, indoor or outdoor installations. Finest quality. Available in many widths and lengths. Excellent color selction. Write for a FREE Sample and Booklet.

Only 49¢ SQ. FT.

IMPORTED FROM HOLLAND

SAVE $30.00 ON 26" SPORT BIKE



The 'Jaguar' of Sports Bicycles. Designed and built with all the 'know-how' of the finest European craftsmen. Beautifully finished in two-tone Grey & Cream baked enamel plus other de-luxe features such as:

1- 3-SPEED GEAR SHIFT with handlebar control to select gear ratio.
2- TWO-WHEEL CALIPER HAND BRAKES.
3- De-Luxe Saddle Bag. 4-Pump & Tools.
5- Kickstand and Sport Tires.

Only 39.50 IN SPECIAL . . . PROTECTIVE PACKING



BICYCLE HEADLIGHT AND TAILIGHT GENERATOR KIT

DEVELOPS 3 WATTS OF POWER at 6 volts, 0.5 amp. Easy to install on any bike. Kit includes generator, head and tail lights, all parts. Beautiful chrome.

5.95

SAVE UP TO 85% AT PALLEY'S SEE THE OPPOSITE PAGE →

Copyrighted material



ARMY PILOT'S BRIEFCASE

Made to Gov't Standards. Genuine leather with heavy duty zipper around three sides. Fabric lined and has five large inner pockets. Size 17" x 13". New. **3.75 EA**



SOUND POWER PHONES

Originally used by the Navy for gun control. Ideal for emergency communication because each set is 'sound powered'. Will operate up to 1/2 mile distance. Set includes 2 phones on chest plate, 2 headsets, approx., 35 feet of wire. **9.95 PER SET**

RS 38A MICROPHONE



Carbon type with push-to-talk button. Ideal for use where background noise is high. Can be operated with 1½V drycell. Comes 6 ft., 3 conductor, shielded cable & plug. **2.49**

HS-30U Signal Corps HEADSET – Low Impedence. Two earphones & band. . . 3.45

STEEL FRAME BRITISH

PACK RACK



Has extra lightweight tubular steel frame. Orlginally designed for British Army Mountain troops. Frame has fold-down pack shelf at bottom. Rack is designed so that weight is carried at hips. Weight only 3-1/2 lbs. Folds flat when not. **4.50**



ARMY MACHETE

Has 22" Vanadium steel blade. Hardwood handle. 27" overall. Complete in rugged belt sheath. **1.98**

PORTABLE SHOVEL



Has 20" hardwood handle. Blade folds to form pick or shovel. Ideal for emergency. **1.75**

SURPLUS HOISTS

5 TON HOIST

$110.00 VALUE **69.95**



A real heavy duty Hoist. Mfd. by the Seattle Chain & Mfg. Co. Crank operated. Has two speeds, one for rapid lift – other for heavy duty. Drum size: 8-3/8" x 5" diameter. Complete with hand brake and handle.

3 TON WINCH HOIST – With crank type handle and ratchet brake. In excellent condition. Ideal for truck or jeep mounting. **39.95**

10 TON WINCH HOIST – Has 17" drum. Used by Signal Corps. In good condition. With brake and handle. **89.50**

$80.00 VALUE

HOIST

ONLY **32.50**



Lifts 2500 lbs. with 24 to 1 gear ratio. Bronze worm gear drive. Has 18 ft. of 3/16" steel cable.



PORTABLE **WINCH HOIST**

A 'swing around' type hoist. Will lift up to 1500 lbs. with 21 to 1 gear ratio. Has 12 ft. of 3/16" steel cable. 40" arm with 3" pulley. **22.50**



NEW 4-SPEED HOBBY MOTOR

Has four take-off shafts turning at 5, 25, 150 & 4000 RPM. Operates on 110 volt, 60 cycle current. Ideal for home shop, barbeque. **9.95**

NOW! A PROVEN FACT – SAFETY BELTS SAVE LIVES


NYLON AUTO SAFETY BELTS

MADE TO WITHSTAND A CRASH PRESSURE OF 3000 POUNDS

Meets CAA standards. Approved by Police, Safety Councils, Highway Patrol, Fleet Operators, etc. Made of finest NYLON webbing and fitted with Aircraft type buckle. Easily installed in any car. Special sizes for Sports Cars. Available in the following colors: Blue, Green, Gray and Maroon.



HOLDS YOU IN YOUR SEAT

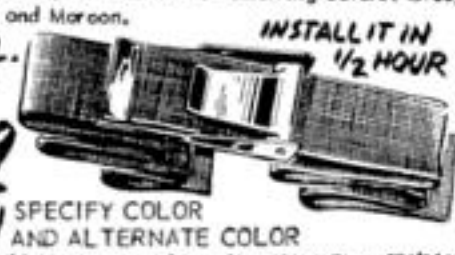

INSTALL IT IN ½ HOUR

9.95 VAL. ONLY **4.89** EACH

SPECIFY COLOR AND ALTERNATE COLOR



PREVENT THIS IN A CRASH

5 SECONDS TO FASTEN – 1 SECOND TO UNFASTEN

SAVE 50%

PHILIPPINE MAHOGANY CUAN PLYWOOD AT LESS THAN WHOLESALE

For Paneling Dens, Offices, etc. Use in Cabinets, Furniture, etc. Rotary cut. Both sides sanded. Bonded with finest resin adhesive. Face side unjointed. Shipped at lowest rates.

3MM (1/8") x 3FT. x 6FT. $5.00 VALUE **1.79** PER SHEET

MINIMUM ORDER 8 SHEETS

FREE SAMPLE ON REQUEST

¼" x 4FT. x 8FT. 9.50 VAL. **4.49** PER SHEET

MIN. ORDER 4 SHEETS

HARDWOOD LEGS with BRASS TIPS



Beautifully turned, fully seasoned hardwood legs. Smoothly sanded and complete with brushed Brass tip and sturdy steel mounting plate. Available Finished or Unfinished – Finished units come in Blonde, Silver Fox, Mahogany or Charcoal Black. Please specify finish.

Price per set of 4 with Brass tip.

SIZE	FINISHED	UNFINISHED	SIZE	FINISHED	UNFINISHED
4"	$2.65	$2.15	14"	$4.40	$3.95
6"	3.00	2.65	16"	4.75	4.40
8"	3.55	3.00	18"	5.35	4.75
12"	3.95	3.55	28"	6.25	5.35

NEW 60-450X MICROSCOPE

FEATURING 60, 120, 150, 180, 300 AND 450 POWER MAGNIFICATION

NEWLY DEVELOPED – Self-Contained SUB-STAGE LIGHT ELIMINATES NEED FOR EXTERNAL LIGHT SOURCE

Take advantage of our tremendous foreign purchase. Ideal for use by Amateur Scientist, Student, in Home Laboratory for study of insects, plant life, etc.



✓ CHECK THESE FEATURES

1 - Triple, revolving turret with 10X, 20X, 30X precision ground & polished lenses.
2 - Two interchangeable eyepieces, 6X and 15X with precision ground and polished lenses.
3 - SIX MAGNIFICATIONS for all purposes – 60X, 120X, 150X, 180X, 300X and 450X.
4 - NEW! Sub-stage with SELF-CONTAINED LIGHT. No external light source needed.
5 - Large sub-stage mirror for use with external light sources.
6 - All Metal Body – inclines through 90 degrees.
7 - Special Hardwood Case and 3 glass slides.



FREE! with MICROSCOPE – 8 Pc. DISSECTING SET with hardwood case.

12.95 MICROSCOPE AND DISSECT SET

NEW Special 12 Pc. SPORTSMAN'S KNIFE



Eliminates 12 Items from Pack or Tool Kit

ONLY **4.95**

Contains a regular knife, a fork, a spoon, scissors, draw knife, bone saw and fish scaler, can & bottle opener, cork screw, awl punch, screwdriver, and metal file. Mounted in a rugged bone handle.

COMPLETE WITH LEATHER BELT CASE

FAMOUS PALLEY MIXES



GADGET MIX – Consists of 5 pounds of Rivets, Spacers, Bolts, Screws, Gears, Wheel Bearings, Springs, Clamps, and many more. ALL for ONLY. . . **1.19**

BEARING MIX – Approximately 20 needle and Ball and Roller bearings. New and Used. Sizes: 1/2" to 4". Some of these cost the Gov't $10 apiece. Never such a value. 5 lbs. ONLY **1.59**

FILE MIX – Ten assorted Files, 4" to 12", includes 3 Vixens, half rounds bastards, mills, etc., in seconds and used but in good condition. 1 Vixen alone worth our price for entire mix. F-1 **1.09**

PULLEY MIX, No. PM-1 – You'll want this one around. 10 micarta & metal pulleys ranging from 1" to 5" with ball and one piece bearings. These are aircraft pulleys, the best made with 100's of uses. A WONDERFUL BUY!!! **2.95**



300 FOOT ANTENNA

Can be trimmed to 80 METER SW Band with up to 75 feet lead-in. Stranded copper with eyelet end. A BUY AT **1.49**

SIGNAL CORPS WHIP ANTENNA

Ideal for use with auto or portable radios. Can be used with FM receivers. Telescoping type, from 12" to 7 feet. **1.49**



REFLECTOR ANTENNA

Originally used in Radar. Can be adapted to TV or FM use. Webbing is fine mesh monel wire. Overall span 44 inches... **1.49**

65 to 3 GEAR DRIVE



A precision gear drive for light, accurate work. Has a 65 to 3 gear ratio. Gears rotate on self-lubricating ball bearings. Shafts are 1/2" & a 2" coupling plate. **9.95**

180° OFFSET DRIVE



For use where tremendous power at low take-off RPM is desired. 6 gears rotate on self-lubricating, hi-speed roller bearings. 85 to 1 gear ratio. Shafts are 1/4" & 3/8" dia. USED NEW in excellent condition . . . **5.95** / **8.95**

PRESSURE TANKS



G1 Type Stainless Steel. Shatterproof and rustless. Has reinforcing ribs and is pressure tested up to 400 PSI. Has high safety factor. 1/4" pipe ports. Ideal for use in air supply in underwater fishing, painting, spraying, etc. Also as buoy or for water supply. Size 12½" x 24". Stainless Steel. . . **12.95**

Corrosion Resistant Steel TANK – No. D-2. 500 cu. in. capacity. .. 3.95

PALLEY HYDRAULIC BUY



One of our many Hydraulic Bargains. Use for opening & closing doors, etc. 1500 PSI constant – 3000 PSI intermittent. Will lift or push 1100 lbs. Has adjustable stroke from 2½" to 4". Bore 1". Shaft 5/8". **5.75**

SAVE 50% ON PALLEY HYDRAULICS



For for our Special HYDRAULIC CATALOG SUPPLEMENT – Shows the entire line of our New Hydraulic Equipment designed especially to fill the needs of Industry. Also shows our regular line of War Surplus Hydraulics such as pumps, valves, cylinders, fittings, etc. at SAVINGS UP TO 85%. Write today. It's FREE!

Palley's

2263 E. VERNON AVE., DEPT. PS-4 LOS ANGELES 58, CALIF.

Order From This Ad. Pay by M.O. or check. P.O.'s accptd. from D&B firms. ⅓ deposit with C.O.D.'s. All Prices FOB Los Angeles.

Copyrighted material

[Continued from page 117]

transistors and extensive use of printed circuits are expected to trim the price tag eventually.


Safety. To the undisguised relief of many Detroiters, 1956's big push on safety does not seem to have repelled the customers. Next year, the same advertising themes will continue, though at a lesser pace. Changes for improved safety will probably include relocating some ignition keys and parking-brake handles away from areas where they can cause severe knee injury in crashes.

Outside door handles on many cars will be recessed. The plan for Chrysler-built cars calls for a depression bridged by a crossbar. Lifting up and out on the bar unlatches the door.

More boudoirs. Hard-shelled guys who think cars are just transportation machines will find little solace in '57. Metal-flecked upholstery, multihued colors, and the general air of a rolling harem will continue. There will be further use of the new acrylic lacquers. (These are already appearing as an extra-cost option on some GM cars.) The new lacquers are reportedly capable of holding gloss and color three or four times longer than present finishes. Better yet, they go well with showy metallic-powder pigments. As an engineer for a competitive company says, ruefully: "They're putting out the kind of colors we think we're lucky to get on our dream cars."

Tain't so. A number of Detroit rumors seem to be *not* true at this writing: The new Ford Motor Company car, aimed at the gap between Mercury and Lincoln, will not be called the "Edsel" and it will not be out in the fall of this year. Disk brakes, though under study at many proving grounds, are evidently not ticketed for '57 production, on the theory that there is still development room with drum brakes. The soft-top and four-door Mark II Continentals will not be ready this fall, and the Mark III is not currently scheduled before 1960.—*Frank Rowsome Jr.*

NEXT MONTH . . . How They'll Build a City in Space

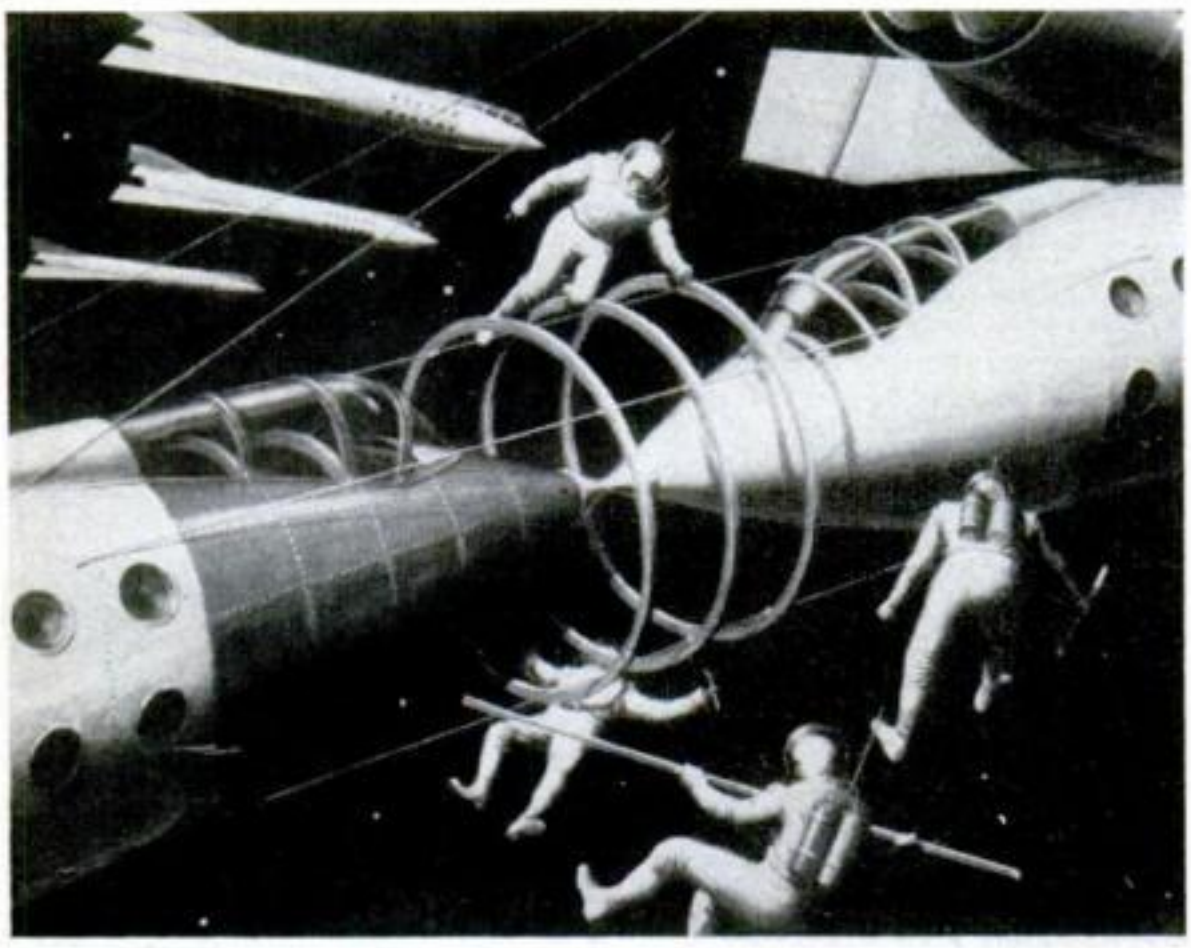

SPACE travel has been accepted by the scientists and they have gone on to think of space *living*. At left is one of the many startling illustrations from a seven-page article—four in full color—that gives the details of how a huge sky city, housing thousands of people, might be built. It is based on an engineering study by Darrell C. Romick, of the Goodyear Aerophysics Dept. Watch for it in the May issue of POPULAR SCIENCE MONTHLY.

Copyrighted material

This One
A60Q-EW4-8T48
Copyrighted material



Biggest value ever!

Sensational new heavy-duty saw

—only $69.50

At last—true heavy-duty design and precision engineering in a *professional quality* 6½" saw!

Porter-Cable's revolutionary new Model 146 has the *capacity* you need—makes every cut it takes to build a house! It slices through 2" dressed lumber—even at a 45° angle—with speed and power to spare. It does everything that bigger saws can do—does it *easier*—does it all day long without a whimper.

Model 146 is light and handy—just 11 lbs. of perfect "feel" and balance. And just check its features! Full ball-bearing construction, telescoping guard, exclusive new calibrated depth gauge, famous Porter-Cable Kick-Proof Clutch, husky 9-ampere Universal motor (1.3 equivalent h.p.) and many, many more.

See the new Model 146 at your dealer's *now*—or mail the coupon below. At only $69.50, *it's the saw "buy" of the century!*

SEE YOUR DEALER — OR MAIL COUPON TODAY!

PORTER-CABLE MACHINE CO.
6154 N. Salina St., Syracuse 8, N. Y.

Yes, send me a complete catalog sheet on the Model 146 Heavy-Duty Saw, and the name of my nearest dealer.

Name_____

Address_____


City_____ Zone____ State_____

Porter-Cable

Quality Electric Tools

First with the finest for 50 years

Copyrighted material

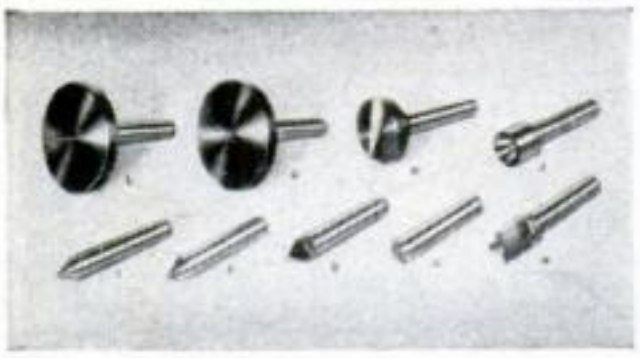


CENTERS AND DRILL PADS




STEEL AND BRASS COLLETS



BALL BEARING LIVE CENTER

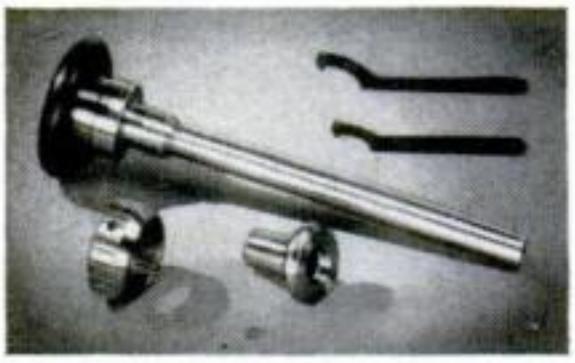


HANDWHEEL COLLET ATTACHMENT

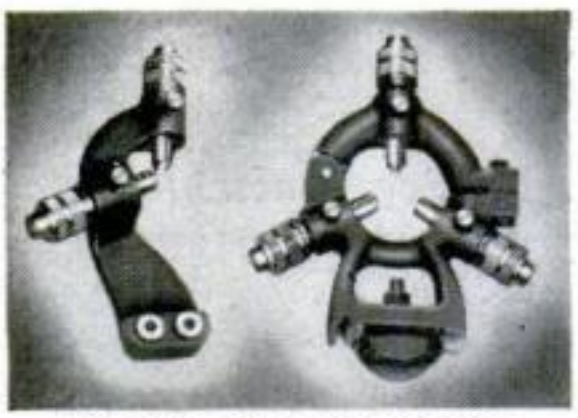


FOLLOWER AND STEADY RESTS

YOU CAN DO MORE WITH SOUTH BEND LATHES


because of the very complete line of practical attachments available. Only a few are shown here. Send for complete catalog.

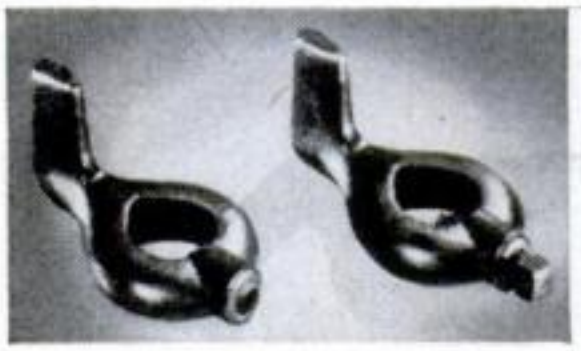

SAFETY and STANDARD LATHE DOGS

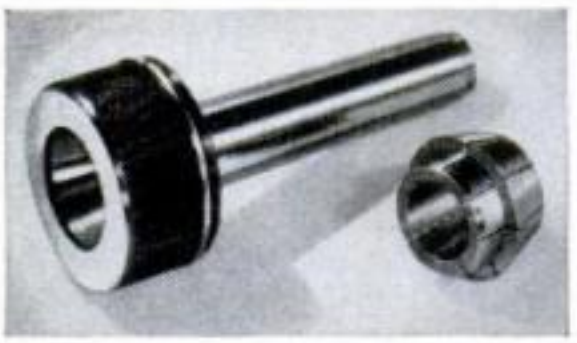

ADJUSTABLE COLLET BUSHING CHUCK

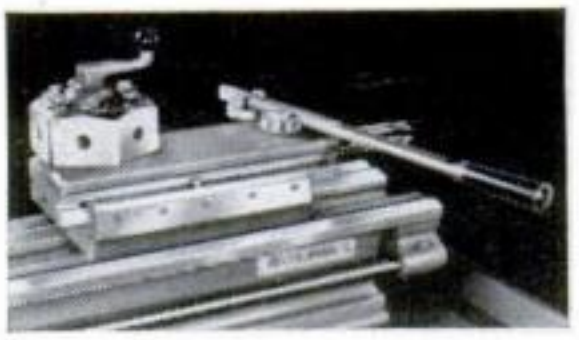


HANDLEVER BED TURRET


South Bend Attachments will enable you to do more and better lathe work. Write for new 50th Anniversary Catalog today.

SOUTH BEND LATHE


BUILDING BETTER TOOLS SINCE 1906 • SOUTH BEND 22, INDIANA

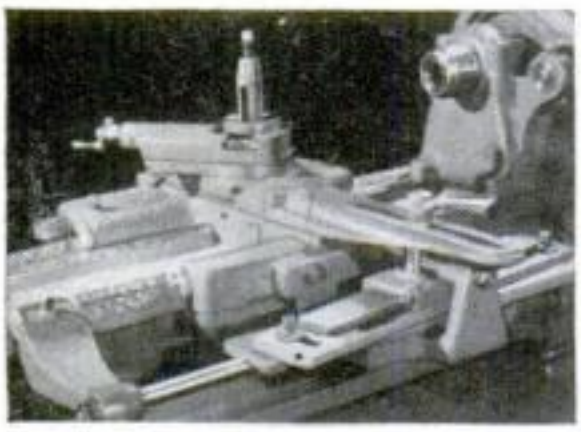


TELESCOPIC TAPER ATTACHMENT

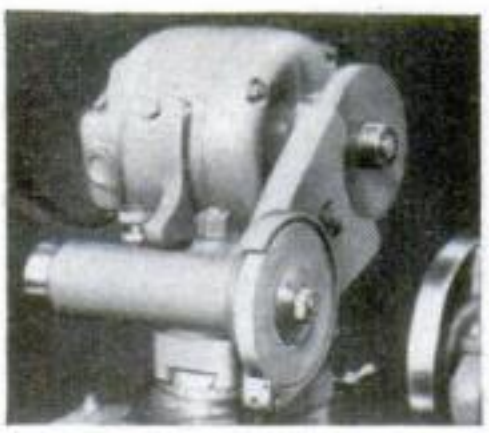

EXTERNAL GRINDER

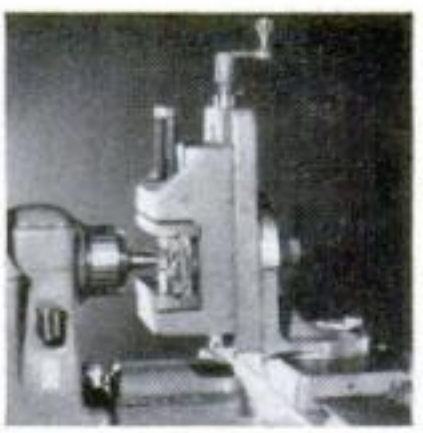

MILLING ATTACHMENT

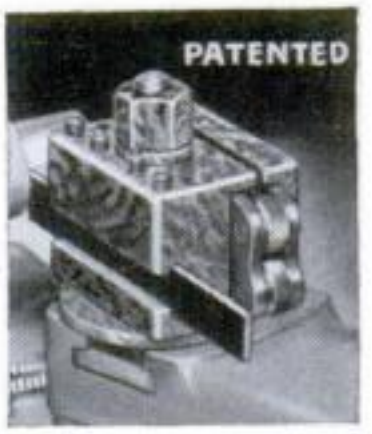

10 in 1 TOOL BLOCK



PLEASE SEND INFORMATION CHECKED:



☐ 9" and 10" BENCH LATHES



☐ 10" to 16-24" FLOOR LATHES



☐ DRILL PRESSES



☐ ½" & 1" Collet TURRET LATHES



☐ TOOL GRINDERS



☐ 7" BENCH SHAPERS



☐ MILLING MACHINES

Name_____ Street _____

City _____ State _____

Building Better Tools Since 1906 • **SOUTH BEND LATHE** • South Bend 22, Indiana


Copyrighted material

Make these Beautiful Furniture Pieces

yourself with FORMICA®

Laminated Plastic



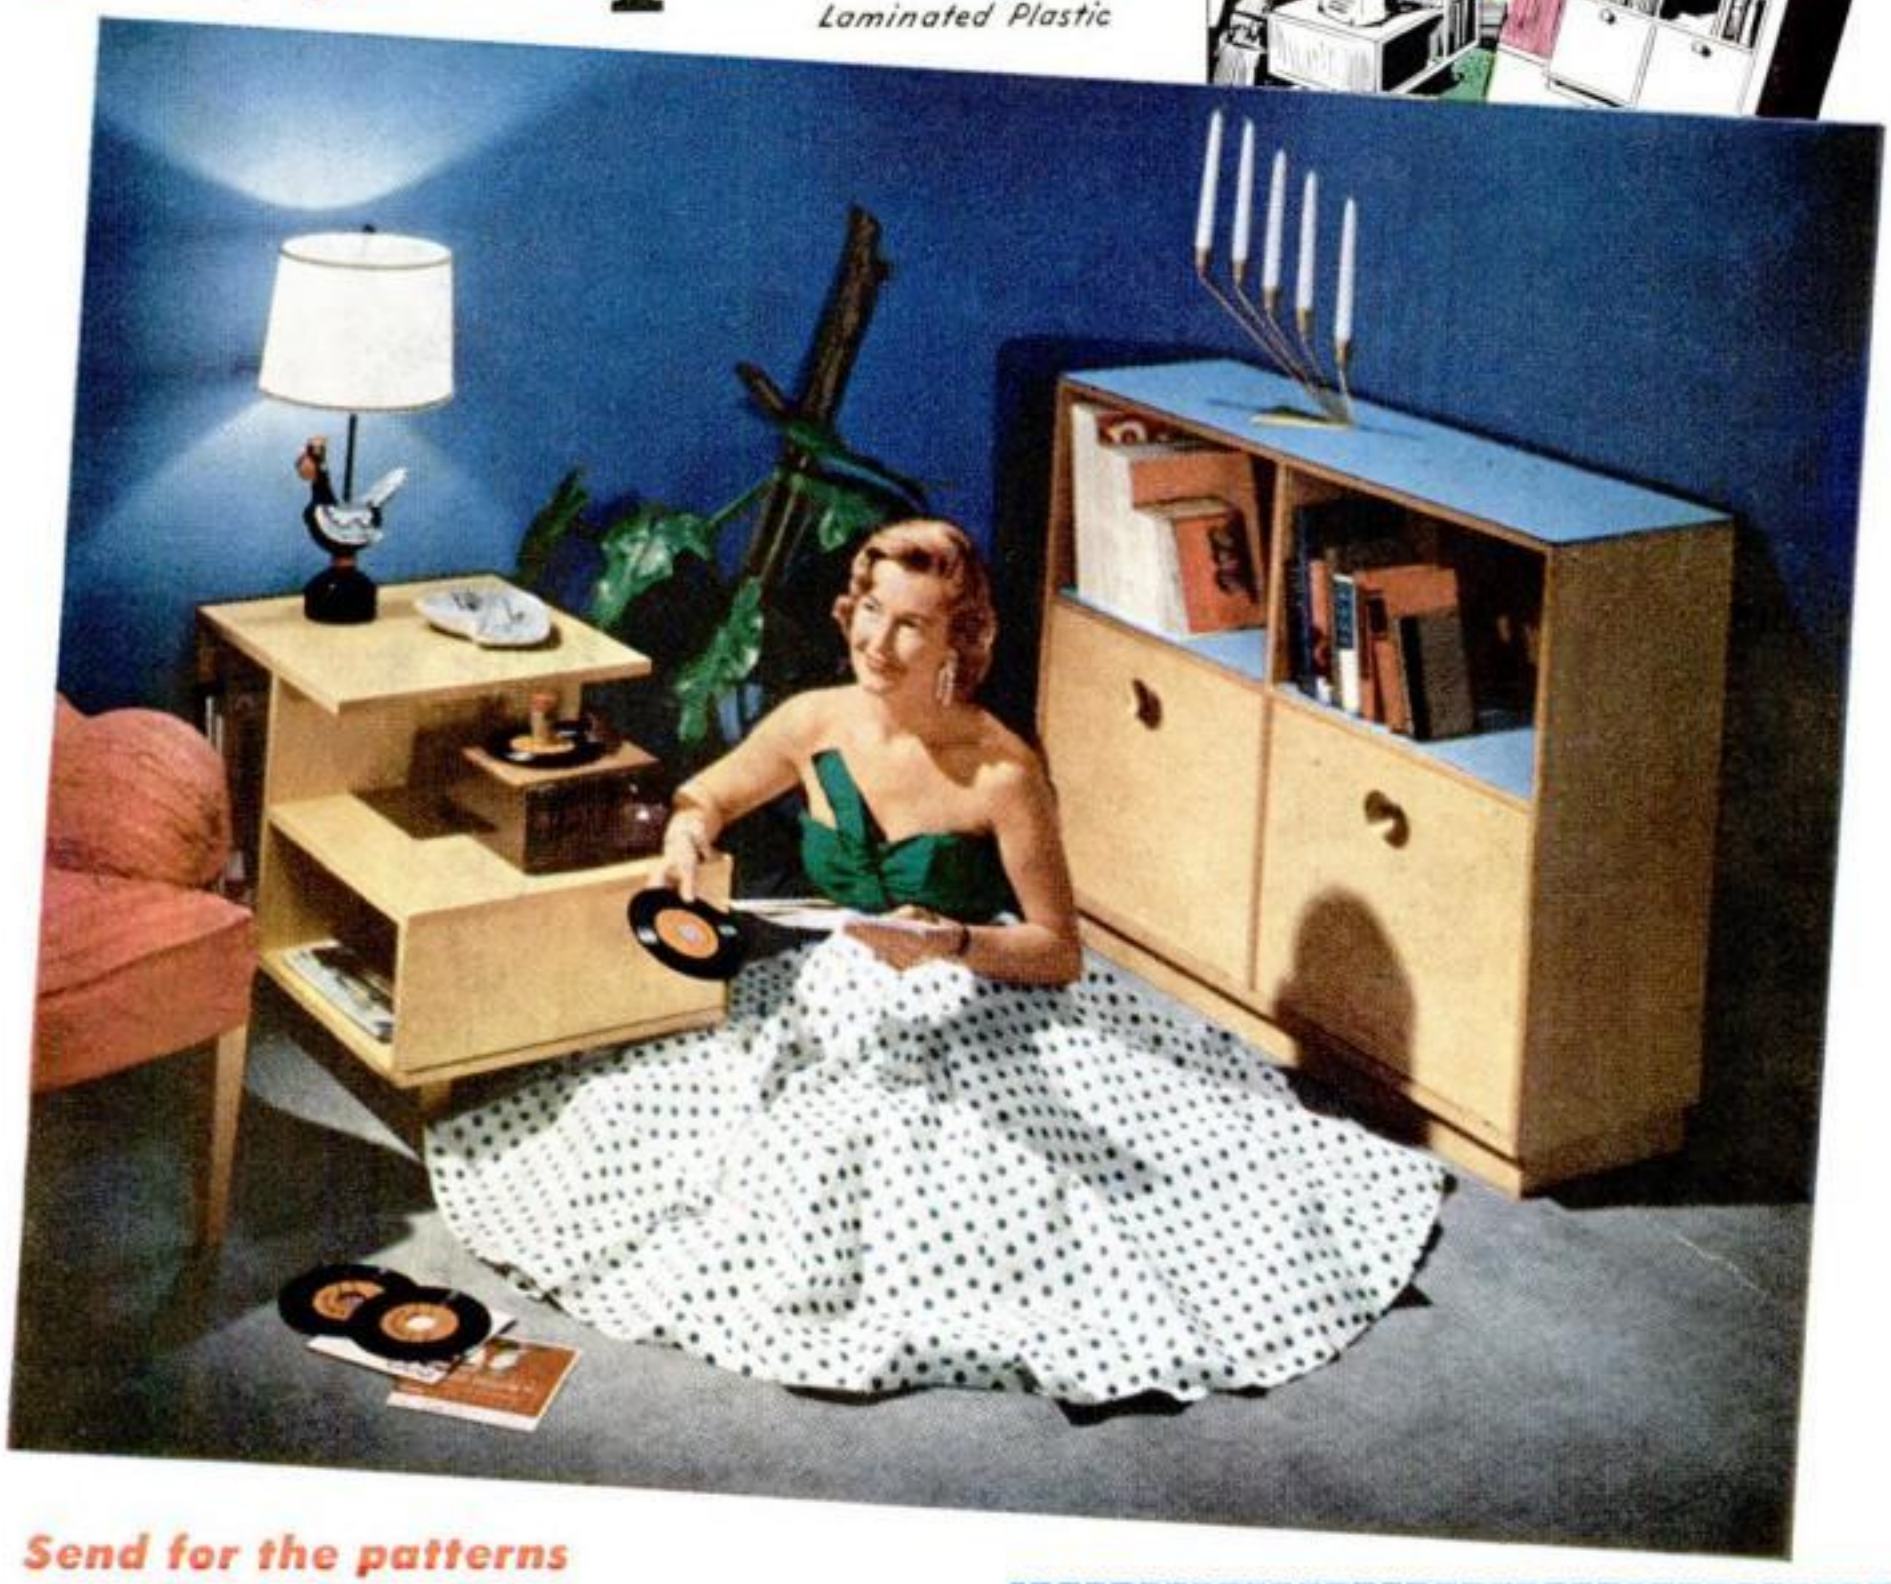

Send for the patterns

After you've had the satisfying experience of resurfacing a sink top or furniture with Formica you'll want to extend this do-it-yourself fun to other projects. If you've run out of things to resurface, why not send for one of our Easi-Bild Patterns* and start from scratch. The record cabinet and the step table are just two of the nine fascinating Formica projects available in patterns. When you select a color or wood grain from the more than 70 in the Formica Sunrise Line, choose well—it lasts a long time. Just check the patterns you want and send cash with order. We'll send with your patterns, complete instructions for using Formica and Formica contact Bond Cement—and tell you where you can buy Formica in your area.

*Registered Trade Mark Easi-Bild Pattern Co.

FORMICA PATTERN DEPARTMENT
4595 Easi-Bild Pattern Co.
Pleasantville, N.Y.

Gentlemen: Enclosed is cash, check, or money order for the patterns as checked below.

- ☐ No. 90 Bar or Dining Counter ..... .35
- ☐ No. 557 Favorite Window ..... .50
- ☐ No. 99 Modern End Table ..... .25
- ☐ No. 3 Kitchen Unit ..... .50
- ☐ No. 127 Step End Table ..... .50
- ☐ No. 192 Record Cabinet Bar ..... .35
- ☐ No. 201 Kitchen Cabinets 1.00
- ☐ No. 309 Coffee Table ..... .35
- ☐ No. 537 Decorators Desk..... .50

Name_____

Address_____

City_____ Zone____ State_____

DEMAND THIS CERTIFICATION

This mark certifies genuine Beauty Bonded FORMICA® Laminated Plastic

RUB OFF WITH LOTS OF BAR SOAP ON A DAMP CLOTH

Guaranteed by Good Housekeeping

Pays in Performance

Seeing is believing. If this wash-off identification is not on the product, it's not FORMICA.

Copyrighted material

NOW AMERICA'S TWO MOST USEFUL . . . MOST WANTED

OUTDOOR APPLIANCES

can be yours at AMAZING Introductory Discount Prices!



The ALL-NEW 1956 "Hi-Speed Cutting Head"

MONTAMOWER

3 TIMES THE SPEED, 3 TIMES THE POWER!

The *All-New* 1956 MontaMower with precision engineered "Hi-Speed Cutting Head" cuts smoother, easier, cleaner! 3 times the traction and speed . . . non-clogging, cutting discs assure positive cutting of grass and lawn weeds! "TRIMS AS IT MOWS". Join the thousands of satisfied owners . . . save $6.00 to $9.00 on your new MontaMower, or better yet —

SAVE $9.00

NEW PORTABLE

BLITZ-BURNER

WITH BAR-B-Q ACCESSORY



Homeowners, cottagers and business firms alike hail Blitz-Burner as the first *really* safe, efficient outdoor burner! Stays so attractive it can be kept anywhere in your yard . . . rolls easily for collection of leaves, paper and garden waste . . . burns anywhere without fire hazard . . . need not scorch lawn or drive! It's the new, completely enclosed, long-lasting Armco Aluminized Steel Blitz-Burner! Act now . . . INVEST JUST ONCE at a SAVINGS of $5.99 to $8.98 or, even better, you can —

SAVE $8.98

GRILL CH

SAVE $17.98 ON MONTAMOWER and BLITZ-BURNER COMBINATION INTRODUCTORY OFFER

Both the new MontaMower and the Blitz-Burner are their own best salesmen! To get as many in use throughout the nation as early as possible in the season, we are making this spectacular Combination Introductory Discount Offer for a limited time only! SAVE $17.98 on America's two finest outdoor appliances.

90-DAY FREE TRIAL WITH FULL MONEY-BACK GUARANTEE
ON EVERY MONTAMOWER PURCHASED IN COMBINATION WITH THE BLITZ-BURNER



WEIGHS ONLY 9½ LBS.

HERE'S HOW THE INCREDIBLE ALL-NEW MONTAMOWER WORKS

Working on an entirely unique and patented principle, eight sets of newly designed, overlapping, precision ground tool steel "Hi-Speed Cutting Discs" shear the grass as it is gathered by revolving teeth. Like an electric razor, the new MontaMower cutting head takes small, even, positive "bites" at even the slightest forward movement . . . no misses, no skips.

CUTS ANY GRASS, TALL LAWN WEEDS! With MontaMower there's no more "going-back-over", with whipper, or back-breaking hand pulling.

MONTAMOWER "TRIMS-AS-IT-CUTS" . . . right up to fences, trees, buildings, under overhanging shrubs . . . eliminates that long hand-trimming job!

POWER MOWER USERS SAY IT'S A "MUST" for those hard-to-get-at spots, close-quarter mowing and all the trimming!

IDEAL FOR TERRACES, STEEP GRADES . . . MontaMower is so light (9½ lbs.) that you can mow steep banks up, down or across with scarcely any effort! Can't "shave" crests.

THE BLITZ-BURNER IS WONDERFUL BARBECUE TO

With inexpensive accessories ill trated, it becomes a completely sa tary, portable Bar-B-Q! Simply vert dome to seal off burner . . . s in charcoal basket and grill . . . a you're ready to broil steaks, ha burgers, chickens, etc., to perfecti

SAFE, HIGHLY EFFICIENT . . . the Bl Burner is fully enclosed . . . wo scatter burning debris to create hazard. Widely approved by city forest fire authorities! Exclus Smoke-Reducing Combustion Do and Mixing Chamber, plus multi draft ports assure fastest burning w minimum of residue.

RUGGED, RUST RESISTANT . . . made of pensive Armco Aluminized Steel tough steel with molten alumin bonded inside and out! Deep forn reinforcing ribs and welded constr tion assure much longer life and la ing eye appeal!

BIG CAPACITY full 3½ bushels, can st waste for days before burning. Co tents always dry to burn readily!

TRY IT ON YOUR OWN LAWN . . . ON APPROVAL!

A thorough trial on your own lawn is the most convincing proof that the MontaMower has many time and work saving advantages — that's why every MontaMower is sold on an Extended Trial Basis. Send Coupon for Full Details!

ALL-NEW "HI-SPEED CUTTING HEAD" GREATEST ADVANCEMENT IN OUR 35-YEAR HISTORY!

1. **TRACTION CONTACT INCREASED 300%** . . . newly-designed drive gears provide 3 times the traction, speed, cutting power and smoothness!
2. **NEW NON-CLOGGING CUTTERS** with take-up feature can't slip and clog as wear occurs! Self-sharpening.

MAIL BARGAIN COUPON!

CHECK COUPON FOR COMPLETE DETAILS NOW!

ACT TODAY — MAIL BARGAIN COUPON!

Get all the facts on these wonderful appliances — Big Color Brochures. Payment Plan. FREE — mail coupon Today!

MONTAMOWER DISTRIBUTING COMPANY
PS-46 KEELER BLDG., GRAND RAPIDS, MICHIGAN

- ☐ I want to know more about the limited MONTAMOWER BLITZ-BURNER COMBINATION OFFER.
- ☐ MONTAMOWER alone at special Discount.
- ☐ BLITZ-BURNER alone at special Discount.

NAME _____

ADDRESS _____

CITY _____ ZONE _____ STATE _____

FREE

Copyrighted material